

PROJECT MANUAL

Fayetteville Regional Airport

A.I.P No. 3-37-0021-054-2022

AIRLINE TERMINAL IMPROVEMENTS – Part 3



Owner:

THE CITY OF FAYETTEVILLE

Architect of Record:

***GORDON JOHNSON ARCHITECTURE
FAYETTEVILLE, NC***

Structural Engineer:

***FLEMING & ASSOCIATES
FAYETTEVILLE, NC***

Mechanical / Electrical / Fire Protection Engineer:

***RMF ENGINEERING
CHARLOTTE, NC***

July 31, 2023

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

TABLE OF CONTENTS

INSTRUCTIONS TO BIDDERS

ITB-1 thru 7

GENERAL PROVISIONS

Section 10 – Definition of Terms	0010-1 thru 8
Section 20 – Proposal Requirements and Conditions	0020-1 thru 5
Section 30 – Award and Execution of Contract	0030-1 thru 2
Section 40 – Scope of Work	0040-1 thru 5
Section 50 – Control of Work	0050-1 thru 9
Section 60 – Control of Materials	0060-1 thru 5
Section 70 – Legal Regulations and Responsibility to Public	0070-1 thru 10
Section 80 – Execution and Progress	0080-1 thru 9
Section 90 – Measurement and Payment	0090-1 thru 10
Section 100 – Quality Control Testing Program	0100-1 thru 8
Section 110 – Method of Estimating % of Mat. w/ Spec Limits (PWL)	0110-1 thru 9

SUPPLEMENTAL GENERAL PROVISIONS

SGP-1 thru 25

PROJECT SPECIAL PROVISIONS

PSP-1 thru 10

DIVISION 01: GENERAL REQUIREMENTS: *by Gordon Johnson Architecture*

Section 01011 – Summary of Work	01011-1 thru 2
Section 01140 – Work Restrictions	01140-1 thru 1
Section 01230 – Alternates	01230-1 thru 2
Section 01250 – Contract Modification Procedures	01250-1 thru 2
Section 01270 – Unit Prices	01270-1 thru 2
Section 01310 – Project Management and Coordination	01310-1 thru 6
Section 01330 – Submittal Procedures	01330-1 thru 9
Section 01500 – Temporary Facilities and Controls	01500-1 thru 10
Section 01731 – Cutting and Patching	01731-1 thru 5
Section 01732 – Selective Demolition	01732-1 thru 8
Section 01770 – Closeout Procedures	01770-1 thru 8

DIVISION 02 – SITE WORK:

NOT USED

DIVISION 03 – CONCRETE: *by Gordon Johnson Architecture*

Section 033000 – Cast-in-Place Concrete	033000-1 thru 11
Section 033503 – Water Vapor Emission Control	033503-1 thru 4

DIVISION 04 – MASONRY: *by Gordon Johnson Architecture*

Section 042000 – Unit Masonry	042000-1 thru 9



Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

DIVISION 05 – METALS: *by Gordon Johnson Architecture*

Section 051200 – Structural Steel Framing	051200-1 thru 6
Section 053100 – Steel Decking	053100-1 thru 4
Section 055000 – Metal Fabrications	055000-1 thru 7

DIVISION 06 – WOOD, PLASTICS AND COMPOSITES: *by Gordon Johnson Architecture*

Section 061053 – Miscellaneous Rough Carpentry	061053-1 thru 3
Section 064116 – Plastic-Laminate-Faced Architectural Cabinets	064116-1 thru 5

DIVISION 07 – THERMAL AND MOISTURE PROTECTION: *by Gordon Johnson Architecture*

Section 071416 – Cold Fluid-Applied Waterproofing	071416-1 thru 4
Section 072100 – Thermal Insulation	072100-1 thru 5
Section 072119 – Foamed-in-place Insulation	072119-1 thru 2
Section 072419 – Water-Drainage Exterior Insulation and Finish Systems (EIFS)	072419-1 thru 4
Section 072715 – Non-bituminous Self-adhering Sheet Air Barriers	072715-1 thru 5
Section 075419 – Polyvinyl-Chloride Roofing (PVC)	075419-1 thru 7
Section 076200 – Sheet Metal Flashing and Trim	076200-1 thru 9
Section 078443 – Joint Firestopping	078443-1 thru 4
Section 079200 – Joint Sealants	079200-1 thru 3
Section 079513.13 – Interior Expansion Joint Cover Assemblies	079513.13-1 thru 4

DIVISION 08 – OPENINGS: *by Gordon Johnson Architecture*

Section 081113 – Hollow Metal Doors and Frames	081113-1 thru 8
Section 081416 – Flush Wood Doors	081416-1 thru 4
Section 084113 – Aluminum-Framed Entrances and Storefronts	084113-1 thru 7
Section 087100 – Door Hardware	087100-1 thru 10
Section 088000 – Glazing	088000-1 thru 7

DIVISION 09 – FINISHES: *by Gordon Johnson Architecture*

Section 092216 – Non-Structural Metal Framing	092216-1 thru 6
Section 092900 – Gypsum Board	092900-1 thru 6
Section 093013 – Ceramic Tiling	093013-1 thru 4
Section 095113 – Acoustical Panel Ceilings	095113-1 thru 3
Section 096513 – Resilient Base and Accessories	096513-1 thru 2
Section 096519 – Resilient Tile Flooring	096519-1 thru 4
Section 096813 – Tile Carpeting	096813-1 thru 4
Section 099113 – Exterior Painting	099113-1 thru 3
Section 099123 – Interior Painting	099123-1 thru 4

DIVISION 10 – SPECIALTIES: *by Gordon Johnson Architecture*

Section 102800 – Toilet, Bath, and Laundry Accessories	102800-1 thru 6
Section 104413 – Fire Protection Cabinets	104413-1 thru 3
Section 104416 – Fire Extinguishers	104416-1 thru 2

DIVISION 11 - EQUIPMENT NOT USED

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

DIVISION 12 – FURNISHINGS: *by Gordon Johnson Architecture*

Section 122113 – Horizontal Louver Blinds

122113-1 thru 3

Section 123661.16 – Solid Surfacing Countertops

123661.16-1 thru 3

DIVISION 13 – SPECIAL CONSTRUCTION NOT USED

DIVISION 14 – CONVEYING EQUIPMENT: NOT USED

DIVISION 15 – 20 NOT USED

DIVISION 21 – FIRE PROTECTION SEE PME TABLE OF CONTENTS TO FOLLOW

DIVISION 22 – PLUMBING SEE PME TABLE OF CONTENTS TO FOLLOW

DIVISION 23 – HEATING, BENTILATION, AND AIR CONDITITIONING (HVAC) SEE PME TABLE OF CONTENTS TO FOLLOW

DIVISION 24 – 25 NOT USED

DIVISION 26 – ELECTRICAL SEE PME TABLE OF CONTENTS TO FOLLOW

DIVISION 27 – COMMUNICATIONS SEE PME TABLE OF CONTENTS TO FOLLOW

DIVISION 28 – ELECTRONIC SAFETY AND SECURITY SEE PME TABLE OF CONTENTS TO FOLLOW

APPENDIX

A – Notice to Bidders

B – Bid Proposal Form, Partial Schedule of Values & Bidder Information Sheet

C – DBE Program Requirements & Compliance Forms

D – Federal Contract Requirements & Iran Divestment Act Form

E – Contract for Construction & Payment & Performance Bond Forms

F – Required Forms (Post Award)

END OF DOCUMENT

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture


RMF#: 02230515.A0

July 31, 2023

TABLE OF CONTENTS

DIVISION 21 – FIRE PROTECTION: *by RMF Engineering, Inc.*


Section 210517 – Sleeve and Sleeve Seals for Fire-Suppression Piping	210517-1 thru 3
Section 210518 – Escutcheons for Fire-Suppression Piping	210518-1 thru 2
Section 211000 – Water Based Fire-Suppression Systems	211000-1 thru 11



07/31/23

DIVISION 22 – PLUMBING: *by RMF Engineering, Inc.*


Section 220517 – Sleeves and Sleeve Seals for Plumbing Piping	220517-1 thru 5
Section 220518 – Escutcheons for Plumbing Piping	220518-1 thru 3
Section 220519 – Meters and Gages for Plumbing Piping	220519-1 thru 5
Section 220523 – General-Duty Valves for Plumbing Piping	220523-1 thru 10
Section 220529 – Hangers and Supports for Plumbing Piping and Equipment	220529-1 thru 12
Section 220553 – Identification for Plumbing Piping and Equipment	220553-1 thru 5
Section 220719 – Plumbing Piping Insulation	220719-1 thru 20
Section 221116 – Domestic Water Piping	221116-1 thru 11
Section 221119 – Domestic Water Piping Specialties	221119-1 thru 12
Section 221316 – Sanitary Waste and Vent Piping	221316-1 thru 10
Section 221319 – Sanitary Waste Piping Specialties	221319-1 thru 9
Section 221323 – Sanitary Waste Interceptors	221323-1 thru 4
Section 224000 – Plumbing Fixtures	224000-1 thru 17



07/31/23

DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC): *by RMF Engineering, Inc.*

Section 230513 – Common Motor Requirements for HVAC Equipment	230513-1 thru 3
Section 230517 – Sleeves and Sleeve Seals for HVAC Piping	230517-1 thru 5
Section 230518 – Escutcheons for HVAC Piping	230518-1 thru 3
Section 230519 – Meters and Gages for HVAC Piping	230519-1 thru 8
Section 230523 – General Duty Valves for HVAC Piping	230523-1 thru 20
Section 230529 – Hangers and Supports for HVAC Piping and Equipment	230529-1 thru 12
Section 230548 – Vibration and Seismic Controls for HVAC Piping And Equipment	230548-1 thru 11
Section 230553 – Identification for HVAC Piping and Equipment	230553-1 thru 7
Section 230593 – Testing, Adjusting, and Balancing for HVAC	230593-1 thru 20
Section 230713 – Duct Insulation	230713-1 thru 15
Section 230719 – HVAC Piping Insulation	230719-1 thru 19
Section 230900 – Building Automation System	230900-1 thru 102
Section 232113 – Hydronic Piping	232113-1 thru 18
Section 233113 – Metal Ducts	233113-1 thru 16
Section 233300 – Air Duct Accessories	233300-1 thru 14
Section 233423 – HVAC Power Ventilators	233423-1 thru 6
Section 233600 – Air Terminal Units	233600-1 thru 7
Section 233713 – Diffusers, Registers and Grilles	233713-1 thru 6



07/31/23

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Section 237313.13 – Indoor Basic Air-Handling Units	237313-1 thru 11
DIVISION 26 – ELECTRICAL: <i>by RMF Engineering, Inc.</i>	
Section 260519 – Low-Voltage Electrical Power Conductors And Cables	260519-1 thru 11
Section 260526 – Grounding and Bonding for Electrical Systems	260526-1 thru 9
Section 260529 – Hangers and Supports for Electrical Systems	260529-1 thru 7
Section 260533 – Raceway and Boxes for Electrical Systems	260533-1 thru 14
Section 260548 – Vibration and Seismic Controls for Electrical Systems	260548-1 thru 7
Section 260553 – Identification for Electrical Systems	260553-1 thru 8
Section 260923 – Lighting Control Devices	260923-1 thru 9
Section 262200 – Low-Voltage Transformers	262200-1 thru 7
Section 262413 – Switchboards	262413-1 thru 12
Section 262726 – Wiring Devices	262726-1 thru 7
Section 262813 – Fuses	262813-1 thru 4
Section 262816 – Enclosed Switches and Circuit Breakers	262816-1 thru 7
Section 262923 – Variable-Frequency Motor Controllers	262923-1 thru 18
Section 264313 – Surge Protection Devices for Low-Voltage Electrical Power Circuits	264313-1 thru 6
Section 265100 – Interior Lighting	265100-1 thru 10
Section 265600 – Exterior Lighting	265600-1 thru 20
DIVISION 27 – COMMUNICATIONS: <i>by RMF Engineering, Inc.</i>	
Section 270500 – Common Work Results for Communications	270100-1 thru 2
Section 270526 – Grounding and Bonding for Communications Systems	270526-1 thru 8
Section 270528 – Pathways for Communications Systems	270528-1 thru 13
Section 270529 – Hangers and Supports for Communications Systems	270529-1 thru 8
Section 270536 – Cable Trays for Communications Systems	270536-1 thru 14
Section 270544 – Sleeves and Sleeve Seals for Communications Pathways	270544-1 thru 5
Section 270553 – Identification for Communications Systems	270553-1 thru 9
DIVISION 28 – ELECTRONIC SAFETY AND SECURITY: <i>by Vertex Technology Consultants, Inc.</i>	
Section 283111 – Digital, Addressable Fire-Alarm Systems: <i>by RMF Engineering, Inc.</i>	283111-1 thru 26

END OF DOCUMENT



Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

INSTRUCTIONS TO BIDDERS

1. PROPOSAL

Proposals shall be made in strict accordance with the "Bid Proposal Package" provided herein, and all blank spaces for bids, alternates and unit prices shall be properly filled in. When requested alternates are not bid, the proposal may be considered incomplete. Any modifications to the "Bid Proposal Package" (including alternates and/or unit prices) will disqualify the bid and shall cause the bid to be rejected.

The Bidder agrees that the "Bid Proposal Package" detached from plans & specifications will be considered and will have the same force and effect as if attached thereto. Photocopied or faxed proposals will not be considered. Numbers shall be stated both in writing and in figures for the base bids and alternates.

Unit / Bid Alternate prices quoted in the "Bid Proposal Package" shall include labor, equipment, materials, miscellaneous expenses, overhead, profit and taxes and shall be the full compensation for the Bidder's cost involved in the work.

Proposals may be rejected if they show omissions, alterations of form, additions not called for, conditional bids, or irregularities of any kind.

Appendix B – Bid Certifications pages B-1 through B-11 included in the Appendix section are certifications which must be included with the bid.

2. EXAMINATION OF CONDITIONS

By submitting a bid, the Bidder is affirming that he has carefully examined all documents pertaining to the work, the location, accessibility and general character of the site of the work and all existing buildings and structures within and adjacent to the site, and has satisfied himself as to the nature of the work, the condition of existing buildings and structures, the conformation of the ground, the character, quality and quantity of the material to be encountered, the character of the equipment, machinery, plant, and any other facilities needed preliminary to and during prosecution of the work, the general and local conditions, the construction hazards, and all other matters, including but not limited to the labor situation which can in any way affect the work under the contract, and including all safety measures required by the Occupational Safety and Health Act of 1970 and all rules and regulations issued pursuant thereto. The Bidder further affirms by submitting a proposal that he has satisfied himself as to the feasibility and meaning of the plans, drawings, specifications, and other contract documents for the construction of work

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

and that he accepts all the terms, conditions and stipulations contained therein, and that he is prepared to work in cooperation with other Contractors performing work on the site.

Reference is made to contract documents for the identification of those surveys and investigative reports of subsurface or latent physical conditions at the site or otherwise affecting performance of the work which have been relied upon by the Designer in preparing the documents. The City will make copies of all such surveys and reports available to the Bidder upon request. Each Bidder may, at his own expense, make such additional surveys and investigations as he may deem necessary to determine his bid price for the performance of the work. Any on-site investigation shall be done at the convenience of the Airport and the City. Any reasonable request for access to the site will be honored by the Airport and the City.

3. FAMILIARITY WITH LAWS

The bidder is assumed to have made himself familiar with all laws, ordinances, and regulations which in any manner affect those engaged or employed in the work or the materials or equipment used in or upon the work, or in any way affects the conduct of the work.

4. PREPARATION OF PROPOSAL

The bidder must submit his bid proposal on the blank forms herewith provided, and prices must be given both in writing and in figures (if requested). The bidder shall sign his proposal correctly. If the proposal is made by an individual, his name and address must be shown. If made by a corporation, the person signing shall state under the laws of what state the corporation was chartered, the location of the home office, and the name and title of officers having authority under the bylaws to sign contracts. Wet seals (vs raised seals) for corporate and notary seals on bid forms are acceptable.

5. LICENSING

The successful Contractor must be properly licensed to do the work in accordance with the North Carolina General Statutes (Chapter 87, Article 1). Upon request, bidders shall show evidence of proper license type and limitation.

6. BULLETINS AND ADDENDA

Any addenda to plans and specifications issued during the time of bidding are to be considered covered in the proposal and in closing a contract they will become a part thereof. It shall be the Bidder's responsibility to ascertain prior to bid time the addenda issued and to see that his bid includes any changes thereby required.

Should the bidder find discrepancies in, or omission from, the drawings or documents or should he be in doubt as to their meaning, he shall at once notify the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

Contracting Office who will send written instructions in the form of addenda to all bidders. Notification should be no later than seven (7) days from the date set for receipt of bids. Neither the City nor the Purchasing Office will be responsible for any oral instructions. All addenda shall be acknowledged by the Bidder(s) on the Proposal Form.

7. BID SECURITY

Each proposal shall be accompanied by a cash deposit, or a certified check drawn on some bank or trust company insured by the Federal Deposit Insurance Corporation, or a bid bond executed by a corporate surety licensed under the laws of North Carolina to execute such bonds in an amount equal to not less than five percent (5%) of the bid. Bid Bonds shall be conditioned that the Surety will, upon demand, forthwith make payment to the obligee upon said bond if the bidder fails to execute the contract within ten (10) days after the award or to give satisfactory surety as required by law (G.S. 143-129).

All bid securities except those of the three (3) lowest responsible bidders will be returned within five (5) days after the opening of the bids. The remaining bid securities, except that of the successful bidder, will be returned within five (5) working days after the award of the contract.

8. DELIVERY OF PROPOSAL

Each proposal must be submitted in a sealed opaque envelope so marked as to indicate its contents, project number, project title, bidder's name, address, contractor's license number and status. Bids may be mailed or delivered in person to the Airport Director, Attn: Toney Coleman, Fayetteville Regional Airport, 400 Airport Road, Fayetteville, NC 28306.

The City of Fayetteville will not be responsible for picking up bids at the post office. Bids arriving after the specific time designated for opening shall not be considered.

9. RECEIPT OF BIDS

Bids shall be received in strict accordance with requirements of the General Statutes of North Carolina under the single-prime contracting system only.

10. WITHDRAWAL OF PROPOSAL

If the bidder desires to withdraw his proposal, he must do so before the time fixed for the receipt of bids, without prejudice to himself by communicating his purpose in writing to the City, and when received it shall be handed to him or to his authorized agent unread. After bids are opened, bids may only be withdrawn in

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

accordance with N.C.G.S. Section 143-129.1. Otherwise, bids may not be withdrawn after the time for receipt for a period of one hundred twenty (120) days.

11. BID OPENING

Bids will be opened publicly and read at the hour and on the date set in the advertisement in the 1st floor Conference Room of the Airport Terminal Building, 400 Airport Road, Fayetteville, North Carolina. Bidders or their authorized agents are invited to be present. Late bids will not be considered and will be returned to the Bidder unopened. Upon opening, all bids shall be read aloud and become the property of the City. Bids will not be returned to the Bidder. Bids must be held firm for acceptance by the City of Fayetteville (City) for a period of one hundred twenty (120) days after bid opening date.

12. BID EVALUATION

The City may award bid on the basis of the base bid and any alternates the City chooses. Before awarding a contract, the City may require the apparent low bidder to requalify himself to be a responsible bidder by furnishing the documentary data listed below:

- (1) An up-to-date financial statement or other documentation showing assets and liabilities of the Company and any open claims made against the same.
- (2) A list of three successfully completed projects of similar scope and nature.
- (3) Permanent name and address of place of business.
- (4) The number of employees of the organization and length of time the organization has been in business under the present name.
- (5) The name and address of the surety proposed and the name and address of the responsible local adjuster for insurance claims.
- (6) The names of members of the firm who hold appropriate trade licenses, together with license numbers.
- (7) An affidavit stating whether or not any OSHA or TSA security violations have occurred within the past three years.

Failure or refusal to furnish any items of information requested by the City shall constitute a basis for disqualification of any bidder.

Should the City adjudge that the apparent low bidder is not the lowest responsible bidder by virtue of the above information requested, said apparent low bidder will be so notified and his bid security shall be returned to him.

Should the successful bidder default and fail to execute a contract, the contract may be awarded to the next lowest and responsible bidder.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

13. MATERIAL GUARANTY

Before the award of contract, the successful bidder, when requested, shall furnish a complete statement of the origin, composition, and manufacturer of any and all materials to be used in the construction of the project together with samples, which samples may be subjected to the tests provided for in these specifications to determine their quality and fitness for the work. All materials furnished must meet or exceed quality required by the latest specifications of the North Carolina Department of Transportation.

BUY AMERICAN PREFERENCE

The contractor agrees to comply with 49 USC § 50101, which provides that Federal funds may not be obligated unless all steel and manufactured goods used in AIP funded projects are produced in the United States, unless the FAA has issued a waiver for the product; the product is listed as an Excepted Article, Material Or Supply in Federal Acquisition Regulation subpart 25.108; or is included in the FAA Nationwide Buy American Waivers Issued list. A bidder or offeror must complete and submit the Buy America certification included herein with their bid or offer. The Owner will reject as nonresponsive any bid or offer that does not include a completed Certificate of Buy American Compliance.

A1.1.1 Certificate of Buy American Compliance – Total Facility

14. DISQUALIFICATION OF BIDDERS

More than one proposal from an individual, a firm or partnership, a corporation, or an association under the same or different names will not be considered. Reasonable grounds for believing that any bidder is interested in more than one proposal for the work contemplated will cause the rejection of all proposals in which such bidder is interested. Any or all proposals will be rejected if there is reason for believing that collusion exists among the bidders, and all participants in such collusion will not be considered in future proposals for the same work. No contract will be awarded except to competent bidders capable of performing the class of work contemplated.

15. UNBALANCED BIDS

The City reserves the right to reject any bid determined to be unbalanced. In the event that an unbalanced bid is determined to be the lowest responsible bid, the City reserves the right to request negotiation of the particular line item(s) disputed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

16. RIGHT TO REJECT PROPOSALS

The City reserves the unqualified right to reject any and all bids. Reasons for rejection may include, but shall not be limited to, the following:

- a. If the "Bid Proposal Package" furnished to the bidder is not used or is altered.
- b. If the bidder fails to insert a price for all bid items, alternate and unit prices requested.
- c. If the bidder adds any provisions reserving the right to accept or reject any award.
- d. If there are unauthorized additions or conditions to the bid or irregularities of any kind which tend to make the proposal incomplete, indefinite, or ambiguous as to its meaning.
- e. If the bidder fails to complete the proposal form where information is requested so the bid may be properly evaluated by the City.
- f. If the unit prices contained in the bid are unacceptable to the City.
- g. If the bidder fails to comply with other instructions stated herein.

- 17.** Contractor hereby acknowledges that "E-Verify" is the federal E-Verify program operated by the US Department of Homeland Security and other federal agencies which is used to verify the work authorization of newly hired employees pursuant to federal law and in accordance with Article 2, Chapter 64 of the North Carolina General Statutes. Contractor further acknowledges that all employers, as defined by Article 2, Chapter 64 of the North Carolina General Statutes, must use e-verify and after hiring an employee to work in the United States, shall verify the work authorization of the employee through E-Verify in accordance with NCGS §64-26(a). Contractor hereby pledges, attests and warrants through execution of this Agreement that Contractor complies with the requirements of Article 2 of Chapter 64 of the North Carolina General Statutes and further pledges, attests and warrants that any subcontractors currently employed by or subsequently hired by Contractor shall comply with any and all E-Verify requirements. Failure to comply with the above requirements shall be considered a breach of this Agreement.

18. DBE PARTICIPATION

The City of Fayetteville has a 10% goal for small, minority and women owned business participation.

Policy. It is the policy of the City of Fayetteville that disadvantaged business enterprises, as defined in 49 CFR Part 26, shall have the maximum opportunity to

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

participate in the performance of contracts and subcontracts. Consequently, the DBE requirements of 49 CFR Part 26 apply to this contract.

A separate contract goal of 8.4 % DBE participation has been established for this procurement.

Once the contract is awarded the approved DBE participation submitted by the Contractor shall be the contract requirement.

Only Disadvantaged Business Enterprise (DBE) firms with current certification through the North Carolina Department of Transportation will be considered to meet the contract goal. Certified firms are listed in the North Carolina Department of Transportation “Directory of Transportation Firms” which can be accessed through the following website: <https://apps.dot.state.nc.us/vendor/directory/>.

The bidder shall make good faith efforts, as defined in 49 CFR Part 26, Regulations of the Office of the Secretary of Transportation, to subcontract the percentage of the dollar value stated herein of the prime contract to small certified business concerns owned and controlled by socially and economically disadvantaged individuals (DBE). In the event that the bidder for this solicitation qualifies as a DBE, the contract goal shall be deemed to have been met.

Individuals who are rebuttably presumed to be socially and economically disadvantaged include: Women, Blacks, Hispanics, Native Americans, Asian-pacific Americans, and Asian-Indian Americans. The apparent successful bidder will be required to submit (with the bid) information concerning the DBE’S that will participate in this contract. The information will include the name and address of each DBE, a description of the work to be performed by each named firm, and the dollar value of the contract. If the bidder fails to achieve the contract goal stated herein, it will be required to provide documentation demonstrating that it made good faith efforts in attempting to do so. A bid that fails to meet these requirements will be considered non-responsive.

Bidder shall submit, with his Proposal, the Disadvantaged Business Enterprise documentation requested in these specifications. It is strongly recommended that personnel within your company who are responsible for compliance with these requirements attend the pre-bid, as important information will be reviewed. Failure to submit the DBE documentation, included herein, may result in disqualification of the proposal. Questions regarding this shall be directed to Kimberly Toon, Purchasing Agent (City of Fayetteville), at (910) 433-1942.

END OF SECTION

ITB-7

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 10

DEFINITION OF TERMS

Whenever the following terms are used in these specifications, in the contract, or in any documents or other instruments pertaining to construction where these specifications govern, the intent and meaning shall be interpreted as follows:

- 10-01 AASHTO.** The American Association of State Highway and Transportation Officials, the successor association to AASHO.
- 10-02 Access Road.** The right-of-way, the roadway and all improvements constructed thereon connecting the airport to a public highway.
- 10-03 Advertisement.** A public announcement, as required by local law, inviting bids for work to be performed and materials to be furnished.
- 10-04 Airport Improvement Program (AIP).** A grant-in-aid program, administered by the Federal Aviation Administration (FAA).
- 10-05 Air Operations Area (AOA).** For the purpose of these specifications, the term air operations area (AOA) shall mean any area of the airport used or intended to be used for the landing, takeoff, or surface maneuvering of aircraft. An air operation area shall include such paved or unpaved areas that are used or intended to be used for the unobstructed movement of aircraft in addition to its associated runway, taxiway, or apron.
- 10-06 Airport.** Airport means an area of land or water which is used or intended to be used for the landing and takeoff of aircraft; an appurtenant area used or intended to be used for airport buildings or other airport facilities or rights of way; and airport buildings and facilities located in any of these areas, and includes a heliport.
- 10-07 ASTM International (ASTM).** Formerly known as the American Society for Testing and Materials (ASTM).
- 10-08 Award.** The OWNER's notice to the successful bidder of the acceptance of the submitted bid.
- 10-09 Bidder.** Any individual, partnership, firm, or corporation, acting directly or through a duly authorized representative, who submits a proposal for the work contemplated.
- 10-10 Building Area.** An area on the airport to be used, considered, or intended to be used for airport buildings or other airport facilities or rights-of-way together

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

with all airport buildings and facilities located thereon.

10-11 Calendar Day. Every day shown on the calendar. The contract duration and phase durations set forth in the Contract Documents include inclement weather days normally encountered at the Project site, as well as observed holidays defined below. The Contractor shall be charged for each calendar day during the term of construction including observed holidays defined below and inclement weather days normally encountered at the Project site. ***The number of contract “Planned Lost Days” presume that the singular critical path for the Part 2 construction activities mostly occurs “indoors” and not subject delay caused by inclement weather conditions.***

1. For calculation purposes the date of the Notice to Proceed shall be counted as day one (1) of the contract period.

2. The number of days denoted in the Contract for contract time includes all weekend days and observed holidays. Observed holidays for which a calendar day shall be charged but which the Contractor shall not be allowed to work are as follows: New Year's Day; Memorial Day and the Saturday/Sunday prior to Memorial Day; July 4th; Labor Day and the Saturday/Sunday prior to Labor Day; Thanksgiving and the Friday and Saturday after Thanksgiving; and Christmas Day.

3. For the purposes of this contract, weather shall be factored into the time(s) of performance as follows:

a. A day will be considered as “lost” for scheduling purposes if more than 0.1 inch of rainfall (or equivalent frozen precipitation) is recorded as having fallen in a day by the NOAA weather station at the Fayetteville Regional Airport. A “day” means a calendar day including weekdays, weekend days and holidays, and begins at 12:01 A.M. and ends at the following 12:00 A.M.

b. A day will be considered as “lost” for scheduling purposes if the Contractor cannot work at least 50% of the normal workday on pre-determined controlling work items due to abnormal inclement weather conditions. A day will be considered “worked” even if no Work is done in days when less than 0.1 inch of rainfall is recorded.

c. The Contractor shall assume the following number of “lost” days when developing the project schedule:

Month	Planned “Lost” days	Month	Planned “Lost” days
January	5 days	July	2 days
February	4 days	August	2 days
March	5 days	September	5 days
April	5 days	October	5 days

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

May	4 days	November	4 days
June	3 days	December	4 days

These days will be considered as planned lost days in developing the schedule(s) for completing the Work within the Contract Time including project phases and should be shown in the schedule.

d. Time will be monitored on a monthly basis by the Owner's Representative for days lost beyond the planned lost days. Time adjustments will be immediately reflected on the Contractor's project schedule. The monthly assessment of "lost" days will be tracked cumulatively for the project duration. Any accumulated lost weather days in excess of the shown in paragraph "C" will be granted to the Contractor at the end of the Contract period. Any extensions of Contract Time for lost days due to weather will be non-compensable. ***"Lost Days" will only be granted to the Contractor when weather conditions impact the approved Contractor singular critical path work activities.***

e. Time for planned lost time weather days that are not used as outlined in paragraph "C" above will be adjusted on a monthly basis and will be considered added accumulative float time that belongs to the Owner.

f. For purposes of establishing weather delays, weekdays, weekend days and holidays are all considered as equal.

10-12 Change Order. A written order to the Contractor covering changes in the plans, specifications, or proposal quantities and establishing the basis of payment and contract time adjustment, if any, for the work affected by such changes. The work, covered by a change order, must be within the scope of the contract.

10-13 Contract. The written agreement covering the work to be performed. The awarded contract shall include, but is not limited to: Advertisement, Contract Form, Proposal, Performance Bond, Payment Bond, any required insurance certificates, Specifications, Plans, and any addenda issued to bidders.

10-14 Contract Item (Pay Item). A specific unit of work for which a price is provided in the contract, *for which a value is defined in the Contractor's accepted schedule of values, or which is defined within a change order or supplemental agreement.*

10-15 Contract Time. The number of calendar days allowed for completion of the contract, including authorized time extensions. The contract time for the construction of the Part 3 Terminal construction is as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

	Start	End
Notice to Proceed	Calendar Day 1	N/A
Substantial Completion of all Base Bid work	Calendar Day 1	Calendar Day 365
Complete Final Punch List	Calendar Day 366	Calendar Day 396
Final Acceptance	Calendar Day 396	N/A

- 10-16 Contractor.** The individual, partnership, firm, or corporation primarily liable for the acceptable performance of the work contracted and for the payment of all legal debts pertaining to the work who acts directly or through lawful agents or employees to complete the contract work.
- 10-17 Contractor's Laboratory.** The Contractor's *independent* quality control laboratory.
- 10-18 Construction Safety and Phasing Plan (CSPP).** The overall plan for safety and phasing of a construction project developed by the airport operator or developed by the airport operator's consultant and approved by the airport operator. It is included in the invitation for bids and becomes part of the project specifications.
- 10-19 Drainage System.** The system of pipes, ditches, and structures by which surface or subsurface waters are collected and conducted from the airport area.
- 10-20 Architect/Engineer.** The individual, partnership, firm, or corporation duly authorized by the Owner to be responsible for architectural or engineering inspection of the contract work and acting directly or through an authorized representative. The Architect/Engineer shall be understood to be the A/E of the Owner or the Owner's duly authorized representative. Engineer and Architect are used throughout the contract documents and technical specifications, and the two agents are interchangeable with regard to responsibilities.
- 10-21 Equipment.** All machinery, together with the necessary supplies for upkeep and maintenance, and also all tools and apparatus necessary for the proper construction and acceptable completion of the work.
- 10-22 Extra Work.** An item of work not provided for in the awarded contract as previously modified by change order or supplemental agreement, but which is found by the Architect/Engineer to be necessary to complete the work within the intended scope of the contract as previously modified.
- 10-23 FAA.** The Federal Aviation Administration of the U.S. Department of Transportation. When used to designate a person, FAA shall mean the Administrator or his or her duly authorized representative.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- 10-24 Federal Specifications.** The Federal Specifications and Standards, Commercial Item Descriptions, and supplements, amendments, and indices thereto are prepared and issued by the General Services Administration of the Federal Government.
- 10-25 Force account.** Force account work is planning, engineering, or construction work done by the Sponsor's employees.
- 10-26 Inspector (also known as) "Project Representative".** An authorized representative of the Architect/Engineer assigned to make all necessary observations of tests of the work performed or being performed, or of the materials furnished or being furnished by the Contractor.
- 10-27 Intention of Terms.** Whenever, in these specifications or on the plans, the words "directed," "required," "permitted," "ordered," "designated," "prescribed," or words of like import are used, it shall be understood that the direction, requirement, permission, order, designation, or prescription of the Architect/Engineer is intended; and similarly, the words "approved," "acceptable," "satisfactory," or words of like import, shall mean approved by, or acceptable to, or satisfactory to the Architect/Engineer, subject in each case to the final determination of the OWNER.
- Any reference to a specific requirement of a numbered paragraph of the contract specifications or a cited standard shall be interpreted to include all general requirements of the entire section, specification item, or cited standard that may be pertinent to such specific reference.
- 10-28 Laboratory.** The official testing laboratories of the OWNER or such other laboratories as may be designated by the Architect/Engineer. Also referred to as "Architect/Engineer's Laboratory" or "quality assurance laboratory."
- 10-29 Lighting.** A system of fixtures providing or controlling the light sources used on or near the airport or within the airport buildings. The field lighting includes all luminous signals, markers, floodlights, and illuminating devices used on or near the airport or to aid in the operation of aircraft landing at, taking off from, or taxiing on the airport surface.
- 10-30 Major and Minor Contract Items.** A major contract item shall be any item ~~that is listed in the proposal~~, the total cost of which is equal to or greater than 20% of the total amount of the awarded contract. All other items shall be considered minor contract items.
- 10-31 Materials.** Any substance specified for use in the construction of the contract work.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- 10-32 Notice to Proceed (NTP).** A written notice to the Contractor to begin the actual contract work on a previously agreed to date. If applicable, the Notice to Proceed shall state the date on which the contract time begins.
- 10-33 Owner.** The term “OWNER” shall mean the party of the first part or the contracting agency signatory (City of Fayetteville NC) to the contract. Where the term “OWNER” is capitalized in this document, it shall mean airport Sponsor only.
- 10-34 Passenger Facility Charge (PFC).** Per 14 CFR Part 158 and 49 USC § 40117, a PFC is a charge imposed by a public agency on passengers enplaned at a commercial service airport it controls.”
- 10-35 Pavement.** The combined surface course, base course, and subbase course, if any, considered as a single unit.
- 10-36 Payment Bond.** The approved form of security furnished by the Contractor and his or her surety as a guaranty that the Contractor will pay in full all bills and accounts for materials and labor used in the construction of the work.
- 10-37 Performance Bond.** The approved form of security furnished by the Contractor and his or her surety as a guaranty that the Contractor will complete the work in accordance with the terms of the contract.
- 10-38 Plans.** The official drawings or exact reproductions which show the location, character, dimensions and details of the airport and the work to be done and which are to be considered as a part of the contract, supplementary to the specifications.
- 10-39 Project.** The agreed scope of work for accomplishing specific airport development with respect to a particular airport.
- 10-40 Proposal.** The written offer of the bidder (when submitted on the approved proposal form) to perform the contemplated work and furnish the necessary materials in accordance with the provisions of the plans and specifications.
- 10-41 Proposal Guaranty.** The security furnished with a proposal to guarantee that the bidder will enter into a contract if his or her proposal is accepted by the OWNER.
- 10-42 Runway.** The area on the airport prepared for the landing and takeoff of aircraft.
- 10-42A Quality Control.** Details the methods and procedures that will be taken to assure that all materials and completed construction required by this contract conform to contract plans, technical specifications and other requirements, whether manufactured by the Contractor, or procured from subcontractors or

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

vendors. **The quality control requirements shall be provided solely by the Contractor, at no additional cost to the Owner, as contained Section 100 and elsewhere in the contract technical specifications and are in addition to and separate from the acceptance testing requirements.** The Quality Control testing program shall include fees and labor necessary to comply with any and all Special Inspections required by the respective agencies..

Quality Control testing shall be performed by the Contractor, in conformance with the specifications, in all situations for all applicable materials. A third party independent testing laboratory shall be hired by the Contractor and used for implementation of all the Quality Control Program. All Quality Control testing results shall be submitted to the Architect/Engineer within 24 hours of the testing completion as a formal submittal.

Acceptance testing requirements are the responsibility of the Owner, however the Owner reserves the right to use the Contractor's Quality Control testing for acceptance testing

10-42B Quality Assurance. Elective Owner's validation and assurance of contractor provided quality control testing program.

10-43 Specifications. A part of the contract containing the written directions and requirements for completing the contract work. Standards for specifying materials or testing which are cited in the contract specifications by reference shall have the same force and effect as if included in the contract physically.

10-44 Sponsor. A Sponsor is defined in 49 USC § 47102(24) as a public agency that submits to the FAA for an AIP grant; or a private Owner of a public-use airport that submits to the FAA an application for an AIP grant for the airport.

10-45 Structures. Airport facilities such as bridges; culverts; catch basins, inlets, retaining walls, cribbing; storm and sanitary sewer lines; water lines; underdrains; electrical ducts, manholes, handholes, lighting fixtures and bases; transformers; flexible and rigid pavements; navigational aids; buildings; vaults; and, other manmade features of the airport that may be encountered in the work and not otherwise classified herein.

10-46 Subgrade. The soil that forms the pavement foundation.

10-47 Superintendent. The Contractor's executive representative who is present on the work during progress, authorized to receive and fulfill instructions from the Architect/Engineer, and who shall supervise and direct the construction. ***The Contractor shall have a project superintendent on the job site at all times whenever any work is being performed including subcontractor work activities.***

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

- 10-48 Supplemental Agreement.** A written agreement between the Contractor and the OWNER covering (1) work that would increase or decrease the total amount of the awarded contract, or any major contract item, by more than 25%, such increased or decreased work being within the scope of the originally awarded contract; or (2) work that is not within the scope of the originally awarded contract.
- 10-49 Surety.** The corporation, partnership, or individual, other than the Contractor, executing payment or performance bonds that are furnished to the OWNER by the Contractor.
- 10-50 Taxiway.** For the purpose of this document, the term taxiway means the portion of the air operations area of an airport that has been designated by competent airport authority for movement of aircraft to and from the airport's runways, aircraft parking areas, and terminal areas.
- 10-51 Work.** The furnishing of all labor, materials, tools, equipment, and incidentals necessary or convenient to the Contractor's performance of all duties and obligations imposed by the contract, plans, and specifications.
- 10-52 Working Day. *Deleted.*** ~~A working day shall be any day other than a legal holiday, Saturday, or Sunday on which the normal working forces of the Contractor may proceed with regular work for at least six (6) hours toward completion of the contract. When work is suspended for causes beyond the Contractor's control, it will not be counted as a working day. Saturdays, Sundays and holidays on which the Contractor's forces engage in regular work will be considered as working days.~~

END OF SECTION 10

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 20

PROPOSAL REQUIREMENTS AND CONDITIONS

20-01 Advertisement (Notice to Bidders). See Appendix A.

20-02 Qualification of Bidders. *The City of Fayetteville may require each bidder supply the City the following information at their request for bidding on this project.* Each bidder shall furnish the OWNER satisfactory evidence of his or her competency to perform the proposed work. Such evidence of competency, unless otherwise specified, shall consist of statements covering the bidder's past experience on similar work, a list of equipment that would be available for the work, and a list of key personnel that would be available. In addition, each bidder shall furnish the OWNER satisfactory evidence of his or her financial responsibility. Such evidence of financial responsibility, unless otherwise specified, shall consist of a confidential statement or report of the bidder's financial resources and liabilities as of the last calendar year or the bidder's last fiscal year. Such statements or reports shall be certified by a public accountant. At the time of submitting such financial statements or reports, the bidder shall further certify whether his or her financial responsibility is approximately the same as stated or reported by the public accountant. If the bidder's financial responsibility has changed, the bidder shall qualify the public accountant's statement or report to reflect the bidder's true financial condition at the time such qualified statement or report is submitted to the OWNER.

Unless otherwise specified, a bidder may submit evidence that he or she is prequalified with the State Highway Division and is on the current "bidder's list" of the state in which the proposed work is located. Such evidence of State Highway Division prequalification may be submitted as evidence of financial responsibility in lieu of the certified statements or reports specified above.

Each bidder shall submit "evidence of competency" and "evidence of financial responsibility" to the OWNER at the time of bid opening or immediately thereafter.

20-03 Contents of Proposal Forms. The OWNER shall furnish bidders with proposal forms. All papers bound with or attached to the proposal forms are necessary parts and must not be detached.

The plans, specifications, and other documents designated in the proposal form shall be considered a part of the proposal whether attached or not.

20-04 Issuance of Proposal Forms. The OWNER reserves the right to refuse to issue a proposal form to a prospective bidder should such bidder be in default for any of the following reasons:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Failure to comply with any prequalification regulations of the OWNER, if such regulations are cited, or otherwise included, in the proposal as a requirement for bidding.
- b. Failure to pay, or satisfactorily settle, all bills due for labor and materials on former contracts in force with the OWNER at the time the OWNER issues the proposal to a prospective bidder.
- c. Documented record of Contractor default under previous contracts with the OWNER.
- d. Documented record of unsatisfactory work on previous contracts with the OWNER.

20-05 Interpretation of Estimated Proposal Quantities. *Deleted.* *Project is bidding in lump sum format. An estimate of quantities of work to be done and materials to be furnished under these specifications is given in the proposal. It is the result of careful calculations and is believed to be correct. It is given only as a basis for comparison of proposals and the award of the contract. The OWNER does not expressly, or by implication, agree that the actual quantities involved will correspond exactly therewith; nor shall the bidder plead misunderstanding or deception because of such estimates of quantities, or of the character, location, or other conditions pertaining to the work. Payment to the Contractor will be made only for the actual quantities of work performed or materials furnished in accordance with the plans and specifications. It is understood that the quantities may be increased or decreased as hereinafter provided in the subsection 40-02 titled ALTERATION OF WORK AND QUANTITIES of Section 40 without in any way invalidating the unit bidprices.*

20-06 Examination of Plans, Specifications, and Site. The bidder is expected to carefully examine the site of the proposed work, the proposal, plans, specifications, and contract forms. Bidders shall satisfy themselves as to the character, quality, and quantities of work to be performed, materials to be furnished, and as to the requirements of the proposed contract. The submission of a proposal shall be prima facie evidence that the bidder has made such examination and is satisfied as to the conditions to be encountered in performing the work and as to the requirements of the proposed contract, plans, and specifications.

Boring logs and other records of subsurface investigations and tests are available for inspection of bidders. It is understood and agreed that such subsurface information, whether included in the plans, specifications, or otherwise made available to the bidder, was obtained and is intended for the OWNER's design and estimating purposes only. Such information has been made available for the convenience of all bidders. It is further understood and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

agreed that each bidder is solely responsible for all assumptions, deductions, or conclusions which the bidder may make or obtain from his or her examination of the boring logs and other records of subsurface investigations and tests that are furnished by the OWNER.

20-07 Preparation of Proposal. The bidder shall submit his or her proposal on the forms furnished by the OWNER. All blank spaces in the proposal forms must be correctly filled in where indicated for each and every item ~~for which a quantity is given~~. The bidder shall state the price (written in ink or typed) both in words and numerals for which they propose to do for each pay item furnished in the proposal. In case of conflict between words and numerals, the words, unless obviously incorrect, shall govern.

The bidder shall sign the proposal correctly and in ink. If the proposal is made by an individual, his or her name and post office address must be shown. If made by a partnership, the name and post office address of each member of the partnership must be shown. If made by a corporation, the person signing the proposal shall give the name of the state under the laws of which the corporation was chartered and the name, titles, and business address of the president, secretary, and the treasurer. Anyone signing a proposal as an agent shall file evidence of his or her authority to do so and that the signature is binding upon the firm or corporation.

20-08 Responsive and Responsible Bidder. A responsive bid conforms to all significant terms and conditions contained in the Sponsor's invitation for bid. It is the Sponsor's responsibility to decide if the exceptions taken by a bidder to the solicitation are material or not and the extent of deviation it is willing to accept.

A responsible bidder has the ability to perform successfully under the terms and conditions of a proposed procurement, as defined in 49 CFR § 18.36(b)(8). This includes such matters as Contractor integrity, compliance with public policy, record of past performance, and financial and technical resources.

20-09 Irregular Proposals. Proposals shall be considered irregular for the following reasons:

- a. If the proposal is on a form other than that furnished by the OWNER, or if the OWNER's form is altered, or if any part of the proposal form is detached.
- b. If there are unauthorized additions, conditional or alternate pay items, or irregularities of any kind that make the proposal incomplete, indefinite, or otherwise ambiguous.
- c. If the proposal does not contain a unit price for each pay item listed in the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

proposal, ~~except in the case of authorized alternate pay items, for which the bidder is not required to furnish a unit price.~~

- d. If the proposal contains unit prices that are obviously unbalanced.
- e. If the proposal is not accompanied by the proposal guaranty specified by the OWNER.

The OWNER reserves the right to reject any irregular proposal and the right to waive technicalities if such waiver is in the best interest of the OWNER and conforms to local laws and ordinances pertaining to the letting of construction contracts.

20-10 Bid Guarantee. Each separate proposal shall be accompanied by a certified check, or other specified acceptable collateral, in the amount specified in the proposal form. Such check, or collateral, shall be made payable to the OWNER.

20-11 Delivery of Proposal. Each proposal submitted shall be placed in a sealed envelope plainly marked with the project number, location of airport, and name and business address of the bidder on the outside. When sent by mail, preferably registered, the sealed proposal, marked as indicated above, should be enclosed in an additional envelope. No proposal will be considered unless received at the place specified in the advertisement or as modified by Addendum before the time specified for opening all bids. Proposals received after the bid opening time shall be returned to the bidder unopened.

20-12 Withdrawal or Revision of Proposals. A bidder may withdraw or revise (by withdrawal of one proposal and submission of another) a proposal provided that the bidder's request for withdrawal is received by the OWNER in writing or by fax or email before the time specified for opening bids. Revised proposals must be received at the place specified in the advertisement before the time specified for opening all bids.

20-13 Public Opening of Proposals. Proposals shall be opened, and read, publicly at the time and place specified in the advertisement. Bidders, their authorized agents, and other interested persons are invited to attend. Proposals that have been withdrawn (by written or telegraphic request) or received after the time specified for opening bids shall be returned to the bidder unopened.

20-14 Disqualification of Bidders. A bidder shall be considered disqualified for any of the following reasons:

- a. Submitting more than one proposal from the same partnership, firm, or corporation under the same or different name.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

- b.** Evidence of collusion among bidders. Bidders participating in such collusion shall be disqualified as bidders for any future work of the OWNER until any such participating bidder has been reinstated by the OWNER as a qualified bidder.
- c.** If the bidder is considered to be in “default” for any reason specified in the subsection 20-04 titled ISSUANCE OF PROPOSAL FORMS of this section.

END OF SECTION 20

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 30

AWARD AND EXECUTION OF CONTRACT

30-01 Consideration of Proposals. After the proposals are publicly opened and read, they will be compared on the basis of the *lump sum base bid* summation of the products obtained by multiplying the estimated quantities shown in the proposal by the unit bid prices. If a bidder's proposal contains a discrepancy between unit bid prices written in words and unit bid prices written in numbers, the unit price written in words shall govern.

Until the award of a contract is made, the OWNER reserves the right to reject a bidder's proposal for any of the following reasons:

- a. If the proposal is irregular as specified in the subsection 20-09 titled IRREGULAR PROPOSALS of Section 20.
- b. If the bidder is disqualified for any of the reasons specified in the subsection 20-14 titled DISQUALIFICATION OF BIDDERS of Section 20.

In addition, until the award of a contract is made, the OWNER reserves the right to reject any or all proposals, waive technicalities, if such waiver is in the best interest of the OWNER and is in conformance with applicable state and local laws or regulations pertaining to the letting of construction contracts; advertise for new proposals; or proceed with the work otherwise. All such actions shall promote the OWNER's best interests.

30-02 Award of Contract. The award of a contract, if it is to be awarded, shall be made within 120 calendar days of the date specified for publicly opening proposals, unless otherwise specified herein.

Award of the contract shall be made by the OWNER to the lowest, qualified bidder whose proposal conforms to the cited requirements of the OWNER.

30-03 Cancellation of Award. The OWNER reserves the right to cancel the award without liability to the bidder, except return of proposal guaranty, at any time before a contract has been fully executed by all parties and is approved by the OWNER in accordance with the subsection 30-07 titled APPROVAL OF CONTRACT of this section.

30-04 Return of Proposal Guaranty. All proposal guaranties, except those of the two lowest bidders, will be returned immediately after the OWNER has made a comparison of bids as specified in the subsection 30-01 titled CONSIDERATION OF PROPOSALS of this section. Proposal guaranties of the two lowest bidders will be retained by the OWNER until such time as an award

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

is made, at which time, the unsuccessful bidder's proposal guaranty will be returned. The successful bidder's proposal guaranty will be returned as soon as the OWNER receives the contract bonds as specified in the subsection 30-05 titled REQUIREMENTS OF CONTRACT BONDS of this section.

- 30-05 Requirements of Contract Bonds.** At the time of the execution of the contract, the successful bidder shall furnish the OWNER a surety bond or bonds that have been fully executed by the bidder and the surety guaranteeing the performance of the work and the payment of all legal debts that may be incurred by reason of the Contractor's performance of the work. The surety and the form of the bond or bonds shall be acceptable to the OWNER. Unless otherwise specified in this subsection, the surety bond or bonds shall be in a sum equal to the full amount of the contract.
- 30-06 Execution of Contract.** The successful bidder shall sign (execute) the necessary agreements for entering into the contract and return the signed contract to the OWNER, along with the fully executed surety bond or bonds specified in the subsection 30-05 titled REQUIREMENTS OF CONTRACT BONDS of this section, within 15 calendar days from the date mailed or otherwise delivered to the successful bidder.
- 30-07 Approval of Contract.** Upon receipt of the contract and contract bond or bonds that have been executed by the successful bidder, the OWNER shall complete the execution of the contract in accordance with local laws or ordinances, and return the fully executed contract to the Contractor. Delivery of the fully executed contract to the Contractor shall constitute the OWNER's approval to be bound by the successful bidder's proposal and the terms of the contract.
- 30-08 Failure to Execute Contract.** Failure of the successful bidder to execute the contract and furnish an acceptable surety bond or bonds within the 15 calendar day period specified in the subsection 30-06 titled EXECUTION OF CONTRACT of this section shall be just cause for cancellation of the award and forfeiture of the proposal guaranty, not as a penalty, but as liquidation of damages to the OWNER.

END OF SECTION 30

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 40

SCOPE OF WORK

40-01 Intent of Contract. The intent of the contract is to provide for construction and completion, in every detail, of the work described. It is further intended that the Contractor shall furnish all labor, materials, equipment, tools, transportation, and supplies required to complete the work in accordance with the plans, specifications, and terms of the contract.

40-02 Alteration of Work and Quantities. The OWNER reserves and shall have the right to make such alterations in the work as may be necessary or desirable to complete the work originally intended in an acceptable manner. Unless otherwise specified herein, the ARCHITECT shall be and is hereby authorized to make such alterations in the work as may increase or decrease the originally awarded contract ~~work quantities~~, provided that the aggregate of such alterations does not change the total contract cost or the total cost of any major contract item by more than 25% ~~(total cost being based on the unit prices and estimated quantities in the awarded contract)~~. Alterations that do not exceed the 25% limitation shall not invalidate the contract nor release the surety, and the Contractor agrees to accept payment for such alterations as if the altered work had been a part of the original contract. These alterations that are for work within the general scope of the contract shall be covered by "Change Orders" issued by the ARCHITECT. Change orders for altered work shall include extensions of contract time where, in the ARCHITECT's opinion, such extensions are commensurate with the amount and difficulty of added work.

Should the aggregate amount of altered work exceed the 25% limitation hereinbefore specified, such excess altered work shall be covered by supplemental agreement. If the OWNER and the Contractor are unable to agree on a unit adjustment for any contract item that requires a supplemental agreement, the OWNER reserves the right to terminate the contract with respect to the item and make other arrangements for its completion.

Supplemental agreements shall be approved by the FAA and shall include all applicable Federal contract provisions for procurement and contracting required under AIP. Supplemental agreements shall also require consent of the Contractor's surety and separate performance and payment bonds.

40-03 Omitted Items. The ARCHITECT may, in the OWNER's best interest, omit from the work any contract item, except major contract items. Major contract items may be omitted by a supplemental agreement. Such omission of contract items shall not invalidate any other contract provision or requirement.

Should a contract item be omitted or otherwise ordered to be non-performed,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

the Contractor shall be paid for all work performed toward completion of such item prior to the date of the order to omit such item. Payment for work performed shall be in accordance with the subsection 90-04 titled PAYMENT FOR OMITTED ITEMS of Section 90.

40-04 Extra Work. Should acceptable completion of the contract require the Contractor to perform an item of work for which no basis of payment has been provided in the original contract or previously issued change orders or supplemental agreements, the same shall be called "Extra Work." Extra Work that is within the general scope of the contract shall be covered by written change order. Change orders for such Extra Work shall contain agreed unit prices for performing the change order work in accordance with the requirements specified in the order, and shall contain any adjustment to the contract time that, in the ENGINEER's opinion, is necessary for completion of such Extra Work.

When determined by the ARCHITECT to be in the OWNER's best interest, the ARCHITECT may order the Contractor to proceed with Extra Work as provided in the subsection 90-05 titled PAYMENT FOR EXTRA WORK of Section 90. Extra Work that is necessary for acceptable completion of the project, but is not within the general scope of the work covered by the original contract shall be covered by a Supplemental Agreement as defined in the subsection 10-48 titled SUPPLEMENTAL AGREEMENT of Section 10.

Any claim for payment of Extra Work that is not covered by written agreement (change order or supplemental agreement) shall be rejected by the OWNER.

40-05 Maintenance of Traffic. It is the explicit intention of the contract that the safety of aircraft, as well as the Contractor's equipment and personnel, is the most important consideration.

a. It is understood and agreed that the Contractor shall provide for the free and unobstructed movement of aircraft in the air operations areas (AOAs) of the airport with respect to his or her own operations and the operations of all subcontractors as specified in the subsection 80-04 titled LIMITATION OF OPERATIONS of Section 80. It is further understood and agreed that the Contractor shall provide for the uninterrupted operation of visual and electronic signals (including power supplies thereto) used in the guidance of aircraft while operating to, from, and upon the airport as specified in the subsection 70-15 titled CONTRACTOR'S RESPONSIBILITY FOR UTILITY SERVICE AND FACILITIES OF OTHERS in Section 70.

b. With respect to his or her own operations and the operations of all subcontractors, the Contractor shall provide marking, lighting, and other acceptable means of identifying personnel, equipment, vehicles, storage

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

areas, and any work area or condition that may be hazardous to the operation of aircraft, fire-rescue equipment, or maintenance vehicles at the airport.

- c. When the contract requires the maintenance of vehicular traffic on an existing road, street, or highway during the Contractor's performance of work that is otherwise provided for in the contract, plans, and specifications, the Contractor shall keep such road, street, or highway open to all traffic and shall provide such maintenance as may be required to accommodate traffic. The Contractor shall be responsible for the repair of any damage caused by the Contractor's equipment and personnel. The Contractor shall furnish, erect, and maintain barricades, warning signs, flag person, and other traffic control devices in reasonable conformity with the Manual on Uniform Traffic Control Devices (MUTCD) (<http://mutcd.fhwa.dot.gov/>), unless otherwise specified. The Contractor shall also construct and maintain in a safe condition any temporary connections necessary for ingress to and egress from abutting property or intersecting roads, streets or highways. ~~[Unless otherwise specified herein, the Contractor will not be required to furnish snow removal for such existing road, street, or highway.]~~

40-06 Removal of Existing Structures. All existing structures encountered within the established lines, grades, or grading sections shall be removed by the Contractor, unless such existing structures are otherwise specified to be relocated, adjusted up or down, salvaged, abandoned in place, reused in the work or to remain in place. The cost of removing such existing structures shall not be measured or paid for directly, but shall be included in the ~~various contract items~~ *project lump sum price*.

Should the Contractor encounter an existing structure (above or below ground) in the work for which the disposition is not indicated on the plans, the ARCHITECT shall be notified prior to disturbing such structure. The disposition of existing structures so encountered shall be immediately determined by the ARCHITECT in accordance with the provisions of the contract.

Except as provided in the subsection 40-07 titled RIGHTS IN AND USE OF MATERIALS FOUND IN THE WORK of this section, it is intended that all existing materials or structures that may be encountered (within the lines, grades, or grading sections established for completion of the work) shall be used in the work as otherwise provided for in the contract and shall remain the property of the OWNER when so used in the work.

40-07 Rights In and Use of Materials Found in the Work. Should the Contractor encounter any material such as (but not restricted to) sand, stone, gravel, slag, or concrete slabs within the established lines, grades, or grading sections, the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

use of which is intended by the terms of the contract to be either embankment or waste, the Contractor may at his or her option either:

- a. Use such material in another contract item, providing such use is approved by the ARCHITECT and is in conformance with the contract specifications applicable to such use; or,
- b. Remove such material from the site, upon written approval of the ARCHITECT; or
- c. Use such material for the Contractor's own temporary construction on site; or,
- d. Use such material as intended by the terms of the contract.

Should the Contractor wish to exercise option a., b., or c., the Contractor shall request the ARCHITECT's approval in advance of such use.

~~Should the ENGINEER approve the Contractor's request to exercise option a., b., or c., the Contractor shall be paid for the excavation or removal of such material at the applicable contract price. The Contractor shall replace, at his or her own expense, such removed or excavated material with an agreed equal volume of material that is acceptable for use in constructing embankment, backfills, or otherwise to the extent that such replacement material is needed to complete the contract work. The Contractor shall not be charged for use of such material used in the work or removed from the site.~~

~~Should the ENGINEER approve the Contractor's exercise of option a., the Contractor shall be paid, at the applicable contract price, for furnishing and installing such material in accordance with requirements of the contract item in which the material is used.~~

It is understood and agreed that the Contractor shall make no claim for delays by reason of his or her exercise of option a., b., or c.

The Contractor shall not excavate, remove, or otherwise disturb any material, structure, or part of a structure which is located outside the lines, grades, or grading sections established for the work, except where such excavation or removal is provided for in the contract, plans, or specifications.

40-08 Final Cleanup. Upon completion of the work and before acceptance and final payment will be made, the Contractor shall remove from the site all machinery, equipment, surplus and discarded materials, rubbish, temporary structures, and stumps or portions of trees. The Contractor shall cut all brush and woods within the limits indicated and shall leave the site in a neat and presentable

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

condition. Material cleared from the site and deposited on adjacent property will not be considered as having been disposed of satisfactorily, unless the Contractor has obtained the written permission of such property OWNER.

END OF SECTION 40

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 50

CONTROL OF WORK

50-01 Authority of the ARCHITECT. The ARCHITECT shall decide any and all questions which may arise as to the quality and acceptability of materials furnished, work performed, and as to the manner of performance and rate of progress of the work. The ARCHITECT shall decide all questions that may arise as to the interpretation of the specifications or plans relating to the work. The ARCHITECT shall determine the amount and quality of the several kinds of work performed and materials furnished which are to be paid for the under contract.

The ARCHITECT does not have the authority to accept pavements that do not conform to FAA specification requirements. *This contract does not include pavements intended to support aircraft loads.*

50-02 Conformity with Plans and Specifications. All work and all materials furnished shall be in reasonably close conformity with the lines, grades, grading sections, cross-sections, dimensions, material requirements, and testing requirements that are specified (including specified tolerances) in the contract, plans or specifications.

If the ARCHITECT finds the materials furnished, work performed, or the finished product not within reasonably close conformity with the plans and specifications but that the portion of the work affected will, in his or her opinion, result in a finished product having a level of safety, economy, durability, and workmanship acceptable to the OWNER, the ARCHITECT will advise the OWNER of his or her determination that the affected work be accepted and remain in place. In this event, the ARCHITECT will document the determination and recommend to the OWNER a basis of acceptance that will provide for an adjustment in the contract price for the affected portion of the work. The ARCHITECT's determination and recommended contract price adjustments will be based on sound engineering judgment and such tests or retests of the affected work as are, in the ARCHITECT's opinion, needed. Changes in the contract price shall be covered by contract change order or supplemental agreement as applicable.

If the ARCHITECT finds the materials furnished, work performed, or the finished product are not in reasonably close conformity with the plans and specifications and have resulted in an unacceptable finished product, the affected work or materials shall be removed and replaced or otherwise corrected by and at the expense of the Contractor in accordance with the ARCHITECT's written orders.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

For the purpose of this subsection, the term “reasonably close conformity” shall not be construed as waiving the Contractor’s responsibility to complete the work in accordance with the contract, plans, and specifications. The term shall not be construed as waiving the ARCHITECT’s responsibility to insist on strict compliance with the requirements of the contract, plans, and specifications during the Contractor’s execution of the work, when, in the ARCHITECT’s opinion, such compliance is essential to provide an acceptable finished portion of the work.

For the purpose of this subsection, the term “reasonably close conformity” is also intended to provide the ARCHITECT with the authority, after consultation with the FAA, to use sound engineering judgment in his or her determinations as to acceptance of work that is not in strict conformity, but will provide a finished product equal to or better than that intended by the requirements of the contract, plans and specifications.

The ARCHITECT will not be responsible for the Contractor’s means, methods, techniques, sequences, or procedures of construction or the safety precautions incident thereto.

50-03 Coordination of Contract, Plans, and Specifications. The contract, plans, specifications, and all referenced standards cited are essential parts of the contract requirements. A requirement occurring in one is as binding as though occurring in all. They are intended to be complementary and to describe and provide for a complete work. In case of discrepancy, calculated dimensions will govern over scaled dimensions; contract technical specifications shall govern over contract general provisions, plans, cited standards for materials or testing, and cited advisory circulars (ACs); contract general provisions shall govern over plans, cited standards for materials or testing, and cited ACs; plans shall govern over cited standards for materials or testing and cited ACs. If any paragraphs contained in the Special Provisions conflict with General Provisions or Technical Specifications, the Special Provisions shall govern.

From time to time, discrepancies within cited testing standards occur due to the timing of the change, edits, and/or replacement of the standards. If the Contractor discovers any apparent discrepancy within standard test methods, the Contractor shall immediately ask the ENGINEER for an interpretation and decision, and such decision shall be final.

~~LIST OF SPECIAL PROVISIONS~~

~~{—}~~

50-04 Cooperation of Contractor. The Contractor will be supplied with five copies each of the plans and specifications. The Contractor shall have available on the work at all times one copy each of the plans and specifications. Additional copies of plans and specifications may be obtained by the Contractor for the cost of reproduction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The Contractor shall give constant attention to the work to facilitate the progress thereof, and shall cooperate with the ARCHITECT and his or her inspectors and with other contractors in every way possible. The Contractor shall have a competent superintendent on the work at all times who is fully authorized as his or her agent on the work. The superintendent shall be capable of reading and thoroughly understanding the plans and specifications and shall receive and fulfill instructions from the ARCHITECT or his or her authorized representative.

50-05 Cooperation Between Contractors. The OWNER reserves the right to contract for and perform other or additional work on or near the work covered by this contract.

When separate contracts are let within the limits of any one project, each Contractor shall conduct the work so as not to interfere with or hinder the progress of completion of the work being performed by other Contractors. Contractors working on the same project shall cooperate with each other as directed.

Each Contractor involved shall assume all liability, financial or otherwise, in connection with his or her contract and shall protect and save harmless the OWNER from any and all damages or claims that may arise because of inconvenience, delays, or loss experienced because of the presence and operations of other Contractors working within the limits of the same project.

The Contractor shall arrange his or her work and shall place and dispose of the materials being used so as not to interfere with the operations of the other Contractors within the limits of the same project. The Contractor shall join his or her work with that of the others in an acceptable manner and shall perform it in proper sequence to that of the others.

50-06 Construction Layout and Stakes. The ARCHITECT shall establish horizontal and vertical control only. The Contractor must establish all layout required for the construction of the work. Such stakes and markings as the ARCHITECT may set for either their own or the Contractor's guidance shall be preserved by the Contractor. In case of negligence on the part of the Contractor, or their employees, resulting in the destruction of such stakes or markings, an amount equal to the cost of replacing the same may be deducted from subsequent estimates due the Contractor at the discretion of the ARCHITECT.

The Contractor will be required to furnish all lines, grades and measurements from the control points necessary for the proper execution and control of the work contracted for under these specifications.

The Contractor must give copies of survey notes to the ARCHITECT for each

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

area of construction and for each placement of material as specified to allow the ARCHITECT to make periodic checks for conformance with plan grades, alignments and grade tolerances required by the applicable material specifications. All surveys must be provided to the ARCHITECT prior to commencing work items that will cover or disturb the survey staking as set by the Contractor's surveyor. Survey(s) and notes shall be provided in the following format(s): PDF and/or AutoCad. In the case of error, on the part of the Contractor, their surveyor, employees or subcontractors, resulting in established grades, alignment or grade tolerances that do not concur with those specified or shown on the plans, the Contractor is solely responsible for correction, removal, replacement and all associated costs at no additional cost to the OWNER.

No direct payment will be made, unless otherwise specified in contract documents, for this labor, materials, or other expenses. The cost shall be included in the *lump sum* price of the bid ~~for the various items of the Contract.~~

Construction Staking and Layout includes but is not limited to:

- a. Existing building structural elements and floor elevations.
- b. Building foundation, columns, walls.
- c. Storm drainage.
- d. Utilities.
- e. Site grading.
- f. Retaining walls.
- g. Pavement subgrade and base courses.
- h. Concrete pavement lanes, form lines, and grades.
- i. Curb and gutter, and sidewalks.
- j. Asphalt pavement lines and grades.
- k. Pavement markings.

- ~~a. Clearing and Grubbing perimeter staking~~
~~b. Rough Grade slope stakes at 100-foot stations~~
~~c. Drainage Swales slope stakes and flow line blue tops at 50-foot stations~~

~~Subgrade blue tops at 25-foot stations and 25-foot offset distance (maximum) for the following section locations:~~

- ~~a. Runway — minimum five (5) per station~~
~~b. Taxiways — minimum three (3) per station~~
~~c. Holding apron areas — minimum three (3) per station~~
~~d. Roadways — minimum three (3) per station~~

~~Base Course blue tops at 25-foot stations and 25-foot offset distance (maximum) for the following section locations:~~

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- ~~a. Runway — minimum five (5) per station~~
- ~~b. Taxiways — minimum three (3) per station~~
- ~~c. Holding apron areas — minimum three (3) per station~~

~~Pavement areas:~~

- ~~a. Edge of Pavement hubs and tacks (for stringline by Contractor) at 100-foot stations.~~
- ~~b. Between Lifts at 25-foot stations for the following section locations:~~
 - ~~(1) Runways — each paving lane width~~
 - ~~(2) Taxiways — each paving lane width~~
 - ~~(3) Holding areas — each paving lane width~~
- ~~c. After finish paving operations at 50 foot stations:~~
 - ~~(1) All paved areas — Edge of each paving lane prior to next paving lot~~
- ~~d. Shoulder and safety area blue tops at 50-foot stations and at all break points with maximum of 50 foot offsets.~~
- ~~e. Fence lines at 100-foot stations minimum.~~
- ~~f. Electrical and Communications System locations, lines and grades including but not limited to duct runs, connections, fixtures, signs, lights, Visual Approach Slope Indicators (VASIs), Precision Approach Path Indicators (PAPIs), Runway End Identifier Lighting (REIL), Wind Cones, Distance Markers (signs), pull boxes and manholes.~~
- ~~g. Drain lines, cut stakes and alignment on 25 foot stations, inlet and manholes.~~
- ~~h. Painting and Striping layout (pinned with 1.5 inch PK nails) marked for paint Contractor. (All nails shall be removed after painting).~~
- ~~i. Laser, or other automatic control devices, shall be checked with temporary control point or grade hub at a minimum of once per 400 feet per pass (that is, paving lane).~~

The establishment of Survey Control and/or reestablishment of survey control shall be by a State Licensed Land Surveyor.

Controls and stakes disturbed or suspect of having been disturbed shall be checked and/or reset as directed by the ARCHITECT without additional cost to the OWNER.

50-07 Automatically Controlled Equipment. Whenever batching or mixing plant equipment is required to be operated automatically under the contract and a breakdown or malfunction of the automatic controls occurs, the equipment may be operated manually or by other methods for a period 48 hours following the breakdown or malfunction, provided this method of operations will produce results which conform to all other requirements of the contract.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

50-08 Authority and Duties of Inspectors. Inspectors shall be authorized to inspect all work done and all material furnished. Such inspection may extend to all or any part of the work and to the preparation, fabrication, or manufacture of the materials to be used. Inspectors are not authorized to revoke, alter, or waive any provision of the contract. Inspectors are not authorized to issue instructions contrary to the plans and specifications or to act as foreman for the Contractor.

Inspectors are authorized to notify the Contractor or his or her representatives of any failure of the work or materials to conform to the requirements of the contract, plans, or specifications and to reject such nonconforming materials in question until such issues can be referred to the ARCHITECT for a decision.

50-09 Inspection of the Work. All materials and each part or detail of the work shall be subject to inspection. The ARCHITECT shall be allowed access to all parts of the work and shall be furnished with such information and assistance by the Contractor as is required to make a complete and detailed inspection.

If the ARCHITECT requests it, the Contractor, at any time before acceptance of the work, shall remove or uncover such portions of the finished work as may be directed. After examination, the Contractor shall restore said portions of the work to the standard required by the specifications. Should the work thus exposed or examined prove acceptable, the uncovering, or removing, and the replacing of the covering or making good of the parts removed will be paid for as extra work; but should the work so exposed or examined prove unacceptable, the uncovering, or removing, and the replacing of the covering or making good of the parts removed will be at the Contractor's expense.

Any work done or materials used without supervision or inspection by an authorized representative of the OWNER may be ordered removed and replaced at the Contractor's expense unless the OWNER's representative failed to inspect after having been given reasonable notice in writing that the work was to be performed.

Should the contract work include relocation, adjustment, or any other modification to existing facilities, not the property of the (contract) OWNER, authorized representatives of the Owners of such facilities shall have the right to inspect such work. Such inspection shall in no sense make any facility owner a party to the contract, and shall in no way interfere with the rights of the parties to this contract.

50-10 Removal of Unacceptable and Unauthorized Work. All work that does not conform to the requirements of the contract, plans, and specifications will be considered unacceptable, unless otherwise determined acceptable by the ENGINEER as provided in the subsection 50-02 titled CONFORMITY WITH PLANS AND SPECIFICATIONS of this section.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Unacceptable work, whether the result of poor workmanship, use of defective materials, damage through carelessness, or any other cause found to exist prior to the final acceptance of the work, shall be removed immediately and replaced in an acceptable manner in accordance with the provisions of the subsection 70-14 titled CONTRACTOR'S RESPONSIBILITY FOR WORK of Section 70.

No removal work made under provision of this subsection shall be done without lines and grades having been established by the ARCHITECT. Work done contrary to the instructions of the ARCHITECT, work done beyond the lines shown on the plans or as established by the ARCHITECT, except as herein specified, or any extra work done without authority, will be considered as unauthorized and will not be paid for under the provisions of the contract. Work so done may be ordered removed or replaced at the Contractor's expense.

Upon failure on the part of the Contractor to comply with any order of the ARCHITECT made under the provisions of this subsection, the ARCHITECT will have authority to cause unacceptable work to be remedied or removed and replaced and unauthorized work to be removed and to deduct the costs incurred by the OWNER from any monies due or to become due the Contractor.

50-11 Load Restrictions. The Contractor shall comply with all legal load restrictions in the hauling of materials on public roads beyond the limits of the work. A special permit will not relieve the Contractor of liability for damage that may result from the moving of material or equipment.

The operation of equipment of such weight or so loaded as to cause damage to structures or to any other type of construction will not be permitted. Hauling of materials over the base course or surface course under construction shall be limited as directed. No loads will be permitted on a concrete pavement, base, or structure before the expiration of the curing period. The Contractor shall be responsible for all damage done by his or her hauling equipment and shall correct such damage at his or her own expense.

50-12 Maintenance During Construction. The Contractor shall maintain the work during construction and until the work is accepted. Maintenance shall constitute continuous and effective work prosecuted day by day, with adequate equipment and forces so that the work is maintained in satisfactory condition at all times.

In the case of a contract for the placing of a course upon a course or subgrade previously constructed, the Contractor shall maintain the previous course or subgrade during all construction operations.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

All costs of maintenance work during construction and before the project is accepted shall be included in the ~~unit prices bid on the various contract items~~ *project lump sum price*, and the Contractor will not be paid an additional amount for such work.

50-13 Failure to Maintain the Work. Should the Contractor at any time fail to maintain the work as provided in the subsection 50-12 titled MAINTENANCE DURING CONSTRUCTION of this section, the ARCHITECT shall immediately notify the Contractor of such noncompliance. Such notification shall specify a reasonable time within which the Contractor shall be required to remedy such unsatisfactory maintenance condition. The time specified will give due consideration to the exigency that exists.

Should the Contractor fail to respond to the ARCHITECT's notification, the OWNER may suspend any work necessary for the OWNER to correct such unsatisfactory maintenance condition, depending on the exigency that exists. Any maintenance cost incurred by the OWNER, shall be deducted from monies due or to become due the Contractor.

50-14 Partial Acceptance. If at any time during the execution of the project the Contractor substantially completes a usable unit or portion of the work, the occupancy of which will benefit the OWNER, the Contractor may request the ARCHITECT to make final inspection of that unit. If the ARCHITECT finds upon inspection that the unit has been satisfactorily completed in compliance with the contract, the ARCHITECT may accept it as being complete, and the Contractor may be relieved of further responsibility for that unit. Such partial acceptance and beneficial occupancy by the OWNER shall not void or alter any provision of the contract.

50-15 Final Acceptance. Upon due notice from the Contractor of presumptive completion of the entire project, the ARCHITECT and OWNER will make an inspection. If all construction provided for and contemplated by the contract is found to be complete in accordance with the contract, plans, and specifications, such inspection shall constitute the final inspection. The ARCHITECT shall notify the Contractor in writing of final acceptance as of the date of the final inspection.

If, however, the inspection discloses any work, in whole or in part, as being unsatisfactory, the ARCHITECT will give the Contractor the necessary instructions for correction of same and the Contractor shall immediately comply with and execute such instructions. Upon correction of the work, another inspection will be made which shall constitute the final inspection, provided the work has been satisfactorily completed. In such event, the ARCHITECT will make the final acceptance and notify the Contractor in writing of this acceptance as of the date of final inspection.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

50-16 Claims for Adjustment and Disputes. If for any reason the Contractor deems that additional compensation is due for work or materials not clearly provided for in the contract, plans, or specifications or previously authorized as extra work, the Contractor shall notify the ARCHITECT in writing of his or her intention to claim such additional compensation before the Contractor begins the work on which the Contractor bases the claim. If such notification is not given or the ARCHITECT is not afforded proper opportunity by the Contractor for keeping strict account of actual cost as required, then the Contractor hereby agrees to waive any claim for such additional compensation. Such notice by the Contractor and the fact that the ARCHITECT has kept account of the cost of the work shall not in any way be construed as proving or substantiating the validity of the claim. When the work on which the claim for additional compensation is based has been completed, the Contractor shall, within 10 calendar days, submit a written claim to the ARCHITECT who will present it to the OWNER for consideration in accordance with local laws or ordinances.

Nothing in this subsection shall be construed as a waiver of the Contractor's right to dispute final payment based on differences in measurements or computations.

END OF SECTION 50

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 60

CONTROL OF MATERIALS

60-01 Source of Supply and Quality Requirements. The materials used in the work shall conform to the requirements of the contract, plans, and specifications. Unless otherwise specified, such materials that are manufactured or processed shall be new (as compared to used or reprocessed).

In order to expedite the inspection and testing of materials, the Contractor shall furnish complete statements to the ARCHITECT as to the origin, composition, and manufacture of all materials to be used in the work. Such statements shall be furnished promptly after execution of the contract but, in all cases, prior to delivery of such materials.

At the ARCHITECT's option, materials may be approved at the source of supply before delivery is stated. If it is found after trial that sources of supply for previously approved materials do not produce specified products, the Contractor shall furnish materials from other sources.

~~The Contractor shall furnish airport lighting equipment that conforms to the requirements of cited materials specifications. In addition, where an FAA specification for airport lighting equipment is cited in the plans or specifications, the Contractor shall furnish such equipment that is:~~

- ~~a. Listed in advisory circular (AC) 150/5345-53, Airport Lighting Equipment Certification Program, and Addendum that is in effect on the date of advertisement; and,~~
- ~~b. Produced by the manufacturer as listed in the Addendum cited above for the certified equipment part number.~~

~~The following airport lighting equipment is required for this contract and is to be furnished by the Contractor in accordance with the requirements of this subsection: [].~~

60-02 Samples, Tests, and Cited Specifications. Unless otherwise designated, all materials used in the work shall be inspected, tested, and approved by the ARCHITECT before incorporation in the work. Any work in which untested materials are used without approval or written permission of the ARCHITECT shall be performed at the Contractor's risk. Materials found to be unacceptable and unauthorized will not be paid for and, if directed by the ARCHITECT, shall be removed at the Contractor's expense.

Unless otherwise designated, quality assurance tests in accordance with the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

cited standard methods of ASTM, American Association of State Highway and Transportation Officials (AASHTO), Federal Specifications, Commercial Item Descriptions, and all other cited methods, which are current on the date of advertisement for bids, will be made by and at the expense of the ARCHITECT.

The testing organizations performing on-site quality assurance field tests shall have copies of all referenced standards on the construction site for use by all technicians and other personnel, including the Contractor's representative at his or her request. Unless otherwise designated, samples for quality assurance will be taken by a qualified representative of the ARCHITECT. All materials being used are subject to inspection, test, or rejection at any time prior to or during incorporation into the work. Copies of all tests will be furnished to the Contractor's representative at their request after review and approval of the ARCHITECT.

The Contractor shall employ a testing organization to perform all Contractor required Quality Control tests. The Contractor shall submit to the ARCHITECT resumes on all testing organizations and individual persons who will be performing the tests. The ARCHITECT will determine if such persons are qualified. All the test data shall be reported to the ARCHITECT after the results are known. A legible, handwritten copy of all test data shall be given to the ARCHITECT daily, along with printed reports, in an approved format, on a weekly basis. After completion of the project, and prior to final payment, the Contractor shall submit a final report to the ARCHITECT showing all test data reports, plus an analysis of all results showing ranges, averages, and corrective action taken on all failing tests.

60-03 Certification of Compliance. The ARCHITECT may permit the use, prior to sampling and testing, of certain materials or assemblies when accompanied by manufacturer's certificates of compliance stating that such materials or assemblies fully comply with the requirements of the contract. The certificate shall be signed by the manufacturer. Each lot of such materials or assemblies delivered to the work must be accompanied by a certificate of compliance in which the lot is clearly identified.

Materials or assemblies used on the basis of certificates of compliance may be sampled and tested at any time and if found not to be in conformity with contract requirements will be subject to rejection whether in place or not.

The form and distribution of certificates of compliance shall be as approved by the ARCHITECT.

When a material or assembly is specified by "brand name or equal" and the Contractor elects to furnish the specified "brand name," the Contractor shall be required to furnish the manufacturer's certificate of compliance for each lot of

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

such material or assembly delivered to the work. Such certificate of compliance shall clearly identify each lot delivered and shall certify as to:

- a. Conformance to the specified performance, testing, quality or dimensional requirements; and,
- b. Suitability of the material or assembly for the use intended in the contract work.

Should the Contractor propose to furnish an “or equal” material or assembly, the Contractor shall furnish the manufacturer’s certificates of compliance as hereinbefore described for the specified brand name material or assembly. However, the ARCHITECT shall be the sole judge as to whether the proposed “or equal” is suitable for use in the work.

The ARCHITECT reserves the right to refuse permission for use of materials or assemblies on the basis of certificates of compliance.

60-04 Plant Inspection. The ARCHITECT or his or her authorized representative may inspect, at its source, any specified material or assembly to be used in the work. Manufacturing plants may be inspected from time to time for the purpose of determining compliance with specified manufacturing methods or materials to be used in the work and to obtain samples required for acceptance of the material or assembly.

Should the ARCHITECT conduct plant inspections, the following conditions shall exist:

- a. The ARCHITECT shall have the cooperation and assistance of the Contractor and the producer with whom the ARCHITECT has contracted for materials.
- b. The ARCHITECT shall have full entry at all reasonable times to such parts of the plant that concern the manufacture or production of the materials being furnished.
- c. If required by the ARCHITECT, the Contractor shall arrange for adequate office or working space that may be reasonably needed for conducting plant inspections. Office or working space should be conveniently located with respect to the plant.

It is understood and agreed that the OWNER shall have the right to retest any material that has been tested and approved at the source of supply after it has been delivered to the site. The ARCHITECT shall have the right to reject only material which, when retested, does not meet the requirements of the contract,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

plans, or specifications.

60-05 Architect's Field Office. An ARCHITECT's field office is not required.

60-06 Storage of Materials. Materials shall be so stored as to assure the preservation of their quality and fitness for the work. Stored materials, even though approved before storage, may again be inspected prior to their use in the work. Stored materials shall be located to facilitate their prompt inspection. The Contractor shall coordinate the storage of all materials with the ARCHITECT. Materials to be stored on airport property shall not create an obstruction to air navigation nor shall they interfere with the free and unobstructed movement of aircraft. Unless otherwise shown on the plans, the storage of materials and the location of the Contractor's plant and parked equipment or vehicles shall be as directed by the ARCHITECT. Private property shall not be used for storage purposes without written permission of the owner or lessee of such property. The Contractor shall make all arrangements and bear all expenses for the storage of materials on private property. Upon request, the Contractor shall furnish the ARCHITECT a copy of the property owner's permission.

All storage sites on private or airport property shall be restored to their original condition by the Contractor at his or her entire expense, except as otherwise agreed to (in writing) by the owner or lessee of the property.

60-07 Unacceptable Materials. Any material or assembly that does not conform to the requirements of the contract, plans, or specifications shall be considered unacceptable and shall be rejected. The Contractor shall remove any rejected material or assembly from the site of the work, unless otherwise instructed by the ARCHITECT.

Rejected material or assembly, the defects of which have been corrected by the Contractor, shall not be returned to the site of the work until such time as the ARCHITECT has approved its use in the work.

60-08 Owner Furnished Materials. The Contractor shall furnish all materials required to complete the work, except those specified, if any, to be furnished by the OWNER. OWNER-furnished materials shall be made available to the Contractor at the location specified.

All costs of handling, transportation from the specified location to the site of work, storage, and installing OWNER-furnished materials shall be included in the unit price bid for the contract item in which such OWNER-furnished material is used *project lump sum price*.

After any OWNER-furnished material has been delivered to the location

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

specified, the Contractor shall be responsible for any demurrage, damage, loss, or other deficiencies that may occur during the Contractor's handling, storage, or use of such OWNER-furnished material. The OWNER will deduct from any monies due or to become due the Contractor any cost incurred by the OWNER in making good such loss due to the Contractor's handling, storage, or use of OWNER-furnished materials.

END OF SECTION 60

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 70

LEGAL REGULATIONS AND RESPONSIBILITY TO PUBLIC

- 70-01 Laws to be Observed.** The Contractor shall keep fully informed of all Federal and state laws, all local laws, ordinances, and regulations and all orders and decrees of bodies or tribunals having any jurisdiction or authority, which in any manner affect those engaged or employed on the work, or which in any way affect the conduct of the work. The Contractor shall at all times observe and comply with all such laws, ordinances, regulations, orders, and decrees; and shall protect and indemnify the OWNER and all his or her officers, agents, or servants against any claim or liability arising from or based on the violation of any such law, ordinance, regulation, order, or decree, whether by the Contractor or the Contractor's employees.
- 70-02 Permits, Licenses, and Taxes.** The Contractor shall procure all permits and licenses, pay all charges, fees, and taxes, and give all notices necessary and incidental to the due and lawful execution of the work.
- 70-03 Patented Devices, Materials, and Processes.** If the Contractor is required or desires to use any design, device, material, or process covered by letters of patent or copyright, the Contractor shall provide for such use by suitable legal agreement with the Patentee or owner. The Contractor and the surety shall indemnify and hold harmless the OWNER, any third party, or political subdivision from any and all claims for infringement by reason of the use of any such patented design, device, material or process, or any trademark or copyright, and shall indemnify the OWNER for any costs, expenses, and damages which it may be obliged to pay by reason of an infringement, at any time during the execution or after the completion of the work.
- 70-04 Restoration of Surfaces Disturbed by Others.** The OWNER reserves the right to authorize the construction, reconstruction, or maintenance of any public or private utility service, FAA or National Oceanic and Atmospheric Administration (NOAA) facility, or a utility service of another government agency at any time during the progress of the work. To the extent that such construction, reconstruction, or maintenance has been coordinated with the OWNER, such authorized work (by others) is indicated as follows:

Fayetteville PWC: Electrical and Fiber Optic

Time Warner Cable: Service Lines

CenturyLink: Copper and Fiber Optic Service Lines

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

City IT: Fiber Optic and Copper Cables

Fayetteville PWC: Water and Sewer

Except as listed above, the Contractor shall not permit any individual, firm, or corporation to excavate or otherwise disturb such utility services or facilities located within the limits of the work without the written permission of the ARCHITECT.

Should the owner of public or private utility service, FAA, or NOAA facility, or a utility service of another government agency be authorized to construct, reconstruct, or maintain such utility service or facility during the progress of the work, the Contractor shall cooperate with such owners by arranging and performing the work in this contract to facilitate such construction, reconstruction or maintenance by others whether or not such work by others is listed above. When ordered as extra work by the ARCHITECT, the Contractor shall make all necessary repairs to the work which are due to such authorized work by others, unless otherwise provided for in the contract, plans, or specifications. It is understood and agreed that the Contractor shall not be entitled to make any claim for damages due to such authorized work by others or for any delay to the work resulting from such authorized work.

70-05 Federal Aid Participation. For Airport Improvement Program (AIP) contracts, the United States Government has agreed to reimburse the OWNER for some portion of the contract costs. Such reimbursement is made from time to time upon the OWNER's request to the FAA. In consideration of the United States Government's (FAA's) agreement with the OWNER, the OWNER has included provisions in this contract pursuant to the requirements of Title 49 of the USC and the Rules and Regulations of the FAA that pertain to the work.

As required by the USC, the contract work is subject to the inspection and approval of duly authorized representatives of the FAA Administrator, and is further subject to those provisions of the rules and regulations that are cited in the contract, plans, or specifications.

No requirement of the USC, the rules and regulations implementing the USC, or this contract shall be construed as making the Federal Government a party to the contract nor will any such requirement interfere, in any way, with the rights of either party to the contract.

70-06 Sanitary, Health, and Safety Provisions. The Contractor shall provide and maintain in a neat, sanitary condition such accommodations for the use of his or her employees as may be necessary to comply with the requirements of the state and local Board of Health, or of other bodies or tribunals having jurisdiction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Attention is directed to Federal, state, and local laws, rules and regulations concerning construction safety and health standards. The Contractor shall not require any worker to work in surroundings or under conditions that are unsanitary, hazardous, or dangerous to his or her health or safety.

70-07 Public Convenience and Safety. The Contractor shall control his or her operations and those of his or her subcontractors and all suppliers, to assure the least inconvenience to the traveling public. Under all circumstances, safety shall be the most important consideration.

The Contractor shall maintain the free and unobstructed movement of aircraft and vehicular traffic with respect to his or her own operations and those of his or her subcontractors and all suppliers in accordance with the subsection 40-05 titled MAINTENANCE OF TRAFFIC of Section 40 hereinbefore specified and shall limit such operations for the convenience and safety of the traveling public as specified in the subsection 80-04 titled LIMITATION OF OPERATIONS of Section 80 hereinafter.

70-08 Barricades, Warning Signs, and Hazard Markings. The Contractor shall furnish, erect, and maintain all barricades, warning signs, and markings for hazards necessary to protect the public and the work. When used during periods of darkness, such barricades, warning signs, and hazard markings shall be suitably illuminated. Unless otherwise specified, barricades, warning signs, and markings for hazards that are in the air operations area (AOAs) shall be a maximum of 18 inches high. Unless otherwise specified, barricades shall be spaced not more than 4 feet apart. Barricades, warning signs, and markings shall be paid for under subsection 40-05.

For vehicular and pedestrian traffic, the Contractor shall furnish, erect, and maintain barricades, warning signs, lights and other traffic control devices in reasonable conformity with the Manual on Uniform Traffic Control Devices.

When the work requires closing an air operations area of the airport or portion of such area, the Contractor shall furnish, erect, and maintain temporary markings and associated lighting conforming to the requirements of advisory circular (AC) 150/5340-1L, Standards for Airport Markings.

The Contractor shall furnish, erect, and maintain markings and associated lighting of open trenches, excavations, temporary stock piles, and the Contractor's parked construction equipment that may be hazardous to the operation of emergency fire-rescue or maintenance vehicles on the airport in reasonable conformance to AC 150/5370-2F, Operational Safety on Airports During Construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The Contractor shall identify each motorized vehicle or piece of construction equipment in reasonable conformance to AC 150/5370-2F.

The Contractor shall furnish and erect all barricades, warning signs, and markings for hazards prior to commencing work that requires such erection and shall maintain the barricades, warning signs, and markings for hazards until their removal is directed by the ARCHITECT.

Open-flame type lights shall not be permitted.

70-09 Use of Explosives. ~~Use of explosives is not authorized. When the use of explosives is necessary for the execution of the work, the Contractor shall exercise the utmost care not to endanger life or property, including new work. The Contractor shall be responsible for all damage resulting from the use of explosives.~~

~~All explosives shall be stored in a secure manner in compliance with all laws and ordinances, and all such storage places shall be clearly marked. Where no local laws or ordinances apply, storage shall be provided satisfactory to the ENGINEER and, in general, not closer than 1,000 feet from the work or from any building, road, or other place of human occupancy.~~

~~The Contractor shall notify each property owner and public utility company having structures or facilities in proximity to the site of the work of his or her intention to use explosives. Such notice shall be given sufficiently in advance to enable them to take such steps as they may deem necessary to protect their property from injury.~~

~~The use of electrical blasting caps shall not be permitted on or within 1,000 feet of the airport property.~~

70-10 Protection and Restoration of Property and Landscape. The Contractor shall be responsible for the preservation of all public and private property, and shall protect carefully from disturbance or damage all land monuments and property markers until the ARCHITECT has witnessed or otherwise referenced their location and shall not move them until directed.

The Contractor shall be responsible for all damage or injury to property of any character, during the execution of the work, resulting from any act, omission, neglect, or misconduct in manner or method of executing the work, or at any time due to defective work or materials, and said responsibility shall not be released until the project has been completed and accepted.

When or where any direct or indirect damage or injury is done to public or private property by or on account of any act, omission, neglect, or misconduct

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

in the execution of the work, or in consequence of the non-execution thereof by the Contractor, the Contractor shall restore, at his or her own expense, such property to a condition similar or equal to that existing before such damage or injury was done, by repairing, or otherwise restoring as may be directed, or the Contractor shall make good such damage or injury in an acceptable manner.

70-11 Responsibility for Damage Claims. The Contractor shall indemnify and save harmless the ARCHITECT and the OWNER and their officers, and employees from all suits, actions, or claims, of any character, brought because of any injuries or damage received or sustained by any person, persons, or property on account of the operations of the Contractor; or on account of or in consequence of any neglect in safeguarding the work; or through use of unacceptable materials in constructing the work; or because of any act or omission, neglect, or misconduct of said Contractor; or because of any claims or amounts recovered from any infringements of patent, trademark, or copyright; or from any claims or amounts arising or recovered under the "Workmen's Compensation Act," or any other law, ordinance, order, or decree. Money due the Contractor under and by virtue of his or her contract considered necessary by the OWNER for such purpose may be retained for the use of the OWNER or, in case no money is due, his or her surety may be held until such suits, actions, or claims for injuries or damages shall have been settled and suitable evidence to that effect furnished to the OWNER, except that money due the Contractor will not be withheld when the Contractor produces satisfactory evidence that he or she is adequately protected by public liability and property damage insurance.

70-12 Third Party Beneficiary Clause. It is specifically agreed between the parties executing the contract that it is not intended by any of the provisions of any part of the contract to create for the public or any member thereof, a third party beneficiary or to authorize anyone not a party to the contract to maintain a suit for personal injuries or property damage pursuant to the terms or provisions of the contract.

70-13 Opening Sections of the Work to Traffic. Should it be necessary for the Contractor to complete portions of the contract work for the beneficial occupancy of the OWNER prior to completion of the entire contract, such "phasing" of the work shall be specified herein and indicated on the plans. When so specified, the Contractor shall complete such portions of the work on or before the date specified or as otherwise specified. The Contractor shall make his or her own estimate of the difficulties involved in arranging the work to permit such beneficial occupancy by the OWNER as described below:

Refer to Phasing Plans and Diagrams

Upon completion of any portion of the work listed above, such portion shall be

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

accepted by the OWNER in accordance with the subsection 50-14 titled PARTIAL ACCEPTANCE of Section 50.

No portion of the work may be opened by the Contractor for public use until ordered by the ARCHITECT in writing. Should it become necessary to open a portion of the work to public traffic on a temporary or intermittent basis, such openings shall be made when, in the opinion of the ARCHITECT, such portion of the work is in an acceptable condition to support the intended traffic. Temporary or intermittent openings are considered to be inherent in the work and shall not constitute either acceptance of the portion of the work so opened or a waiver of any provision of the contract. Any damage to the portion of the work so opened that is not attributable to traffic which is permitted by the OWNER shall be repaired by the Contractor at his or her expense.

The Contractor shall make his or her own estimate of the inherent difficulties involved in completing the work under the conditions herein described and shall not claim any added compensation by reason of delay or increased cost due to opening a portion of the contract work.

Contractor shall be required to conform to safety standards contained AC 150/5370-2F (see Special Provisions).

Contractor shall refer to the approved Construction Safety Phasing Plan (CSPP) to identify barricade requirements and other safety requirements prior to opening up sections of work to traffic.

70-14 Contractor's Responsibility for Work. Until the ARCHITECT's final written acceptance of the entire completed work, excepting only those portions of the work accepted in accordance with the subsection 50-14 titled PARTIAL ACCEPTANCE of Section 50, the Contractor shall have the charge and care thereof and shall take every precaution against injury or damage to any part due to the action of the elements or from any other cause, whether arising from the execution or from the non-execution of the work. The Contractor shall rebuild, repair, restore, and make good all injuries or damages to any portion of the work occasioned by any of the above causes before final acceptance and shall bear the expense thereof except damage to the work due to unforeseeable causes beyond the control of and without the fault or negligence of the Contractor, including but not restricted to acts of God such as earthquake, tidal wave, tornado, hurricane or other cataclysmic phenomenon of nature, or acts of the public enemy or of government authorities.

If the work is suspended for any cause whatever, the Contractor shall be responsible for the work and shall take such precautions necessary to prevent damage to the work. The Contractor shall provide for normal drainage and shall erect necessary temporary structures, signs, or other facilities at his or her

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

expense. During such period of suspension of work, the Contractor shall properly and continuously maintain in an acceptable growing condition all living material in newly established planting, seeding, and sodding furnished under the contract, and shall take adequate precautions to protect new tree growth and other important vegetative growth against injury.

70-15 Contractor's Responsibility for Utility Service and Facilities of Others. As provided in the subsection 70-04 titled RESTORATION OF SURFACES DISTURBED BY OTHERS of this section, the Contractor shall cooperate with the owner of any public or private utility service, FAA or NOAA, or a utility service of another government agency that may be authorized by the owner to construct, reconstruct or maintain such utility services or facilities during the progress of the work. In addition, the Contractor shall control their operations to prevent the unscheduled interruption of such utility services and facilities.

To the extent that such public or private utility services, FAA, or NOAA facilities, or utility services of another governmental agency are known to exist within the limits of the contract work, the approximate locations have been indicated on the plans and the owners are indicated as follows:

Fayetteville PWC:	Electrical and Fiber Optic
Time Warner Cable:	Service Lines
CenturyLink:	Copper and Fiber Optic Service Lines
City IT:	Fiber Optic and Copper Cables
Fayetteville PWC:	Water and Sewer
Piedmont Natural Gas:	Natural Gas Lines

It is understood and agreed that the OWNER does not guarantee the accuracy or the completeness of the location information relating to existing utility services, facilities, or structures that may be shown on the plans or encountered in the work. Any inaccuracy or omission in such information shall not relieve the Contractor of the responsibility to protect such existing features from damage or unscheduled interruption of service.

It is further understood and agreed that the Contractor shall, upon execution of the contract, notify the owners of all utility services or other facilities of his or her plan of operations. Such notification shall be in writing ~~addressed to THE PERSON TO CONTACT~~ as provided in this subsection and subsection 70-04 titled RESTORATION OF SURFACES DISTURBED BY OTHERS of this section. A copy of each notification shall be given to the ENGINEER.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

In addition to the general written notification provided, it shall be the responsibility of the Contractor to keep such individual owners advised of changes in their plan of operations that would affect such owners.

Prior to beginning the work in the general vicinity of an existing utility service or facility, the Contractor shall again notify each such owner of their plan of operation. If, in the Contractor's opinion, the owner's assistance is needed to locate the utility service or facility or the presence of a representative of the owner is desirable to observe the work, such advice should be included in the notification. Such notification shall be given by the most expeditious means to reach the utility owner's PERSON TO CONTACT no later than two normal business days prior to the Contractor's commencement of operations in such general vicinity. The Contractor shall furnish a written summary of the notification to the ARCHITECT.

The Contractor's failure to give the two days' notice shall be cause for the OWNER to suspend the Contractor's operations in the general vicinity of a utility service or facility.

Where the outside limits of an underground utility service have been located and staked on the ground, the Contractor shall be required to use hand excavation methods within 3 feet of such outside limits at such points as may be required to ensure protection from damage due to the Contractor's operations.

Should the Contractor damage or interrupt the operation of a utility service or facility by accident or otherwise, the Contractor shall immediately notify the proper authority and the ARCHITECT and shall take all reasonable measures to prevent further damage or interruption of service. The Contractor, in such events, shall cooperate with the utility service or facility owner and the ARCHITECT continuously until such damage has been repaired and service restored to the satisfaction of the utility or facility owner.

The Contractor shall bear all costs of damage and restoration of service to any utility service or facility due to their operations whether due to negligence or accident. The OWNER reserves the right to deduct such costs from any monies due or which may become due the Contractor, or his or her surety.

70-15.1 FAA Facilities and Cable Runs. The Contractor is hereby advised that the construction limits of the project include existing facilities and buried cable runs that are owned, operated and maintained by the FAA. The Contractor, during the execution of the project work, shall comply with the following:

- a. The Contractor shall permit FAA maintenance personnel the right of

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

access to the project work site for purposes of inspecting and maintaining all existing FAA owned facilities.

- b. The Contractor shall provide notice to the FAA Air Traffic Organization (ATO)/Technical Operations/System Support Center (SSC) Point-of-Contact through the airport manager a minimum of seven (7) calendar days prior to commencement of construction activities in order to permit sufficient time to locate and mark existing buried cables and to schedule any required facility outages.
- c. If execution of the project work requires a facility outage, the Contractor shall contact the FAA Point-of-Contact a minimum of 72 hours prior to the time of the required outage.
- d. Any damage to FAA cables, access roads, or FAA facilities during construction caused by the Contractor's equipment or personnel whether by negligence or accident will require the Contractor to repair or replace the damaged cables, access road, or FAA facilities to FAA requirements. The Contractor shall not bear the cost to repair damage to underground facilities or utilities improperly located by the FAA.
- e. If the project work requires the cutting or splicing of FAA owned cables, the FAA Point-of-Contact shall be contacted a minimum of 72 hours prior to the time the cable work commences. The FAA reserves the right to have a FAA representative on site to observe the splicing of the cables as a condition of acceptance. All cable splices are to be accomplished in accordance with FAA specifications and require approval by the FAA Point-of-Contact as a condition of acceptance by the OWNER. The Contractor is hereby advised that FAA restricts the location of where splices may be installed. If a cable splice is required in a location that is not permitted by FAA, the Contractor shall furnish and install a sufficient length of new cable that eliminates the need for any splice.

70-16 Furnishing Rights-of-Way. The OWNER will be responsible for furnishing all rights-of-way upon which the work is to be constructed in advance of the Contractor's operations.

70-17 Personal Liability of Public Officials. In carrying out any of the contract provisions or in exercising any power or authority granted by this contract, there shall be no liability upon the ARCHITECT, his or her authorized representatives, or any officials of the OWNER either personally or as an official of the OWNER. It is understood that in such matters they act solely as agents and representatives of the OWNER.

70-18 No Waiver of Legal Rights. Upon completion of the work, the OWNER will

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

expeditiously make final inspection and notify the Contractor of final acceptance. Such final acceptance, however, shall not preclude or stop the OWNER from correcting any measurement, estimate, or certificate made before or after completion of the work, nor shall the OWNER be precluded or stopped from recovering from the Contractor or his or her surety, or both, such overpayment as may be sustained, or by failure on the part of the Contractor to fulfill his or her obligations under the contract. A waiver on the part of the OWNER of any breach of any part of the contract shall not be held to be a waiver of any other or subsequent breach.

The Contractor, without prejudice to the terms of the contract, shall be liable to the OWNER for latent defects, fraud, or such gross mistakes as may amount to fraud, or as regards the OWNER's rights under any warranty or guaranty.

70-19 Environmental Protection. The Contractor shall comply with all Federal, state, and local laws and regulations controlling pollution of the environment. The Contractor shall take necessary precautions to prevent pollution of streams, lakes, ponds, and reservoirs with fuels, oils, bitumens, chemicals, or other harmful materials and to prevent pollution of the atmosphere from particulate and gaseous matter.

70-20 Archaeological and Historical Findings. Unless otherwise specified in this subsection, the Contractor is advised that the site of the work is not within any property, district, or site, and does not contain any building, structure, or object listed in the current National Register of Historic Places published by the United States Department of Interior.

Should the Contractor encounter, during his or her operations, any building, part of a building, structure, or object that is incongruous with its surroundings, the Contractor shall immediately cease operations in that location and notify the ARCHITECT. The ARCHITECT will immediately investigate the Contractor's finding and the OWNER will direct the Contractor to either resume operations or to suspend operations as directed.

Should the OWNER order suspension of the Contractor's operations in order to protect an archaeological or historical finding, or order the Contractor to perform extra work, such shall be covered by an appropriate contract change order or supplemental agreement as provided in the subsection 40-04 titled EXTRA WORK of Section 40 and the subsection 90-05 titled PAYMENT FOR EXTRA WORK of Section 90. If appropriate, the contract change order or supplemental agreement shall include an extension of contract time in accordance with the subsection 80-07 titled DETERMINATION AND EXTENSION OF CONTRACT TIME of Section 80.

END OF SECTION 70

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 80

EXECUTION AND PROGRESS

80-01 Subletting of Contract. The OWNER will not recognize any subcontractor on the work. The Contractor shall at all times when work is in progress be represented either in person, by a qualified superintendent, or by other designated, qualified representative who is duly authorized to receive and execute orders of the Architect/Engineer.

The Contractor shall provide copies of all subcontracts to the Architect/Engineer. The Contractor shall perform, with his organization, an amount of work equal to at least 25 percent of the total contract cost.

Should the Contractor elect to assign his or her contract, said assignment shall be concurred in by the surety, shall be presented for the consideration and approval of the OWNER, and shall be consummated only on the written approval of the OWNER.

80-02 Notice to Proceed. The notice to proceed shall state the date on which it is expected the Contractor will begin the construction and from which date contract time will be charged. The Contractor shall begin the work to be performed under the contract within 10 days of the date set by the Architect/Engineer in the written notice to proceed, but in any event, the Contractor shall notify the Architect/Engineer at least 24 hours in advance of the time actual construction operations will begin. The Contractor shall not commence any actual construction prior to the date on which the notice to proceed is issued by the OWNER.

80-03 Execution and Progress. Unless otherwise specified, the Contractor shall submit their comprehensive progress schedule for the Architect/Engineer's approval **within five calendar days after the effective date of the notice to proceed.** The Contractor's progress schedule, when approved by the Architect/Engineer, may be used to establish major construction operations and to check on the progress of the work. **Time for completing all contracted work is of paramount importance to this contract.** The Contractor shall provide sufficient materials, equipment, and labor to ensure the completion of the project in accordance with the plans and specifications within the time set forth in the proposal.

The Contractor shall provide a comprehensive schedule that details all necessary work efforts and items to complete the work. This schedule shall illustrate a **singular critical path** within the schedule that identifies the progression of critical work tasks that, if not completed in a timely manner, could delay the contract completion. **There shall be only one critical work task along the progression of the schedule's "critical path".** If the critical

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

path is not properly shown on the proposed schedule; the approval of the schedule by the Architect/Engineer is subject to rejection. **The critical path noted on the schedule shall be primary test to determine if the Contractor is due additional time for delay for conditions beyond the control of the Contractor.** The Contractor may revise their critical work path as necessary with the submission of a revised project schedule that is approved by the Engineer.

If the Contractor falls significantly behind the submitted schedule, the Contractor shall, upon the Architect/Engineer's request, submit a revised schedule for completion of the work within the contract time and modify their operations to provide such additional materials, equipment, and labor necessary to meet the revised schedule. Should the execution of the work be discontinued for any reason, the Contractor shall notify the Architect/Engineer at least 24 hours in advance of resuming operations.

The Contractor shall not commence any actual construction prior to the date on which the notice to proceed is issued by the OWNER.

80-04 Limitation of Operations. The Contractor shall control his or her operations and the operations of his or her subcontractors and all suppliers to provide for the free and unobstructed movement of aircraft in the air operations areas (AOA) of the airport.

When the work requires the Contractor to conduct his or her operations within an AOA of the airport, the work shall be coordinated with airport operations (through the Architect/Engineer) at least 48 hours prior to commencement of such work. The Contractor shall not close an AOA until so authorized by the Architect/Engineer and until the necessary temporary marking and associated lighting is in place as provided in the subsection 70-08 titled BARRICADES, WARNING SIGNS, AND HAZARD MARKINGS of Section 70.

When the contract work requires the Contractor to work within an AOA of the airport on an intermittent basis (intermittent opening and closing of the AOA), the Contractor shall maintain constant communications as specified; immediately obey all instructions to vacate the AOA; immediately obey all instructions to resume work in such AOA. Failure to maintain the specified communications or to obey instructions shall be cause for suspension of the Contractor's operations in the AOA until the satisfactory conditions are provided. The following AOA cannot be closed to operating aircraft to permit the Contractor's operations on a continuous basis and will therefore be closed to aircraft operations intermittently as follows:

Refer to Project Plans for Partial Closure of the Air Carrier Apron

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31, 2023

Contractor shall be required to conform to safety standards contained in AC 150/5370-2F, Operational Safety on Airports During Construction (see Special Provisions).

80-04.1 Operational Safety on Airport During Construction. All Contractors' operations shall be conducted in accordance with the project Construction Safety and Phasing Plan (CSPP) and the provisions set forth within the current version of AC 150/5370-2F. The CSPP included within the contract documents conveys minimum requirements for operational safety on the airport during construction activities. The Contractor shall prepare and submit a Safety Plan Compliance Document that details how it proposes to comply with the requirements presented within the CSPP.

The Contractor shall implement all necessary safety plan measures prior to commencement of any work activity. The Contractor shall conduct routine checks to assure compliance with the safety plan measures.

The Contractor is responsible to the OWNER for the conduct of all subcontractors it employs on the project. The Contractor shall assure that all subcontractors are made aware of the requirements of the CSPP and that they implement and maintain all necessary measures.

No deviation or modifications may be made to the approved CSPP unless approved in writing by the OWNER or Architect/Engineer.

80-05 Character of Workers, Methods, and Equipment. The Contractor shall, at all times, employ sufficient labor and equipment for prosecuting the work to full completion in the manner and time required by the contract, plans, and specifications.

All workers shall have sufficient skill and experience to perform properly the work assigned to them. Workers engaged in special work or skilled work shall have sufficient experience in such work and in the operation of the equipment required to perform the work satisfactorily.

Any person employed by the Contractor or by any subcontractor who violates any operational regulations or operational safety requirements and, in the opinion of the Architect/Engineer, does not perform his work in a proper and skillful manner or is intemperate or disorderly shall, at the written request of the Architect/Engineer, be removed forthwith by the Contractor or subcontractor employing such person, and shall not be employed again in any portion of the work without approval of the Architect/Engineer.

Should the Contractor fail to remove such persons or person, or fail to furnish suitable and sufficient personnel for the proper execution of the work, the Architect/Engineer may suspend the work by written notice until compliance with such orders.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

In addition, the following requirements shall apply concerning all workers utilized on the project:

a. The Contractor shall provide and maintain, continually on the project site of the work during its progress, adequate and competent superintendence of all operations for and in connection with the work. The Contractor shall provide a capable superintendent acceptable to the Owner. Such representative shall be able to read, write and speak English fluently and shall be authorized to receive instructions from the Engineer or his authorized representative. Said superintendent shall have authority to see that the work is carried out in accordance with the Contract Documents and in a first class, thorough and workmanlike manner in every respect.

b. Incompetent, disorderly, intemperate or incorrigible employees of any authority level shall be dismissed from the project by the Contractor or his representative when requested by the Engineer or the Owner, and such persons shall not again be permitted to return to the work without the written consent of the Owner.

c. The Contractor agrees to indemnify and hold the Owner harmless from any and all loss or damages arising out of jurisdictional labor disputes or other labor troubles of any kind that may occur during the construction and performance of the Contract.

d. The Contractor shall provide at the request of the Owner such reasonable information about his employees as may be necessary, including in part, name, address and social security number.

e. Any employee of the Contractor or any subcontractors who violate the badging requirements or leaves unbadged individuals in the Airport Operations Area (AOA) or the Secured Identification Display Area (SIDA) without properly badged individuals will be removed from the Airport and not be allowed back onto the Airport without prior approval by the Owner.

When the methods and equipment to be used by the Contractor in accomplishing the work are not prescribed in the contract, the Contractor is free to use any methods or equipment that will accomplish the work in conformity with the requirements of the contract, plans, and specifications.

When the contract specifies the use of certain methods and equipment, such methods and equipment shall be used unless others are authorized by the Architect/Engineer. If the Contractor desires to use a method or type of equipment other than specified in the contract, the Contractor may request authority from the Architect/Engineer to do so. The request shall be in writing and shall include a full description of the methods and equipment proposed and of the reasons for desiring to make the change. If approval is given, it will be on the condition that the Contractor will be fully responsible for producing work in conformity with contract requirements. If, after trial use of the substituted methods or equipment, the Architect/Engineer determines that the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

work produced does not meet contract requirements, the Contractor shall discontinue the use of the substitute method or equipment and shall complete the remaining work with the specified methods and equipment. The Contractor shall remove any deficient work and replace it with work of specified quality or take such other corrective action as the Architect/Engineer may direct. No change will be made in basis of payment for the contract items involved nor in contract time as a result of authorizing a change in methods or equipment under this subsection.

80-06 Temporary Suspension of the Work. The OWNER shall have the authority to suspend the work wholly, or in part, for such period or periods as the OWNER may deem necessary, due to unsuitable weather, or such other conditions as are considered unfavorable for the execution of the work, or for such time as is necessary due to the failure on the part of the Contractor to carry out orders given or perform any or all provisions of the contract.

In the event that the Contractor is ordered by the OWNER, in writing, to suspend work for some unforeseen cause not otherwise provided for in the contract and over which the Contractor has no control, the Contractor may be reimbursed for actual money expended on the work during the period of shutdown. No allowance will be made for anticipated profits. The period of shutdown shall be computed from the effective date of the Architect/Engineer's order to suspend work to the effective date of the Architect/Engineer's order to resume the work. Claims for such compensation shall be filed with the Architect/Engineer within the time period stated in the Architect/Engineer's order to resume work. The Contractor shall submit with his or her claim information substantiating the amount shown on the claim. The Architect/Engineer will forward the Contractor's claim to the OWNER for consideration in accordance with local laws or ordinances. No provision of this article shall be construed as entitling the Contractor to compensation for delays due to inclement weather, for suspensions made at the request of the OWNER, or for any other delay provided for in the contract, plans, or specifications.

If it should become necessary to suspend work for an indefinite period, the Contractor shall store all materials in such manner that they will not become an obstruction nor become damaged in any way. The Contractor shall take every precaution to prevent damage or deterioration of the work performed and provide for normal drainage of the work. The Contractor shall erect temporary structures where necessary to provide for traffic on, to, or from the airport.

80-07 Determination and Extension of Contract Time. The number of calendar days allowed for completion of the work shall be stated in the proposal and contract and shall be known as the CONTRACT TIME.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The Contractor shall notify the Owner and Architect in writing of any declaration of intent to request a Contract time extension within 15 calendar days from the occurrence of the event that triggered the schedule change.

Failure by the Contractor to follow the aforementioned procedure shall void or otherwise invalidate any Contract time extension requested by the Contractor with the exception of delays associated with abnormal weather conditions. **Claims for additional contract time by the Contractor shall be judged by the Engineer based on the approved contract work schedule and identified “critical path” work tasks.**

Should the contract time require extension for reasons beyond the Contractor’s control, it shall be adjusted as follows:

a. Contract Time based on calendar days shall consist of the number of calendar days stated in the contract counting from the effective date of the notice to proceed and including all Saturdays, Sundays, holidays, and non-work days. All calendar days elapsing between the effective dates of the Owner’s orders to suspend and resume all work, due to causes not the fault of the Contractor, shall be excluded.

The contract duration and phase durations set forth in the Contract Documents include inclement weather days normally encountered at the Project site, as well as observed holidays defined in General Provision Section 10. The Contractor shall be charged for each calendar day during the term of construction including observed holidays defined in General Provision Section 10 and inclement weather days normally encountered at the Project site. See General Provision Section 10 – Calendar Day for definition of normal inclement weather and observed holidays.

80-08

Failure to Complete on Time. For each calendar day ~~or working day~~, as specified in the contract, that any work remains uncompleted after the contract time (including all extensions and adjustments as provided in the subsection 80-07 titled DETERMINATION AND EXTENSION OF CONTRACT TIME of this Section) the sum specified in the contract and proposal as liquidated damages will be deducted from any money due or to become due the Contractor or his or her surety. Such deducted sums shall not be deducted as a penalty but shall be considered as liquidation of a reasonable portion of damages including but not limited to additional engineering services that will be incurred by the OWNER should the Contractor fail to complete the work in the time provided in their contract.

Liquidated Damages for failure to complete within contract time shall be \$1,500.00 (Fifteen Hundred Dollars) per Calendar Day.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Permitting the Contractor to continue and finish the work or any part of it after the time fixed for its completion, or after the date to which the time for completion may have been extended, will in no way operate as a wavier on the part of the Owner of any of its rights under the contract.

80-09 Default and Termination of Contract. The Contractor shall be considered in default of his or her contract and such default will be considered as cause for the OWNER to terminate the contract for any of the following reasons if the Contractor:

- a. Fails to begin the work under the contract within the time specified in the Notice to Proceed, or
- b. Fails to perform the work or fails to provide sufficient workers, equipment and/or materials to assure completion of work in accordance with the terms of the contract, or
- c. Performs the work unsuitably or neglects or refuses to remove materials or to perform anew such work as may be rejected as unacceptable and unsuitable, or
- d. Discontinues the execution of the work, or
- e. Fails to resume work which has been discontinued within a reasonable time after notice to do so, or
- f. Becomes insolvent or is declared bankrupt, or commits any act of bankruptcy or insolvency, or
- g. Allows any final judgment to stand against the Contractor unsatisfied for a period of 10 days, or
- h. Makes an assignment for the benefit of creditors, or
- i. For any other cause whatsoever, fails to carry on the work in an acceptable manner.

Should the Architect/Engineer consider the Contractor in default of the contract for any reason above, the Architect/Engineer shall immediately give written notice to the Contractor and the Contractor's surety as to the reasons for considering the Contractor in default and the OWNER's intentions to terminate the contract.

If the Contractor or surety, within a period of 10 days after such notice, does not proceed in accordance therewith, then the OWNER will, upon written notification from the Architect/Engineer of the facts of such delay, neglect, or default and the Contractor's failure to comply with such notice, have full power

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

and authority without violating the contract, to take the execution of the work out of the hands of the Contractor. The OWNER may appropriate or use any or all materials and equipment that have been mobilized for use in the work and are acceptable and may enter into an agreement for the completion of said contract according to the terms and provisions thereof, or use such other methods as in the opinion of the Architect/Engineer will be required for the completion of said contract in an acceptable manner.

All costs and charges incurred by the OWNER, together with the cost of completing the work under contract, will be deducted from any monies due or which may become due the Contractor. If such expense exceeds the sum which would have been payable under the contract, then the Contractor and the surety shall be liable and shall pay to the OWNER the amount of such excess.

80-10 Termination for National Emergencies. The OWNER shall terminate the contract or portion thereof by written notice when the Contractor is prevented from proceeding with the construction contract as a direct result of an Executive Order of the President with respect to the execution of war or in the interest of national defense.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

When the contract, or any portion thereof, is terminated before completion of all items of work in the contract, payment will be made for the actual number of units or items of work completed at the contract price or as mutually agreed for items of work partially completed or not started. No claims or loss of anticipated profits shall be considered.

Reimbursement for organization of the work, and other overhead expenses, (when not otherwise included in the contract) and moving equipment and materials to and from the job will be considered, the intent being that an equitable settlement will be made with the Contractor.

Acceptable materials, obtained or ordered by the Contractor for the work and that are not incorporated in the work shall, at the option of the Contractor, be purchased from the Contractor at actual cost as shown by receipted bills and actual cost records at such points of delivery as may be designated by the Architect/Engineer.

Termination of the contract or a portion thereof shall neither relieve the Contractor of his or her responsibilities for the completed work nor shall it relieve his or her surety of its obligation for and concerning any just claim arising out of the work performed.

80-11 Work Area, Storage Area and Sequence of Operations. The Contractor shall obtain approval from the Architect/Engineer prior to beginning any work in all areas of the airport. No operating runway, taxiway, or air operations area (AOA) shall be crossed, entered, or obstructed while it is operational. The Contractor shall plan and coordinate his or her work in such a manner as to ensure safety and a minimum of hindrance to flight operations. All Contractor equipment and material stockpiles shall be stored a minimum of 700 feet from the centerline of an active runway. No equipment will be allowed to park within the approach area of an active runway at any time. No equipment shall be within 500 feet of an active runway at any time.

END OF SECTION 80

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 90

MEASUREMENT AND PAYMENT

90-01 Measurement of Quantities. *All Any unit price* work completed under the contract will be measured by the ARCHITECT, or his or her authorized representatives, using United States Customary Units of Measurement or the International System of Units.

The method of measurement and computations to be used in determination of quantities of material furnished and of work performed under the contract will be those methods generally recognized as conforming to good engineering practice.

Unless otherwise specified, longitudinal measurements for area computations will be made horizontally, and no deductions will be made for individual fixtures (or leave-outs) having an area of 9 square feet or less. Unless otherwise specified, transverse measurements for area computations will be the neat dimensions shown on the plans or ordered in writing by the ARCHITECT.

Structures will be measured according to neat lines shown on the plans or as altered to fit field conditions.

Unless otherwise specified, all contract items which are measured by the linear foot such as electrical ducts, conduits, pipe culverts, underdrains, and similar items shall be measured parallel to the base or foundation upon which such items are placed.

In computing volumes of excavation the average end area method or other acceptable methods will be used.

The thickness of plates and galvanized sheet used in the manufacture of corrugated metal pipe, metal plate pipe culverts and arches, and metal cribbing will be specified and measured in decimal fraction of inch.

The term “ton” will mean the short ton consisting of 2,000 lb avoirdupois. All materials that are measured or proportioned by weights shall be weighed on accurate, approved scales by competent, qualified personnel at locations designed by the ARCHITECT. If material is shipped by rail, the car weight may be accepted provided that only the actual weight of material is paid for. However, car weights will not be acceptable for material to be passed through mixing plants. Trucks used to haul material being paid for by weight shall be weighed empty daily at such times as the ARCHITECT directs, and each truck shall bear a plainly legible identification mark.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Materials to be measured by volume in the hauling vehicle shall be hauled in approved vehicles and measured therein at the point of delivery. Vehicles for this purpose may be of any size or type acceptable for the materials hauled, provided that the body is of such shape that the actual contents may be readily and accurately determined. All vehicles shall be loaded to at least their water level capacity, and all loads shall be leveled when the vehicles arrive at the point of delivery.

When requested by the Contractor and approved by the ARCHITECT in writing, material specified to be measured by the cubic yard may be weighed, and such weights will be converted to cubic yards for payment purposes. Factors for conversion from weight measurement to volume measurement will be determined by the ARCHITECT and shall be agreed to by the Contractor before such method of measurement of pay quantities is used.

Bituminous materials will be measured by the gallon or ton. When measured by volume, such volumes will be measured at 60°F or will be corrected to the volume at 60°F using ASTM D1250 for asphalts or ASTM D633 for tars.

Net certified scale weights or weights based on certified volumes in the case of rail shipments will be used as a basis of measurement, subject to correction when bituminous material has been lost from the car or the distributor, wasted, or otherwise not incorporated in the work.

When bituminous materials are shipped by truck or transport, net certified weights by volume, subject to correction for loss or foaming, may be used for computing quantities.

Cement will be measured by the ton or hundredweight.

Timber will be measured by the thousand feet board measure (MFBM) actually incorporated in the structure. Measurement will be based on nominal widths and thicknesses and the extreme length of each piece.

The term “lump sum” when used as an item of payment will mean complete payment for the work described in the contract.

When a complete structure or structural unit (in effect, “lump sum” work) is specified as the unit of measurement, the unit will be construed to include all necessary fittings and accessories.

Rental of equipment will be measured by time in hours of actual working time and necessary traveling time of the equipment within the limits of the work. Special equipment ordered by the ARCHITECT in connection with force account work will be measured as agreed in the change order or supplemental

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

agreement authorizing such force account work as provided in the subsection 90-05 titled PAYMENT FOR EXTRA WORK of this section.

When standard manufactured items are specified such as fence, wire, plates, rolled shapes, pipe conduit, etc., and these items are identified by gauge, unit weight, section dimensions, etc., such identification will be considered to be nominal weights or dimensions. Unless more stringently controlled by tolerances in cited specifications, manufacturing tolerances established by the industries involved will be accepted.

Scales for weighing materials which are required to be proportioned or measured and paid for by weight shall be furnished, erected, and maintained by the Contractor, or be certified permanently installed commercial scales.

Scales shall be accurate within 1/2% of the correct weight throughout the range of use. The Contractor shall have the scales checked under the observation of the inspector before beginning work and at such other times as requested. The intervals shall be uniform in spacing throughout the graduated or marked length of the beam or dial and shall not exceed one-tenth of 1% of the nominal rated capacity of the scale, but not less than 1 pound. The use of spring balances will not be permitted.

Beams, dials, platforms, and other scale equipment shall be so arranged that the operator and the inspector can safely and conveniently view them.

Scale installations shall have available ten standard 50-pound weights for testing the weighing equipment or suitable weights and devices for other approved equipment.

Scales must be tested for accuracy and serviced before use at a new site. Platform scales shall be installed and maintained with the platform level and rigid bulkheads at each end.

Scales "overweighing" (indicating more than correct weight) will not be permitted to operate, and all materials received subsequent to the last previous correct weighting-accuracy test will be reduced by the percentage of error in excess of one-half of 1%.

In the event inspection reveals the scales have been underweighing (indicating less than correct weight), they shall be adjusted, and no additional payment to the Contractor will be allowed for materials previously weighed and recorded.

All costs in connection with furnishing, installing, certifying, testing, and maintaining scales; for furnishing check weights and scale house; and for all other items specified in this subsection, for the weighing of materials for

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

proportioning or payment, shall be included in the unit contract prices for the various items of the project.

When the estimated quantities for a specific portion of the work are designated as the pay quantities in the contract, they shall be the final quantities for which payment for such specific portion of the work will be made, unless the dimensions of said portions of the work shown on the plans are revised by the ARCHITECT. If revised dimensions result in an increase or decrease in the quantities of such work, the final quantities for payment will be revised in the amount represented by the authorized changes in the dimensions.

90-02 Scope of Payment. The Contractor shall receive and accept compensation provided for in the contract as full payment for furnishing all materials, for performing all work under the contract in a complete and acceptable manner, and for all risk, loss, damage, or expense of whatever character arising out of the nature of the work or the execution thereof, subject to the provisions of the subsection 70-18 titled NO WAIVER OF LEGAL RIGHTS of Section 70.

When the “basis of payment” subsection of a technical specification requires that the contract price (price bid) include compensation for certain work or material essential to the item, this same work or material will not also be measured for payment under any other contract item which may appear elsewhere in the contract, plans, or specifications.

90-03 Compensation for Altered Quantities. When the accepted quantities of work vary from the quantities in the proposal, the Contractor shall accept as payment in full, so far as contract items are concerned, payment at the original contract price for the accepted quantities of work actually completed and accepted. No allowance, except as provided for in the subsection 40-02 titled ALTERATION OF WORK AND QUANTITIES of Section 40 will be made for any increased expense, loss of expected reimbursement, or loss of anticipated profits suffered or claimed by the Contractor which results directly from such alterations or indirectly from his or her unbalanced allocation of overhead and profit among the contract items, or from any other cause.

90-04 Payment for Omitted Items. As specified in the subsection 40-03 titled OMITTED ITEMS of Section 40, the ARCHITECT shall have the right to omit from the work (order nonperformance) any contract item, except major contract items, in the best interest of the OWNER.

Should the ARCHITECT omit or order nonperformance of a contract item or portion of such item from the work, the Contractor shall accept payment in full at the contract prices *or as agreed by change order* for any work actually completed and acceptable prior to the ARCHITECT's order to omit or non-perform such contract item.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Acceptable materials ordered by the Contractor or delivered on the work prior to the date of the ARCHITECT's order will be paid for at the actual cost to the Contractor and shall thereupon become the property of the OWNER.

In addition to the reimbursement hereinbefore provided, the Contractor shall be reimbursed for all actual costs incurred for the purpose of performing the omitted contract item prior to the date of the ARCHITECT's order. Such additional costs incurred by the Contractor must be directly related to the deleted contract item and shall be supported by certified statements by the Contractor as to the nature the amount of such costs.

90-05 Payment for Extra Work. Extra work, performed in accordance with the subsection 40-04 titled EXTRA WORK of Section 40, will be paid for at the contract prices or agreed prices specified in the change order or supplemental agreement authorizing the extra work.

90-06 Partial Payments. Partial payments will be made to the Contractor at least once each month as the work progresses. Said payments will be based upon estimates, prepared by the *Contractor* ~~ENGINEER~~, of the value of the work performed and materials complete and in place, in accordance with the contract, plans, and specifications. Such partial payments may also include the delivered actual cost of those materials stockpiled and stored in accordance with the subsection 90-07 titled PAYMENT FOR MATERIALS ON HAND of this section. No partial payment will be made when the amount due to the Contractor since the last estimate amounts to less than five hundred dollars.

The Contractor is required to pay all subcontractors for satisfactory performance of their contracts no later than 30 days after the Contractor has received a partial payment. The OWNER must ensure prompt and full payment of retainage from the prime Contractor to the subcontractor within 30 days after the subcontractor's work is satisfactorily completed. A subcontractor's work is satisfactorily completed when all the tasks called for in the subcontract have been accomplished and documented as required by the OWNER. When the OWNER has made an incremental acceptance of a portion of a prime contract, the work of a subcontractor covered by that acceptance is deemed to be satisfactorily completed.

From the total of the amount determined to be payable on a partial payment, five (5) percent of such total amount will be deducted and retained by the OWNER until the final payment is made, except as may be provided (at the Contractor's option) in the subsection 90-08 titled PAYMENT OF WITHHELD FUNDS of this section. The balance (ninety-five (95) percent) of the amount payable, less all previous payments, shall be certified for payment. Should the Contractor exercise his or her option, as provided in the subsection 90-08 titled

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PAYMENT OF WITHHELD FUNDS of this section, no such percent retainage shall be deducted.

When at least 95% of the work has been completed, the ARCHITECT shall, at the OWNER's discretion and with the consent of the surety, prepare estimates of both the contract value and the cost of the remaining work to be done.

The OWNER may retain an amount not less than twice the contract value or estimated cost, whichever is greater, of the work remaining to be done. The remainder, less all previous payments and deductions, will then be certified for payment to the Contractor.

It is understood and agreed that the Contractor shall not be entitled to demand or receive partial payment based on quantities of work in excess of ~~that those~~ provided in the proposal or covered by approved change orders or supplemental agreements. ~~except when such excess quantities have been determined by the ENGINEER to be a part of the final quantity for the item of work in question.~~

No partial payment shall bind the OWNER to the acceptance of any materials or work in place as to quality or quantity. All partial payments are subject to correction at the time of final payment as provided in the subsection 90-09 titled ACCEPTANCE AND FINAL PAYMENT of this section.

The Contractor shall deliver to the OWNER a complete release of all claims for labor and material arising out of this contract before the final payment is made. If any subcontractor or supplier fails to furnish such a release in full, the Contractor may furnish a bond or other collateral satisfactory to the OWNER to indemnify the OWNER against any potential lien or other such claim. The bond or collateral shall include all costs, expenses, and attorney fees the OWNER may be compelled to pay in discharging any such lien or claim.

90-07 Payment for Materials on Hand. Partial payments may be made to the extent of the delivered cost of materials to be incorporated in the work, provided that such materials meet the requirements of the contract, plans, and specifications and are delivered to acceptable sites on the airport property or at other sites in the vicinity that are acceptable to the OWNER. Such delivered costs of stored or stockpiled materials may be included in the next partial payment after the following conditions are met:

- a. The material has been stored or stockpiled in a manner acceptable to the ENGINEER at or on an approved site.
- b. The Contractor has furnished the ARCHITECT with acceptable evidence of the quantity and quality of such stored or stockpiled materials.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- c. The Contractor has furnished the ARCHITECT with satisfactory evidence that the material and transportation costs have been paid.
- d. The Contractor has furnished the OWNER legal title (free of liens or encumbrances of any kind) to the material so stored or stockpiled.
- e. The Contractor has furnished the OWNER evidence that the material so stored or stockpiled is insured against loss by damage to or disappearance of such materials at any time prior to use in the work.

It is understood and agreed that the transfer of title and the OWNER's payment for such stored or stockpiled materials shall in no way relieve the Contractor of his or her responsibility for furnishing and placing such materials in accordance with the requirements of the contract, plans, and specifications.

In no case will the amount of partial payments for materials on hand exceed the contract price for such materials or the contract price for the contract item in which the material is intended to be used.

No partial payment will be made for stored or stockpiled living or perishable plant materials.

The Contractor shall bear all costs associated with the partial payment of stored or stockpiled materials in accordance with the provisions of this subsection.

90-08 Payment of Withheld Funds. At the Contractor's option, if an OWNER withholds retainage in accordance with the methods described in subsection 90-06 PARTIAL PAYMENTS, the Contractor may request that the OWNER deposit the retainage into an escrow account. The OWNER's deposit of retainage into an escrow account is subject to the following conditions:

- a. The Contractor shall bear all expenses of establishing and maintaining an escrow account and escrow agreement acceptable to the OWNER.
- b. The Contractor shall deposit to and maintain in such escrow only those securities or bank certificates of deposit as are acceptable to the OWNER and having a value not less than the retainage that would otherwise be withheld from partial payment.
- c. The Contractor shall enter into an escrow agreement satisfactory to the OWNER.
- d. The Contractor shall obtain the written consent of the surety to such agreement.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

90-09 Acceptance and Final Payment. When the contract work has been accepted in accordance with the requirements of the subsection 50-15 titled FINAL ACCEPTANCE of Section 50, the ARCHITECT will prepare *a statement of the final contract price including all prior change orders and supplemental agreements, and any final change order items.* ~~the final estimate of the items of work actually performed.~~ The Contractor shall approve the ARCHITECT's final ~~estimate statement~~ or advise the ARCHITECT of the Contractor's objections. ~~to the final estimate which are based on disputes in measurements or computations of the final quantities to be paid under the contract as amended by change order or supplemental agreement.~~ The Contractor and the ARCHITECT shall resolve all disputes (if any) ~~in the measurement and computation of final quantities to be paid~~ within 30 calendar days of the Contractor's receipt of the ARCHITECT's final ~~estimate statement~~. If, after such 30-day period, a dispute still exists, the Contractor may approve the ARCHITECT's *final contract price estimate* under protest of the ~~amount quantities~~ in dispute, and such disputed ~~amount quantities~~ shall be considered by the OWNER as a claim in accordance with the subsection 50-16 titled CLAIMS FOR ADJUSTMENT AND DISPUTES of Section 50.

After the Contractor has approved, or approved under protest, the ARCHITECT's final estimate, and after the ARCHITECT's receipt of the project closeout documentation required in subsection 90-11 Project Closeout, final payment will be processed based on the entire sum, or the undisputed sum in case of approval under protest, determined to be due the Contractor less all previous payments and all amounts to be deducted under the provisions of the contract. All prior partial estimates and payments shall be subject to correction in the final estimate and payment.

If the Contractor has filed a claim for additional compensation under the provisions of the subsection 50-16 titled CLAIMS FOR ADJUSTMENTS AND DISPUTES of Section 50 or under the provisions of this subsection, such claims will be considered by the OWNER in accordance with local laws or ordinances. Upon final adjudication of such claims, any additional payment determined to be due the Contractor will be paid pursuant to a supplemental final estimate.

90-10 Construction Warranty.

- a. In addition to any other warranties in this contract, the Contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect in equipment, material, workmanship, or design furnished, or performed by the Contractor or any subcontractor or supplier at any tier.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- b. This warranty shall continue for a period of one year from the date of final acceptance of the work. If the OWNER takes possession of any part of the work before final acceptance, this warranty shall continue for a period of one year from the date the OWNER takes possession. However, this will not relieve the Contractor from corrective items required by the final acceptance of the project work.
- c. The Contractor shall remedy at the Contractor's expense any failure to conform, or any defect. In addition, the Contractor shall remedy at the Contractor's expense any damage to OWNER real or personal property, when that damage is the result of:
 - (1) The Contractor's failure to conform to contract requirements; or
 - (2) Any defect of equipment, material, workmanship, or design furnished by the Contractor.
- d. The Contractor shall restore any work damaged in fulfilling the terms and conditions of this clause. The Contractor's warranty with respect to work repaired or replaced will run for one year from the date of repair or replacement.
- e. The OWNER will notify the Contractor, in writing, within **[seven (7)]** days after the discovery of any failure, defect, or damage.
- f. If the Contractor fails to remedy any failure, defect, or damage within **[14]** days after receipt of notice, the OWNER shall have the right to replace, repair, or otherwise remedy the failure, defect, or damage at the Contractor's expense.
- g. With respect to all warranties, express or implied, from subcontractors, manufacturers, or suppliers for work performed and materials furnished under this contract, the Contractor shall: (1) Obtain all warranties that would be given in normal commercial practice; (2) Require all warranties to be executed, in writing, for the benefit of the OWNER, as directed by the OWNER, and (3) Enforce all warranties for the benefit of the OWNER.
- h. This warranty shall not limit the OWNER's rights with respect to latent defects, gross mistakes, or fraud.

90-11 Project Closeout. Approval of final payment to the Contractor is contingent upon completion and submittal of the items listed below. The final payment will not be approved until the ARCHITECT approves the Contractor's final submittal. The Contractor shall:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Provide two (2) copies of all manufacturers warranties specified for materials, equipment, and installations.
- b. Provide weekly payroll records (not previously received) from the general Contractor and all subcontractors.
- c. Complete final cleanup in accordance with subsection 40-08, FINAL CLEANUP.
- d. Complete all punch list items identified during the Final Inspection.
- e. Provide complete release of all claims for labor and material arising out of the Contract.
- f. Provide a certified statement signed by the subcontractors, indicating actual amounts paid to the Disadvantaged Business Enterprise (DBE) subcontractors and/or suppliers associated with the project.
- g. When applicable per state requirements, return copies of sales tax completion forms.
- h. Manufacturer's certifications for all items incorporated in the work.
- i. All required record drawings, as-built drawings or as-constructed drawings.
- j. Project Operation and Maintenance (O&M) Manual.
- k. Security for Construction Warranty.
- l. Equipment commissioning documentation submitted, if required.

END OF SECTION 90

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 100

CONTRACTOR QUALITY CONTROL PROGRAM

100-01 General. When the specification requires a Contractor Quality Control Program, the Contractor shall establish, provide, and maintain an effective Quality Control Program that details the methods and procedures that will be taken to assure that all materials and completed construction required by this contract conform to contract plans, technical specifications and other requirements, whether manufactured by the Contractor, or procured from subcontractors or vendors. Although guidelines are established and certain minimum requirements are specified here and elsewhere in the contract technical specifications, the Contractor shall assume full responsibility for accomplishing the stated purpose.

The intent of this section is to enable the Contractor to establish a necessary level of control that will:

- a. Adequately provide for the production of acceptable quality materials.
- b. Provide sufficient information to assure both the Contractor and the Architect/Engineer that the specification requirements can be met.
- c. Allow the Contractor as much latitude as possible to develop his or her own standard of control.

The Contractor shall be prepared to discuss and present, at the preconstruction conference, their understanding of the quality control requirements. **The Contractor shall not begin any construction or production of materials to be incorporated into the completed work until the Quality Control Program has been reviewed and accepted by the Architect/Engineer and a written finding of no objection to the Quality Control Program is provided by the Architect/Engineer.** No partial payment will be made for materials subject to specific quality control requirements until the Quality Control Program has been reviewed and a written finding of no objection to the Quality Control Program is provided by the Architect/Engineer.

The quality control requirements shall be provided solely by the Contractor as contained in this section and elsewhere in the contract technical specifications are in addition to and separate from the acceptance testing requirements. Separate acceptance testing requirements are the responsibility of the Owner. The Owner may elect to take whatever number of samples and conduct tests as the Owner deems appropriate; or may elect to accept tests for materials provided by the Contractor's quality control testing program. The Contractor shall be solely responsible for all retesting costs for failing **assurance** tests conducted by the Owner.

100-02 Description of program.

a. General description. The Contractor shall establish a Quality Control Program to perform quality control inspection and testing of all items of work required by the technical specifications, including those performed by subcontractors. This Quality Control

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Program shall ensure conformance to applicable specifications and plans with respect to materials, workmanship, construction, finish, and functional performance. The Quality Control Program shall be effective for control of all construction work performed under this Contract and shall specifically include surveillance and tests required by the technical specifications, in addition to other requirements of this section and any other activities deemed necessary by the Contractor to establish an effective level of quality control. All quality control testing shall be performed by the Contractor at no additional cost to the Owner.

b. Quality Control Program. The Contractor shall describe the Quality Control Program in a written document that shall be reviewed and approved by the Architect/Engineer prior to the start of any production, construction, or off-site fabrication. **The written draft Quality Control Program shall be submitted to the Architect/Engineer for review and approval at least five calendar days before the Preconstruction Conference.** The Contractor's Quality Control Plan and third party Quality Control testing laboratory must be approved in writing by the Architect/Engineer prior to the Notice to Proceed (NTP).

The Quality Control Program shall be organized to address, as a minimum, the following items:

- a. Quality control organization and communication plan
- b. Project progress schedule
- c. Submittals schedule
- d. Inspection requirements
- e. Quality control testing plan
- f. Documentation of quality control activities
- g. Requirements for corrective action when quality control and/or acceptance criteria are not met
- h. Compliance with any special testing or inspections required by State or County code.

The Contractor is encouraged to add any additional elements to the Quality Control Program that is deemed necessary to adequately control all production and/or construction processes required by this contract.

The cost of development, administration and/or performance of the Quality Control Program shall be paid for by the Contractor and said costs shall be incidental to the various other bid items.

100-03 Quality control organization. The Contractor Quality Control Program shall be implemented by the establishment of a separate (third party) quality control organization. An organizational chart shall be developed to show all quality control personnel and how these personnel integrate with other management/production and construction functions and personnel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The organizational chart shall identify all quality control staff by name and function, and shall indicate the total staff required to implement all elements of the Quality Control Program, including inspection and testing for each item of work. A third party independent testing laboratory shall be used for implementation of all the Quality Control Program. Testing personnel assigned shall be subject to the qualification requirements of paragraph 100-03a and 100-03b. The organizational chart shall indicate which personnel are Contractor employees and which are provided by an outside organization.

The quality control organization shall, as a minimum, consist of the following personnel:

a. Program Administrator. The Program Administrator shall be a full-time employee of the Contractor, or a consultant engaged by the Contractor. The Program Administrator shall have a minimum of five (5) years of experience in airport and/or building construction and shall have had prior quality control experience on a project of comparable size and scope as the contract.

Additional qualifications for the Program Administrator shall include at least one of the following requirements:

(1) Registered Architect or Professional Engineer with one (1) year of airport construction experience.

(2) Engineer-in-training with two (2) years of airport experience.

(3) An individual with three (3) years of building experience, with a Bachelor Degree in Architecture, Engineering or Construction.

(4) Construction materials technician certified at Level III by the National Institute for Certification in Engineering Technologies (NICET).

(5) A NICET certified engineering technician in Civil Engineering Technology with five (5) years of airport experience.

The Program Administrator shall have full authority to institute any and all actions necessary for the successful implementation of the Quality Control Program to ensure compliance with the contract plans and technical specifications. The Program Administrator shall report directly to a responsible officer of the construction firm. The Program Administrator may supervise the Quality Control Program on more than one project provided that person can be at the job site within two (2) hours after being notified of a problem.

b. Quality control technicians. A sufficient number of quality control technicians necessary to adequately implement the Quality Control Program shall be provided. These personnel shall be either Engineers, engineering technicians, or experienced craftsman with qualifications in the appropriate field equivalent to NICET Level II or higher construction materials technician or highway construction technician and shall have a minimum of two (2) years of experience in their area of expertise.

The quality control technicians shall report directly to the Program Administrator and shall perform the following functions:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

(1) Inspection of all materials, construction, plant, and equipment for conformance to the technical specifications, and as required by subsection 100-06.

(2) Performance of all quality control tests as required by the technical specifications and subsection 100-07.

(3) Performance of density tests for the Architect/Engineer when required by the technical specifications.

Certification at an equivalent level, by a state or nationally recognized organization will be acceptable in lieu of NICET certification.

c. Staffing levels. The Contractor or their independent testing laboratory shall provide sufficient qualified quality control personnel to monitor each work activity at all times. Where material is being produced in a plant for incorporation into the work, separate plant and field technicians shall be provided at each plant and field placement location. The scheduling and coordinating of all inspection and testing must match the type and pace of work activity. The Quality Control Program shall state where different technicians will be required for different work elements.

100-04 Project progress schedule. The Contractor shall submit a coordinated construction schedule for all work activities. The schedule shall be prepared as a network diagram in **singular** Critical Path Method (CPM), Program Evaluation and Review Technique (PERT), or other format, or as otherwise specified in the contract. As a minimum, it shall provide information on the sequence of work critical path activities, milestone dates, and activity duration.

The Contractor shall maintain the work schedule and provide an update and analysis of the progress schedule on a twice monthly basis, or as otherwise specified in the contract. Submission of the work schedule shall not relieve the Contractor of overall responsibility for scheduling, sequencing, and coordinating all work to comply with the requirements of the contract.

100-05 Submittals schedule. The Contractor shall submit a detailed listing of all submittals (for example, mix designs, material certifications) and shop drawings required by the technical specifications. The listing can be developed in a spreadsheet format and shall include:

- a. Specification item number
- b. Item description
- c. Description of submittal
- d. Specification paragraph requiring submittal
- e. Scheduled date of submittal

100-06 Inspection requirements. Quality control inspection functions shall be organized to provide inspections for all definable features of work, as detailed below. All inspections shall be documented by the Contractor as specified by subsection 100-07. All special inspections required for building construction required by the State or County shall the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

responsibility and cost of the Owner. All other inspections shall be the responsibility of the Contractor.

Inspections shall be performed daily to ensure continuing compliance with contract requirements until completion of the particular feature of work. These shall include the following minimum requirements:

a. During plant operation for material production, quality control test results and periodic inspections shall be used to ensure the quality of aggregates and other mix components, and to adjust and control mix proportioning to meet the approved mix design and other requirements of the technical specifications. All equipment used in proportioning and mixing shall be inspected to ensure its proper operating condition. The Quality Control Program shall detail how these and other quality control functions will be accomplished and used.

b. During field operations, quality control test results and periodic inspections shall be used to ensure the quality of all materials and workmanship. All equipment used in placing, finishing, and compacting shall be inspected to ensure its proper operating condition and to ensure that all such operations are in conformance to the technical specifications and are within the plan dimensions, lines, grades, and tolerances specified. The Program shall document how these and other quality control functions will be accomplished and used.

100-07 Quality control testing plan. As a part of the overall Quality Control Program, the Contractor shall implement a quality control testing plan, as required by the technical specifications. The testing plan shall include the minimum tests and test frequencies required by each technical specification Item, as well as any additional quality control tests that the Contractor deems necessary to adequately control production and/or construction processes.

The testing plan can be developed in a spreadsheet fashion and shall, as a minimum, include the following:

- a. Specification item number (for example, P-401)
- b. Item description (for example, Plant Mix Bituminous Pavements)
- c. Test type (for example, gradation, grade, asphalt content, mil spec)
- d. Test standard (for example, ASTM or American Association of State Highway and Transportation Officials (AASHTO) test number, as applicable)
- e. Test frequency (for example, as required by technical specifications or minimum frequency when requirements are not stated)
- f. Responsibility (for example, plant technician)
- g. Control requirements (for example, target, permissible deviations)

The testing plan shall contain a statistically-based procedure of random sampling for acquiring test samples in accordance with ASTM D3665. The Architect/Engineer shall be provided the opportunity to witness quality control sampling and testing. The

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Architect/Engineer may elect to have Contractor's independent testing laboratory take/make testing samples (cores, cylinders, beams, etc.) or obtain/make samples from the Architect/Engineer's testing lab. The Architect/Engineer may elect to store materials samples used for assurance testing (curing) in approved shelters being used by the Contractor or shelters at locations provided by the Architect/Engineer.

All quality control test results shall be documented by the Contractor as required by subsection 100-08.

100-08 Documentation. The Contractor shall maintain current quality control records of all inspections and tests performed. These records shall include factual evidence that the required inspections or tests have been performed, including type and number of inspections or tests involved; results of inspections or tests; nature of defects, deviations, causes for rejection, etc.; proposed remedial action; and corrective actions taken. **Copies of all Quality Control testing and formal inspections shall be transmitted daily to the Architect/Engineer upon receipt from the testing labor inspector. NO exceptions. The Contractor shall submit additional copies of testing reports or inspections to the governing authority, when the authority so directs.**

These records must cover both conforming and defective or deficient features, and must include a statement that all supplies and materials incorporated in the work are in full compliance with the terms of the contract. Legible copies of these records shall be furnished to the Architect/Engineer daily. The records shall cover all work placed subsequent to the previously furnished records and shall be verified and signed by the Contractor's Program Administrator.

Specific Contractor quality control records required for the contract shall include, but are not necessarily limited to, the following records:

a. Daily inspection reports. Each Contractor quality control technician shall maintain a daily log of all inspections performed for both Contractor and subcontractor operations. These technician's daily reports shall provide factual evidence that continuous quality control inspections have been performed and shall, as a minimum, include the following:

- (1) Technical specification item number and description
- (2) Compliance with approved submittals
- (3) Proper storage of materials and equipment
- (4) Proper operation of all equipment
- (5) Adherence to plans and technical specifications
- (6) Review of quality control tests
- (7) Safety inspection.

The daily inspection reports shall identify inspections conducted, results of inspections, location and nature of defects found, causes for rejection, and remedial or corrective actions taken or proposed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The daily inspection reports shall be signed by the responsible quality control technician and the Program Administrator. The Architect/Engineer shall be provided at least one copy of each daily inspection report on the work day following the day of record.

b. Daily test reports. The Contractor shall be responsible for establishing a system that will record all quality control test results. Daily test reports shall document the following information:

- (1) Technical specification item number and description
- (2) Test designation
- (3) Location
- (4) Date of test
- (5) Control requirements
- (6) Test results
- (7) Causes for rejection
- (8) Recommended remedial actions
- (9) Retests

Test results from each day's work period shall be submitted to the Architect/Engineer prior to the start of the next day's work period. When required by the technical specifications, the Contractor shall maintain statistical quality control charts. The daily test reports shall be signed by the responsible quality control technician and the Program Administrator.

100-09 Corrective action requirements. The Quality Control Program shall indicate the appropriate action to be taken when a process is deemed, or believed, to be out of control (out of tolerance) and detail what action will be taken to bring the process into control. The requirements for corrective action shall include both general requirements for operation of the Quality Control Program as a whole, and for individual items of work contained in the technical specifications.

The Quality Control Program shall detail how the results of quality control inspections and tests will be used for determining the need for corrective action and shall contain clear sets of rules to gauge when a process is out of control and the type of correction to be taken to regain process control.

When applicable or required by the technical specifications, the Contractor shall establish and use statistical quality control charts for individual quality control tests. The requirements for corrective action shall be linked to the control charts.

100-10 Surveillance by the Architect/Engineer. All items of material and equipment shall be subject to surveillance by the Architect/Engineer at the point of production, manufacture or shipment to determine if the Contractor, producer, manufacturer or shipper maintains an adequate quality control system in conformance with the requirements detailed here and the applicable technical specifications and plans. In addition, all items of materials, equipment and work in place shall be subject to surveillance by the Architect/Engineer at the site for the same purpose.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Surveillance by the Architect/Engineer does not relieve the Contractor of performing quality control inspections of either on-site or off-site Contractor's or subcontractor's work.

100-11 Noncompliance.

a. The Architect/Engineer will notify the Contractor of any noncompliance with any of the foregoing requirements. The Contractor shall, after receipt of such notice, immediately take corrective action. Any notice, when delivered by the Architect/Engineer or his or her authorized representative to the Contractor or his or her authorized representative at the site of the work, shall be considered sufficient notice.

b. In cases where quality control activities do not comply with either the Contractor Quality Control Program or the contract provisions, or where the Contractor fails to properly operate and maintain an effective Quality Control Program, as determined by the Architect/Engineer, the Architect/Engineer may:

(1) Order the Contractor to replace ineffective or unqualified quality control personnel or subcontractors.

(2) Order the Contractor to stop operations until appropriate corrective actions are taken.

END OF SECTION 100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 110

METHOD OF ESTIMATING PERCENTAGE OF MATERIAL WITHIN SPECIFICATION LIMITS (PWL)

110-01 General. When the specifications provide for acceptance of material based on the method of estimating percentage of material within specification limits (PWL), the PWL will be determined in accordance with this section. All test results for a lot will be analyzed statistically to determine the total estimated percent of the lot that is within specification limits. The PWL is computed using the sample average ($\bar{X}$) and sample standard deviation (S_n) of the specified number (n) of sublots for the lot and the specification tolerance limits, L for lower and U for upper, for the particular acceptance parameter. From these values, the respective Quality index, Q_L for Lower Quality Index and/or Q_U for Upper Quality Index, is computed and the PWL for the lot for the specified n is determined from Table 1. All specification limits specified in the technical sections shall be absolute values. Test results used in the calculations shall be to the significant figure given in the test procedure.

There is some degree of uncertainty (risk) in the measurement for acceptance because only a small fraction of production material (the population) is sampled and tested. This uncertainty exists because all portions of the production material have the same probability to be randomly sampled. The Contractor's risk is the probability that material produced at the acceptable quality level is rejected or subjected to a pay adjustment. The OWNER's risk is the probability that material produced at the rejectable quality level is accepted.

It is the intent of this section to inform the Contractor that, in order to consistently offset the Contractor's risk for material evaluated, production quality (using population average and population standard deviation) must be maintained at the acceptable quality specified or higher. In all cases, it is the responsibility of the Contractor to produce at quality levels that will meet the specified acceptance criteria when sampled and tested at the frequencies specified.

110-02 Method for Computing PWL. The computational sequence for computing PWL is as follows:

- a. Divide the lot into n sublots in accordance with the acceptance requirements of the specification.
- b. Locate the random sampling position within the subplot in accordance with the requirements of the specification.
- c. Make a measurement at each location, or take a test portion and make the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

measurement on the test portion in accordance with the testing requirements of the specification.

- d. Find the sample average ($\bar{X}$) for all subplot values within the lot by using the following formula:

$$\bar{X} = (x_1 + x_2 + x_3 + \dots + x_n) / n$$

Where: $\bar{X}$ = Sample average of all subplot values within a lot

x_1, x_2 = Individual subplot values

n = Number of sublots

- e. Find the sample standard deviation (S_n) by use of the following formula:

$$S_n = [(d_1^2 + d_2^2 + d_3^2 + \dots + d_n^2)/(n-1)]^{1/2}$$

Where: S_n = Sample standard deviation of the number of subplot values in the set
 d_1, d_2 = Deviations of the individual subplot values $x_1, x_2, \dots$ from the average value $\bar{X}$

that is: $d_1 = (x_1 - \bar{X}), d_2 = (x_2 - \bar{X}) \dots d_n = (x_n - \bar{X})$

n = Number of sublots

- f. For single sided specification limits (that is, L only), compute the Lower Quality Index Q_L by use of the following formula:

$$Q_L = (\bar{X} - L) / S_n$$

Where: L = specification lower tolerance limit

Estimate the percentage of material within limits (PWL) by entering Table 1 with Q_L , using the column appropriate to the total number (n) of measurements. If the value of Q_L falls between values shown on the table, use the next higher value of PWL.

- g. For double-sided specification limits (that is, L and U), compute the Quality Indexes Q_L and Q_U by use of the following formulas:

$$Q_L = (\bar{X} - L) / S_n$$

and

$$Q_U = (U - \bar{X}) / S_n$$

Where: L and U = specification lower and upper tolerance limits

Estimate the percentage of material between the lower (L) and upper (U) tolerance limits (PWL) by entering Table 1 separately with Q_L and Q_U , using the column appropriate to the total number (n) of measurements, and determining the percent of material above P_L and percent of material below P_U for each tolerance limit. If the values of Q_L fall between values shown on the table, use the next higher value of P_L or P_U . Determine the PWL by use

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

of the following formula:

$$PWL = (P_U + P_L) - 100$$

Where: P_L = percent within lower specification limit

P_U = percent within upper specification limit

EXAMPLE OF PWL CALCULATION

Project: Example Project

Test Item: Item P-401, Lot A.

A. PWL Determination for Mat Density.

1. Density of four random cores taken from Lot A.

$$A-1 = 96.60$$

$$A-2 = 97.55$$

$$A-3 = 99.30$$

$$A-4 = 98.35$$

$$n = 4$$

2. Calculate average density for the lot.

$$X = (x_1 + x_2 + x_3 + \dots + x_n) / n$$

$$X = (96.60 + 97.55 + 99.30 + 98.35) / 4$$

$$X = 97.95\% \text{ density}$$

3. Calculate the standard deviation for the lot.

$$S_n = [((96.60 - 97.95)^2 + (97.55 - 97.95)^2 + (99.30 - 97.95)^2 + (98.35 - 97.95)^2) / (4 - 1)]^{1/2}$$

$$S_n = [(1.82 + 0.16 + 1.82 + 0.16) / 3]^{1/2}$$

$$S_n = 1.15$$

4. Calculate the Lower Quality Index Q_L for the lot. ($L=96.3$)

$$Q_L = (X - L) / S_n$$

$$Q_L = (97.95 - 96.30) / 1.15$$

$$Q_L = 1.4348$$

5. Determine PWL by entering Table 1 with $Q_L = 1.44$ and $n = 4$.

$$PWL = 98$$

B. PWL Determination for Air Voids.

1. Air Voids of four random samples taken from Lot A.

$$A-1 = 5.00$$

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

$$A-2 = 3.74$$

$$A-3 = 2.30$$

$$A-4 = 3.25$$

2. Calculate the average air voids for the lot.

$$X = (x_1 + x_2 + x_3 \dots n) / n$$

$$X = (5.00 + 3.74 + 2.30 + 3.25) / 4$$

$$X = 3.57\%$$

3. Calculate the standard deviation S_n for the lot.

$$S_n = [((3.57 - 5.00)^2 + (3.57 - 3.74)^2 + (3.57 - 2.30)^2 + (3.57 - 3.25)^2) / (4 - 1)]^{1/2}$$

$$S_n = [(2.04 + 0.03 + 1.62 + 0.10) / 3]^{1/2}$$

$$S_n = 1.12$$

4. Calculate the Lower Quality Index Q_L for the lot. ($L=2.0$)

$$Q_L = (X - L) / S_n$$

$$Q_L = (3.57 - 2.00) / 1.12$$

$$Q_L = 1.3992$$

5. Determine P_L by entering Table 1 with $Q_L = 1.41$ and $n = 4$.

$$P_L = 97$$

6. Calculate the Upper Quality Index Q_U for the lot. ($U=5.0$)

$$Q_U = (U - X) / S_n$$

$$Q_U = (5.00 - 3.57) / 1.12$$

$$Q_U = 1.2702$$

7. Determine P_U by entering Table 1 with $Q_U = 1.29$ and $n = 4$.

$$P_U = 93$$

8. Calculate Air Voids PWL

$$PWL = (P_L + P_U) - 100$$

$$PWL = (97 + 93) - 100 = 90$$

EXAMPLE OF OUTLIER CALCULATION (REFERENCE ASTM E178)

Project: Example Project

Test Item: Item P-401, Lot A.

A. Outlier Determination for Mat Density.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Density of four random cores taken from Lot A arranged in descending order.
A-3 = 99.30
A-4 = 98.35
A-2 = 97.55
A-1 = 96.60
2. Use $n=4$ and upper 5% significance level of to find the critical value for test criterion = 1.463.
3. Use average density, standard deviation, and test criterion value to evaluate density measurements.
 - a. For measurements greater than the average:

If $(\text{measurement} - \text{average})/(\text{standard deviation})$ is less than test criterion, then the measurement is not considered an outlier

For A-3, check if $(99.30 - 97.95) / 1.15$ is greater than 1.463.
Since 1.174 is less than 1.463, the value is not an outlier.
 - b. For measurements less than the average:

If $(\text{average} - \text{measurement})/(\text{standard deviation})$ is less than test criterion, then the measurement is not considered an outlier.

For A-1, check if $(97.95 - 96.60) / 1.15$ is greater than 1.463.
Since 1.435 is less than 1.463, the value is not an outlier.

Note: In this example, a measurement would be considered an outlier if the density were:

Greater than $(97.95 + 1.463 \times 1.15) = 99.63\%$

OR

less than $(97.95 - 1.463 \times 1.15) = 96.27\%$.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Table 1. Table for Estimating Percent of Lot Within Limits (PWL)

Percent Within Limits (P _L and P _U)	Positive Values of Q (Q _L and Q _U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
99	1.1541	1.4700	1.6714	1.8008	1.8888	1.9520	1.9994	2.0362
98	1.1524	1.4400	1.6016	1.6982	1.7612	1.8053	1.8379	1.8630
97	1.1496	1.4100	1.5427	1.6181	1.6661	1.6993	1.7235	1.7420
96	1.1456	1.3800	1.4897	1.5497	1.5871	1.6127	1.6313	1.6454
95	1.1405	1.3500	1.4407	1.4887	1.5181	1.5381	1.5525	1.5635
94	1.1342	1.3200	1.3946	1.4329	1.4561	1.4717	1.4829	1.4914
93	1.1269	1.2900	1.3508	1.3810	1.3991	1.4112	1.4199	1.4265
92	1.1184	1.2600	1.3088	1.3323	1.3461	1.3554	1.3620	1.3670
91	1.1089	1.2300	1.2683	1.2860	1.2964	1.3032	1.3081	1.3118
90	1.0982	1.2000	1.2290	1.2419	1.2492	1.2541	1.2576	1.2602
89	1.0864	1.1700	1.1909	1.1995	1.2043	1.2075	1.2098	1.2115
88	1.0736	1.1400	1.1537	1.1587	1.1613	1.1630	1.1643	1.1653
87	1.0597	1.1100	1.1173	1.1192	1.1199	1.1204	1.1208	1.1212
86	1.0448	1.0800	1.0817	1.0808	1.0800	1.0794	1.0791	1.0789
85	1.0288	1.0500	1.0467	1.0435	1.0413	1.0399	1.0389	1.0382
84	1.0119	1.0200	1.0124	1.0071	1.0037	1.0015	1.0000	0.9990
83	0.9939	0.9900	0.9785	0.9715	0.9671	0.9643	0.9624	0.9610
82	0.9749	0.9600	0.9452	0.9367	0.9315	0.9281	0.9258	0.9241
81	0.9550	0.9300	0.9123	0.9025	0.8966	0.8928	0.8901	0.8882
80	0.9342	0.9000	0.8799	0.8690	0.8625	0.8583	0.8554	0.8533
79	0.9124	0.8700	0.8478	0.8360	0.8291	0.8245	0.8214	0.8192
78	0.8897	0.8400	0.8160	0.8036	0.7962	0.7915	0.7882	0.7858
77	0.8662	0.8100	0.7846	0.7716	0.7640	0.7590	0.7556	0.7531
76	0.8417	0.7800	0.7535	0.7401	0.7322	0.7271	0.7236	0.7211
75	0.8165	0.7500	0.7226	0.7089	0.7009	0.6958	0.6922	0.6896

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Percent Within Limits (P _L and P _U)	Positive Values of Q (Q _L and Q _U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
74	0.7904	0.7200	0.6921	0.6781	0.6701	0.6649	0.6613	0.6587
73	0.7636	0.6900	0.6617	0.6477	0.6396	0.6344	0.6308	0.6282
72	0.7360	0.6600	0.6316	0.6176	0.6095	0.6044	0.6008	0.5982
71	0.7077	0.6300	0.6016	0.5878	0.5798	0.5747	0.5712	0.5686
70	0.6787	0.6000	0.5719	0.5582	0.5504	0.5454	0.5419	0.5394
69	0.6490	0.5700	0.5423	0.5290	0.5213	0.5164	0.5130	0.5105
68	0.6187	0.5400	0.5129	0.4999	0.4924	0.4877	0.4844	0.4820
67	0.5878	0.5100	0.4836	0.4710	0.4638	0.4592	0.4560	0.4537
66	0.5563	0.4800	0.4545	0.4424	0.4355	0.4310	0.4280	0.4257
65	0.5242	0.4500	0.4255	0.4139	0.4073	0.4030	0.4001	0.3980
64	0.4916	0.4200	0.3967	0.3856	0.3793	0.3753	0.3725	0.3705
63	0.4586	0.3900	0.3679	0.3575	0.3515	0.3477	0.3451	0.3432
62	0.4251	0.3600	0.3392	0.3295	0.3239	0.3203	0.3179	0.3161
61	0.3911	0.3300	0.3107	0.3016	0.2964	0.2931	0.2908	0.2892
60	0.3568	0.3000	0.2822	0.2738	0.2691	0.2660	0.2639	0.2624
59	0.3222	0.2700	0.2537	0.2461	0.2418	0.2391	0.2372	0.2358
58	0.2872	0.2400	0.2254	0.2186	0.2147	0.2122	0.2105	0.2093
57	0.2519	0.2100	0.1971	0.1911	0.1877	0.1855	0.1840	0.1829
56	0.2164	0.1800	0.1688	0.1636	0.1607	0.1588	0.1575	0.1566
55	0.1806	0.1500	0.1406	0.1363	0.1338	0.1322	0.1312	0.1304
54	0.1447	0.1200	0.1125	0.1090	0.1070	0.1057	0.1049	0.1042
53	0.1087	0.0900	0.0843	0.0817	0.0802	0.0793	0.0786	0.0781
52	0.0725	0.0600	0.0562	0.0544	0.0534	0.0528	0.0524	0.0521
51	0.0363	0.0300	0.0281	0.0272	0.0267	0.0264	0.0262	0.0260
50	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Percent Within Limits (P _L and P _U)	Negative Values of Q (Q _L and Q _U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
49	-0.0363	-0.0300	-0.0281	-0.0272	-0.0267	-0.0264	-0.0262	-0.0260
48	-0.0725	-0.0600	-0.0562	-0.0544	-0.0534	-0.0528	-0.0524	-0.0521
47	-0.1087	-0.0900	-0.0843	-0.0817	-0.0802	-0.0793	-0.0786	-0.0781
46	-0.1447	-0.1200	-0.1125	-0.1090	-0.1070	-0.1057	-0.1049	-0.1042
45	-0.1806	-0.1500	-0.1406	-0.1363	-0.1338	-0.1322	-0.1312	-0.1304
44	-0.2164	-0.1800	-0.1688	-0.1636	-0.1607	-0.1588	-0.1575	-0.1566
43	-0.2519	-0.2100	-0.1971	-0.1911	-0.1877	-0.1855	-0.1840	-0.1829
42	-0.2872	-0.2400	-0.2254	-0.2186	-0.2147	-0.2122	-0.2105	-0.2093
41	-0.3222	-0.2700	-0.2537	-0.2461	-0.2418	-0.2391	-0.2372	-0.2358
40	-0.3568	-0.3000	-0.2822	-0.2738	-0.2691	-0.2660	-0.2639	-0.2624
39	-0.3911	-0.3300	-0.3107	-0.3016	-0.2964	-0.2931	-0.2908	-0.2892
38	-0.4251	-0.3600	-0.3392	-0.3295	-0.3239	-0.3203	-0.3179	-0.3161
37	-0.4586	-0.3900	-0.3679	-0.3575	-0.3515	-0.3477	-0.3451	-0.3432
36	-0.4916	-0.4200	-0.3967	-0.3856	-0.3793	-0.3753	-0.3725	-0.3705
35	-0.5242	-0.4500	-0.4255	-0.4139	-0.4073	-0.4030	-0.4001	-0.3980
34	-0.5563	-0.4800	-0.4545	-0.4424	-0.4355	-0.4310	-0.4280	-0.4257
33	-0.5878	-0.5100	-0.4836	-0.4710	-0.4638	-0.4592	-0.4560	-0.4537
32	-0.6187	-0.5400	-0.5129	-0.4999	-0.4924	-0.4877	-0.4844	-0.4820
31	-0.6490	-0.5700	-0.5423	-0.5290	-0.5213	-0.5164	-0.5130	-0.5105
30	-0.6787	-0.6000	-0.5719	-0.5582	-0.5504	-0.5454	-0.5419	-0.5394
29	-0.7077	-0.6300	-0.6016	-0.5878	-0.5798	-0.5747	-0.5712	-0.5686
28	-0.7360	-0.6600	-0.6316	-0.6176	-0.6095	-0.6044	-0.6008	-0.5982
27	-0.7636	-0.6900	-0.6617	-0.6477	-0.6396	-0.6344	-0.6308	-0.6282
26	-0.7904	-0.7200	-0.6921	-0.6781	-0.6701	-0.6649	-0.6613	-0.6587
25	-0.8165	-0.7500	-0.7226	-0.7089	-0.7009	-0.6958	-0.6922	-0.6896

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Percent Within Limits (P _L and P _U)	Negative Values of Q (Q _L and Q _U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
24	-0.8417	-0.7800	-0.7535	-0.7401	-0.7322	-0.7271	-0.7236	-0.7211
23	-0.8662	-0.8100	-0.7846	-0.7716	-0.7640	-0.7590	-0.7556	-0.7531
22	-0.8897	-0.8400	-0.8160	-0.8036	-0.7962	-0.7915	-0.7882	-0.7858
21	-0.9124	-0.8700	-0.8478	-0.8360	-0.8291	-0.8245	-0.8214	-0.8192
20	-0.9342	-0.9000	-0.8799	-0.8690	-0.8625	-0.8583	-0.8554	-0.8533
19	-0.9550	-0.9300	-0.9123	-0.9025	-0.8966	-0.8928	-0.8901	-0.8882
18	-0.9749	-0.9600	-0.9452	-0.9367	-0.9315	-0.9281	-0.9258	-0.9241
17	-0.9939	-0.9900	-0.9785	-0.9715	-0.9671	-0.9643	-0.9624	-0.9610
16	-1.0119	-1.0200	-1.0124	-1.0071	-1.0037	-1.0015	-1.0000	-0.9990
15	-1.0288	-1.0500	-1.0467	-1.0435	-1.0413	-1.0399	-1.0389	-1.0382
14	-1.0448	-1.0800	-1.0817	-1.0808	-1.0800	-1.0794	-1.0791	-1.0789
13	-1.0597	-1.1100	-1.1173	-1.1192	-1.1199	-1.1204	-1.1208	-1.1212
12	-1.0736	-1.1400	-1.1537	-1.1587	-1.1613	-1.1630	-1.1643	-1.1653
11	-1.0864	-1.1700	-1.1909	-1.1995	-1.2043	-1.2075	-1.2098	-1.2115
10	-1.0982	-1.2000	-1.2290	-1.2419	-1.2492	-1.2541	-1.2576	-1.2602
9	-1.1089	-1.2300	-1.2683	-1.2860	-1.2964	-1.3032	-1.3081	-1.3118
8	-1.1184	-1.2600	-1.3088	-1.3323	-1.3461	-1.3554	-1.3620	-1.3670
7	-1.1269	-1.2900	-1.3508	-1.3810	-1.3991	-1.4112	-1.4199	-1.4265
6	-1.1342	-1.3200	-1.3946	-1.4329	-1.4561	-1.4717	-1.4829	-1.4914
5	-1.1405	-1.3500	-1.4407	-1.4887	-1.5181	-1.5381	-1.5525	-1.5635
4	-1.1456	-1.3800	-1.4897	-1.5497	-1.5871	-1.6127	-1.6313	-1.6454
3	-1.1496	-1.4100	-1.5427	-1.6181	-1.6661	-1.6993	-1.7235	-1.7420
2	-1.1524	-1.4400	-1.6016	-1.6982	-1.7612	-1.8053	-1.8379	-1.8630
1	-1.1541	-1.4700	-1.6714	-1.8008	-1.8888	-1.9520	-1.9994	-2.0362

END OF SECTION 110

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SUPPLEMENTAL GENERAL PROVISIONS

(City of Fayetteville Requirements)

1. DEFINITION OF TERMS

Whenever in these specifications and contract the following terms, or pronouns in place of them, are used, the intent and meaning shall be interpreted as follows:

1. City/Owner - The City of Fayetteville, North Carolina
2. City Council - The Mayor - City Council of the City of Fayetteville, NC
3. City Attorney - The legal counsel employed by the City.
4. Contracting Officer - The City representative; acting directly or through an assistant fully authorized to handle the administration of all City Contracts.
5. Engineer – The Engineer and/or Architect consultant representative for the City fully authorized to provide general administration of the performance of construction contracts, including liaison and necessary observation of the work.

2. CONTRACT BONDS REQUIRED

The successful bidder, at the time of the execution of the contract shall provide the City with a contract payment bond and a contract performance bond that shall be in compliance with N.C.G.S. Chapter 44A, Article 3, as follows:

(a) A performance bond in the amount of one hundred percent (100%) of the construction contract amount, conditioned upon the faithful performance of the contract in accordance with the plans, specifications, and conditions of the contract shall be provided. Such bonds shall be solely for the protection of the City of Fayetteville.

(b) A laborer and materials payment bond in the amount of one hundred percent (100%) of the construction contract amount, conditioned upon the prompt payment for all labor or materials for which a Contractor or subcontractor is liable shall be provided. The payment bond shall be solely for the protection of the persons furnishing materials or performing labor for which the Contractor or subcontractor is liable.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

The corporate surety furnishing the bonds shall be authorized to do business in the State of North Carolina, and shall be acceptable to the City Attorney. All contract payment bonds and contract performance bonds shall be executed on "Performance Bond" and "Payment Bond" forms provided in the "Contract Award Package" and be countersigned by a regularly authorized agent of the corporate surety who is resident in North Carolina and who is licensed by the North Carolina Department of Insurance.

3. INSURANCE

The Contractor shall not commence work under this Contract until he has obtained all insurance required under this paragraph, and such insurance has been approved by the City Attorney, nor shall the Contractor allow any subcontractor to commence work on his subcontract until all similar insurance has been so obtained and approved. See Other Provisions Section (2) (c) below titled "Subcontractors."

The insurance required for this contract is as follows:

- (a) Commercial General Liability ISO #CG 00 01 10 93: The Contractor shall take out and maintain during the life of this contract commercial general liability insurance with limits of \$5,000,000 per occurrence; \$5,000,000 aggregate other than products/completed operations; \$5,000,000 aggregate for products/completed.
- (b) Automobile Liability ISO #CA 00 01 12 93: The Contractor shall take out and maintain during the life of this contract automobile liability insurance in an amount not less than \$5,000,000 combined single limit per accident for bodily injury and property damage from owned, non-owned, and hired automobiles.
- (c) Workers' Compensation and Employers' Liability Insurance: The Contractor shall take out and maintain during the life of this contract workers' compensation insurance as required by the laws of the State of North Carolina and Employers' Liability with limits of \$100,000 each accident, \$500,000 policy limit and \$100,000 each employee for all employees employed on the project. In case any employee(s) engaged in work under this contract is or are not protected under the Workers' Compensation Statute, the Contractor shall provide adequate coverage for the protection of employees not otherwise protected.
- (d) Property Insurance: If contracted to construct a building, the Contractor shall purchase and maintain "Builder's Risk" insurance. This insurance shall include the interests of the City, the Contractor and Subcontractors

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

and shall be written on a one hundred percent (100%) completed value basis (full value as of the date that all construction is finished and includes the Contractor's total cost plus profit), and to remain in force until the project is completed and accepted by the City.

Regardless of the nature of the work to be performed, coverage must also be provided for the theft or damage of building materials and supplies, which are not permanently attached and stored on site for any period of time. This coverage shall be an "Installation Floater," and where no building construction is involved, the amount of the coverage shall equal the value of the materials stored on site.

It is the responsibility of the Contractor to inform the policy provider of any and all change orders which increase the building's value. Any penalties or losses incurred due to the Contractor's failure to adequately insure the building during construction will be the Contractor's responsibility.

- (e) Owner's and Contractor's Protective Liability I.S.O.#CG 00 09 10 93: The Contractor shall secure and maintain during the life of the contract, an Owner's and Contractor's Protective Liability insurance policy for the City, with minimum limits of \$1,000,000 per occurrence/\$2,000,000 aggregate.

Acceptability of Insurance

All insurance policies shall be written by insurers licensed to do business in North Carolina. It is realized that certain business activities may not be readily insurable by admitted carriers. If insurance is written by non-admitted carriers whose names appear on the current listing of approved and non-admitted carriers prepared by the North Carolina Department of Insurance, such carriers will be favorably considered assuming they meet all other requirements. Non-admitted carriers should be so identified on the Certificate of Insurance form. The City reserves the right to reject any and all certificates or policies issued by insurers with a Best's rating less than A;VII.

Indemnity Provision

Contractor assumes entire responsibility and liability for losses, expenses, demands and claims in connection with or arising out of any injury, or alleged injury (including death) to any person, or damage, or alleged damage, to property of the City of Fayetteville or others sustained or alleged to have been sustained in connection with or to have arisen out of or resulting from the negligence of the Contractor, his subcontractors, agents, and employees, in the performance of the work/service set forth in the Standard Specifications and Special Provisions, and any changes, addenda, or modifications including losses, expenses or damages

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

sustained by the City of Fayetteville, and agrees to indemnify and hold harmless the City of Fayetteville, its officials, employees, agents or volunteers from any and all such losses, expenses, damages, demands and claims and agrees to defend any suit or action brought against them, or any of them, based on any such alleged injury or damage, and to pay all damages, cost and expenses in connection therewith or resulting therefrom. As an integral part of this agreement Contractor agrees to purchase and maintain during the life of this contract contractual liability insurance in the amount required in the general liability insurance requirements and to furnish proper evidence thereof.

Other Provisions:

- (1) Any deductible or self-insured retention must be declared to and approved by the City.
- (2) The policies are to contain, or be endorsed to contain, the following provisions:
 - (a) Commercial General Liability Coverage
 - 1) The City of Fayetteville, its officials, employees and volunteers are to be covered as additional insured as respects: liability arising out of activities performed by or on behalf of the Contractor; products and completed operations of the Contractor; premises owned, leased or used by the Contractor; or automobiles owned, leased, hired or borrowed by the Contractor. The coverage shall contain no special limitations on the scope of protection afforded to the City, its officials, employees or volunteers.
 - 2) The Contractor's insurance coverage shall be primary insurance as respects the City, its officials, employees and volunteers. Any insurance or self-insurance maintained by the City, its officials, employees or volunteers shall be excess of Contractor's insurance and shall not contribute with it.
 - 3) Coverage shall state that Contractor's insurance shall apply separately to each insured against whom claim is made or suit is brought, except with respect to the limits of the insurer's liability.
 - (b) All Coverages

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Each insurance policy required by this clause shall be endorsed to state that coverage shall not be suspended, voided, canceled by either party, reduced in coverage or in limits except after thirty (30) days prior written notice by certified mail, return receipt requested, has been given to:

City of Fayetteville Purchasing Office
433 Hay Street
Fayetteville, NC 28301

Any failure to comply with reporting provisions of the policies shall not affect coverage provided to the City, its officials, employees, and volunteers. In the event the City is damaged by the failure of the Contractor to maintain such insurance and to so notify the City, the Contractor shall bear all reasonable costs properly attributable thereto.

(c) **Subcontractors**

Contractor shall include all subcontractors as insurers under its policies OR shall furnish separate certificates and endorsements for each subcontractor. All coverages for subcontractors shall be subject to all of the requirements stated herein.

(d) **No Waiver of Immunity**

Any insurance coverage required by the terms of this contract shall not be deemed a contract of insurance purchased by the City nor a waiver of the City's immunity pursuant to NCGS 160A-485.

4. SUBLETTING OR ASSIGNING OF CONTRACT

The Contractor shall not sublet, sell, transfer, assign, or otherwise dispose of the contract or any portion thereof, or of the work provided for therein, or his right, title or interest therein to any person, firm, partnership, or corporation without the written consent of the City Council. Except as may be required under the terms of the Performance Bond or Payment Bond, no funds or sums of money due the Contractor under the contract may be assigned.

5. INTENT OF PLANS AND SPECIFICATIONS

The drawings and specifications are complementary, one to the other. That which is shown on the drawings or called for in the specifications shall be as binding as if it were both called for and shown. The intent of the drawings and specifications

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

is to establish the scope of all labor, materials, transportation, equipment, and any and all other things necessary to provide a complete job.

The wording of the specifications shall be interpreted in accordance with common usage of the language except that words having a commonly used technical or trade meaning shall be so interpreted in preference to other meanings.

6. ENGINEER STATUS

The City's Engineer (or Architect) representative will provide general administration of the performance of construction contracts, including liaison and necessary observation of the work. The Engineer will endeavor to protect the interests of the Owner such that the project is completed in general conformance with the design intent as depicted in the plans and specifications. He is the agent of the City only for the purpose of the construction of this work and to the extent stipulated in the contract documents. He has authority to stop work or to order work removed, or to order corrections of faulty work where such action may be necessary to assure successful completion of the work

The Engineer will coordinate inspections and tests of the work at intervals appropriate to the stage of construction and the Contractor will be responsible for notifying the Engineer in advance when any work will be ready for testing. The Engineer will observe the progress, the quality and the quantity of the work.

7. PLANS AND WORKING DRAWINGS

The Engineer will furnish drawings necessary to show the line, grade, and details of all construction work to be done under this contract. The locations of underground utility lines are depicted on the plans to the extent known to the Engineer, but the exact locations, sizes, nature and extent of such lines cannot be guaranteed. Additional utilities may also be present. It will be the responsibility of the Contractor to protect all utility lines against damages at all time. Any deviation from the plans, specifications, etc., as may be required by the exigencies of the construction, in all cases will be determined by the Engineer. The Engineer reserves the right to make such alterations in the plans or in the character of the work, from time to time, as may be considered necessary or desirable to complete fully the construction of the work, and if such alterations of the plans result in increased cost or result in decreased cost to the Contractor, an equitable adjustment therefore is to be agreed upon by Change Order.

8. CLARIFICATIONS AND DETAIL

In such cases where the nature of the work requires clarification by the Engineer, such clarification shall be furnished by the Engineer with reasonable promptness by means of written instructions or detail drawings, or both. Clarifications and drawings shall be consistent with the intent of contract documents, and shall

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

become a part thereof. The Contractor shall not proceed with the work without such detail drawings and/or written clarifications.

9. SHOP DRAWINGS, SUBMITTALS, SAMPLES, DATA

The Contractor shall submit to the Engineer electronic copies by e-mail all shop or setting drawings, descriptive data, samples, color charts, etc., required for the work. Samples, color charts, etc. may be requested as actual products or printed cards for selection. All shop submittals shall first be reviewed and stamped by the Contractor. Any deviations from specification requirements shall be clearly noted on the Contractor's transmittal. Each submittal shall be keyed to the specification section(s) and/or plan sheets associated with the item. The Engineer will review the shop submittals promptly, noting desired corrections, if any, and will endeavor to return copies electronically to the Contractor within 14 calendar days after receipt from the Contractor. The Contractor shall furnish revised submittals to the Engineer if so indicated.

The Engineer reserves the right to review only those shop submittals specifically required by the contract documents or as directed. Other submittals may be reviewed, returned without action or entered into the project record without review action, as the Engineer deems appropriate.

Shop submittals shall not represent a forum for material substitution. The Contractor shall include in any substitution request a statement agreeing to reimburse the Engineer for design team costs incurred in reviewing the substitution request.

Review of shop submittals by the Engineer will be for general conformance with the design intent and shall not be construed as relieving the Contractor from responsibility for compliance with the design or terms of the contract documents nor from responsibility for errors of any sort in the shop drawings.

10. INSPECTION OF THE WORK

It is a condition of this contract that the work shall be subject to observation and inspection during normal working hours by the Engineer, designated official representatives of the City, and those persons required by State law or local ordinance to test special work for official approval. The Contractor shall therefore provide safe access to the work at all times for such inspections.

Inspection shall consist of visual observations of materials, equipment and construction work for the purpose of ascertaining that the work is in conformance with the contract documents. Such inspection shall not be relied upon by the Contractor as acceptance of the work, nor should it be construed to relieve the Contractor in any way from the obligation and responsibilities the Contractor

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

assumes under the construction contract. Specifically, but without limitation, inspection by the Engineer or designated official representatives shall not require the Engineer or designated official representatives to assume responsibilities for the means and methods of construction, nor for safety on the job site.

Where special inspection or testing is required by State laws or local ordinances, instructions of the Engineer, specification or codes, the Contractor shall give adequate notice to the Engineer of the time set for such inspection or test, if the inspection or test will be conducted by a party other than the Engineer. Such special tests or inspections will be made in the presence of the Engineer, or his authorized representative, and it shall be the Contractor's responsibility to serve ample notice of such tests.

Should any work be covered up or concealed prior to inspection and approval by the Engineer, such work shall be uncovered or exposed for inspection if so requested by the Engineer in writing. Inspection of the work will be made promptly upon notice from the Contractor. All cost involved in uncovering, repairing, replacing, recovering, and restoring to design condition, the work that has been covered or concealed shall be paid by the Contractor.

11. TESTING

The City reserves the right to test any or all materials and workmanship through a certified independent testing laboratory at City expense. Testing shall be accomplished as deemed necessary by the Engineer. Any necessary re-testing due to failures of previous tests shall be at the Contractor's expense.

12. USE OF A SECTION OF THE WORK

Whenever in the opinion of the Engineer any portion of the work is completed or is in acceptable condition for use, it shall be used for the purpose it was intended as may be directed, and such use shall not be held to be in any way acceptance of that portion of the work used or as a waiver of any of these specifications and contract. Necessary repairs or renewals made in any section of the work, due to defective materials, or work, or natural causes, shall be performed at the expense of the Contractor.

13. PROSECUTION OF WORK

The Contractor shall begin the work to be performed under the contract within ten (10) days after such date as the Contracting Officer or Engineer shall notify him to proceed. Commencement of work by the Contractor shall be deemed and taken as a waiver of this notice on his part. The Contractor will be required to prosecute the work in a continuous and uninterrupted manner from the time he begins the work until completion and final acceptance of the project. The Contractor is not permitted to suspend his operation except for reasons beyond his control and/or

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

where the Engineer has authorized a suspension of the work in writing. The City will not be liable for delays of any nature providing the work is progressing satisfactorily to ensure its completion within the time set forth in the contract. Should prosecution of the work for either above reason be discontinued by the Contractor, he shall notify the Engineer at least twenty-four (24) hours before again resuming operations.

In the event that the Contractor's operations are suspended in violation of these provisions, liquidated damages will be charged to the Contractor for each and every calendar day that such suspension takes place. These damages will be additional to any damages that may become chargeable due to failure to complete the work on time. The Contractor hereby agrees by executing the contract that such liquidated damages are considered a just and reasonable compensation to the City.

14. CITY'S RIGHT TO DO WORK

If, during the progress of the work or during the period of guarantee, the Contractor fails to prosecute the work properly or to perform any provision of the contract, the City, after fifteen (15) days written notice sent by certified mail return receipt requested to the Contractor from the Engineer, may perform or have performed that portion of the work. The cost of the work may be deducted from any amounts due or to become due to the Contractor, such action and cost of same having been first approved by the Engineer. Should the cost of such action of the City exceed the amount due or to become due the Contractor, then the Contractor or his surety, or both, shall be liable for and shall pay to the City the amount of said excess.

15. CHANGE ORDERS

The City may have changes made in the work covered by the contract. These changes will not invalidate and will not relieve or release the Contractor from any guarantee given by him pertinent to the contract provisions. These changes will not affect the validity of the guarantee bond and will not relieve the surety or sureties of said bond. All extra work shall be executed under conditions of the original contract.

Except in an emergency endangering life or property, no changes shall be made by the Contractor except upon written order from the Contracting Officer, Countersigned by the Assistant City Manager authorizing such change, and no claim for adjustments of the contract price shall be valid unless this procedure is followed.

At the time of signing a change order, the Contractor shall be required to certify as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

"I certify that my Bonding Company will be notified forth-with that my contract has been changed by the amount of this change order, and that a copy of the approved change order will be mailed upon receipt by me to my surety."

A change order, when issued, shall be full compensation, or credit, for the extra work included, omitted, or substituted. It shall show on its face the adjustment in time for completion of the project as a result of the change in the work.

If, during the progress of the work, the City requests a change order and the Contractor's terms are unacceptable, the City without prejudice, with the approval of the City Purchasing Division, may perform or have performed that portion of the work requested in the change order.

16. DISCOVERY OF DEFECTS

The City reserves the right, should an error be discovered in the estimate or conclusive proof of defective work or materials used by or on the part of the Contractor be discovered either before or after the final payment has been made, to claim and remove by process of law such sum or sums as may be sufficient to correct the error or make good the defects in the work and materials.

17. SCOPE OF PAYMENTS

The Contractor shall receive and accept the compensation as herein provided in full payment for:

- (1) Furnishing all materials, labor, tools, and equipment and for performing all work contemplated and embraced under the contract.
- (2) All loss or damages arising out of the nature of the work or from the action of the elements or from any unforeseen difficulties or obstruction which may arise or be encountered during the prosecution of the work, until its final acceptance.
- (3) All risks of every description connected with the prosecution of the work.
- (4) All expenses incurred by, or in consequence of, the suspension or discontinuance of the said prosecution of the work herein specified.
- (5) Completing the project and the whole thereof in an acceptable manner according to the plans and specifications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

18. REQUEST AND CERTIFICATES FOR PAYMENT

Not later than the tenth day of the month, the Contractor shall submit to the Engineer a request for payment for work done during the previous month. The request shall be in the form agreed upon between the Contractor and the Engineer, but shall show substantially the value of work done and materials delivered to the site during the period since the last payment, and shall sum up the financial status of the contract.

The Contractor shall coordinate with the RPR as to work quantities and completion status in preparing the pay requests. The pay requests are to be signed by the RPR prior to delivery to the Engineers Project Manager.

The making and acceptance of payment by the City shall not constitute an acceptance of the work or any part thereof.

19. PAYMENTS

Payments will be made monthly on a Net 30 day basis as follows:

- (1) Partial payments for mobilization will be made on the first and second payments. Up to 2 ½ percent of the value of the contract will be paid on each of these partial payments. Any excess (amount over 5 percent of the value of the contract) will be paid on the final payment.
- (2) Amount to be paid monthly is amount of work completed monthly less 5% percent retainage, in accordance with FAA standards.
- (3) The City reserves the right to hold a greater amount of retainage, for unsatisfactory job progress, defective construction not remedied, disputed work, or third-party claims filed against the City or reasonable evidence that a third-party claim will be filed.

20. ESTIMATED QUANTITIES

The estimated quantities contained for certain items in the proposal are for the purpose of comparing bids. Such quantities are not guaranteed, and settlement will be made on the basis of the work as actually executed at the unit price in the proposal as accepted. Any variation is understood to be in the total amount of the contract and each item need not necessarily be varied the same amount.

21. VARIATION IN ESTIMATED QUANTITY

Variations between estimated and final quantities will be handled as set forth in Section 40 and Section 90 of the General Conditions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

22. SALES TAX CERTIFICATE

The Contractor is to complete City forms certifying sales tax paid, on all materials used in construction. The Contractor may use his own computer forms as long as the form supplies all information requested by the City certificate. The certificate shall be furnished with each pay request, regardless of amount, and list taxes for all items included in the pay request. In the event the pay request does not include any taxable items, the certificate is still required and must certify this fact. Pay requests without the required certificate may be denied approval (and thus payment) until the certificate is provided.

23. CLAIMS FOR EXTRA COST

The Contractor shall not act on instructions received by him from persons other than the Engineer, Contracting Officer or any designated representative, and any claims for extra compensation or extension of time on account of unauthorized instruction will not be honored. The City will not be responsible for misunderstandings claimed by the Contractor of verbal instructions which have not been confirmed in writing, and in no case shall instructions be interpreted as permitting a departure from the contract documents unless such instruction is confirmed in writing and supported by a properly authorized change order.

24. DISPUTES

To prevent disputes and litigation or claims, the Contracting Officer shall in all cases be the point of contact and shall act as negotiator to resolve any questions concerning the performance of work or amounts to be paid under this contract. The Contracting Officer in conjunction with the Engineer will strive to resolve any questions or claims concerning the performance of the contract. All decisions shall be final and conclusive except as allowed as follows. All claims, disputes and other matters in question arising out of, or relating to, this contract not resolved by the aforementioned negotiation shall be resolved by legal action instituted and tried in the General Courts of North Carolina under North Carolina law with venue for trial being Cumberland County.

25. PAYMENTS WITHHELD

- a. The Contracting Official with the approval of the City may withhold payment for the following reasons:
 1. Faulty work not corrected.
 2. The unpaid balance on the contract is insufficient to complete the work in the judgment of the Engineer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. To provide for sufficient contract balance to cover liquidated damages that will be assessed.
 4. Claims filed against the Contractor or evidence that a claim will be filed.
 5. Evidence that subcontractors have not been paid.
- b. When grounds for withholding payments have been removed, payment will be released.

26. FINAL INSPECTION

The Engineer shall make final inspection of the project within fourteen (14) days after receipt of a written notice from the Contractor of the final completion and cleaning up of the work covered by the contract.

27. CORRECTION OF WORK BEFORE FINAL PAYMENT

- a. Any work, materials, fabricated items, or other parts of the work which have been condemned or declared not in accordance with the contract by the Engineer shall be promptly removed from the work site by the Contractor, and shall be immediately replaced by new work in accordance with the contract at no additional cost to the City. Work or property of other Contractors or the City, damaged or destroyed by virtue of such faulty work, shall be made good at the expense of the Contractor whose work is faulty.
- b. Correction of condemned work described above shall commence within twenty-four (24) hours after receipt of notice from the Engineer, and shall make satisfactory progress until completed.
- c. Should the Contractor fail to proceed with the required corrections, then the City may complete the work in accordance with the provisions (City's Right to Do Work).

28. ACCEPTANCE AND FINAL PAYMENT

When the Contractor has completed the work in an acceptable manner in accordance with the terms of the contract, the Project Engineer shall make a final inspection for acceptance of work by the City.

The making and acceptance of final payment shall constitute a waiver of all claims by the Contractor except those claims previously made and remaining unsettled.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Final certificate of payment shall be accompanied by the following:

1. Warranties and guarantees required by the contract.
2. Release and Waiver of Claim for Prime Contractors.
3. Affidavit of Contractors of payment to material suppliers and subcontractors.
4. Consent of Surety to final payment.
5. Return of all Contractor issued SIDA Badges to the Airport Manager's Office.
6. Final acceptance by the Engineer of all punch list work to be performed by the Contractor.
7. Issuance of final Certificate of Occupancy from the City.

29. CORRECTION OF WORK AFTER FINAL PAYMENT

Neither the final certificate, final payment, occupancy of the premises by the City, nor any provision of the contract, nor any other act or instrument of the City, nor the Engineer, shall relieve the Contractor from responsibility for negligence, or faulty material or workmanship, or failure to comply with the drawings and specifications. He shall correct or make good any defects due thereto and repair any damage resulting therefrom which may appear during the guarantee period following final acceptance of the work except as stated otherwise under Article Guarantee. The City or Engineer will report any defects as they may appear to the Contractor and establish a time limit from completion of corrections by the Contractor. The City will be the judge as to the responsibility for correction of defects.

30. TERMINATION OF CONTRACT

The contract shall be considered complete when all work has been completed and accepted by the Owner.

31. CONTRACT TERMINATION FOR CONVENIENCE

If the City shall determine that it is in the City's best interest, the City shall notify the Contractor to terminate the work within seven (7) days. In such event, the Contractor shall be entitled to compensation for all work properly executed and any expenses incurred in terminating the contract and vacating the construction site. No claim shall be made by the Contractor for any loss of anticipated profits because of any alteration, change or termination, or by reason of any variation between the approximate quantities and the quantity of work as done.

32. GENERAL STATUTES GUIDELINES

All Prospective Bidders are Hereby Advised to Become Familiar with Certain Provisions of the General Statutes of North Carolina. The following list is

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

furnished for your information and is not meant to be all-inclusive. Full compliance of the Current General Statutes of North Carolina applicable to this contract shall be required from all bidders.

Chapter 44A, Article 3	Payment and Performance Bonds.
Chapter 87	Contractors.
Chapter 95, Article 16	Occupational Safety and Health Act of North Carolina
Chapter 113A, Article 1	Pollution Control and Environment.
Chapter 130A, Article 19	Asbestos Hazard Management.
Chapter 132	Public Records.
Chapter 133, Article 1	Public Works - General.
Chapter 133, Article 3	Public Works - Regulation of Contractors.
Chapter 143, Article 8	Public Contracts.
Chapter 143, Article 21	Water and Air Resources.
Chapter 143, Article 21B	Air Pollution Control.

33. RESPONSIBILITY FOR THE WORK

Until the final acceptance of the project by the Owner, it shall be under the charge and care of the Contractor, and he shall take every precaution against injury or damage to same or any part thereof by the action of the elements or from any other cause whatever, whether arising from the execution of or the non-execution of the work. The Contractor will be held responsible for the protection and restoration, at his expense, of property monuments or markers, buildings, fences and all utility installations affected in the prosecution of the work.

34. CONSTRUCTION SUPERVISION

Throughout the progress of the work, the Contractor shall keep on the job a competent superintendent or supervisory staff satisfactory to the Engineer. The superintendent shall not be changed without the consent of the Engineer unless said superintendent ceases to be employed by the Contractor or ceases to be competent. The superintendent shall have authority to act on behalf of the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Contractor, and instructions, directions or notices given to him shall be as binding as if given to the Contractor. However, important directions, instructions, and notices will be confirmed in writing to the Contractor, as will all such items if requested by the Contractor. Construction will be stopped if the Contractor's Superintendent is not available.

35. USE OF PREMISES

The Contractor(s) shall confine his apparatus, the storage of materials and the operations of his workmen to limits indicated by law, ordinances, permits, or directions of the Engineer and shall not exceed those established limits in his operations.

The Contractor(s) shall not load or permit any part of the structure to be loaded with a weight that will endanger its safety.

The Contractor(s) shall enforce the Engineer's instructions regarding signs, advertisements, fires, smoking or any other written instructions given.

36. EQUIPMENT, MATERIALS, WORKMANSHIP

The Contractor shall, unless otherwise specified, supply and pay for all labor, transportation, materials, tools, apparatus, lights, power, heat, sanitary facilities, water, scaffolding, and incidentals necessary for the completion of his work, and shall install, maintain and remove all equipment of the construction, other utensils or incidentals, and be responsible for the safe, proper and lawful construction, maintenance and use of same, and shall construct in the best and most workmanlike manner, a complete job and everything incidental thereto, as shown on the plans, stated in the specifications, or reasonably implied therefrom, all in accordance with the contract documents.

The Contractor shall furnish such equipment as is considered necessary by the Engineer for the prosecution of the work in an acceptable manner and at a satisfactory rate of progress. Equipment used on any portion of the work shall be such that no injury to adjacent work or property will result from its use.

Whenever products, materials, or equipment are named in the specifications, the specifications shall be interpreted to mean an item of material or equipment similar to that named and which is suited for the same use and capable of performing the same function as that named.

All materials shall be new and of quality specified, except where reclaimed material is authorized herein and approved for use. Upon notice, the Contractor shall furnish evidence as to quality of materials.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Workmanship shall at all times be of a grade accepted as the best practice of the particular trade involved, and as stipulated in written standards, laws, rules, codes or regulations of recognized organizations or institutes of the respective trades except as exceeded or qualified by the specifications.

All work under this contract shall be performed in a skillful and workmanlike manner. The City may require, in writing, at any time during the construction and completion of the work covered by these contract documents, the removal of any employee of, or person connected with, the Contractor who shall use profane or abusive language to the inspector or other employees of the City, or otherwise interfere with him in the performance of his duties, or who shall disobey or evade instructions or who is careless, incompetent, or considered a nuisance or detriment to the work. The Contractor shall order such parties removed immediately from the grounds and shall not allow their return except by consent of the Contracting Officer.

37. INDEMNIFICATION

To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the City, the Engineer and other authorized representatives, consultants, and employees of the City, from and against all claims, damages, losses and expenses, including, but not limited to, attorneys' fees, arising out of or resulting from the performance or failure of performance of the work, provided that any such claim, damage, loss or expense (1) is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the work itself) including the loss of use resulting therefrom, and (2) is caused in whole or in part by any negligent act or omission of the Contractor, the Contractor's subcontractor, or the agents of either the Contractor or the Contractor's subcontractor. Such obligation shall not be construed to negate, abridge, or otherwise reduce any other right or obligation of indemnity which would otherwise exist as to any party or person described in this Article.

38. EQUAL OPPORTUNITY CLAUSE

The non-discrimination clause contained in Appendix D relative to Equal Employment Opportunity for all persons without regard to race, color, religion, sex or national origin, and the implementing rules and regulations prescribed by the Secretary of Labor, are incorporated herein.

39. EMPLOYMENT OF THE HANDICAPPED

The Contractors agree not to discriminate against any employee or applicant for employment because of physical or mental handicap in regard to any position for which the employee or applicant is qualified. The Contractor agrees to take affirmative action to employ, advance in employment and otherwise treat

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

qualified handicapped individuals without discrimination based upon their physical or mental handicap in all employment practices.

40. SUBCONTRACTS AND SUBCONTRACTORS

The Contractor shall submit to the Engineer and the City, a list giving the names and addresses of subcontractors and equipment and material suppliers he proposes to use, together with the scope of their respective parts of the work.

The Contractor is and remains fully responsible for his own acts or omissions as well as those of any subcontractor or of any employee of either. The Contractor agrees that no contractual relationship exists between the subcontractor and the City in regard to the contract, and that the subcontractor acts on this work as an agent or employee of the Contractor.

41. CONTRACTORS AND SUBCONTRACTOR RELATIONSHIPS

The Contractor agrees that the terms and conditions of these contract documents shall apply equally to each subcontractor as to the Contractor, and the Contractor agrees to take such action as may be necessary to bind each subcontractor to these terms. The Contractor further agrees to conform to the "Code of Ethical Conduct" as adopted by the Associated General Contractors of America, Inc., with respect to Contractor-subcontractor relationships, and that payments to subcontractors shall be made in accordance with the provisions of G.S. 143-134.1 entitled, Interest on final payments due to prime contractors: payments to subcontractors.

42. CODES AND STANDARDS

Wherever reference is given to codes, standard specifications or other data published by regulating agencies including, but not limited to, National Electrical Codes, North Carolina State Building Codes, Federal Specifications, ASTM Specifications, various institute Specifications, etc., it shall be understood that such reference is to the latest edition including addenda published prior to the date of the contract documents.

43. OBSERVANCE OF LAWS

The Contractor at all times shall observe, conform to, and comply with all laws, regulations, and ordinances of the United States, the State of North Carolina, County of Cumberland and the City of Fayetteville, and shall indemnify and save harmless the City and all of its officers, agents, and employees against any claim or liability arising from or based on the violation of any such law or regulation, order, or decree, whether by himself or his employees.

If the Contractor observes that the drawings and specifications are at variance therewith, he shall promptly notify the Engineer in writing. Additional requirements or changes implemented after contract award will be subject to

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

equitable negotiations and shall be made by change order. If the Contractor performs any work knowing it to be contrary to such laws, ordinances, codes, rules and regulations, and without such notice to the Engineer, he shall bear all cost arising therefrom.

44. TRUCK ROUTE ORDINANCE

The Contractor shall comply with the City's Truck Route Ordinance, Sec. 200-60; 20-61; 20-64; and 20-65. The Contractor shall make a thorough examination of the individual streets and establish all haul routes to comply with the Truck Route Ordinance. City of Fayetteville truck route maps are available upon request.

45. SEDIMENTATION POLLUTION CONTROL ACT OF 1973

Any land-disturbing activity performed by the Contractor(s) in connection with the project shall comply with all erosion control measures set forth in the contract documents and any additional measures which may be required in order to ensure that the project is in full compliance with the Sedimentation Pollution Control Act of 1973, as implemented by Title 15, North Carolina Administrative Code, Chapter 4, Sedimentation Control, Subchapters 4A, 4B and 4C, as amended (15 NCAC 4A, 4B, and 4C).

Upon receipt of notice that a land-disturbing activity is in violation of said Act, the Contractor(s) shall be responsible for insuring that all steps or actions necessary to bring the project in compliance with said Act are promptly taken.

To the fullest extent permitted by law, the Contractor(s) shall indemnify and hold harmless the City and agents, consultants and employees of the City, from and against all claims, damages, civil penalties, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from the performance of work or failure of performance of work, provided that any such claim, damage, civil penalty, loss or expense is attributable to a violation of the Sedimentation Pollution Control Act. Such obligation shall not be construed to negate, abridge or otherwise reduce any other right or obligation of indemnity which would otherwise exist as to any party or persons described in this Article.

46. PERMITS/LICENSES/NOTICES

The Contractor shall procure and bear the costs of all permits, licenses, fees, and inspections, and give all notices necessary and incidental to the due and lawful prosecution of the work.

47. HAZARDOUS MATERIALS

If the Contractor encounters any materials considered or suspected of being hazardous beyond that indicated in the Hazardous Materials Survey, he shall

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

immediately secure the area and contact the City of Fayetteville, Engineering Department, (phone: 433-1656) for further instructions.

48. TRAFFIC

The Contractor will be required to maintain traffic within the limits of this project, including all existing roadways which cross or intersect unless otherwise provided in the contract or approved by the Project Engineer. The Contractor shall provide continuous safe vehicle and pedestrian access (which may include temporary bridges and their maintenance) to all properties, both public and private, and shall conduct his operations in such a manner that inconvenience to the public will be held to a minimum.

The Contractor shall utilize complete and proper traffic controls and traffic control devices during all operations. All traffic control devices required for any operation shall be functional and in place prior to the commencement of the operations. Signs for temporary operations shall be removed during periods of inactivity. The Contractor is required to leave the project in a manner that will be safe to the traveling public and which will not impede motorists.

Traffic movements through lane closures on roads with two-way traffic shall be controlled by flaggers stationed at each end of the work zone. In situations where slight distance is limited, the Contractor shall provide additional means of controlling traffic, including, but not limited to, two-way radios, pilot vehicles, or additional flaggers. Flaggers shall be competent personnel, adequately trained in flagging procedures, and furnished with proper safety devices and equipment, including, but not limited to, safety vests and stop/slow paddles.

All personnel when working in traffic areas or areas in close proximity to traffic shall wear an approved safety vest, or shirt or jacket and hat or helmet which meets the color requirements of the Manual of Uniform Traffic Control Devices (MUTCD).

No work on this project shall start until all the traffic control devices required for the particular work activity have been installed, inspected and approved by the Project Engineer. The Contractor will be required to notify the City of Fayetteville Traffic Engineer five (5) working days prior to closing any street.

The furnishing, erecting, maintaining, relocating, and removing of traffic control devices will be in accordance with the current edition of the Manual on Uniform Traffic Devices for Streets and Highways.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

49. LIGHTS, BARRICADES, AND SIGNS

The Contractor shall provide, erect, and maintain all necessary barricades, suitable and sufficient red lights and danger signals. The Contractor shall also provide a sufficient number of watchmen and take all precautions for the protection of the work and safety of the public. It is the duty and responsibility of the Contractor to furnish and mount any necessary signs on suitable and approved standards. "Street Closed" signs shall be placed immediately adjacent to the work in a conspicuous position, at such locations where traffic demands. Whenever an intersection is closed to cross-bound traffic, "Street Closed at next intersection to through traffic" sign shall be placed one block on each side of the street closed in order to properly guide traffic around the closed street. If lighted barricades are not placed on open ditches or any other dangerous conditions that are hazardous to the public or as required by the Engineering Department, the City will place barricades at Contractor's expenses (Current City rates for labor, equipment and material will be charged).

50. PASSAGEWAYS TO BE LEFT CLEAR

The roadway on one side of the line of work and/or corridors (permanent or temporary) through the buildings shall be kept open at all times for the passage of vehicles or pedestrians to keep the Terminal and its associated site improvements in full operation at all times. The Contractor shall in all cases so arrange his work as to cause the least inconvenience to the public consistent with the proper prosecution of the work as determined by the Engineer. When deemed necessary by the Engineer the Contractor shall complete his work up to such point as designated by the Engineer before opening the work ahead, in order to give access to private property, etc. The opening of any street for travel shall not be held to be in any way an acceptance of the project or any part of it, or as a waiver of any of the provisions of these specifications and contract. Necessary repairs or renewals made on any section of the work, which has been opened to travel under instructions from the Engineer, due to defective materials or work pending completion and acceptance, shall be performed at the expenses of the Contractor.

51. PUBLIC SAFETY

Fire hydrants on or adjacent to the street shall be kept accessible to fire apparatus at all times.

52. PRESERVATION AND RESTORATION OF PROPERTY, ETC.,

The Contractor shall protect carefully from disturbance or damage all land monuments and property marks until the Engineer has witnessed or otherwise referenced their location and shall not remove them until directed. The Contractor shall protect all trees and shrubs designated to remain in the vicinity of the operations. When any direct or indirect damage or injury is done to public or

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

private property, land monuments, or utility by or on account of any act, omission, neglect or misconduct in the execution of the work, or in consequence of the non-execution thereof on the part of the Contractor, he shall restore, at his own expenses, such property to a condition similar or equal to that existing before such damage or injury was done or he shall make good damage or injury in an acceptable manner.

53. PROTECTION OF WORK, PROPERTY AND THE PUBLIC

The Contractors shall be jointly responsible for the entire site and the building or construction of the same and provide all the necessary protections, as required by the City, and by laws or ordinances governing such conditions. They shall be responsible for any damage to the Owner's property or of that of others on the job by them, their personnel, or their subcontractors, and shall make good such damages. They shall be responsible for and pay for any claims against the City. All Contractors shall have access to the project at all times.

The Contractor shall provide cover and protect all portions of the structure when the work is not in progress, provide and set all temporary roofs, covers for doorways, sash and windows, and all other materials necessary to protect all the work on the building or any other facilities, whether set by him, or any of the subcontractors. Any work damaged through the lack of proper protection or from any other cause, shall be repaired or replaced without extra cost to the City.

No fires of any kind will be allowed inside or around the operations during the course of construction without special permission from the Engineer.

The Contractor shall barricade all walks, roads, etc., as directed by the Engineer or Contracting Officer to keep the public away from the construction. All trenches, excavations, or other hazards in the vicinity of the work shall be well barricaded and properly lighted at night.

54. WORKER SAFETY/OSHA

Contractor shall provide all necessary safety measures for the protection of all persons on the work site at all times during the prosecution of the work, regardless of whether the worker is an employee of the Contractor or a subcontractor. The Contractor is required to comply with the provisions of the "North Carolina Occupational Safety and Health Standards (OSHA) for the Construction Industry" and revisions thereto as adopted by General Statutes of North Carolina 95.126 through 155.

55. ROYALTIES, LICENSES AND PATENTS

It is the intention of the contract documents that the work covered herein will not constitute in any way infringement of any patent whatsoever unless the fact of

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

such patent is clearly evidenced herein. The Contractor must notify the City immediately of any claim or infringement of any patent in connection with the performance of this contract.

The Contractor shall pay all royalties and/or license fees required on account of patented articles or processes, whether or not the patent rights are evidenced hereinafter.

The Contractor shall hold and save harmless the City, its officers, agents, servants, and employees from liability of any nature or kind for or on account of the use of any patented or unpatented invention, article, appliance, or process furnished or used in the performance of this contract, excepting patented articles required or designated by the City in its specifications, the use of which the Contractor does not control.

56. GUARANTEE

The Contractor(s) shall guarantee and warrant all labor and material for the project against defect due to faulty material, workmanship, and/or negligence for a period of ONE YEAR from the date of final inspection of the project. Where items of equipment or material carry a manufacturer's warranty for any period in excess of twelve (12) months, the manufacture's warranty shall apply for that particular piece of equipment or material. The Contractor shall respond to any repair request from the City within 48 hours of notice received by telephone, telegraph, or letter. The Contractor shall replace defective materials, equipment, or workmanship without cost to the City within the stipulated guarantee period.

57. CONTRACTOR'S RIGHT TO STOP WORK/TERMINATE CONTRACT

Should the work be stopped by order of a court having jurisdiction, or by order of any other public authority for a period of three (3) months, due to cause beyond the fault or control of the Contractor, or if the City should fail or refuse to make payment of account of a certificate issued by the Engineer within thirty (30) days after receipt of same, then the Contractor, after fifteen (15) days written notice sent by certified mail, return receipt requested, to the City and the Engineer, may suspend operations on the work or terminate the contract.

The City shall be liable to the Contractor for the cost of all specified materials delivered and work acceptably performed on this contract.

58. UTILITY CONFLICTS

It shall be the responsibility of the Contractor to contact all affected utility owners and determine the precise location of all utilities prior to beginning construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Utility owners shall be contacted a minimum of 48 hours prior to the commencement of operations. Special care shall be used in working around or near existing utilities, protecting them when necessary to provide uninterrupted service. In the event that any utility service is interrupted, the Contractor shall notify the utility owner immediately and shall cooperate with the owner, or his representative, in the restoration of service in the shortest time possible. Existing hydrants shall be kept accessible to fire department at all times.

The Contractor shall adhere to all applicable regulations and follow accepted safety procedures when working in the vicinity of utilities in order to ensure the safety of construction personnel and the public.

Caution All Trades - Existing Copper Telephone Lines, Room B130B: All bidders and trades are hereby advised that the existing CenturyLink telephone utility service cable (300 pair copper) and a return feed cable (200 pair copper), run east-west under the floor slab of new telecommunications room B129 & B130B. These lines are believed to pass over the top of the existing “tree column” footing in B130B. These lines provide telephone and data service to terminal building tenants, including the airlines, TSA, rental car agencies and others, as well as service to the airfield lighting vault, ARFF/Fire Station 10 (including 911 dispatch), FAA ATCT complex (including flight safety data), the FBO and others. The Contractor shall protect these lines throughout the Part 2 project.

59. E-VERIFY REQUIREMENTS

Contractor hereby acknowledges that “E-Verify” is the federal E-Verify program operated by the US Department of Homeland Security and other federal agencies which is used to verify the work authorization of newly hired employees pursuant to federal law and in accordance with Article 2, Chapter 64 of the North Carolina General Statutes. Contractor further acknowledges that all employers, as defined by Article 2, Chapter 64 of the North Carolina General Statutes, must use E-Verify and after hiring an employee to work in the United States, shall verify the work authorization of the employee through E-Verify in accordance with NCGS §64-26(a). Contractor hereby pledges, attests and warrants through execution of this Agreement that Contractor complies with the requirements of Article 2 of Chapter 64 of the North Carolina General Statutes and further pledges, attests and warrants that any subcontractors currently employed by or subsequently hired by Contractor shall comply with any and all E-Verify requirements. Failure to comply with the above requirements shall be considered a breach of this Agreement.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

60. IRAN DIVESTMENT ACT CERTIFICATION

As mandated by N.C.G.S. 143C-6A-5(a), Bidder hereby certifies that it is not listed on the Final Divestment List created by the North Carolina State Treasurer pursuant to N.C.G.S. 143C-6A-4. Bidder further certifies that in accordance with N.C.G.S. 143C-6A-5(b) that it shall not utilize any subcontractor found on the State Treasurer's Final Divestment List. Bidder certifies that the signatory to this Request for Proposals is authorized by the Bidder to make the foregoing statement. **An Iran Divestment Certification form is attached in the Appendix for bidder to review, sign, and return with his bid.**

END OF SECTION

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PROJECT SPECIAL PROVISIONS

PSP-1 PROJECT CONSTRUCTION TRAFFIC SPEED LIMIT AND ADMINISTRATIVE FINES

Construction access for this project will use existing airport roadways. Construction traffic must share the road with normal airport traffic, including private passenger vehicles, rental cars, taxicabs, and commercial vehicles. The access routes include the airline passenger drop-off and pick up curb front area, multiple pedestrian crossings, taxi cab queueing areas, access to parking lots (passenger long term, passenger short term, rental car, general aviation, employee, management and FAA). The construction traffic speed limit for the terminal loop roadway, Air Freight Road, Control Tower Road, Corporate Road, Hangar Road and temporary routes marked on the GA and Air Carrier aprons shall be 15 MPH, regardless of any higher posted speed limits. All construction traffic, including but not limited to vehicles owned or operated by the general contractor, subcontractors, suppliers, freight carriers and all construction personnel shall strictly adhere to the 15 MPH construction traffic speed limit. In addition to applicable motor vehicle law enforcement, the Owner reserves the right to issue and the General Contractor shall be liable for an administrative fine of \$200.00 per speed limit infraction by any vehicle involved in the construction. The Contractor shall include traffic and pedestrian safety considerations in all project meetings with subcontractors and suppliers.

PSP-2 TRAFFIC CONTROL

The Contractor shall be responsible for traffic control in all roadway and parking lot areas affected by the work. All traffic control materials and procedures shall be in general accordance with NCDOT standards and the MUTCD. The Contractor shall furnish a package of traffic control signs as per the table shown on the plans and as may otherwise be required by the Contractor's operations. The list of signs shall be the minimum; it shall be the Contractor's responsibility to provide additional signs as may be needed in support of particular operations. The Contractor shall prepare and submit a traffic control plan sketch for all short term utility, storm drainage, grading, curb line, paving and other work operations which affect the roadside, roadway lanes and/or parking lot areas. The contractor shall provide temporary signage (as per the table and as otherwise needed), cones, drums, skinny drums, barricades, traffic plates, etc., in sufficient quantities as to safely guide vehicles and pedestrians around the work. The Contractor shall position and reposition signs, drums, cones, skinny drums, etc. as often as needed in support of the work. The Contractor shall provide flaggers as appropriate to the operation.

The terminal loop road, Air Freight Road, Control Tower Road, Corporate Road, Hangar Road and parking lots shall be open to traffic at all times. The July 2019 flight schedule shows the first departure at 5:25 am and the last arrival at 11:44 pm. Passenger and employee traffic extends beyond those hours, such that the overnight period with no traffic is quite short. The Contractor shall plan all operations crossing the loop road such that at least one traffic lane remains open to traffic at all times.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

All costs for project traffic control shall be included in the project lump sum bid.

~~PSP-3 ASBESTOS CONTAINING MATERIALS~~

~~A preconstruction inspection found that caulking and ceiling finish in certain areas of the 2nd floor old restaurant and 3rd floor manager's office is an asbestos containing material. A copy of that inspection and report is included in these construction documents. The Contractor shall retain a licensed asbestos abatement contractor to inspect these areas to determine the presence, nature, condition and extent of asbestos containing materials (ACM) to be removed and disposed; prepare the appropriate handling and disposal plans (including worker safety requirements and training/instruction and wet removal techniques); obtain the necessary permits; perform the abatement work; photo document the abatement work and provide landfill disposal documentation for each load. All such work shall be performed in accordance with federal, state and local laws, regulations and standards, including but not limited to 10A NCAC 41C Section .0600 and NCGS Chapter 130A, Article 19.~~

~~Abatement/disposal of the asbestos containing material shall be included in the project lump sum base bid price.~~

PSP-4 PROTECTION, RELOCATION AND RESTORATION OF UTILITIES AND SYSTEMS

It is the intent of this contract that the Contractor shall be responsible for including in the base bid and for coordinating and implementing all labor, materials and equipment, including the Contractor's forces and all subcontracted disciplines, for the identification, location, determination, protection, relocation and restoration of all utilities and systems serving the airline terminal complex. For the purposes of this provision, the term "utilities and systems" shall include the lines, equipment and service components owned and operated by public utilities (including but not limited to the Fayetteville Public Works Commission (PWC) (electric, water, sewer, Fiber Optic), CenturyLink, Time Warner Cable/Spectrum, Piedmont Natural Gas); the lines and equipment associated with City/airport and tenant owned and operated electrical, water, sewer, storm drainage, HVAC, data and communications (copper and fiber optic); and City/airport and tenant owned integrated systems (including but not limited to security monitoring, access control, FIDS, flight status, public address, lighting control, fire alarm, HVAC). The lines and equipment shall include those in underground, under slab, overhead, surface mounted, roof mounted and building interior locations, including concealed spaces. The Contractor and subcontractors shall consider the extent of existing utilities and systems in the facility and the extent and nature of the demolition and construction operations necessary for the work, and shall carry all such temporary and permanent materials and work necessary by all disciplines to protect, relocate and restore utility and system components such that those utilities and components remain in service

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

throughout the construction period and remain intact and operational upon project completion, except to the extent that new and/or replacement utilities, systems and/or subsystems are specified, completed and placed into service. Temporary services which have been placed within the existing main terminal building shall be coordinated in advance with the Architect so as to avoid/minimize conflicts with this Part 2 construction. All costs for this work shall be included in the lump sum bid price for the project.

The Contractor shall include utility location services in the affected areas in the lump sum bid price for the project. For this purpose, the term “utility” shall be all inclusive, including but not limited to public and private utilities and service lines, water, sewer, gas, stormwater, electrical, communications, CATV, data, HVAC. The utility locating work shall include appropriate non-destructive techniques as well as test holes using vacuum extraction and/or other techniques. Test holes need not be executed in any given area until pavement removal operations are scheduled; however, critical crossings and alignments shall be confirmed by test hole sufficiently in advance (30 days) of proposed construction activities to allow for planning of grade and alignment adjustments. The Contractor shall obtain photographs, utility size measurements and positional measurements (horizontal and vertical) at all test holes and at all locations where utility elements are encountered in the course of the work. The utility locating work shall apply over the full limits of Part 1 construction. The Contractor shall submit utility location reports to the Architect for informational purposes within 14 days of the field work, and shall immediately report data applicable to critical crossings and whenever the data indicates a potential or apparent conflict with any element of the work.

PSP-5 EXISTING UTILITY INFORMATION SHOWN ON PLANS

Existing public and private utilities, service lines and systems as shown on the civil plans are based on Quality Level B geophysical utility locating/designating services conducted for project design, field survey, visual observation of physical features and information depicted on old drawings. The information, including approximate locations and depths shown on profiles and sections may not be entirely complete nor entirely accurate. It is the intent of this contract that the Contractor will locate and verify all existing utilities, service lines and systems near work elements and crossings, shall protect and relocate affected lines and shall notify the Architect without delay regarding any apparent discrepancies or conflicts as they are identified.

PSP-6 AIR CARRIER AND NORTH GA APRON MARKINGS

This contract may include marking removal and application of new relocated permanent pavement markings on the Air Carrier and North GA aprons. This work, which may be included by change order, shall be performed in accordance with specification section 020 620 and shall include removal of existing markings and painting new markings as needed to implement the proposed relocated aircraft parking layout for existing Concourse B.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PSP-7 ROADWAY, PEDESTRIAN AND PARKING LOT MARKINGS

This contract includes marking removal and application of temporary and permanent pavement markings for roadways, pedestrian crossings, parking lots, curb lines and related uses. All such markings shall be in accordance with NCDOT details and specifications and as detailed on the plans. All costs shall be included in the lump sum bid price for the project.

PSP-8 AIR CARRIER APRON CONSTRUCTION STAGING

A portion of the Air Carrier Apron will be available to the Contractor for construction staging purposes for the demolition and reconstruction of the Concourse B Gate Lounge area. The Contractor shall be responsible for conducting staging operations and those of all subcontractors in a manner which prevents damage to the pavement and the joint sealant. Upon completion of construction operations, the contractor shall repair any staining, spalls, sealant damage, cracking, gouging or other damage to the satisfaction of the Architect and Owner. The Contractor is not granted general authorization to use core holes, drill holes or anchoring devices in the apron pavement for temporary fence lines or other temporary purpose. The Owner may consider but retains the right to refuse specific requests for temporary holes or anchorage. If so authorized, the Contractor shall patch all holes and remove and patch all anchorages using non-shrink grout to the full satisfaction of the Owner.

PSP-9 DUST AND FOD CONTROL

It is the intent of these specifications that the Contractor shall proactively control dust, grit, sand, gravel, debris, tools, hardware and loose material of any sort at all times during the course of the work. Active aircraft operations and airline ground support operations will be on-going on the apron adjacent to the work area. In addition to wind and rain, aircraft jet blast and propeller wash can lift and transport loose material, resulting in a significant FOD (foreign object damage) hazard, which can cause serious damage to aircraft, including engine damage and flight safety issues. The contractor shall maintain on site operational water truck, mechanical broom, vacuum sweeper and other equipment and shall utilize such equipment as frequently as necessary (including continuous operation) to prevent the occurrence of dust, grit or other hazard to aircraft safety or nuisance which is objectionable to the Airport, its tenants or the residents of the area or which violates existing laws or regulations.

The Contractor shall thoroughly clean and secure all work areas each day to the satisfaction of the Architect and Owner prior to releasing work crews.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PSP-10 CONSTRUCTION SITE DRAINAGE

The Contractor will be required to establish and maintain temporary diversions, low point sumps and other means to allow for draining or pumping of runoff from the construction area. Dewatering pump discharge shall be directed into sediment trapping bags. Storm water runoff shall be removed from the construction site subgrade during and/or immediately following each rainfall event. All costs for maintaining construction site drainage shall be included in the project lump sum bid price.

PSP-11 DEBRIS DISPOSAL

The Contractor shall dispose of demolition debris off Airport property in a properly permitted facility. All costs for offsite disposal shall be included in the project lump sum bid. The Contractor is encouraged to recycle asphalt and concrete pavement materials.

PSP-12 MATERIAL MANIPULATION

The specifications require that soil materials be compacted within specific limits of optimum moisture. The wetting or drying of soil material, including any necessary manipulation to achieve the specified conditions, shall be included in the project lump sum price.

PSP-13 GROUND COVER REQUIREMENTS

In accordance with the North Carolina Sedimentation Control Rules (Title 15A, Chapter 4), a ground cover must be provided on all graded slopes within 14 working days following completion of any phase of grading and a permanent ground cover must be provided for all disturbed areas within 14 working days following completion of the final grading phase.

PSP-14 NIGHTTIME CONSTRUCTION OPERATIONS

Night time construction operations will be allowed on this project. The Contractor shall be responsible for providing adequate lighting for all work performed at night. Adequate lighting will be as determined by the Contractor and approved by the Architect and should be sufficient light to allow safe and continuous operation for all ongoing construction activities. Light provided should allow all equipment operators to see the work and to allow the Architect to provide adequate inspection. Construction lighting shall be positioned and oriented in a manner that does not result in light straying from the work area and impeding the visibility for air traffic controllers, airline ground personnel and pilots. Lighting and construction noise shall not create an undue nuisance in the residential area across Doc Bennett Road. Prior to any night time operations, the Contractor shall provide, at least 7 days in advance, a lighting layout plan to the Architect for review and coordination.

PSP-15 SALES TAX REPORTS

The Contractor shall submit a statement showing an invoice identification number, sales

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

taxes paid to North Carolina, and sales taxes paid to county of vendor's location, for all material and equipment used in the project. A sales tax statement shall be submitted with each pay request and shall be accompanied by an affidavit verifying its accuracy. The sales tax reporting form will be provided to the Contractor.

~~PSP-16 CONSTRUCTION SAFETY AND PHASING PLAN~~

~~An Aviation Construction Safety and Phasing Plan (CSPP) document has been prepared for the project and is included as an Appendix to this project specification book. In accordance with FAA requirements, the Contractor shall review the document and prepare, submit and maintain (update) a Safety Plan Compliance Document (SPCD), providing supplemental data and formatted using the same Chapters as the CSPP.~~

~~PSP-17 EROSION AND SEDIMENTATION CONTROL PLAN AND CITY STORMWATER PERMIT~~

~~NCDEQ Erosion and Sedimentation Control Plan approval and City Stormwater approval are pending for this project. Copies of the E&S plan approval and associated state general stormwater permit coverage and the City Stormwater permit will be furnished to the Contractor. The Contractor shall comply with all conditions listed in the approval and permit documents, including self-inspection requirements. The Contractor shall cooperate with city and state inspectors regarding these approvals and permits. All costs are subsidiary to the project lump sum bid price.~~

PSP-18 FUEL AND ASPHALT CEMENT PRICE ADJUSTMENTS

Contract price adjustments WILL NOT be made based on fluctuations in fuel and/or asphalt cement prices.

PSP-19 LIST OF DOCUMENTS AVAILABLE TO BIDDERS.

Surveys, subsurface investigations, and environmental reports listed below have been used as data sources by the project design team. They are made available for review by bidders. It is understood and agreed that such information, whether included in the plans, specifications, or otherwise made available to the bidder, was obtained and compiled for the OWNER's design purposes only. Such information has been made available for the convenience of all bidders. It is further understood and agreed that each bidder is solely responsible for all assumptions, deductions, or conclusions which the bidder may make or obtain from his or her examination of the surveys, boring logs and other records of investigations and tests that are furnished by the OWNER. The survey information is intended solely to transmit horizontal and vertical control used for project design surveys; the Contractor shall conduct his own surveys and shall independently verify any and all control points to be used during project construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

Survey:

Survey Control, Fayetteville Regional Airport, Fayetteville, North Carolina, Accu Tech Surveying & Mapping, LLC, May 12, 2015.

Soils:

Report of Subsurface Investigation, GeoTechnologies, 11/09/2015
Addendum to Report of Subsurface Investigation, GeoTechnologies, 10/30/2015

Environmental:

Lead Paint Survey, Locklear, Locklear & Jacobs, 4/16/2015
Asbestos Survey, Locklear, Locklear & Jacobs, 4/14/2015
Final Report for Environmental Monitoring and Soil Screening, Withers & Ravenel, 5/23/2012
Soil Assessment Report, Withers & Ravenel, 11/2/2015

PSP-20 CAUTION ALL TRADES - EXISTING COPPER TELEPHONE LINES, ROOM B130B

All bidders and trades are hereby advised that the existing CenturyLink telephone utility service cable (300 pair copper) and a return feed cable (200 pair copper), run east-west under the floor slab of new telecommunications room B130B. These lines are believed to pass over the top of the existing "tree column" footing in that room. These lines provide telephone and data service to terminal building tenants, including the airlines, TSA, rental car agencies and others, as well as service to the airfield lighting vault, ARFF/Fire Station 10 (including 911 dispatch), FAA ATCT complex (including flight safety data), the FBO and others. The Contractor shall protect these lines throughout the Part 2 project.

PSP-21 CONTRACTOR CONTROL SURVEY

Horizontal and vertical control point data from the project design survey will be provided to the contractor. The contractor shall retain a North Carolina Licensed Land Surveyor to establish/verify horizontal and vertical control for the work. The contractor's surveyor shall perform field survey to verify the existing control points, shall reference available geodetic survey monuments in the project vicinity (including the NGS PAC and SAC monuments on the airfield) and shall report any inconsistencies noted. The contractor's surveyor shall set no fewer than 10 additional horizontal and vertical control points around the perimeter of the project area and beyond the project disturbance limits. Refer to the plans for additional contractor survey requirements related to the existing building. Within 45 days following Notice to Proceed, the contractor shall submit a sealed survey plan and a narrative report describing the control survey verification, additional control set and contractor building survey.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PSP-22 SETTING UTILITY STRUCTURES TO FINAL GRADE

The Contractor shall set the tops of all utility structures (including but not limited to storm manholes, drainage inlets, sewer manholes, electrical hand holes, telecommunications handholes, cleanouts, valve boxes) to final finished grade, which may vary from top, rim or other surface grade indications shown on the plans. The Contractor shall review and verify grades prior to ordering structures and shall notify the architect of any discrepancies noted.

PSP-23 BUY AMERICAN ACT REQUIREMENTS – SUPPLEMENTAL INFORMATION

The FAA Buy American Act requirements are included in Appendix D, Federal Contract Requirements, sub-appendix A4. The base bid project and, separately, the add alternate(s) accepted by the Owner are each considered to be an “entire facility,” with the construction site in Fayetteville, North Carolina considered to be the location of final assembly.

Each bidder must submit with the bid two completed Certificate of Buy American Compliance – Total Facility (see Appendix B), representing the base bid and any alternate(s) accepted. The bidder must select one of two check boxes. With the first box (A), the bidder represents that only steel and manufactured products produced in the United States will be supplied and incorporated into the work, except for a limited number of exemptions. With the second box (B), the bidder represents inability to provide only steel and manufactured products produced in the United States (excepting exempt items), but will provide detailed documentation in support of a waiver request (a Type 3 waiver requires 60% US and exempt product; a Type 4 waiver requires demonstration that the total project cost for full compliance exceeds the total project cost without full compliance by 25% or more). Waivers cannot be granted by the Owner; the Owner will forward the Bidder’s waiver request documentation to the FAA office in Memphis for consideration and approval action.

Additional information regarding the FAA Buy American Act requirements can be found on the FAA Airports Division web site (https://www.faa.gov/airports/aip/buy_american/), including links to the Buy American statute, the FAA Buy American guidance in Appendix Y of the AIP Handbook, and the most recent FAA Nationwide Buy American Waivers Issued list.

To facilitate the orderly documentation to the Owner of Buy American compliance, the Contractor shall include with all material shop submittals a signed Buy American compliance statement, together with supporting documentation as to the manufacturing or production location for all steel and manufactured products, using the forms included here. Forms are provided for bid certificate check box A and for bid certificate check box B with a Type 3 waiver. In the event FAA issues a Type 4 waiver for the project, a similar form will be developed based on the details of the waiver.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

City of Fayetteville, North Carolina									
Fayetteville Regional Airport									
Airline Terminal Improvements - Part 2									
Material Shop Submittal - Buy American Compliance Statement									
Bid Document Page B-6 Check Box A - Steel and manufactured products produced in U.S. except standard FAA exemptions									
General Contractor:									
Subcontractor:									
Supplier:									
Submittal Number:									
Product:									
Manufacturer/Producer:									
Location of Manufacture/Production (City, State):									
<i>Attach documentation confirming location of manufacture/production. Products of unknown origin must be considered as non-domestic products in their entirety.</i>									
GENERAL CONTRACTOR'S STATEMENT TO OWNER									
This product, which is a component or sub-component of the facility:									
	Complies with the FAA Buy American Requirements.								
	Is Exempt from FAA Buy American Requirements								
	Basis:		subpart 25.108 list						
			FAA Nationwide Buy American Waivers List						
			AIP Handbook Table Y-3d (Asphalt, Cement, Concrete)						
	Is non-domestic; FAA waiver requested due to extenuating circumstances.								
By (name):									
Title:									
Signature									
Date									

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

City of Fayetteville, North Carolina									
Fayetteville Regional Airport									
Airline Terminal Improvements - Part 2									
Material Shop Submittal - Buy American Compliance Statement									
Bid Document Page B-6 Check Box B - Project Type 3 Waiver									
General Contractor:									
Subcontractor:									
Supplier:									
Submittal Number:									
Product:									
Manufacturer/Producer:									
Location of Manufacture/Production (City, State):									
<i>Attach documentation confirming location of manufacture/production. Products of unknown origin must be considered as non-domestic products in their entirety.</i>									
GENERAL CONTRACTOR'S STATEMENT TO OWNER									
This product, which is a component or sub-component of the facility:									
Complies with the FAA Buy American Requirements, and is included toward the 60% minimum U.S. content for the project Type 3 waiver request/approval.									
Is Exempt from FAA Buy American Requirements									
Basis:			subpart 25.108 list						
			FAA Nationwide Buy American Waivers List						
			AIP Handbook Table Y-3d (Asphalt, Cement, Concrete)						
Is non-domestic, and was included in the listing of non-domestic products submitted with the original Type 3 waiver request/approval.									
Is non-domestic and not included in the original listing; FAA waiver requested due to extenuating circumstances.									
Product Cost, Delivered to the Site:									
By (name):									
Title:									
Signature									
Date									

END OF PROJECT SPECIAL PROVISIONS

Project Special Provisions

PSP-10

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01100 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 WORK COVERED BY CONTRACT DOCUMENTS

- A. Project Identification: Project consists of additions and renovations including but not limited to:
 - 1. Main Terminal first-story airline ticket office renovation
 - 2. Concourse B Gate Lounge expansion and VIP Lounge renovation
 - 3. Reroofing of Ticketing, Baggage Claim, and Concourse B wings
- B. Project Location: 400 Airport, Fayetteville, NC 28306.
- C. Owner: City of Fayetteville, 433 Hay Street, Fayetteville, N.C. 28301
- D. Architect Identification: The Contract Documents, dated 07-31-2023, were prepared for the project by Gordon Johnson Architecture, 654 Hay Street Suite 4, Fayetteville, NC 28301 in association with Fleming & Associates and RMF Engineering, Inc.

1.3 CONTRACT

- A. Project will be constructed under a single prime contract to include all:
 - 1. General / structural construction
 - 2. Civil / site work construction
 - 3. Plumbing construction
 - 4. Mechanical construction
 - 5. Electrical construction
 - 6. Fire Protection construction
 - 7. Data / communications construction

1.4 USE OF PREMISES

- A. General: The Contractors shall have limited use of premises for construction operations, including use of Project site, during the construction period. Contractor's use of premises is limited to 1) their ability to be badged for security clearance, 2) by Owner's right to perform work, or 3) to retain other contractors on portions of the Project. The Owner will occupy and use all parts of the terminal facilities during ongoing renovations for normal Airport operations during the construction period.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1.5 SPECIFICATION FORMATS AND CONVENTIONS

- A. Specification Format: The Specifications are organized into Divisions and Sections using the 34-division format and CSI/CSC's "MasterFormat" numbering system.
 - 1. Section Identification: The Specifications use section numbers and titles to help cross-referencing in the Contract Documents. Sections in the Project Manual are in numeric sequence; however, the sequence is incomplete. Consult the table of contents at the beginning of the Project Manual to determine numbers and names of sections in the Contract Documents.
- B. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Abbreviated Language: Language used in the Specifications and other Contract Documents are abbreviated. Words and meanings shall be interpreted as appropriate. Words implied, but not stated, shall be inferred, as the sense requires. Singular words shall be interpreted as plural and plural words shall be interpreted as singular where applicable as the context of the Contract Documents indicates.
 - 2. Imperative mood and streamlined language are generally used in the Specifications. Requirements expressed in the imperative mood are to be performed by Contractor. Occasionally, the indicative or subjunctive mood may be used in the Section Text for clarity to describe responsibilities that must be fulfilled indirectly by Contractor or by others when so noted.
 - a. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.

PART 2 - PRODUCTS (Not Used)

END OF SECTION 01100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01140 - WORK RESTRICTIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 USE OF PREMISES

- A. Use of Site: Limit use of premises to work in areas indicated and as phased. Do not disturb portions of site beyond areas in which the Work is indicated.
 - 1. Limits: Confine construction operations to minimize impact on owner's operation of all facilities.
 - 2. Owner Occupancy: Allow for Owner occupancy of site and use by the public.
 - 3. Driveways and Entrances: Keep driveways and entrances whether permanent or temporary serving all premises not under construction clear and available to the public, the Owner, Owner's employees, and emergency vehicles at all times. Use only designated areas for parking or storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances.
- B. Use of Existing Building: Maintain existing building in a weathertight air conditioned condition throughout construction period. Repair damage caused by construction operations. Protect building, its contents, and its occupants during construction period.

1.3 OCCUPANCY REQUIREMENTS

- A. Full Owner Occupancy: Owner will occupy site and existing building during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01140

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01230 - ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

- A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the Bidding Requirements that may be added to or deducted from the Base Bid amount if Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.
 - 1. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternate into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

- A. Coordination: Modify or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.
 - 1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of alternate.
- B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each alternate. Indicate if alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated modifications to alternates.
- C. Execute accepted alternates under the same conditions as other work of the Contract.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Schedule: A Schedule of Alternates is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

- A. Add Alternate G-1: Provide all work associated with reroofing the Main Terminal Ticketing Wing as shown on the plans and specifications.
- B. Add Alternate G-2: Provide Owner's and Contractor's Protective Liability I.S.O.#CG 00 09 10 93 insurance policy as stated in the Supplemental General Provisions section 3.e.

END OF SECTION 01230

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01250 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section specifies administrative and procedural requirements for handling and processing Contract modifications.

1.3 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, by written letter or memo signed and dated by the architect.

1.4 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
 - 1. Proposal Requests issued by Architect are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
 - 2. Within 20 days after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
 - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - c. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- B. Contractor-Initiated Proposals: If latent or unforeseen conditions require modifications to the Contract, Contractor may propose changes by submitting a request for a change to the Architect.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
4. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.

C. Proposal Request Form: Use AIA Document G709 or written letter for Proposal Requests.

1.5 CHANGE ORDER PROCEDURES

- A. On Owner's approval of a Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor on AIA Document G701 or Owner provided form.

1.6 CONSTRUCTION CHANGE DIRECTIVE

- A. Construction Change Directive: Architect may issue a Construction Change Directive on AIA Document G714 or other form. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.

1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.

- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.

1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01250

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01270 - UNIT PRICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for unit prices.
- B. Related Sections include the following:
 - 1. Division 1 Section 01250 “Contract Modification Procedures” for procedures for submitting and handling change orders.
 - 2. Division 33 Section “Earthwork” For additional work beyond that shown on the drawings.

1.3 DEFINITIONS

- A. Unit price is an amount proposed by bidders, stated on the Bid Form, as a price per unit of measurement for materials or services added to or deducted from the Contract Sum by appropriate modification, if estimated quantities of Work required by the Contract Documents are increased or decreased.

1.4 PROCEDURES

- A. Unit prices include all necessary material, plus cost for delivery, installation, insurance, applicable taxes, overhead, and profit.
- B. Measurement and Payment: Refer to individual Specification Sections for work that requires establishment of unit prices. Methods of measurement and payment for unit prices are specified in those Sections.
- C. Owner reserves the right to reject Contractor's measurement of work-in-place that involves use of established unit prices and to have this work measured, at Owner's expense, by an independent surveyor acceptable to Contractor.
- D. List of Unit Prices: A list of unit prices is included at the end of this Section. Specification Sections referenced in the schedule contain requirements for materials described under each unit price.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 LIST OF UNIT PRICES

- A. Unit Price A-1 – Cost to undercut, excavate and refill with Compacted Suitable Soil, as Directed, per CY (if required) Dollars* (\$___) C.Y.
- B. Unit Price A-2 - Cost to undercut, excavate and refill with clean #57 or #67 Stone, as directed, per CY (if required) Dollars (\$___) C.Y.

*This above referenced item shall only be used if unsuitable soils are encountered one foot below the established sub-base. All work required to this limit shall be included in the Contractor's base bid.

END OF SECTION 01270

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01310 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. General project coordination procedures.
 - 2. Conservation.
 - 3. Coordination Drawings.
 - 4. Administrative and supervisory personnel.
 - 5. Project meetings.
- B. Each contractor shall participate in coordination requirements. Certain areas of responsibility will be assigned to a specific contractor.
- C. Related Sections: The following Sections contain requirements that relate to this Section:
 - 1. Division 1 Section "Closeout Procedures" for coordinating Contract closeout.

1.3 COORDINATION

- A. Coordination: Coordinate construction operations included in various Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections that depend on each other for proper installation, connection, and operation.
- B. Coordination: Each contractor shall coordinate its construction operations with those of other contractors and entities to ensure efficient and orderly installation of each part of the Work. Each contractor shall coordinate its operations with operations, included in different Sections that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Coordinate installation of different components with other contractors to ensure maximum accessibility for required maintenance, service, and repair.
 3. Make adequate provisions to accommodate items scheduled for later installation.
- C. If necessary, prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.
- D. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
1. Preparation of Contractor's Construction Schedule.
 2. Preparation of the Schedule of Values.
 3. Installation and removal of temporary facilities and controls.
 4. Delivery and processing of submittals.
 5. Progress meetings.
 6. Preinstallation conferences.
 7. Project closeout activities.
- E. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work.

1.4 SUBMITTALS

- A. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.
1. Indicate relationship of components shown on separate Shop Drawings.
 2. Indicate required installation sequences.
 3. Refer to Division 23 Section "Basic Mechanical Materials and Methods" and Division 26 Section "Basic Electrical Materials and Methods" for specific Coordination Drawing requirements for mechanical and electrical installations.
- B. Staff Names: Within 15 days of starting construction operations, submit a list of principal staff assignments including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone.

1.5 ADMINISTRATIVE AND SUPERVISORY PERSONNEL

- A. General: In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work.

1.6 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site, unless otherwise indicated.

1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
3. Minutes: Record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within 3 days of the meeting.

- B. Preconstruction Conference: Schedule a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement. Hold the conference at Project site or another convenient location. Conduct the meeting to review responsibilities and personnel assignments.

1. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; manufacturers; suppliers; and other concerned parties shall attend the conference. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Tentative construction schedule.
 - b. Phasing.
 - c. Critical work sequencing.
 - d. Designation of responsible personnel.
 - e. Procedures for processing field decisions and Change Orders.
 - f. Procedures for processing Applications for Payment.
 - g. Distribution of the Contract Documents.
 - h. Submittal procedures.
 - i. Preparation of Record Documents.
 - j. Use of the premises.
 - k. Responsibility for temporary facilities and controls.
 - l. Parking availability.
 - m. Office, work, and storage areas.
 - n. Equipment deliveries and priorities.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- o. First aid.
 - p. Security.
 - q. Progress cleaning.
 - r. Working hours.
- C. Preinstallation Conferences: Conduct a pre-installation conference at Project site before each construction activity that requires coordination with other construction.
 - 1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
 - 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Options.
 - c. Related Change Orders.
 - d. Purchases.
 - e. Deliveries.
 - f. Submittals.
 - g. Possible conflicts.
 - h. Compatibility problems.
 - i. Time schedules.
 - j. Weather limitations.
 - k. Manufacturer's written recommendations.
 - l. Warranty requirements.
 - m. Compatibility of materials.
 - n. Acceptability of substrates.
 - o. Temporary facilities and controls.
 - p. Space and access limitations.
 - q. Regulations of authorities having jurisdiction.
 - r. Testing and inspecting requirements.
 - s. Required performance results.
 - t. Protection of construction and personnel.
 - 3. Record significant conference discussions, agreements, and disagreements.
 - 4. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- D. Progress Meetings: Conduct progress meetings at monthly intervals. Coordinate dates of meetings with preparation of payment requests.
 - 1. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's Construction Schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - b. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements.
 - 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site utilization.
 - 8) Temporary facilities and controls.
 - 9) Work hours.
 - 10) Hazards and risks.
 - 11) Progress cleaning.
 - 12) Quality and work standards.
 - 13) Change Orders.
 - 14) Documentation of information for payment requests.
3. Reporting: Distribute minutes of the meeting to each party present and to parties who should have been present. Include a brief summary, in narrative form, of progress since the previous meeting and report.
 - a. Schedule Updating: Revise Contractor's Construction Schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.
- E. Coordination Meetings: Conduct Project coordination meetings at bi-weekly intervals. Project coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and preinstallation conferences.
 1. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work
 2. Agenda: Review and correct or approve minutes of the previous coordination meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Combined Contractor's Construction Schedule: Review progress since the last coordination meeting. Determine whether each contract is on time, ahead of schedule, or behind schedule, in relation to Combined Contractor's Construction Schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - b. Schedule Updating: Revise Combined Contractor's Construction Schedule after each coordination meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with report of each meeting.
 - c. Review present and future needs of each contractor present, including the following:
 - 1) Interface requirements.
 - 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site utilization.
 - 8) Temporary facilities and controls.
 - 9) Work hours.
 - 10) Hazards and risks.
 - 11) Progress cleaning.
 - 12) Quality and work standards.
 - 13) Change Orders.
3. Reporting: Record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01310

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01330 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other miscellaneous submittals.
- B. Related Sections include the following:
 - 1. Division 1 Section "Project Management and Coordination" for submitting Coordination Drawings.
 - 2. Division 1 Section "Closeout Procedures" for submitting warranties Project Record Documents and operation and maintenance manuals.

1.3 DEFINITIONS

- A. Action Submittals: Written and graphic information that requires Architect's responsive action.
- B. Informational Submittals: Written information that does not require Architect's approval. Submittals may be rejected for not complying with requirements.

1.4 SUBMITTAL PROCEDURES

- A. General: Electronic copies of CAD Drawings of the Contract Drawings will not be provided by Architect for Contractor's use in preparing submittals.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities. All submittals should be complete (ie: product data, warranties, mfg reports, shop drawings) packaged to include all relevant information needing a review and response for the proposed item. Partial submittals will not be accepted.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Submittals Schedule: Submit to the Architect a list of submittals and time requirements for scheduled performance of related construction activities.
- D. Processing Time: Allow enough time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal.
 1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if processing must be delayed to permit coordination with subsequent submittals. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
 2. Concurrent Review: Where concurrent review of submittals by Architect's consultants, Owner, or other parties is required, allow 21 days for initial review of each submittal.
 3. Direct Transmittal to Consultant: Where the Contract Documents indicate that submittals may be transmitted directly to Architect's consultants, provide duplicate copy of transmittal to Architect. Submittal will be returned to Architect before being returned to Contractor.
 4. If intermediate submittal is necessary, process it in same manner as initial submittal.
 5. Allow 15 days for processing each resubmittal.
 6. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing.
- E. Identification: Place a permanent label or title block on each submittal for identification.
 1. Indicate name of firm or entity that prepared each submittal on label or title block.
 2. Provide a space approximately 4 by 5 inches on label or beside title block to record Contractor's review and approval markings and action taken by Architect.
 3. Include the following information on label for processing and recording action taken:
 - a. Project name.
 - b. Date.
 - c. Name and address of Architect.
 - d. Name and address of Contractor.
 - e. Name and address of subcontractor.
 - f. Name and address of supplier.
 - g. Name of manufacturer.
 - h. Unique identifier, including revision number.
 - i. Number and title of appropriate Specification Section.
 - j. Drawing number and detail references, as appropriate.
 - k. Other necessary identification.
- F. Deviations: Highlight, encircle, or otherwise identify deviations from the Contract Documents on submittals.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- G. Additional Copies: Unless additional copies are required for final submittal, and unless Architect observes noncompliance with provisions of the Contract Documents, initial submittal may serve as final submittal.
1. Submit one copy of submittal via e-mail to concurrent reviewer in addition to Architect.
- H. Transmittal: Package each complete submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form via e-mail directly to Architect. Architect will return submittals, without review, received from sources other than Contractor. Architect will also not be required to download or upload submittals from Contractor's internal submittal management software.
1. On an attached separate sheet, prepared on Contractor's letterhead, record relevant information, requests for data, revisions other than those requested by Architect on previous submittals, and deviations from requirements of the Contract Documents, including minor variations and limitations. Include the same label information as the related submittal.
 2. Include Contractor's certification stating that information submitted complies with requirements of the Contract Documents.
 3. Transmittal Form: Provide locations on form for the following information:
 - a. Project name.
 - b. Date.
 - c. Destination (To:).
 - d. Source (From:).
 - e. Names of subcontractor, manufacturer, and supplier.
 - f. Category and type of submittal.
 - g. Submittal purpose and description.
 - h. Submittal and transmittal distribution record.
 - i. Remarks.
 - j. Signature of transmitter.
- I. Distribution: Furnish electronic copy of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- J. Use for Construction: Use only final submittals with mark indicating action taken by Architect in connection with construction.

PART 2 - PRODUCTS

2.1 ACTION SUBMITTALS

- A. General: Prepare and submit Action Submittals required by individual Specification Sections.
1. Number of Copies: Submit one copy via e-mail of each General Construction submittal, or one copy of each plumbing, mechanical, electrical, and fire alarm submittal unless

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

otherwise indicated. Architect will return one marked up electronic copy. Also provide marked up copy as a Project Record Document at Project Closeout.

- B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
 2. Mark each copy of each submittal to show which products and options are applicable.
 3. Include the following information, as applicable:
 - a. Manufacturer's written recommendations.
 - b. Manufacturer's product specifications.
 - c. Manufacturer's installation instructions.
 - d. Standard color charts.
 - e. Manufacturer's catalog cuts.
 - f. Wiring diagrams showing factory-installed wiring.
 - g. Printed performance curves.
 - h. Operational range diagrams.
 - i. Mill reports.
 - j. Standard product operating and maintenance manuals.
 - k. Compliance with recognized trade association standards.
 - l. Compliance with recognized testing agency standards.
 - m. Application of testing agency labels and seals.
 - n. Notation of coordination requirements.
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
1. Preparation: Include the following information, as applicable:
 - a. Dimensions.
 - b. Identification of products.
 - c. Fabrication and installation drawings.
 - d. Roughing-in and setting diagrams.
 - e. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring.
 - f. Shopwork manufacturing instructions.
 - g. Templates and patterns.
 - h. Schedules.
 - i. Design calculations.
 - j. Compliance with specified standards.
 - k. Notation of coordination requirements.
 - l. Notation of dimensions established by field measurement.
 2. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
 3. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches but no larger than 30 by 40 inches.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

4. Number of Copies: Submit one electronic copy via e-mail of each submittal. Retain one returned marked up copy as a Project as-built Drawing.
- D. Samples: Prepare physical units of materials or products, including the following:
1. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
 2. Preparation: Mount, display, or package Samples in manner specified to facilitate review of qualities indicated. Prepare Samples to match Architect's sample where so indicated. Attach label on unexposed side that includes the following:
 - a. Generic description of Sample.
 - b. Product name or name of manufacturer.
 - c. Sample source.
 3. Additional Information: On an attached separate sheet, prepared on Contractor's letterhead, provide the following:
 - a. Size limitations.
 - b. Compliance with recognized standards.
 - c. Availability.
 - d. Delivery time.
 4. Submit Samples for review of kind, color, pattern, and texture for a final check of these characteristics with other elements and for a comparison of these characteristics between final submittal and actual component as delivered and installed.
 - a. If variation in color, pattern, texture, or other characteristic is inherent in the product represented by a Sample, submit at least three sets of paired units that show approximate limits of the variations.
 - b. Refer to individual Specification Sections for requirements for Samples that illustrate workmanship, fabrication techniques, details of assembly, connections, operation, and similar construction characteristics.
 5. Number of Samples for Initial Selection: Submit 2 full sets of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.
- E. Contractor's Construction Schedule: Comply with requirements in Division 1 Section "Project Management and Coordination" for Construction Manager's action.
- F. Submittals Schedule: Comply with requirements in Division 1 Section "Project Management and Coordination."
- G. Application for Payment: Comply with requirements in Division 1 Section "Project Management and Coordination."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- H. Schedule of Values: Comply with requirements in Division 1 Section "Project Management and Coordination."
- I. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 - 1. Name, address, and telephone number of entity performing subcontract or supplying products.
 - 2. Number and title of related Specification Section(s) covered by subcontract.
 - 3. Drawing number and detail references, as appropriate, covered by subcontract.

2.2 INFORMATIONAL SUBMITTALS

- A. General: Prepare and submit Informational Submittals required by other Specification Sections.
 - 1. Number of Copies: Submit one electronic copy via e-mail of each submittal, unless otherwise indicated. Architect will not return copies.
 - 2. Certificates and Certifications: Provide a notarized statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.
 - 3. Test and Inspection Reports: Comply with requirements in Division 1 Section "Project Management and Coordination."
- B. Contractor's Construction Schedule: Comply with requirements in Division 1 Section "Project Management and Coordination."
- C. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.
- D. Product Certificates: Prepare written statements on manufacturer's letterhead certifying that product complies with requirements.
- E. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements. Submit record of Welding Procedure Specification (WPS) and Procedure Qualification Record (PQR) on AWS forms. Include names of firms and personnel certified.
- F. Installer Certificates: Prepare written statements on manufacturer's letterhead certifying that Installer complies with requirements and, where required, is authorized for this specific Project.
- G. Manufacturer Certificates: Prepare written statements on manufacturer's letterhead certifying that manufacturer complies with requirements. Include evidence of manufacturing experience where required.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- H. Material Certificates: Prepare written statements on manufacturer's letterhead certifying that material complies with requirements.
- I. Material Test Reports: Prepare reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements.
- J. Preconstruction Test Reports: Prepare reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements.
- K. Compatibility Test Reports: Prepare reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.
- L. Field Test Reports: Prepare reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements.
- M. Product Test Reports: Prepare written reports indicating current product produced by manufacturer complies with requirements. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
- N. Research/Evaluation Reports: Prepare written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
 - 1. Name of evaluation organization.
 - 2. Date of evaluation.
 - 3. Time period when report is in effect.
 - 4. Product and manufacturers' names.
 - 5. Description of product.
 - 6. Test procedures and results.
 - 7. Limitations of use.
- O. Maintenance Data: Prepare written and graphic instructions and procedures for operation and normal maintenance of products and equipment. Comply with requirements in Division 1 Section "Closeout Procedures."
- P. Design Data: Prepare written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- Q. Manufacturer's Instructions: Prepare written or published information that documents manufacturer's recommendations, guidelines, and procedures for installing or operating a product or equipment. Include name of product and name, address, and telephone number of manufacturer. Include the following, as applicable:
1. Preparation of substrates.
 2. Required substrate tolerances.
 3. Sequence of installation or erection.
 4. Required installation tolerances.
 5. Required adjustments.
 6. Recommendations for cleaning and protection.
- R. Manufacturer's Field Reports: Prepare written information documenting factory-authorized service representative's tests and inspections. Include the following, as applicable:
1. Name, address, and telephone number of factory-authorized service representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.
 4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- S. Insurance Certificates and Bonds: Prepare written information indicating current status of insurance or bonding coverage. Include name of entity covered by insurance or bond, limits of coverage, amounts of deductibles, if any, and term of the coverage.

2.3 DELEGATED-DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.
- B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally-signed PDF electronic file and three paper copies of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.
1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

PART 3 - EXECUTION

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.1 CONTRACTOR'S REVIEW

- A. Review each submittal and check for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.
- B. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

3.2 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.
- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or modifications required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action taken, as follows:
 - 1. Approved as submitted
 - 2. Approved as noted
 - 3. Revise and resubmit
 - 4. Rejected
- C. Informational Submittals: Architect will review each submittal and will not return it, or will reject and return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- D. Submittals not required by the Contract Documents will not be reviewed and may be discarded.

END OF SECTION 01330

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01500 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes requirements for temporary facilities and controls, including temporary utilities, support facilities, and security and protection facilities.
- B. Temporary utilities include, but are not limited to, the following:
 - 1. Sanitary facilities, including toilets, wash facilities, and drinking-water facilities.
 - 2. Heating and cooling facilities.
 - 3. Electric power service.
 - 4. Lighting.
 - 5. Telephone service.
- C. Support facilities include, but are not limited to, the following:
 - 1. Project identification and temporary signs.
 - 2. Waste disposal facilities.
 - 3. Field offices.
 - 4. Storage and fabrication sheds.
- D. Security and protection facilities include, but are not limited to, the following:
 - 1. Barricades, warning signs, and lights.
- E. Related Sections include the following:
 - 1. Division 2 Section "Termite Control" for pest control.
 - 2. Divisions 2 through 26 for temporary heat, ventilation, and humidity requirements for products in those Sections.

1.3 DEFINITIONS

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- A. Permanent Enclosure: As determined by Architect, permanent or temporary roofing is complete, insulated, and weathertight; exterior walls are insulated and weathertight; and all openings are closed with permanent construction or substantial temporary closures.

1.4 USE CHARGES

- A. General: Cost or use charges for temporary facilities are not chargeable to Owner or Architect and shall be included in the Contract Sum. Allow other entities to use temporary services and facilities without cost, including, but not limited to, the following:
 - 1. Owner's construction forces.
 - 2. Occupants of Project.
 - 3. Architect.
 - 4. Testing agencies.
 - 5. Personnel of authorities having jurisdiction.
- B. Water Service: Use water from Owner's existing water system without metering and without payment of use charges.
- C. Electric Power Service: Use electric power from Owner's existing system without metering and without payment of use charges.

1.5 SUBMITTALS

- A. Implementation and Termination Schedule: Within 15 days of date established for submittal of Contractor's Construction Schedule, submit a schedule indicating implementation and termination of each temporary utility.

1.6 QUALITY ASSURANCE

- A. Standards: Comply with ANSI A10.6, NECA's "Temporary Electrical Facilities," and NFPA 241.
 - 1. Trade Jurisdictions: Assigned responsibilities for installation and operation of temporary utilities are not intended to interfere with trade regulations and union jurisdictions.
 - 2. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

1.7 PROJECT CONDITIONS

- A. Temporary Utilities: At earliest feasible time, when acceptable to Owner, change over from use of temporary service to use of permanent service.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Temporary Use of Permanent Facilities: Installer of each permanent service shall assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.
- B. Conditions of Use: The following conditions apply to use of temporary services and facilities by all parties engaged in the Work:
 1. Keep temporary services and facilities clean and neat.
 2. Relocate temporary services and facilities as required by progress of the Work.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General: Provide new materials. Undamaged, previously used materials in serviceable condition may be used if approved by Architect. Provide materials suitable for use intended.
- B. Tarpaulins: Fire-resistive labeled with flame-spread rating of 15 or less.
- C. Water: Potable.

2.2 EQUIPMENT

- A. General: Provide equipment suitable for use intended.
- B. Field Offices: Mobile units with lockable entrances, operable windows, and serviceable finishes; heated and air conditioned; on foundations adequate for normal loading.
- C. Fire Extinguishers: Hand carried, portable, UL rated. Provide class and extinguishing agent as indicated or a combination of extinguishers of NFPA-recommended classes for exposures.
 1. Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.
- D. Self-Contained Toilet Units: Single-occupant units of chemical, aerated recirculation, or combustion type; vented; fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material.
- E. Drinking-Water Fixtures: Containerized, tap-dispenser, bottled-water drinking-water units, including paper cup supply.
- F. Heating Equipment: Unless Owner authorizes use of permanent heating system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
 2. Heating Units: Listed and labeled, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use for type of fuel being consumed.
- G. Electrical Outlets: Properly configured, NEMA-polarized outlets to prevent insertion of 110- to 120-V plugs into higher-voltage outlets; equipped with ground-fault circuit interrupters, reset button, and pilot light.
- H. Power Distribution System Circuits: Where permitted and overhead and exposed for surveillance, wiring circuits, not exceeding 125-V ac, 20-A rating, and lighting circuits may be nonmetallic sheathed cable.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.
- B. Provide each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Engage appropriate local utility company to install temporary service or connect to existing service. Where utility company provides only part of the service, provide the remainder with matching, compatible materials and equipment. Comply with utility company recommendations.
1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
 2. Provide adequate capacity at each stage of construction. Before temporary utility is available, provide trucked-in services.
 3. Obtain easements to bring temporary utilities to Project site where Owner's easements cannot be used for that purpose.
- B. Water Service: Use of Owner's existing water service facilities will be permitted, as long as facilities are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
1. Provide rubber hoses as necessary to serve Project site.
 2. As soon as water is required at each level, extend service to form a temporary water- and fire-protection standpipe. Provide distribution piping. Space outlets so water can be reached with a 100-foot (30-m) hose. Provide one hose at each outlet.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. Where installations below an outlet might be damaged by spillage or leakage, provide a drip pan of suitable size to minimize water damage. Drain accumulated water promptly from pans.
- C. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking-water fixtures. Comply with regulations and health codes for type, number, location, operation, and maintenance of fixtures and facilities.
1. Disposable Supplies: Provide toilet tissue, paper towels, paper cups, and similar disposable materials for each facility. Maintain adequate supply. Provide covered waste containers for disposal of used material.
 2. Toilets: Install self-contained toilet units. Shield toilets to ensure privacy. Provide separate facilities for male and female personnel.
 3. Wash Facilities: Install wash facilities supplied with potable water at convenient locations for personnel who handle materials that require wash up. Dispose of drainage properly. Supply cleaning compounds appropriate for each type of material handled.
 4. Drinking-Water Facilities: Provide bottled-water, drinking-water units.
 5. Locate toilets and drinking-water fixtures so personnel need not walk more than two stories vertically or 200 feet (60 m) horizontally to facilities.
- D. Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment from that specified that will not have a harmful effect on completed installations or elements being installed.
- E. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment from that specified that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.
- F. Electric Power Service: Provide weatherproof, grounded electric power service and distribution system of sufficient size, capacity, and power characteristics during construction period. Include meters, transformers, overload-protected disconnecting means, automatic ground-fault interrupters, and main distribution switchgear.
1. Install electric power service underground, unless overhead service must be used.
 2. Install power distribution wiring overhead and rise vertically where least exposed to damage.
 3. Connect temporary service to Owner's existing power source, as directed by electric company officials.
- G. Electric Power Service: Use of Owner's existing electric power service will be permitted, as long as equipment is maintained in a condition acceptable to Owner.
- H. Electric Distribution: Provide receptacle outlets adequate for connection of power tools and equipment.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Provide waterproof connectors to connect separate lengths of electrical power cords if single lengths will not reach areas where construction activities are in progress. Do not exceed safe length-voltage ratio.
 2. Provide warning signs at power outlets other than 110 to 120 V.
 3. Provide metal conduit, tubing, or metallic cable for wiring exposed to possible damage. Provide rigid steel conduits for wiring exposed on grades, floors, decks, or other traffic areas.
 4. Provide metal conduit enclosures or boxes for wiring devices.
 5. Provide 4-gang outlets, spaced so 100-foot extension cord can reach each area for power hand tools and task lighting. Provide a separate 125-V ac, 20-A circuit for each outlet.
- I. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations and traffic conditions.
1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
 2. Provide one 100-W incandescent lamp per 500 sq. ft., uniformly distributed, for general lighting, or equivalent illumination.
 3. Provide one 100-W incandescent lamp every 50 feet in traffic areas.
- J. Telephone Service: Provide temporary telephone service throughout construction period for common-use facilities used by all personnel engaged in construction activities.
1. At each telephone, post a list of important telephone numbers.
 - a. Police and fire departments.
 - b. Ambulance service.
 - c. Contractor's home office.
 - d. Architect's office.
 - e. Engineers' offices.
 - f. Owner's office.
 - g. Principal subcontractors' field and home offices.
 2. Provide an answering machine on superintendent's telephone.
 3. Provide a portable cellular telephone for superintendent's use in making and receiving telephone calls when away from field office.

3.3 SUPPORT FACILITIES INSTALLATION

A. General: Comply with the following:

1. Locate field offices, storage sheds, sanitary facilities, and other temporary construction and support facilities for easy access.
2. Provide incombustible construction for offices, shops, and sheds located within construction area or within 30 feet of building lines. Comply with NFPA 241.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. Maintain support facilities until near Substantial Completion. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Traffic Controls: Provide temporary traffic controls at junction of temporary roads with public roads. Include warning signs for public traffic and "STOP" signs for entrance onto public roads. Comply with requirements of authorities having jurisdiction.
- C. Project Identification and Temporary Signs: Prepare Project identification and other signs in sizes indicated. Install signs where indicated to inform public and persons seeking entrance to Project. Do not permit installation of unauthorized signs.
 1. Engage an experienced sign fabricator to apply graphics for Project identification signs. Comply with details indicated for one 4' x 8' one sided sign.
 2. Prepare temporary signs to provide directional information to construction personnel and visitors.
 3. Construct signs of exterior-type Grade B-B high-density concrete form overlay plywood in sizes and thicknesses indicated. Support on posts or framing of preservative-treated wood or steel.
 4. Paint sign panel and applied graphics with exterior-grade alkyd gloss enamel over exterior primer or provide weather proof vinyl wrap.
- D. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Containerize and clearly label hazardous, dangerous, or unsanitary waste materials separately from other waste. Comply with Division 1 Section "Execution Requirements" for progress cleaning requirements.
 1. If required by authorities having jurisdiction, provide separate containers, clearly labeled, for each type of waste material to be deposited.
 2. Develop a waste management plan for Work performed on Project. Indicate types of waste materials Project will produce and estimate quantities of each type. Provide detailed information for on-site waste storage and separation of recyclable materials. Provide information on destination of each type of waste material and means to be used to dispose of all waste materials.
- E. Janitorial Services: Provide janitorial services on a daily basis for temporary offices, first-aid stations, toilets, wash facilities, lunchrooms, and similar areas.
- F. Common-Use Field Office: Provide an insulated, weathertight, air-conditioned field office for use as a common facility by all personnel engaged in construction activities; of sufficient size to accommodate required office personnel and meetings of 6 persons at Project site. Keep office clean and orderly.
- G. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment involved, including temporary utility services. Sheds may be open shelters or fully enclosed spaces within building or elsewhere on-site.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects. Avoid using tools and equipment that produce harmful noise. Restrict use of noisemaking tools and equipment to hours that will minimize complaints from persons or firms near Project site.
- B. Stormwater Control: Provide earthen embankments and similar barriers in and around excavations and subgrade construction, sufficient to prevent flooding by runoff of stormwater from heavy rains.
- C. Pest Control: Before deep foundation work has been completed, retain a local exterminator or pest-control company to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests. Engage this pest-control service to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Obtain extended warranty for Owner. Perform control operations lawfully, using environmentally safe materials.
- D. Security Enclosure and Lockup: Install substantial temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security.
- E. Barricades, Warning Signs, and Lights: Comply with standards and code requirements for erecting structurally adequate barricades. Paint with appropriate colors, graphics, and warning signs to inform personnel and public of possible hazard. Where appropriate and needed, provide lighting, including flashing red or amber lights.
 - 1. For safety barriers, sidewalk bridges, and similar uses, provide minimum 5/8-inch thick exterior plywood.
- F. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
 - 1. Where heating or cooling is needed and permanent enclosure is not complete, provide insulated temporary enclosures. Coordinate enclosure with ventilating and material drying or curing requirements to avoid dangerous conditions and effects.
 - 2. Vertical Openings: Close openings of 25 sq. ft. or less with plywood or similar materials.
 - 3. Horizontal Openings: Close openings in floor or roof decks and horizontal surfaces with load-bearing, wood-framed construction.
 - 4. Install tarpaulins securely using fire-retardant-treated wood framing and other materials.
 - 5. Where temporary wood or plywood enclosure exceeds 100 sq. ft. in area, use fire-retardant-treated material for framing and main sheathing.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- G. Temporary Partitions: Erect and maintain dustproof partitions and temporary enclosures to limit dust and dirt migration and to separate areas from fumes and noise.
1. Construct dustproof partitions of not less than nominal 4-inch studs, 5/8-inch gypsum wallboard with joints taped on occupied side, and 1/2-inch fire-retardant plywood on construction side.
 2. Construct dustproof, floor-to-ceiling partitions of not less than nominal 4-inch studs, 2 layers of 3-mil polyethylene sheets, inside and outside temporary enclosure. Cover floor with 2 layers of 3-mil polyethylene sheets, extending sheets 18 inches up the side walls. Overlap and tape full length of joints. Cover floor with 3/4-inch fire-retardant plywood.
 3. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
 4. Protect air-handling equipment.
- H. Temporary Fire Protection: Until fire-protection needs are supplied by permanent facilities, install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.
1. Provide fire extinguishers, installed on walls on mounting brackets, visible and accessible from space being served, with sign mounted above.
 - a. Field Offices: Class A stored-pressure water-type extinguishers.
 - b. Other Locations: Class ABC dry-chemical extinguishers or a combination of extinguishers of NFPA-recommended classes for exposures.
 - c. Locate fire extinguishers where convenient and effective for their intended purpose; provide not less than one extinguisher on each floor at or near each usable stairwell.
 2. Store combustible materials in containers in fire-safe locations.
 3. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire-protection facilities, stairways, and other access routes for firefighting. Prohibit smoking in hazardous fire-exposure areas.
 4. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition.
 5. Permanent Fire Protection: At earliest feasible date in each area of Project, complete installation of permanent fire-protection facility, including connected services, and place into operation and use. Instruct key personnel on use of facilities.
 6. Develop and supervise an overall fire-prevention and first-aid fire-protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
 7. Provide hoses for fire protection of sufficient length to reach construction areas. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.5 OPERATION, TERMINATION, AND REMOVAL

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage caused by freezing temperatures and similar elements.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
 - 2. Prevent water-filled piping from freezing. Maintain markers for underground lines. Protect from damage during excavation operations.
- C. Temporary Facility Changeover: Except for using permanent fire protection as soon as available, do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
- D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
 - 1. Materials and facilities that constitute temporary facilities are the property of Contractor. Owner reserves right to take possession of Project identification signs.
 - 2. Remove temporary paving not intended for or acceptable for integration into permanent paving. Where area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at temporary entrances, as required by authorities having jurisdiction.
 - 3. At Substantial Completion, clean and renovate permanent facilities used during construction period. Comply with final cleaning requirements in Division 1 Section "Closeout Procedures."

END OF SECTION 01500

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01731 - CUTTING AND PATCHING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes procedural requirements for cutting and patching.
- B. Related Sections include the following:
 - 1. Division 1 Section "Selective Demolition" for demolition of selected portions of the building for alterations.
 - 2. Divisions 2 through 26 Sections for specific requirements and limitations applicable to cutting and patching individual parts of the Work.
 - a. Requirements in this Section apply to mechanical and electrical installations. Refer to Divisions 22, 23 and 26 Sections for other requirements and limitations applicable to cutting and patching mechanical and electrical installations.

1.3 DEFINITIONS

- A. Cutting: Removal of existing construction necessary to permit installation or performance of other Work.
- B. Patching: Fitting and repair work required to restore surfaces to original conditions after installation of other Work.

1.4 SUBMITTALS

- A. Cutting and Patching Proposal: Submit a proposal describing procedures at least 10 days before the time cutting and patching will be performed, requesting approval to proceed. Include the following information:
 - 1. Extent: Describe cutting and patching, show how they will be performed, and indicate why they cannot be avoided.
 - 2. Changes to Existing Construction: Describe anticipated results. Include changes to structural elements and operating components as well as changes in building's appearance and other significant visual elements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. Products: List products to be used and firms or entities that will perform the Work.
4. Dates: Indicate when cutting and patching will be performed.
5. Utilities: List utilities that cutting and patching procedures will disturb or affect. List utilities that will be relocated and those that will be temporarily out of service. Indicate how long service will be disrupted.
6. Structural Elements: Where cutting and patching involve adding reinforcement to structural elements, submit details and engineering calculations showing integration of reinforcement with original structure.
7. Architect's Approval: Obtain approval of cutting and patching proposal before cutting and patching. Approval does not waive right to later require removal and replacement of unsatisfactory work.

1.5 QUALITY ASSURANCE

- A. Structural Elements: Do not cut and patch structural elements in a manner that could change their load-carrying capacity or load-deflection ratio.
 1. **Cutting & patching of floor & roof decks require Architect's approval of a cutting and patching proposal.**
- B. Operational Elements: Do not cut and patch the following operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.
 1. Primary operational systems and equipment.
 2. Air or smoke barriers.
 3. Fire-protection systems.
 4. Control systems.
 5. Communication systems.
 6. Conveying systems.
 7. Electrical wiring systems.
 8. Operating systems of special construction in Division 13 Sections.
- C. Miscellaneous Elements: Do not cut and patch the following elements or related components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety.
 1. Water, moisture, or vapor barriers.
 2. Membranes and flashings.
 3. Exterior curtain-wall construction.
 4. Equipment supports.
 5. Piping, ductwork, vessels, and equipment.
 6. Noise- and vibration-control elements and systems.
 7. Existing roofing systems.
- D. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

in occupied spaces in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

1. If possible, retain original Installer or fabricator to cut and patch exposed Work listed below. If it is impossible to engage original Installer or fabricator, engage another recognized, experienced, and specialized firm.
 - a. Processed concrete finishes.
 - b. Ornamental metal.
 - c. Matched-veneer woodwork.
 - d. Preformed metal panels.
 - e. Roofing.
 - f. Firestopping.
 - g. Window wall system.
 - h. Stucco and ornamental plaster.
 - i. Terrazzo.
 - j. Fluid-applied flooring.
 - k. Wall covering.
 - l. HVAC enclosures, cabinets, or covers.

- E. Cutting and Patching Conference: Before proceeding, meet at Project site with parties involved in cutting and patching, including mechanical and electrical trades. Review areas of potential interference and conflict. Coordinate procedures and resolve potential conflicts before proceeding.

1.6 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections of these Specifications.
- B. Existing Materials: Use materials identical to existing materials. For exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible.
 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will match the visual and functional performance of existing materials.

PART 3 - EXECUTION

CUTTING AND PATCHING

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.1 EXAMINATION

- A. Examine surfaces to be cut and patched and conditions under which cutting and patching are to be performed.
 - 1. Compatibility: Before patching, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
 - 2. Proceed with installation only after unsafe or unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Temporary Support: Provide temporary support of Work to be cut.
- B. Protection: Protect existing construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- C. Adjoining Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
- D. Existing Services: Where existing services are required to be removed, relocated, or abandoned, bypass such services before cutting to minimize interruption of services to occupied areas.

3.3 PERFORMANCE

- A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 - 1. Cut existing construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Cutting: Cut existing construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
 - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots as small as possible, neatly to size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 - 2. Existing Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 - 3. Concrete: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 - 4. Excavating and Backfilling: Comply with requirements in applicable Division 2 Sections where required by cutting and patching operations.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 6. Proceed with patching after construction operations requiring cutting are complete.
- C. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified in other Sections of these Specifications.
1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate integrity of installation.
 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.
 3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove existing floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - a. Where patching occurs in a painted surface, apply primer and intermediate paint coats over the patch and apply final paint coat over entire unbroken surface containing the patch. Provide additional coats until patch blends with adjacent surfaces.
 4. Ceilings: Patch, repair, or rehang existing ceilings as necessary to provide an even-plane surface of uniform appearance.
 5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition.

END OF SECTION 01731

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01732 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:

1. Demolition and removal of selected portions of a building or structure.
2. Demolition and removal of selected site elements.
3. Repair procedures for selective demolition operations.

- B. Related Sections include the following:

1. Division 1 Section "Summary" for use of the premises and phasing requirements.
2. Division 1 Section "Work Restrictions" for restrictions on use of the premises due to owner or tenant occupancy.
3. Division 1 Section "Temporary Facilities and Controls" for temporary construction and environmental-protection measures for selective demolition operations.
4. Division 1 Section "Cutting and Patching" for cutting and patching procedures for selective demolition operations.
5. Division 22 & 23 Sections for demolishing, cutting, patching, or relocating plumbing and mechanical items.
6. Division 26 Section for demolishing, cutting, patching, or relocating electrical items.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction and deliver them to owner.
- C. Remove and Reinstall: Detach items from existing construction, prepare them for reuse, and reinstall them where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1.4 MATERIALS OWNERSHIP

- A. Except for items or materials indicated to be reused, salvaged, reinstalled, or otherwise indicated to remain Owner's property, demolished materials shall become Contractor's property and shall be removed from Project site.
- B. Historic items, relics, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, antiques, and other items of interest or value to Owner that may be encountered during selective demolition remain Owner's property. Carefully remove and salvage each item or object in a manner to prevent damage and deliver promptly to Owner.

1.5 PROJECT CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted. Provide not less than 48 hours' notice to Owner of activities that will affect Owner's operations.
- B. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities.
 - 1. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from authorities having jurisdiction.
- C. Owner assumes no responsibility for condition of areas to be selectively demolished.
 - 1. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
 - 2. Before selective demolition, Owner will remove the following items:
 - a. All loose furniture and vending machines.
- D. Hazardous Materials: Hazardous materials are not expected to be encountered in the Work. Hazardous materials if found will be removed by Contractor before start of demolition work in the affected areas.
- E. Storage or sale of removed items or materials on-site will not be permitted.
- F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
 - 1. Maintain fire-protection facilities in service during selective demolition operations.

1.6 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials so as not to void existing warranties.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. If possible, retain original Installer or fabricator to patch the exposed Work listed below that is damaged during selective demolition. If it is impossible to engage original Installer or fabricator, engage another recognized experienced and specialized firm.
 - a. Roofing.
 - b. Stucco and ornamental plaster.
 - c. Terrazzo.

PART 2 - PRODUCTS

2.1 REPAIR MATERIALS

- A. Use repair materials identical to existing materials.
 1. If identical materials are unavailable or cannot be used for exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible.
 2. Use materials whose installed performance equals or surpasses that of existing materials.
- B. Comply with material and installation requirements specified in individual Specification Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped.
- B. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required.
- C. Inventory and record the condition of items to be removed and reinstalled and items to be removed and salvaged.
- D. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to Architect.
- E. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.

3.2 UTILITY SERVICES

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- A. Existing Utilities: Maintain services indicated to remain and protect them against damage during selective demolition operations.
- B. Do not interrupt existing utilities serving occupied or operating facilities unless authorized in writing by Owner and authorities having jurisdiction. Provide temporary services during interruptions to existing utilities, as acceptable to Owner and to authorities having jurisdiction.
 - 1. Provide at least 48 hours' notice to Owner if shutdown of service is required during changeover.
- C. Utility Requirements: Locate, identify, disconnect, and seal or cap off indicated utilities serving areas to be selectively demolished.
 - 1. The Building Manager will arrange to shut off indicated utilities when requested by Contractor.
 - 2. Arrange to shut off indicated utilities with utility companies.
 - 3. If utility services are required to be removed, relocated, or abandoned, before proceeding with selective demolition provide temporary utilities that bypass area of selective demolition and that maintain continuity of service to other parts of building.
 - 4. Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing.
- D. Utility Requirements: Refer to Division 22, 23 and 26 Sections for shutting off, disconnecting, removing, and sealing or capping utilities. Do not start selective demolition work until utility disconnecting and sealing have been completed and verified in writing.

3.3 PREPARATION

- A. Dangerous Materials: Drain, purge, or otherwise remove, collect, and dispose of chemicals, gases, explosives, acids, flammables, or other dangerous materials before proceeding with selective demolition operations.
- B. Pest Control: Employ a certified, licensed exterminator to treat building and to control rodents and vermin before and during selective demolition operations.
- C. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 - 1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by governing regulations.
 - 2. Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction.
 - 3. Protect existing site improvements, appurtenances, and landscaping to remain.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Temporary Facilities: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 - 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 - 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
- E. Temporary Enclosures: Provide temporary enclosures for protection of existing building and construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
 - 1. Where heating or cooling is needed and permanent enclosure is not complete, provide insulated temporary enclosures. Coordinate enclosure with ventilating and material drying or curing requirements to avoid dangerous conditions and effects.
- F. Temporary Partitions: Erect and maintain dustproof partitions and temporary enclosures to limit dust and dirt migration and to separate areas from fumes and noise.

3.4 POLLUTION CONTROLS

- A. Dust Control: Use water mist, temporary enclosures, and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations.
 - 1. Do not use water when it may damage existing construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.
 - 2. Wet mop floors to eliminate trackable dirt and wipe down walls and doors of demolition enclosure. Vacuum carpeted areas.
- B. Disposal: Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- C. Cleaning: Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

3.5 SELECTIVE DEMOLITION

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping, to minimize disturbance of adjacent surfaces. Temporarily cover openings to remain.
 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 5. Maintain adequate ventilation when using cutting torches.
 6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 7. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 8. Dispose of demolished items and materials promptly.
 9. Return elements of construction and surfaces that are to remain to condition existing before selective demolition operations began.
- B. Existing Facilities: Comply with building manager's requirements for using and protecting elevators, stairs, walkways, loading docks, building entries, and other building facilities during selective demolition operations.
- C. Removed and Salvaged Items: Comply with the following:
1. Clean salvaged items.
 2. Pack or crate items after cleaning. Identify contents of containers.
 3. Store items in a secure area until delivery to Owner.
 4. Protect items from damage during storage.
 5. Transport items to owner's storage area on-site.
- D. Removed and Reinstalled Items: Comply with the following:
1. Clean and repair items to functional condition adequate for intended reuse. Paint equipment to match new equipment.
 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

- F. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals, using power-driven saw, then remove concrete between saw cuts.
- G. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, then remove masonry between saw cuts.
- H. Roofing: Remove no more existing roofing than can be covered in one day by new roofing. Refer to applicable Division 7 Section for new roofing requirements.
- I. Air-Conditioning Equipment: Remove equipment without releasing refrigerants.

3.6 PATCHING AND REPAIRS

- A. General: Promptly repair damage to adjacent construction caused by selective demolition operations.
- B. Repairs: Where repairs to existing surfaces are required, patch to produce surfaces suitable for new materials.
 - 1. Completely fill holes and depressions in existing masonry walls that are to remain with an approved masonry patching material applied according to manufacturer's written recommendations.
- C. Finishes: Restore exposed finishes of patched areas and extend restoration into adjoining construction in a manner that eliminates evidence of patching and refinishing.
- D. Floors and Walls: Where walls or partitions that are demolished extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish color, texture, and appearance. Remove existing floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - 1. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified in other Sections of these Specifications.
 - 2. Where patching occurs in a painted surface, apply primer and intermediate paint coats over patch and apply final paint coat over entire unbroken surface containing patch. Provide additional coats until patch blends with adjacent surfaces.
 - 3. Where feasible, test and inspect patched areas after completion to demonstrate integrity of installation.
- E. Ceilings: Patch, repair, or rehang existing ceilings as necessary to provide an even-plane surface of uniform appearance.
- F. Patching: Comply with Division 1 Section "Cutting and Patching."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.7 DISPOSAL OF DEMOLISHED MATERIALS

- A. General: Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
- B. Burning: Do not burn demolished materials.
- C. Disposal: Transport demolished materials off Owner's property and legally dispose of them.

END OF SECTION 01732

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 01770 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Provisions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Inspection procedures.
 - 2. Project Record Documents.
 - 3. Operation and maintenance manuals.
 - 4. Warranties.
 - 5. Instruction of Owner's personnel.
 - 6. Final cleaning.
- B. Related Sections include the following:
 - 1. Divisions 2 through 16 Sections for specific closeout and special cleaning requirements for products of those Sections.

1.3 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for determining date of Substantial Completion, complete the following. List items below that are incomplete in request.
 - 1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
 - 2. Advise Owner of pending insurance changeover requirements.
 - 3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 5. Prepare and submit Project Record Documents, operation and maintenance manuals, damage or settlement surveys, property surveys, and similar final record information.
 - 6. Deliver tools, spare parts, extra materials, and similar items to location designated by Owner. Label with manufacturer's name and model number where applicable.
 - 7. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

8. Complete startup testing of systems.
9. Submit test/adjust/balance records.
10. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
11. Advise Owner of changeover in heat and other utilities.
12. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
13. Complete final cleaning requirements, including touchup painting.
14. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.

B. Inspection: Submit a written request for inspection for Substantial Completion. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Re-inspection: Request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.

1.4 FINAL COMPLETION

A. Preliminary Procedures: Before requesting final inspection for determining date of Final Completion, complete the following:

1. Submit a final Application for Payment according to General Provisions "Payment Procedures."
2. Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. The certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
3. Submit evidence of final, continuing insurance coverage complying with insurance requirements.
4. Submit pest-control final inspection report and warranty.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.

B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Re-inspection: Request re-inspection when the Work identified in previous inspections as incomplete is complete or corrected.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1.5 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

- A. Preparation: Submit one copy of list. Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
1. Organize list of spaces in sequential order, starting with exterior areas first and proceeding from lowest room # to highest room #.
 2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
 3. Include the following information at the top of each page:
 - a. Project name.
 - b. Date.
 - c. Name of Architect.
 - d. Name of Contractor.
 - e. Page number.

1.6 PROJECT RECORD DOCUMENTS

- A. General: Do not use Project Record Documents for construction purposes. Protect Project Record Documents from deterioration and loss. Provide access to Project Record Documents for Architect's reference during normal working hours.
- B. Record Drawings: Maintain and submit one set of blue- or black-line white prints of Contract Drawings and Shop Drawings.
1. Mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that cannot be readily identified and recorded later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
 - d. Mark Contract Drawings or Shop Drawings, whichever is most capable of showing actual physical conditions, completely and accurately. Where Shop Drawings are marked, show cross-reference on Contract Drawings.
 2. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at the same location.
 3. Mark important additional information that was either shown schematically or omitted from original Drawings.
 4. Note Construction Change Directive numbers, Change Order numbers, alternate numbers, and similar identification where applicable.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

5. Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location. Organize into manageable sets; bind each set with durable paper cover sheets. Include identification on cover sheets.
- C. Record Specifications: Submit one copy of Project's Specifications, including addenda and contract modifications. Mark copy to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 3. Note related Change Orders, Record Drawings, and Product Data, where applicable.
- D. Record Product Data: Submit one copy of each Product Data submittal. Mark one set to indicate the actual product installation where installation varies substantially from that indicated in Product Data.
 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 3. Note related Change Orders, Record Drawings, and Record Specifications, where applicable.
- E. Miscellaneous Record Submittals: Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

1.7 OPERATION AND MAINTENANCE MANUALS

- A. Assemble a complete set of operation and maintenance data indicating the operation and maintenance of each system, subsystem, and piece of equipment not part of a system. Include operation and maintenance data required in individual Specification Sections and as follows:
 1. Operation Data:
 - a. Emergency instructions and procedures.
 - b. System, subsystem, and equipment descriptions, including operating standards.
 - c. Operating procedures, including startup, shutdown, seasonal, and weekend operations.
 - d. Description of controls and sequence of operations.
 - e. Piping diagrams.
 2. Maintenance Data:
 - a. Manufacturer's information, including list of spare parts.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

- b. Name, address, and telephone number of Installer or supplier.
 - c. Maintenance procedures.
 - d. Maintenance and service schedules for preventive and routine maintenance.
 - e. Maintenance record forms.
 - f. Sources of spare parts and maintenance materials.
 - g. Copies of maintenance service agreements.
 - h. Copies of warranties and bonds.
- B. Organize operation and maintenance manuals into suitable sets of manageable size. Bind and index data in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, with pocket inside the covers to receive folded oversized sheets. Identify each binder on front and spine with the printed title "OPERATION AND MAINTENANCE MANUAL," Project name, and subject matter of contents. Also provide same material organized in electronic pdf format on CDs.

1.8 WARRANTIES

- A. Submittal Time: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated.
- B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.
- C. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
- 1. Bind warranties and bonds in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
 - 4. Provide same material described in item #3 above in electronic pdf format on CDs.
- D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 DEMONSTRATION AND TRAINING

- A. Instruction: Instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
 - 1. Provide instructors experienced in operation and maintenance procedures.
 - 2. Provide instruction at mutually agreed-on times. For equipment that requires seasonal operation, provide similar instruction at the start of each season.
 - 3. Schedule training with Owner, through Architect, with at least seven days' advance notice.
 - 4. Coordinate instructors, including providing notification of dates, times, length of instruction, and course content.
- B. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections. For each training module, develop a learning objective and teaching outline. Include instruction for the following:
 - 1. System design and operational philosophy.
 - 2. Review of documentation.
 - 3. Operations.
 - 4. Adjustments.
 - 5. Troubleshooting.
 - 6. Maintenance.
 - 7. Repair.

3.2 FINAL CLEANING

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and anti-pollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a portion of Project:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
- b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
- c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
- d. Remove tools, construction equipment, machinery, and surplus material from Project site.
- e. Remove snow and ice to provide safe access to building.
- f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
- g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
- h. Sweep concrete floors broom clean in unoccupied spaces.
- i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.
- j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
- k. Remove labels that are not permanent.
- l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
- m. Wipe surfaces of mechanical and electrical equipment, and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
- n. Replace parts subject to unusual operating conditions.
- o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
- p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
- q. Clean ducts, blowers, and coils if units were operated without filters during construction.
- r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
- s. Leave Project clean and ready for occupancy.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests. Prepare a report.
- D. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on Owner's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

END OF SECTION 01770

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes.

- 1.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Design Mixtures: For each concrete mixture.
- C. Steel Reinforcement Shop Drawings: Placing Drawings that detail fabrication, bending, and placement.

1.3 INFORMATIONAL SUBMITTALS

- A. Material certificates.
- B. Material test reports.
- C. Floor surface flatness and levelness measurements indicating compliance with specified tolerances.

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
 - 1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- B. Testing Agency Qualifications: An independent agency qualified according to ASTM C 1077 and ASTM E 329 for testing indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

1.5 FIELD CONDITIONS

- A. Cold-Weather Placement: Comply with ACI 306.1.
 - 1. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- B. Hot-Weather Placement: Comply with ACI 305R.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

- A. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
 - 1. ACI 301
 - 2. ACI 117

2.2 FORM-FACING MATERIALS

- A. Smooth-Formed Finished Concrete: Form-facing panels that provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.
- B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.

2.3 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Plain-Steel Welded-Wire Reinforcement: ASTM A 1064/A 1064M, plain, fabricated from as-drawn steel wire into flat sheets.
- C. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded-wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice."

2.4 CONCRETE MATERIALS

- A. Cementitious Materials:
 - 1. Portland Cement: ASTM C 150, Type I/II.
 - 2. Fly Ash: ASTM C 618, Class F

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

- B. Normal-Weight Aggregates: ASTM C 33, uniformly graded.
 - 1. Maximum Coarse-Aggregate Size: $\frac{3}{4}$ inches (U.N.O.). 1 inch at footings.
 - 2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- C. Lightweight Aggregate: ASTM C 330, 3/4-inch nominal maximum aggregate size.
- D. Air-Entraining Admixture: ASTM C 260/C 260M.
- E. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures and that do not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C 494, Type A.
 - 2. Retarding Admixture: ASTM C 494, Type B.
 - 3. Water-Reducing and Retarding Admixture: ASTM C 494, Type D.
- F. Water: ASTM C 94 and potable.

2.5 VAPOR RETARDERS

- A. Sheet Vapor Retarder: Polyethylene sheet, ASTM D 4397, not less than 10 mils thick.

2.6 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete. Retain curing aids and materials from remaining paragraphs.
- B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. when dry.
- C. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- D. Water: Potable.
- E. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, dissipating.

2.7 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

2.8 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:
 - 1. Fly Ash: 25 percent
- C. Admixtures: Use admixtures according to manufacturer's written instructions.
 - 1. Use water-reducing admixture in concrete, as required, for placement and workability.
 - 2. Use water-reducing and -retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 - 3. Use water-reducing admixture in pumped concrete, concrete required to be watertight, and concrete with a w/c ratio below 0.50.

2.9 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Normal-Weight Concrete:
 - 1. Minimum Compressive Strength: As indicated at 28 days.
 - 2. Maximum W/C Ratio: 0.45.
 - 3. Slump Limit: 5 inches at point of delivery for concrete with verified slump of 2 to 4 inches before adding water-reducing admixture.
 - 4. Air Content: 3.5 percent, plus or minus 1.5 percent, unless otherwise indicated. Do not allow air content of trowel-finished floors to exceed 3 percent.
 - 5. Air Content: 5 percent, plus or minus 1.5 percent at point of delivery for building concrete pedestals.
- B. Suspended Slabs: Lightweight concrete.
 - 1. Minimum Compressive Strength: 4000 psi at 28 days.
 - 2. Calculated Equilibrium Unit Weight: 120 lb/cu. ft., plus or minus 5 lb/cu. ft. as determined by ASTM C 567.
 - 3. Slump Limit: 4 inches, plus or minus 1 inch at point of delivery.
 - 4. Air Content: 3.5 percent, plus or minus 1.5 percent, unless otherwise indicated. Do not allow air content of trowel-finished floors to exceed 3 percent.

2.10 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

2.11 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94 and ASTM C 1116, and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F , reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMWORK INSTALLATION

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117 .
- C. Chamfer exterior corners and edges of permanently exposed concrete.

3.2 EMBEDDED ITEM INSTALLATION

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

3.3 VAPOR-RETARDER INSTALLATION

- A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.

3.4 STEEL REINFORCEMENT INSTALLATION

- A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating, placing, and supporting reinforcement.
 - 1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.5 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness or 1.25 inch minimum as follows:
 - 1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
 - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 3/16 inch wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks (4 to 12 hours after concrete placement).
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated unless noted otherwise.

3.6 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections are completed.
- B. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
 - 1. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.

3.7 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces not exposed to public view.
- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

1. Apply to concrete surfaces exposed to public view.
- C. Rubbed Finish: Apply the following to smooth-formed-finished as-cast concrete where indicated:
1. Smooth-Rubbed Finish: Not later than one day after form removal, moisten concrete surfaces and rub with carborundum brick or another abrasive until producing a uniform color and texture. Do not apply cement grout other than that created by the rubbing process.
 2. Grout-Cleaned Finish: Wet concrete surfaces and apply grout of a consistency of thick paint to coat surfaces and fill small holes. Mix 1 part portland cement to 1-1/2 parts fine sand with a 1:1 mixture of bonding admixture and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Scrub grout into voids and remove excess grout. When grout whitens, rub surface with clean burlap and keep surface damp by fog spray for at least 36 hours.
 3. Cork-Floated Finish: Wet concrete surfaces and apply a stiff grout. Mix 1 part portland cement and 1 part fine sand with a 1:1 mixture of bonding agent and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Compress grout into voids by grinding surface. In a swirling motion, finish surface with a cork float.
- D. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.8 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch in one direction.
1. Apply scratch finish to surfaces indicated.
- C. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power-driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraighening until surface is left with a uniform, smooth, granular texture.
1. Apply float finish to surfaces indicated to receive trowel finish.
- D. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31,2023

1. Apply a trowel finish to surfaces to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system.
 2. Finish and measure surface, so gap at any point between concrete surface and an unlevleled, freestanding, 10-ft.- long straightedge resting on two high spots and placed anywhere on the surface does not exceed 1/8 inch.
- E. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, ramps, and elsewhere as indicated.
1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

3.9 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 305R for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Formed Surfaces: Cure formed concrete surfaces. If removing forms before end of curing period, continue curing for remainder of curing period.
- D. Cure concrete according to ACI 308.1, by one or a combination of the following methods:
 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days.
 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period, using cover material and waterproof tape.
 3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
 - a. Removal: After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound does not interfere with bonding of floor covering used on Project.
 4. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31,2023

instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.10 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.
- B. Patching Mortar: Mix dry-pack patching mortar, consisting of one part portland cement to two and one-half parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.
- C. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
 - 1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
 - 2. After concrete has cured at least 14 days, correct high areas by grinding.
 - 3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
 - 4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.
 - 5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
 - 6. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least 3/4 inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mix as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 - 7. Repair random cracks and single holes 1 inch or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place patching mortar before bonding agent has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.
- E. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.11 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a special inspector and a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to sample materials, perform tests, and submit test reports according to requirements specified in this Article and the Schedule of Structural Special Inspection Services. Testing agency will continuously monitor placement of structural concrete according to the Schedule of Structural Special Inspection Services.
- C. Testing Services: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. or fraction thereof of each concrete mix placed each day.
 - a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mix, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 - 2. Slump: ASTM C 143; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mix. Perform additional tests when concrete consistency appears to change.
 - 3. Air Content: ASTM C 231, pressure method, for normal-weight concrete; ASTM C 173, volumetric method, for structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mix.
 - 4. Concrete Temperature: ASTM C 1064; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each composite sample.
 - 5. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mix.
 - 6. Compression Test Specimens: ASTM C 31/C 31M; cast and laboratory cure one set of four standard cylinder specimens for each composite sample.
 - 7. Compressive-Strength Tests: ASTM C 39; test two laboratory-cured specimens at 7 days and two at 28 days.
 - a. A compressive-strength test shall be the average compressive strength from two specimens obtained from same composite sample and tested at age indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

AP#2207

Gordon Johnson Architecture

July 31,2023

- D. Strength of each concrete mix will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
- E. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mix proportions and materials, compressive breaking strength, and type of break for both 7-and 28-day tests.
- F. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
- G. Additional Tests: Testing agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42 or by other methods as directed by Architect.
- H. Special Inspections: Special Inspector is to obtain Testing Agency testing reports. Verify completion of testing and compliance with the Contract Documents. Special Inspector is to verify and/or inspect construction in accordance with the Schedule of Structural Special Inspection Services.
- I. General Contractor is to correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.

END OF SECTION 033000

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 033503 – WATER VAPOR EMISSION CONTROL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes concrete sealers for the remediation of excessive moisture in concrete slabs.

1.3 SYSTEM DESCRIPTION

- A. Provide liquid penetrant concrete sealer and cementitious underlayment to mechanically and chemically reduce water vapor emission and alkalinity from concrete slab to levels acceptable to manufacturer of finish floor covering and adhesive. Work includes preconstruction testing, preparation of slab, application of sealant, and field quality control.

1.4 PERFORMANCE REQUIREMENTS

- A. Provide concrete sealer to remediate excessive moisture in floor slab so that moisture-vapor-emission will not exceed 3 lb of water/1000 sq. ft. in 24 hours.
- B. Material Compatibility: Provide vapor emission control system materials that are compatible with one another and finish flooring adhesives under conditions of service and application required, as demonstrated by system manufacturer based on testing and long-term field experience.

1.5 SUBMITTALS

- A. Product Data: For each type of product indicated. Include material descriptions, chemical composition, physical properties, test data, and mixing, preparation, and application instructions.
- B. Qualification Data for Installer and Testing Agency.
- C. Field Quality Control Test Reports.
- D. Special Warranties.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Installer that employs workers trained and approved by manufacturer to apply sealers.
- B. Testing Agency Qualifications: An independent testing agency, acceptable to manufacturer, with the experience and capability to conduct the testing indicated, as documented according to ASTM E 548.
- C. Manufacturer Qualifications:
 - 1. Minimum 5 years of producing moisture vapor control emission products.
 - 2. Minimum 5 years of product application experience.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

3. Employs factory-trained representatives who are available for consultation and Project-site inspection.
4. Warranty program covering costs associated with repair or replacement of concrete vapor emission control system and finish floor covering or coating, including repair or replacement labor.
5. Warranty program covering costs for both system materials and system installation for prescribed vapor emission control system treatment.
- D. Source Limitations: Obtain concrete sealers through one source from a single manufacturer. Product shall be acceptable to manufacturer of finish flooring and adhesive.
- E. Inform manufacturer's technical representative of all concrete additives used in the concrete mix or preparation of the slab.
- F. Test area: Shot blast a test area, as designated by Architect, to evaluate the surface condition and verify that treated area will be acceptable to installer of finish flooring.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in manufacturer's original and unopened containers, labeled with type and name of products and manufacturers.
- B. Comply with manufacturer's written instructions for minimum and maximum temperature requirements and other conditions for storage.

1.8 PROJECT CONDITIONS

- A. Environmental Limitations for Sealers: Comply with manufacturer's recommendations for ambient temperature, humidity and condition of slab.
- B. Allow for continuous ventilation and indirect air movement at all times during application and curing process of the water vapor reduction system.

1.9 WARRANTY

- A. The manufacturer warrants that when applied according to manufacturer's written recommendations on properly prepared concrete slab as accepted by manufacturer's technical representative the water vapor reduction system will reduce water vapor emissions by 80 percent as indicated by testing by independent testing agency.
 1. Warranty shall not exclude non-conformance to ACI 318, foreign salts, admixtures, resin and silicate surface treatments or cohesive failure in the concrete surface due to normal concrete movement.
- B. Special Warranty: Manufacturer's standard form in which manufacturer warrants water vapor reduction system against defects in material and workmanship within the specified warranty period. Manufacturer agrees to replace floor coverings that fail within specified warranty period due to excessive water vapor emissions through concrete slab. Failures include, but are not limited to, the following:
 1. Adhesives.
 2. Delamination or adhesive failure of floor covering systems, including epoxy and polyurethane resinous flooring systems.
- C. Warranty Period: 10 years from date of Substantial Completion.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 2 - PRODUCTS

2.1 CONCRETE SEALERS

- A. Sealer: Penetrating sealer recommended by manufacturer for application to interior concrete traffic surfaces for the reduction of excess water vapor emissions from concrete slabs.
- B. Products: Subject to compliance with requirements, provide one of the following:
 - 1. Koester American Corporation. www.koesterusa.com.
 - a. VAP 1-2000 for application to green concrete.
 - b. VAP 1 pH for application to cured concrete
 - 2. Terasco
 - 3. Aquafin
- C. Topcoat: Sealing or finish coats.
 - 1. Resin: Epoxy or urethane.
 - 2. Type: Clear.
 - 3. Finish: Matte.
 - 4. Number of Coats: Two.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer and manufacturer's technical representative present, for compliance with requirements for condition of the concrete slab and other conditions affecting performance of water vapor reduction system.
 - 1. Manufacturer's technical representative shall identify number and location of test sites.
 - 2. Perform testing on freshly abraded concrete.
- B. Testing and Inspecting: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
- C. Moisture Testing: Anhydrous calcium chloride test, ASTM F 1869.
 - 1. Maintain temperature and humidity levels expected during normal occupancy or 65 to 85 degrees F and 40 to 60 percent relative humidity for 48 hours before performing test.
- D. Testing for alkalinity and contaminant: Perform tests recommended by manufacturer's technical representative.
- E. Submit results to Architect and manufacturer's technical representative.

3.2 PREPARATION

- A. Shot blast concrete slabs and remove all residue and loose material from slab.
- B. Repair defects, cracks, and open surface honeycombs.
- C. Clean concrete as recommended by manufacturer to remove dirt, oils, films, and other materials detrimental to sealer application.
- D. Remove reinforcing fibers from surface.
- E. Protect adjacent construction from overspray or splashing of sealer.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

3.3 APPLICATION

- A. General: Comply with manufacturer's written instructions and recommendations for application of products, including surface preparation.
- B. Concrete Sealer: Apply by brush, roller, or airless spray at manufacturer's recommended application rate.
- C. Topcoat: Apply topcoats in number indicated for flooring system and at spreading rates recommended in writing by manufacturer.
- D. Protect sealed concrete slab to prevent damage from active rain or topical water for a period of time recommended by manufacturer.

3.4 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
- B. Moisture Testing: Perform anhydrous calcium chloride test, ASTM F 1869. Report findings to Architect and manufacturer's technical representative.
- C. Reapply sealer, if required, to meet performance requirements.

END OF SECTION 033503

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 042000 - UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Concrete masonry units.
2. Concrete building brick.

1.2 DEFINITIONS

- A. CMU(s): Concrete masonry unit(s).
- B. Reinforced Masonry: Masonry containing reinforcing steel in grouted cells.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For reinforcing steel. Detail bending, lap lengths, and placement of unit masonry reinforcing bars. Comply with ACI 315.

1.4 INFORMATIONAL SUBMITTALS

- A. Material Certificates: For each type and size of product. For masonry units, include data on material properties.
- B. Mix Designs: For each type of mortar and grout. Include description of type and proportions of ingredients.
 1. Include test reports for mortar mixes required to comply with property specification. Test according to ASTM C 109/C 109M for compressive strength, ASTM C 1506 for water retention, and ASTM C 91/C 91M for air content.
 2. Include test reports, according to ASTM C 1019, for grout mixes required to comply with compressive strength requirement.

1.5 FIELD CONDITIONS

- A. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace unit masonry damaged by frost

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

or by freezing conditions. Comply with cold-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.

- B. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.

PART 2 - PRODUCTS

2.1 UNIT MASONRY, GENERAL

- A. Masonry Standard: Comply with TMS 602/ACI 530.1/ASCE 6, except as modified by requirements in the Contract Documents.
- B. Defective Units: Referenced masonry unit standards may allow a certain percentage of units to contain chips, cracks, or other defects exceeding limits stated. Do not use units where such defects are exposed in the completed Work.
- C. Fire-Resistance Ratings: Comply with requirements for fire-resistance-rated assembly designs indicated.
 - 1. Where fire-resistance-rated construction is indicated, units shall be listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction.

2.2 CONCRETE MASONRY UNITS

- A. Shapes: Provide shapes indicated and as follows, with exposed surfaces matching exposed faces of adjacent units unless otherwise indicated.
 - 1. Provide special shapes for lintels, corners, jambs, sashes, movement joints, headers, bonding, and other special conditions.
- B. CMUs: ASTM C 90.
 - 1. Unit Compressive Strength: Provide units with minimum average net-area compressive strength of 1900 psi.
 - 2. Density Classification: Lightweight
- C. Concrete Building Brick: ASTM C 55.
 - 1. Unit Compressive Strength: Provide units with minimum average net-area compressive strength of 2800 psi.
 - 2. Density Classification: Lightweight.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.3 MORTAR AND GROUT MATERIALS

- A. Portland Cement: ASTM C 150/C 150M, Type I or II, except Type III may be used for cold-weather construction.
- B. Hydrated Lime: ASTM C 207, Type S.
- C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.
- D. Aggregate for Mortar: ASTM C 144.
 - 1. For joints less than 1/4 inch thick, use aggregate graded with 100 percent passing the No. 16 sieve.
 - 2. White-Mortar Aggregates: Natural white sand or crushed white stone.
 - 3. Colored-Mortar Aggregates: Natural sand or crushed stone of color necessary to produce required mortar color.
- E. Aggregate for Grout: ASTM C 404, coarse.
- F. Epoxy Pointing Mortar: ASTM C 395, epoxy-resin-based material formulated for use as pointing mortar for glazed or pre-faced masonry units (and approved for such use by manufacturer of units); in color indicated or, if not otherwise indicated, as selected by Architect from manufacturer's colors.
- G. Cold-Weather Admixture: Nonchloride, noncorrosive, accelerating admixture complying with ASTM C 494/C 494M, Type C, and recommended by manufacturer for use in masonry mortar of composition indicated.
- H. Water-Repellent Admixture: Liquid water-repellent mortar admixture intended for use with CMUs containing integral water repellent from same manufacturer.
- I. Water: Potable.

2.4 REINFORCEMENT

- A. Uncoated-Steel Reinforcing Bars: ASTM A 615/A 615M or ASTM A706/A706M where welding of rebar is required, Grade 60.
- B. Masonry-Joint Reinforcement, General: ASTM A 951/A 951M.
 - 1. Interior Walls: Hot-dip galvanized carbon steel.
 - 2. Exterior Walls: Hot-dip galvanized carbon steel.
 - 3. Wire Size for Side Rods: 0.187-inch diameter.
 - 4. Wire Size for Cross Rods: 0.148-inch diameter.
 - 5. Wire Size for Veneer Ties: 0.187-inch diameter.
 - 6. Spacing of Cross Rods, Tabs, and Cross Ties: Not more than 16 inches o.c.
 - 7. Provide in lengths of not less than 10 feet, with prefabricated corner and tee units.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- C. Masonry-Joint Reinforcement for Single-Wythe Masonry: Ladder type with side rods and cross ties.
- D. Masonry-Joint Reinforcement for Multiwythe Masonry:
 - 1. Ladder type with one side rod at each face shell of hollow masonry units more than 4 inches wide, plus one side rod at each wythe of masonry 4 inches wide or less.
 - 2. Tab type, ladder design, with one side rod at each face shell of backing wythe and with rectangular tabs sized to extend at least halfway through facing wythe, but with at least 5/8-inch cover on outside face.
 - 3. Adjustable (two-piece) type, ladder design, with one side rod at each face shell of backing wythe and with separate adjustable ties with pintle-and-eye connections having a maximum horizontal play of 1/16 inch and maximum vertical adjustment of 1-1/4 inches. Size ties to extend at least halfway through facing wythe but with at least 5/8-inch cover on outside face.

TIES AND ANCHORS

- E. General: Ties and anchors shall extend at least 1-1/2 inches into veneer but with at least a 5/8-inch cover on outside face.
- F. Materials: Provide ties and anchors specified in this article that are made from materials that comply with the following unless otherwise indicated:
 - 1. Hot-Dip Galvanized, Carbon-Steel Wire: ASTM A 82/A 82M, with ASTM A 153/A 153M, Class B-2 coating.
 - 2. Steel Sheet, Galvanized after Fabrication: ASTM A 1008/A 1008M, Commercial Steel, with ASTM A 153/A 153M, Class B coating.
 - 3. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.
- G. Individual Wire Ties: Rectangular units with closed ends and not less than 4 inches wide.
 - 1. Wire: Fabricate from 3/16-inch diameter, hot-dip galvanized-steel wire.
- H. Adjustable Anchors for Connecting to Structural Steel Framing: Provide anchors that allow vertical or horizontal adjustment but resist tension and compression forces perpendicular to plane of wall.
 - 1. Anchor Section for Welding to Steel Frame: Crimped 1/4-inch diameter, hot-dip galvanized-steel wire.
 - 2. Tie Section: Triangular-shaped wire tie made from 0.187-inch diameter, hot-dip galvanized-steel wire.
- I. Adjustable Anchors for Connecting to Concrete: Provide anchors that allow vertical or horizontal adjustment but resist tension and compression forces perpendicular to plane of wall.
 - 1. Connector Section: Dovetail tabs for inserting into dovetail slots in concrete and attached to tie section; formed from 0.060-inch thick steel sheet, galvanized after fabrication.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Tie Section: Triangular-shaped wire tie made from 0.187-inch diameter, hot-dip galvanized-steel wire.

2.5 MISCELLANEOUS MASONRY ACCESSORIES

- A. Compressible Filler: Premolded filler strips complying with ASTM D 1056, Grade 2A1; compressible up to 35 percent; of width and thickness indicated; formulated from neoprene.
- B. Preformed Control-Joint Gaskets: Made from styrene-butadiene-rubber compound, complying with ASTM D 2000, Designation M2AA-805 and designed to fit standard sash block and to maintain lateral stability in masonry wall; size and configuration as indicated.
- C. Bond-Breaker Strips: Asphalt-saturated felt complying with ASTM D 226/D 226M, Type I (No. 15 asphalt felt).

2.6 MORTAR AND GROUT MIXES

- A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.
 1. Do not use calcium chloride in mortar or grout.
 2. Use portland cement-lime mortar.
 3. Add cold-weather admixture (if used) at same rate for all mortar that will be exposed to view, regardless of weather conditions, to ensure that mortar color is consistent.
- B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.
- C. Mortar for Unit Masonry: Comply with ASTM C 270, Property Specification. Provide the following types of mortar for applications stated unless another type is indicated.
 1. For masonry below grade or in contact with earth, use Type M.
 2. For reinforced masonry, use Type S.
 3. For mortar parge coats, use Type S.
- D. Grout for Unit Masonry: Comply with ASTM C 476.
 1. Use coarse grout that will comply with TMS 602/ACI 530.1/ASCE 6 for dimensions of grout spaces and pour height.
 2. Proportion grout in accordance with ASTM C 476 for 3000 psi 28-day compressive strength.
 3. Provide grout with a slump of 8 to 11 inches as measured according to ASTM C 143/C 143M.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Use full-size units without cutting if possible. If cutting is required to provide a continuous pattern or to fit adjoining construction, cut units with motor-driven saws; provide clean, sharp, unchipped edges. Allow units to dry before laying unless wetting of units is specified. Install cut units with cut surfaces and, where possible, cut edges concealed.
- B. Select and arrange units for exposed unit masonry to produce a uniform blend of colors and textures. Mix units from several pallets or cubes as they are placed.

3.2 TOLERANCES

A. Dimensions and Locations of Elements:

- 1. For dimensions in cross section or elevation, do not vary by more than plus 1/2 inch or minus 1/4 inch.
- 2. For location of elements in plan, do not vary from that indicated by more than plus or minus 1/2 inch.
- 3. For location of elements in elevation, do not vary from that indicated by more than plus or minus 1/4 inch in a story height or 1/2 inch total.

B. Lines and Levels:

- 1. For bed joints and top surfaces of bearing walls, do not vary from level by more than 1/4 inch in 10 feet, or 1/2-inch maximum.
- 2. For conspicuous horizontal lines, such as lintels, sills, parapets, and reveals, do not vary from level by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2-inch maximum.
- 3. For vertical lines and surfaces, do not vary from plumb by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2-inch maximum.
- 4. For conspicuous vertical lines, such as external corners, door jambs, reveals, and expansion and control joints, do not vary from plumb by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2-inch maximum.
- 5. For lines and surfaces, do not vary from straight by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2-inch maximum.

C. Joints:

- 1. For bed joints, do not vary from thickness indicated by more than plus or minus 1/8 inch, with a maximum thickness limited to 1/2 inch.
- 2. For head and collar joints, do not vary from thickness indicated by more than plus 3/8 inch or minus 1/4 inch.
- 3. For exposed head joints, do not vary from thickness indicated by more than plus or minus 1/8 inch.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.3 LAYING MASONRY WALLS

- A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint thicknesses and for accurate location of openings, movement-type joints, returns, and offsets. Avoid using less-than-half-size units, particularly at corners, jambs, and, where possible, at other locations.
- B. Bond Pattern for Exposed Masonry: Unless otherwise indicated, lay exposed masonry in running bond; do not use units with less-than-nominal 4-inch horizontal face dimensions at corners or jambs.
- C. Built-in Work: As construction progresses, build in items specified in this and other Sections. Fill in solidly with masonry around built-in items.
- D. Fill space between steel frames and masonry solidly with mortar unless otherwise indicated.
- E. Grout all cells with reinforcing solid. Grout all cells solid below grade.

3.4 MORTAR BEDDING AND JOINTING

- A. Lay CMUs as follows:
 - 1. Bed face shells in mortar and make head joints of depth equal to bed joints.
 - 2. Bed webs in mortar in all courses of piers, columns, and pilasters.
 - 3. Bed webs in mortar in grouted masonry, including starting course on footings.
 - 4. Fully bed entire units, including areas under cells, at starting course on footings where cells are not grouted.
- B. Lay solid masonry units with completely filled bed and head joints; butter ends with sufficient mortar to fill head joints and shove into place. Do not deeply furrow bed joints or slush head joints.
- C. Tool exposed joints slightly concave when thumbprint hard, using a jointer larger than joint thickness unless otherwise indicated.
- D. Cut joints flush for masonry walls to receive plaster or other direct-applied finishes (other than paint) unless otherwise indicated.

3.5 MASONRY-JOINT REINFORCEMENT

- A. General: Install entire length of longitudinal side rods in mortar with a minimum cover of 5/8 inch on exterior side of walls, 1/2 inch elsewhere. Lap reinforcement a minimum of 6 inches .
 - 1. Space reinforcement not more than 16 inches o.c.
 - 2. Space reinforcement not more than 8 inches o.c. in foundation walls.
 - 3. Provide reinforcement not more than 8 inches above and below wall openings and extending 12 inches beyond openings in addition to continuous reinforcement.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Interrupt joint reinforcement at control and expansion joints unless otherwise indicated. Continue all bond beam reinforcing thru control joints.
- C. Provide continuity at wall intersections by using prefabricated T-shaped units.
- D. Provide continuity at corners by using prefabricated L-shaped units.

3.6 ANCHORING MASONRY TO STRUCTURAL STEEL AND CONCRETE

- A. Anchor masonry to structural steel and concrete, where masonry abuts or faces structural steel or concrete, to comply with the following:
 - 1. Provide an open space not less than 1/2 inch wide between masonry and structural steel or concrete unless otherwise indicated. Keep open space free of mortar and other rigid materials.
 - 2. Anchor masonry with anchors embedded in masonry joints and attached to structure.
 - 3. Space anchors as indicated, but not more than 24 inches o.c. vertically and 36 inches o.c. horizontally.

3.7 REINFORCED UNIT MASONRY INSTALLATION

- A. Temporary Formwork and Shores: Construct formwork and shores as needed to support reinforced masonry elements during construction.
 - 1. Construct formwork to provide shape, line, and dimensions of completed masonry as indicated. Make forms sufficiently tight to prevent leakage of mortar and grout. Brace, tie, and support forms to maintain position and shape during construction and curing of reinforced masonry.
 - 2. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and that of other loads that may be placed on them during construction.
- B. Placing Reinforcement: Comply with requirements in TMS 602/ACI 530.1/ASCE 6.
- C. Grouting: Do not place grout until entire height of masonry to be grouted has attained enough strength to resist grout pressure.
 - 1. Comply with requirements in TMS 602/ACI 530.1/ASCE 6 for cleanouts and for grout placement, including minimum grout space and maximum pour height.
 - 2. Limit height of vertical grout pours to not more than 4.67 ft.

3.8 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage special inspectors to perform tests and inspections and prepare reports. Allow inspectors access to scaffolding and work areas as needed to perform

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

tests and inspections. Retesting of materials that fail to comply with specified requirements shall be done at Contractor's expense.

- B. Inspections: Special inspections according to Schedule of Structural Special Inspection Services.
 - 1. Begin masonry construction only after inspectors have verified proportions of site-prepared mortar.
 - 2. Place grout only after inspectors have verified compliance of grout spaces and of grades, sizes, and locations of reinforcement.
 - 3. Place grout only after inspectors have verified proportions of site-prepared grout.
- C. Testing Frequency: One set of tests for each 5000 sq. ft. of wall area or portion thereof.
- D. Clay Masonry Unit Test: For each type of unit provided, according to ASTM C 67 for compressive strength.
- E. Grout Test (Compressive Strength): For each mix provided, according to ASTM C 1019.

3.9 REPAIRING, POINTING, AND CLEANING

- A. In-Progress Cleaning: Clean unit masonry as work progresses by dry brushing to remove mortar fins and smears before tooling joints.
- B. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:
 - 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.

3.10 MASONRY WASTE DISPOSAL

- A. Waste Disposal as Fill Material: Dispose of clean masonry waste, including excess or soil-contaminated sand, waste mortar, and broken masonry units, by crushing and mixing with fill material as fill is placed.
 - 1. Do not dispose of masonry waste as fill within 18 inches of finished grade.
- B. Masonry Waste Recycling: Return broken CMUs not used as fill to manufacturer for recycling.
- C. Excess Masonry Waste: Remove excess clean masonry waste that cannot be used as fill, as described above or recycled, and other masonry waste, and legally dispose of off Owner's property.

END OF SECTION 042000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 051200 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel.
2. Grout.

1.2 DEFINITIONS

- ##### **A. Structural Steel:** Elements of the structural frame indicated on Drawings and as described in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

1.3 PREINSTALLATION MEETINGS

- ##### **A. Preinstallation Conference:** Conduct conference at Project site.

1.4 ACTION SUBMITTALS

- ##### **A. Product Data:** For each type of product.
- ##### **B. Shop Drawings:** Show fabrication of structural-steel components.

1.5 INFORMATIONAL SUBMITTALS

- ##### **A. Qualification Data:** For Installer and Fabricator.
- ##### **B. Welding certificates.**
- ##### **C. Mill test reports** for structural steel, including chemical and physical properties.
- ##### **D. Source quality-control reports.**
- ##### **E. Field quality-control and special inspection reports.**

1.6 QUALITY ASSURANCE

- ##### **A. Fabricator Qualifications:** A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category BU.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Installer Qualifications: A qualified installer who participates in the AISC Quality Certification Program and is designated an AISC-Certified Erector, Category CSE.
- C. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- D. Comply with applicable provisions of the following specifications and documents:
 - 1. AISC 303.
 - 2. AISC 360.
 - 3. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Connections: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator to withstand loads indicated and comply with other information and restrictions indicated.
 - 1. Select and complete connections using schematic details indicated and AISC 360.
 - 2. Use Allowable Stress Design; data are given at service-load level.

2.2 STRUCTURAL-STEEL MATERIALS

- A. W-Shapes: ASTM A 992.
- B. Channels and Angles: ASTM A 36.
- C. Plate and Bar: ASTM A 36.
- D. Cold-Formed Hollow Structural Sections (Rectangular): ASTM A 500, Grade C, $F_y=50$ ksi.
- E. Steel Pipe: ASTM A 53, Type E or Type S, Grade B $F_y=35$ ksi.
- F. Welding Electrodes: Comply with AWS requirements.

2.3 BOLTS, CONNECTORS, AND ANCHORS

- A. High-Strength Bolts, Nuts, and Washers: ASTM F-3125, Gr. A 325N, heavy-hex steel structural bolts; ASTM A 563, Grade C, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers; all with plain finish.
- B. Shear Connectors: ASTM A 29, Type A ($F_y=49$ ksi, $F_u=61$ ksi), headed-stud type.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- C. Unheaded Anchor Rods: ASTM F 1554, Grade 36.
 - 1. Configuration: Straight.
 - 2. Finish: Hot-dip zinc coating, ASTM A 153, Class C.
- D. Headed Rods: ASTM F 1554, Grade 36, straight.
 - 1. Finish: Plain
- E. Threaded Rods: ASTM A 36.
 - 1. Finish: Plain

2.4 PRIMER

- A. Primer: Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer complying with MPI#79 and compatible with topcoat.

2.5 GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107/C 1107M, factory-packaged, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.6 FABRICATION

- A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," and to AISC 360.
- B. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.

2.7 SHOP CONNECTIONS

- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug tightened.
- B. Weld Connections: Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.8 SHOP PRIMING

- A. Shop prime steel surfaces except the following:
 - 1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
 - 2. Surfaces to be field welded.
 - 3. Surfaces of high-strength bolted, slip-critical connections.
 - 4. Galvanized surfaces.
- B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:
 - 1. SSPC-SP 2, "Hand Tool Cleaning."
- C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.

2.9 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/A 123M.
 - 1. Fill vent and drain holes that will be exposed in the finished Work unless they will function as weep holes, by plugging with zinc solder and filing off smooth.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify, with certified steel erector present, elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.3 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to AISC 303 and AISC 360.
- B. Baseplates and Bearing Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.
 - 1. Set plates for structural members on wedges, shims, or setting nuts as required.
 - 2. Weld plate washers to top of baseplate where required.
 - 3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with grout.
 - 4. Promptly pack grout solidly between bearing surfaces and plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.
- C. Maintain erection tolerances of structural steel within AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."
- D. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that will be in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
 - 1. Level and plumb individual members of structure.
 - 2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.
- E. Splice members only where indicated.
- F. Do not use thermal cutting during erection unless approved by Architect. Finish thermally cut sections within smoothness limits in AWS D1.1/D1.1M.
- G. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.
- H. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.

3.4 FIELD CONNECTIONS

- A. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug tightened.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Weld Connections: Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
 - 1. Comply with AISC 303 and AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
 - 2. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," for mill material.

3.5 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a qualified special inspector to perform special inspections in accordance with the Schedule of Structural Special Inspection Services.
- B. General Contractor is to correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.

3.6 REPAIRS AND PROTECTION

- A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and repair galvanizing to comply with ASTM A 780.
- B. Touchup Painting: Immediately after erection, clean exposed areas where primer is damaged or missing and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - 1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.

END OF SECTION 051200

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 053100 - STEEL DECKING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. 1.5 inch roof deck.
2. Composite floor deck.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of deck, accessory, and product indicated.

B. Shop Drawings:

1. Include layout and types of deck panels, anchorage details, reinforcing channels, pans, cut deck openings, special jointing, accessories, and attachments to other construction.

1.3 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Product Certificates: For each type of steel deck.

C. Evaluation reports. Manufacturer certification.

D. Field quality-control reports.

1.4 QUALITY ASSURANCE

A. Manufacturer Qualifications: A manufacturer certified by Steel Deck Institute (SDI) to manufacture roof and composite deck complying with applicable standard specifications.

B. Welding Qualifications: Qualify procedures and personnel according to AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. AISI Specifications: Comply with calculated structural characteristics of steel deck according to AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members."

2.2 ROOF DECK

- A. Manufacturers:
 - 1. New Millennium Building Systems, LLC
 - 2. Epic Metals Corporation
 - 3. Canam Steel Corporation
 - 4. Nucor Corp.
- B. Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 31, and with the following:
 - 1. 1.5 inch deep roof decking is to be Galvanized-Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33 , G60 zinc coating. See plans for locations.
 - 2. Deck Profile: Type B (wide rib).
 - 3. Profile Depth: 1.5.
 - 4. Design Uncoated-Steel Thickness: 0.0358

COMPOSITE FLOOR DECK

- C. Manufacturers:
 - 1. New Millennium Building Systems, LLC
 - 2. Epic Metals Corporation
 - 3. Canam Steel Corporation
 - 4. Nucor Corp.
- D. Composite Floor Deck: Fabricate panels, with integrally embossed or raised pattern ribs and interlocking side laps, to comply with "SDI Specifications and Commentary for Composite Steel Floor Deck," in SDI Publication No. 31, with the minimum section properties indicated, and with the following:
 - 1. Galvanized-Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 40, G60 zinc coating.
 - 2. Profile Depth: 2 inches.
 - 3. Design Uncoated-Steel Thickness: 0.0358 inch

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.3 ACCESSORIES

- A. General: Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.
- B. Mechanical Fasteners: Corrosion-resistant, self-drilling, self-threading screws.
- C. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 minimum diameter.
- D. Flexible Closure Strips: Vulcanized, closed-cell, synthetic rubber.
- E. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi, not less than 0.0359-inch design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.
- F. Flat Sump Plates: Single-piece steel sheet, 0.0747 inch thick, of same material and finish as deck. For drains, cut holes in the field.
- G. Galvanizing Repair Paint: ASTM A 780.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Install deck panels and accessories according to applicable specifications and commentary in SDI Publication No. 31, manufacturer's written instructions, and requirements in this Section.
- B. Place deck panels flat and square and fasten to supporting frame without warp or deflection.
- C. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to deck.
- D. Provide additional reinforcement and closure pieces at openings as required for strength, continuity of deck, and support of other work.
- E. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work.
- F. Roof Sump Pans and Sump Plates: Install over openings provided in roof deck and mechanically fasten flanges to top of deck. Space mechanical fasteners not more than 12 inches apart with at least one fastener at each corner.
- G. Miscellaneous Roof-Deck Accessories: Install miscellaneous plates, finish strips, end closures, and reinforcing channels according to deck manufacturer's written instructions. Weld or mechanically fasten to substrate to provide a complete deck installation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

AP#2207

July 31, 2023

- H. Pour Stops and Girder Fillers: Weld steel sheet pour stops and girder fillers to supporting structure according to SDI recommendations unless otherwise indicated.
- I. Floor-Deck Closures: Weld steel sheet column closures, cell closures, and Z-closures to deck, according to SDI recommendations, to provide tight-fitting closures at open ends of ribs and sides of deck.

3.2 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a qualified special inspector to perform tasks according to the Schedule of Structural Special Inspection Services.

3.3 PROTECTION

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.

END OF SECTION 053100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Miscellaneous steel framing and supports.
2. Miscellaneous steel trim.
Metal bollards.
3. Loose bearing and leveling plates.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Paint products.
2. Grout.

B. Shop Drawings: Show fabrication and installation details. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS

A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

B. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.

C. Stainless-Steel Bars and Shapes: ASTM A 276, Type 304.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Steel Tubing: ASTM A 500/A 500M, cold-formed steel tubing.
- E. Steel Pipe: ASTM A 53/A 53M, Standard Weight (Schedule 40) unless otherwise indicated.
- F. Cast Iron: Either gray iron, ASTM A 48/A 48M, or malleable iron, ASTM A 47/A 47M, unless otherwise indicated.
- G. Aluminum Extrusions: ASTM B 221, Alloy 6063-T6.
- H. Aluminum-Alloy Rolled Tread Plate: ASTM B 632/B 632M, Alloy 6061-T6.
- I. Aluminum Castings: ASTM B 26/B 26M, Alloy 443.0-F.
- J. Bronze Extrusions: ASTM B 455, Alloy UNS No. C38500 (extruded architectural bronze).
- K. Bronze Castings: ASTM B 584, Alloy UNS No. C83600 (lead red brass) or No. C84400 (lead semired brass).
- L. Nickel Silver Castings: ASTM B 584, Alloy UNS No. C97600 (20 percent lead nickel bronze).

2.3 FASTENERS

- A. General: Unless otherwise indicated, provide Type 304 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.
 - 1. Provide stainless-steel fasteners for fastening aluminum.
 - 2. Provide stainless-steel fasteners for fastening stainless steel.
 - 3. Provide stainless-steel fasteners for fastening nickel silver.
 - 4. Provide bronze fasteners for fastening bronze.
- B. Cast-in-Place Anchors in Concrete: Either threaded type or wedge type unless otherwise indicated; galvanized ferrous castings, either ASTM A 47/A 47M malleable iron or ASTM A 27/A 27M cast steel. Provide bolts, washers, and shims as needed, all hot-dip galvanized per ASTM F 2329.
- C. Post-Installed Anchors: Torque-controlled expansion anchors.
 - 1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, unless otherwise indicated.
 - 2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F 593, and nuts, ASTM F 594.
- D. Slotted-Channel Inserts: Cold-formed, hot-dip galvanized-steel box channels (struts) complying with MFMA-4, 1-5/8 by 7/8 inches by length indicated with anchor straps or studs not less than 3 inches long at not more than 8 inches o.c. Provide with temporary filler and tee-head bolts,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

complete with washers and nuts, all zinc-plated to comply with ASTM B 633, Class Fe/Zn 5, as needed for fastening to inserts.

2.4 MISCELLANEOUS MATERIALS

- A. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.
 - 1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.
- B. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.
- C. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D 1187/D 1187M.
- D. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C 1107/C 1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.
- E. Concrete: Comply with requirements in Section 033000 "Cast-in-Place Concrete" for normal-weight, air-entrained, concrete with a minimum 28-day compressive strength of 4000 psi.

2.5 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Use connections that maintain structural value of joined pieces.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges. Remove sharp or rough areas on exposed surfaces.
- C. Weld corners and seams continuously to comply with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. At exposed connections, finish exposed welds and surfaces smooth and blended.
- D. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Locate joints where least conspicuous.
- E. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- F. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors not less than 8 inches from ends and corners of units and 24 inches o.c.

2.6 MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.
- B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.

2.7 MISCELLANEOUS STEEL TRIM

- A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.
- B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.
- C. Galvanize exterior miscellaneous steel trim.

2.8 METAL BOLLARDS

- A. Fabricate metal bollards from Schedule 80 steel pipe.
 - 1. Cap bollards with 1/4-inch- thick steel plate.
- B. Fabricate bollards with 3/8-inch- thick steel baseplates for bolting to concrete slab. Drill baseplates at all four corners for 3/4-inch anchor bolts.
- C. Fabricate sleeves for bollard anchorage from steel pipe or tubing with 1/4-inch- thick steel plate welded to bottom of sleeve.
- D. Prime bollards with zinc-rich primer.

2.9 LOOSE BEARING AND LEVELING PLATES

- A. Provide loose bearing and leveling plates for steel items bearing on masonry or concrete construction. Drill plates to receive anchor bolts and for grouting.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.10 LOOSE STEEL LINTELS

- A. Fabricate loose steel lintels from steel angles and shapes of size indicated for openings and recesses in masonry walls and partitions at locations indicated.
- B. Galvanize loose steel lintels located in exterior walls.

2.11 STEEL WELD PLATES AND ANGLES

- A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with no fewer than two integrally welded steel strap anchors for embedding in concrete.

2.12 FINISHES, GENERAL

- A. Finish metal fabrications after assembly.

2.13 STEEL AND IRON FINISHES

- A. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A 153/A 153M for steel and iron hardware and with ASTM A 123/A 123M for other steel and iron products.
- B. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- C. Field Welding: Comply with the following requirements:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

- D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction.
- E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

3.2 INSTALLING METAL BOLLARDS

- A. Fill metal-capped bollards solidly with concrete and allow concrete to cure seven days before installing.
- B. Anchor bollards to existing construction with expansion anchors. Provide four 3/4-inch bolts at each bollard unless otherwise indicated.
- C. Anchor bollards in concrete with pipe sleeves preset and anchored into concrete. Fill annular space around bollard solidly with nonshrink grout.
- D. Anchor bollards in place with concrete footings. Place concrete and vibrate or tamp for consolidation. Support and brace bollards in position until concrete has cured.
- E. Fill bollards solidly with concrete, mounding top surface to shed water.

3.3 INSTALLING BEARING AND LEVELING PLATES

- A. Clean concrete and masonry bearing surfaces of bond-reducing materials, and roughen to improve bond to surfaces. Clean bottom surface of plates.
- B. Set bearing and leveling plates on wedges, shims, or leveling nuts. After bearing members have been positioned and plumbed, tighten anchor bolts. Do not remove wedges or shims but, if protruding, cut off flush with edge of bearing plate before packing with nonshrink grout. Pack grout solidly between bearing surfaces and plates to ensure that no voids remain.

3.4 ADJUSTING AND CLEANING

- A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780/A 780M.

END OF SECTION 055000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

SECTION 061053 - MISCELLANEOUS ROUGH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Wood blocking, cants, and nailers.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product.

1.3 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For the following, from ICC-ES:
 - 1. Preservative-treated wood.
 - 2. Fire-retardant-treated wood.
 - 3. Power-driven fasteners.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, provide lumber that complies with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. For exposed lumber indicated to receive a stained or natural finish, omit grade stamp and provide certificates of grade compliance issued by grading agency.
 - 3. Dress lumber, S4S, unless otherwise indicated.
- B. Maximum Moisture Content of Lumber: 19 percent unless otherwise indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWP U1; Use Category UC2 for interior construction not in contact with ground, Use Category UC3b for exterior construction not in contact with ground, and Use Category UC4a for items in contact with ground.
 - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium. Do not use inorganic boron (SBX) for sill plates.
- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
- D. Application: Treat all miscellaneous carpentry unless otherwise indicated.

2.3 MISCELLANEOUS LUMBER

- A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:
 - 1. Blocking.
 - 2. Nailers.
 - 3. Rooftop equipment bases and support curbs.
 - 4. Cants.
- B. Dimension Lumber Items: Construction or No. 2 grade lumber of any species.

2.4 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
 - 1. Where carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M or of Type 304 stainless steel.
- B. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.
- B. Set carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit carpentry accurately to other construction. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.
- C. Do not splice structural members between supports unless otherwise indicated.
- D. Comply with AWWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.
- E. Securely attach carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
 - 1. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code.
 - 2. ICC-ES evaluation report for fastener.

END OF SECTION 061053

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 064116 - PLASTIC-LAMINATE-FACED ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic-laminate-faced architectural cabinets.
2. Wood furring, blocking, shims, and hanging strips for installing plastic-laminate-faced architectural cabinets unless concealed within other construction before cabinet installation.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product, including panel products high-pressure decorative laminate adhesive for bonding plastic laminate and cabinet hardware and accessories.
- B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.
- C. Samples:
 1. Plastic laminates, for each color, pattern, and surface finish.
 2. Thermoset decorative panels, for each color, pattern, and surface finish.

1.3 INFORMATIONAL SUBMITTALS

- A. Woodwork Quality Standard Compliance Certificates: AWI Quality Certification Program certificates.

1.4 QUALITY ASSURANCE

- A. Fabricator Qualifications: Certified participant in AWI's Quality Certification Program.
- B. Installer Qualifications: Certified participant in AWI's Quality Certification Program.

1.5 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 2 - PRODUCTS

2.1 PLASTIC-LAMINATE-FACED ARCHITECTURAL CABINETS

- A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades of architectural plastic-laminate cabinets indicated for construction, finishes, installation, and other requirements.
 - 1. Provide labels and certificates from AWI certification program indicating that woodwork, including installation, complies with requirements of grades specified.
- B. Grade: Premium.
- C. Type of Construction: Face frame.
- D. Cabinet, Door, and Drawer Front Interface Style: Full overlay.
- E. Reveal Dimension: 1/2 inch.
- F. High-Pressure Decorative Laminate: NEMA LD 3, grades as indicated or if not indicated, as required by woodwork quality standard.
- G. Laminate Cladding for Exposed Surfaces:
 - 1. Horizontal Surfaces: Grade HGL.
 - 2. Postformed Surfaces: Grade HGP.
 - 3. Vertical Surfaces: Grade VGS.
 - 4. Edge Banding for Cabinet Doors and Drawers: 3 mm PVC.
 - 5. Pattern Direction: Vertically for drawer fronts, doors, and fixed panels.
- H. Materials for Semiexposed Surfaces:
 - 1. Surfaces Other Than Drawer Bodies: High-pressure decorative laminate, NEMA LD 3, Grade VGS.
 - 2. Drawer Backs: Thermoset decorative panels with PVC or polyester edge banding.
 - 3. Drawer Bottoms: Thermoset decorative panels.
- I. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:
 - 1. As indicated by on finish schedule.

2.2 WOOD MATERIALS

- A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

1. Wood Moisture Content: 8 to 13 percent.
- B. Composite Wood and Agrifiber Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.
 1. Medium-Density Fiberboard: ANSI A208.2, Grade 130.
 2. Particleboard: ANSI A208.1, Grade M-2.
 3. Softwood Plywood: DOC PS 1, medium-density overlay.
 4. Veneer-Faced Panel Products (Hardwood Plywood): HPVA HP-1.
 5. Thermoset Decorative Panels: Particleboard or medium-density fiberboard finished with thermally fused, melamine-impregnated decorative paper and complying with requirements of NEMA LD 3, Grade VGL, for test methods 3.3, 3.4, 3.6, 3.8, and 3.10.

2.3 CABINET HARDWARE AND ACCESSORIES

- A. General: Provide cabinet hardware and accessory materials associated with architectural cabinets except for items specified in Section 087111 "Door Hardware (Descriptive Specification)."
- B. Frameless Concealed Hinges (European Type): BHMA A156.9, B01602, 100 degrees of opening, self-closing.
- C. Back-Mounted Pulls: BHMA A156.9, B02011.
- D. Hardware: As indicated on Drawings.
- E. Catches: Magnetic catches, BHMA A156.9, B03141.
- F. Adjustable Shelf Standards and Supports: BHMA A156.9, B04071; with shelf rests, B04081.
- G. Shelf Rests: BHMA A156.9, B04013; metal.
- H. Drawer Slides: BHMA A156.9.
 1. Grade 1 and Grade 2: Side mounted and extending under bottom edge of drawer; full-extension type; zinc-plated steel with polymer rollers.
 2. Grade 1HD-100 and Grade 1HD-200: Side mounted; full-extension type; zinc-plated-steel ball-bearing slides.
 3. For drawers not more than 3 inches high and not more than 24 inches wide, provide Grade 2.
 4. For drawers more than 3 inches high but not more than 6 inches high and not more than 24 inches wide, provide Grade 1.
 5. For drawers more than 6 inches high or more than 24 inches wide, provide Grade 1HD-100.
 6. For computer keyboard shelves, provide Grade 1.
 7. For trash bins not more than 20 inches high and 16 inches wide, provide Grade 1HD-100.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- I. Plastic Slides for Sliding Glass Doors: BHMA A156.9, B07063.
- J. Door Locks: BHMA A156.11, E07121.
- K. Drawer Locks: BHMA A156.11, E07041.
- L. Door and Drawer Silencers: BHMA A156.16, L03011.
- M. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with BHMA A156.18 for BHMA finish number indicated.
 - 1. Satin Stainless Steel: BHMA 630.

2.4 MISCELLANEOUS MATERIALS

- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln dried to less than 15 percent moisture content.
- B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.
- C. Adhesive for Bonding Plastic Laminate: Unpigmented contact cement.
 - 1. Adhesive for Bonding Edges: Hot-melt adhesive.

2.5 FABRICATION

- A. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
- B. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.
- C. Install glass to comply with applicable requirements in Section 088000 "Glazing" and in GANA's "Glazing Manual." For glass in wood frames, secure glass with removable stops.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition cabinets to average prevailing humidity conditions in installation areas.

3.2 INSTALLATION

- A. Grade: Install cabinets to comply with same grade as item to be installed.
- B. Install cabinets level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches.
- C. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
- D. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.
- E. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
 - 1. Install cabinets with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
 - 2. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head screws sized for not less than 1-1/2-inch penetration into wood framing, blocking, or hanging strips.

END OF SECTION 064116

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 071416 - COLD FLUID-APPLIED WATERPROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Polyurethane waterproofing.

1.2 PREINSTALLATION MEETINGS

- ##### **A. Preinstallation Conference: Conduct conference at Project site.**

1.3 ACTION SUBMITTALS

- ##### **A. Product Data: For each type of product.**

1.4 INFORMATIONAL SUBMITTALS

- ##### **A. Sample warranty.**

1.5 QUALITY ASSURANCE

- ##### **A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by waterproofing manufacturer.**

1.6 WARRANTY

- ##### **A. Manufacturer's Special Warranty: Manufacturer agrees to repair or replace waterproofing that fails in materials or workmanship within specified warranty period.**

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SINGLE-COMPONENT POLYURETHANE WATERPROOFING

- ##### **A. Single-Component, Modified Polyurethane Waterproofing: ASTM C 836/C 836M and coal-tar free.**

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. BASF Corporation; Construction Systems.
 - b. Carlisle Coatings & Waterproofing Inc.
 - c. Tremco Incorporated.

2.2 AUXILIARY MATERIALS

- A. Primer: Manufacturer's standard primer, sealer, or surface conditioner; factory-formulated acrylic latex, polyurethane, or epoxy.
- B. Sheet Flashing: 50-mil-minimum, nonstaining, uncured sheet neoprene.
 1. Adhesive: Manufacturer's recommended contact adhesive.
- C. Membrane-Reinforcing Fabric: Manufacturer's recommended fiberglass mesh or polyester fabric.
- D. Joint Reinforcing Strip: Manufacturer's recommended fiberglass mesh or polyester fabric.
- E. Joint Sealant: Multicomponent polyurethane sealant, compatible with waterproofing; and as recommended by manufacturer for substrate and joint conditions.
 1. Backer Rod: Closed-cell polyethylene foam.

2.3 PROTECTION COURSE

- A. Protection Course: ASTM D 6506, semirigid sheets of fiberglass or mineral-reinforced-asphaltic core, pressure laminated between two asphalt-saturated fibrous liners and as follows:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Soprema, Inc.
 - b. W. R. Meadows, Inc.
 2. Thickness: 1/8 inch, nominal, for vertical applications; 1/4 inch, nominal, elsewhere.
 3. Adhesive: Rubber-based solvent type recommended in writing by waterproofing manufacturer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean, prepare, and treat substrates according to manufacturer's written instructions. Provide clean, dust-free, and dry substrates for waterproofing application.
- B. Mask off adjoining surfaces not receiving waterproofing to prevent spillage and overspray affecting other construction.
- C. Close off deck drains and other deck penetrations to prevent spillage and migration of waterproofing fluids.
- D. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, acid residues, and other penetrating contaminants or film-forming coatings from concrete.
- E. Remove fins, ridges, and other projections, and fill honeycomb, aggregate pockets, holes, and other voids.
- F. Prepare surfaces at terminations and penetrations through waterproofing and at expansion joints, drains, sleeves, and corners according to waterproofing manufacturer's written instructions and to recommendations in ASTM C 898/C 898M and ASTM C 1471.
- G. Apply waterproofing in two separate applications, and embed a joint reinforcing strip in the first preparation coat when recommended by waterproofing manufacturer.
- H. Prepare, treat, rout, and fill joints and cracks in substrate according to waterproofing manufacturer's written instructions and to recommendations in ASTM C 898/C 898M and ASTM C 1471. Before coating surfaces, remove dust and dirt from joints and cracks according to ASTM D 4258.
- I. Install sheet flashing and bond to deck and wall substrates where required according to waterproofing manufacturer's written instructions.

3.2 WATERPROOFING APPLICATION

- A. Apply waterproofing according to manufacturer's written instructions and to recommendations in ASTM C 898/C 898M and ASTM C 1471.
- B. Install protection course with butted joints over waterproofing before starting subsequent construction operations.
 - 1. For horizontal applications, install protection course loose laid over fully cured membrane.
 - 2. For vertical applications, set protection course in nominally cured membrane, which will act as an adhesive. If membrane cures before application of protection course, use adhesive.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.3 PROTECTION

- A. Do not permit foot or vehicular traffic on unprotected membrane.
- B. Protect waterproofing from damage and wear during remainder of construction period.
- C. Clean spillage and soiling from adjacent construction using cleaning agents and procedures recommended in writing by manufacturer of affected construction.

END OF SECTION 071416

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Extruded polystyrene foam-plastic board.
2. Polyisocyanurate foam-plastic board.
3. Glass-fiber blanket.
4. Glass-fiber board.
5. Spray Insulation.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Product test reports.
- B. Research reports.

PART 2 - PRODUCTS

2.1 EXTRUDED POLYSTYRENE FOAM-PLASTIC BOARD

- A. Extruded polystyrene boards in this article are also called "XPS boards."
- B. Extruded Polystyrene Board, Type X: ASTM C 578, Type X, 15-psi minimum compressive strength; unfaced; maximum flame-spread and smoke-developed indexes of 25 and 450, respectively, per ASTM E 84.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Dow Chemical Company (The).
 - b. Owens Corning.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

2.2 POLYISOCYANURATE FOAM-PLASTIC BOARD

- A. Polyisocyanurate Board, Foil Faced: ASTM C 1289, foil faced, Type I, Class 1 or 2.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Atlas Roofing Corporation.
 - b. Dow Chemical Company (The).
 - c. Firestone Building Products.
2. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

2.3 GLASS-FIBER BLANKET

- A. Glass-Fiber Blanket, Unfaced: ASTM C 665, Type I; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively, per ASTM E 84; passing ASTM E 136 for combustion characteristics.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. CertainTeed Corporation.
 - b. Johns Manville; a Berkshire Hathaway company.
 - c. Owens Corning.

2.4 GLASS-FIBER BOARD

- A. Glass-Fiber Board, Unfaced: ASTM C 612, Type IA; unfaced, with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively, per ASTM E 84, passing ASTM E 136 for combustion characteristics. Nominal density of 2.25 lb/cu. ft., thermal resistivity of 4.3 deg F x h x sq. ft./Btu x in. at 75 deg F.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. CertainTeed Corporation.
 - b. Johns Manville; a Berkshire Hathaway company.
 - c. Owens Corning.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.5 SPRAY INSULATION

- A. Self-Supported, Spray-Applied Cellulosic Insulation: ASTM C 1149, Type I (materials applied with liquid adhesive; suitable for either exposed or enclosed applications, chemically treated for flame-resistance, processing, and handling characteristics).
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide International Cellulose Corporation or a comparable product by one of the following:
 - a. International Cellulose Corporation; K-13 (Basis-of-Design).
 - b. Thermacoustic; TC-417.
 - c. Or approved equal.
 - 2. Color: White and as approved by Architect.
 - a. Surfaces will be painted at a later date, to be determined.
 - b. Mock-Up: Apply 100 square feet representative sample to be reviewed by Architect prior to proceeding.”

2.6 ACCESSORIES

- A. Insulation for Miscellaneous Voids:
 - 1. Glass-Fiber Insulation: ASTM C 764, Type II, loose fill; with maximum flame-spread and smoke-developed indexes of 5, per ASTM E 84.
 - 2. Spray Polyurethane Foam Insulation: ASTM C 1029, Type II, closed cell, with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, per ASTM E 84.
- B. Insulation Anchors, Spindles, and Standoffs: As recommended by manufacturer.
- C. Adhesive for Bonding Insulation: Product compatible with insulation and air and water barrier materials, and with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Comply with insulation manufacturer's written instructions applicable to products and applications.
- B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.
- C. Extend insulation to envelop entire area to be insulated. Fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Provide sizes to fit applications and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units unless multiple layers are otherwise shown or required to make up total thickness or to achieve R-value.

3.2 INSTALLATION OF SLAB INSULATION

- A. On vertical slab edge and foundation surfaces, set insulation units using manufacturer's recommended adhesive according to manufacturer's written instructions.
 - 1. If not otherwise indicated, extend insulation a minimum of 24 inches below exterior grade line.
- B. On horizontal surfaces, loosely lay insulation units according to manufacturer's written instructions. Stagger end joints and tightly abut insulation units.
 - 1. If not otherwise indicated, extend insulation a minimum of 48 inches in from exterior walls.

3.3 INSTALLATION OF FOUNDATION WALL INSULATION

- A. Butt panels together for tight fit.
- B. Anchor Installation: Install board insulation on concrete substrates by adhesively attached, spindle-type insulation anchors.
- C. Adhesive Installation: Install with adhesive or press into tacky waterproofing or dampproofing according to manufacturer's written instructions.

3.4 INSTALLATION OF INSULATION IN FRAMED CONSTRUCTION

- A. Blanket Insulation: Install in cavities formed by framing members according to the following requirements:
 - 1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
 - 2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
 - 3. Maintain 3-inch clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
 - 4. For metal-framed wall cavities where cavity heights exceed 96 inches, support unfaced blankets mechanically and support faced blankets by taping flanges of insulation to flanges of metal studs.
- B. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Glass-Fiber Insulation: Compact to approximately 40 percent of normal maximum volume equaling a density of approximately 2.5 lb/cu. ft..
2. Spray Polyurethane Insulation: Apply according to manufacturer's written instructions.

3.5 INSTALLATION OF CURTAIN-WALL INSULATION

- A. Install board insulation in curtain-wall construction according to curtain-wall manufacturer's written instructions.
 1. Hold insulation in place by securing metal clips and straps or integral pockets within window frames, spaced at intervals recommended in writing by insulation manufacturer to hold insulation securely in place without touching spandrel glass. Maintain cavity width of dimension indicated on Drawings between insulation and glass.
 2. Install insulation to fit snugly without bowing.

END OF SECTION 072100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 072119 - FOAMED-IN-PLACE INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Closed-cell spray polyurethane foam.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Product test reports.
- B. Research reports.

PART 2 - PRODUCTS

2.1 CLOSED-CELL SPRAY POLYURETHANE FOAM

- A. Closed-Cell Spray Polyurethane Foam: ASTM C 1029, Type II, minimum density of 1.5 lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.2 deg F x h x sq. ft./Btu at 75 deg F.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. BASF Corporation; SPF.
 - b. CertainTeed Corporation.
 - c. Dow Chemical Company (The).
 2. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with insulation manufacturer's written instructions applicable to products and applications.
- B. Spray insulation to envelop entire area to be insulated and fill voids.
- C. Apply in multiple passes to not exceed maximum thicknesses recommended by manufacturer. Do not spray into rising foam.

END OF SECTION 072119

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 072419 - WATER-DRAINAGE EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. EIFS-clad drainage-wall assemblies that are field applied over substrate.
2. Water-resistive coatings.

1.2 ACTION SUBMITTALS

- ##### A. Product Data:
- For each EIFS component, trim, and accessory, including water-resistive coatings.

1.3 INFORMATIONAL SUBMITTALS

- A. Manufacturer certificates.
- B. Product certificates.
- C. Product test reports.
- D. Field quality-control reports and special inspection reports.
- E. Evaluation reports.

1.4 CLOSEOUT SUBMITTALS

- ##### A. Maintenance data.

1.5 QUALITY ASSURANCE

- ##### A. Installer Qualifications:
- An installer who is certified in writing by EIFS manufacturer as qualified to install manufacturer's system using trained workers.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Dryvit Systems, Inc.
 - 2. Parex USA, Inc.
 - 3. Sto Corp.
- B. Source Limitations: Obtain EIFS from single source from single EIFS manufacturer and from sources approved by EIFS manufacturer as compatible with EIFS components.

2.2 PERFORMANCE REQUIREMENTS

- A. EIFS Performance: Comply with ASTM E 2568 and ICC-ES AC219 and with the following:
 - 1. Weathertightness: Resistant to uncontrolled water penetration from exterior, with a means to drain water entering EIFS to the exterior.
 - 2. Impact Performance: ASTM E 2568, Standard impact resistance, unless otherwise indicated.
 - 3. Bond Integrity: Free from bond failure within EIFS components or between EIFS and substrates, resulting from exposure to fire, wind loads, weather, or other in-service conditions.

2.3 EIFS MATERIALS

- A. Primer/Sealer: EIFS manufacturer's standard substrate conditioner designed to protect substrates from moisture penetration and to improve the bond between substrate and insulation adhesive.
- B. Water-Resistive Coatings: EIFS manufacturer's standard formulation and accessories for use as water-resistive barriers; compatible with substrate and complying with physical and performance criteria of ASTM E 2570.
- C. Flexible-Membrane Flashing: Cold-applied, self-adhering, self-healing, rubberized-asphalt and polyethylene-film composite sheet or tape and primer; EIFS manufacturer's standard or product recommended in writing by EIFS manufacturer.
- D. Insulation Adhesive: EIFS manufacturer's standard formulation designed for indicated use; specifically formulated to be applied to back side of insulation in a manner that creates open vertical channels designed to serve as an integral part of the water-drainage system of the EIFS-clad drainage-wall assembly, compatible with substrate.
- E. Molded, Rigid Cellular Polystyrene Board Insulation: Comply with ASTM C 578, Type I.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Foam Build-Outs: Provide with profiles and dimensions indicated on Drawings.
- F. Reinforcing Mesh: Balanced, alkali-resistant, open-weave, glass-fiber mesh treated for compatibility with other EIFS materials, made from continuous multiend strands with retained mesh tensile strength of not less than 120 lbf/in. according to ASTM E 2098.
- G. Base-Coat Materials: EIFS manufacturer's standard mixture.
- H. Waterproof Adhesive/Base-Coat Materials: EIFS manufacturer's standard waterproof formulation.
- I. Primer: EIFS manufacturer's standard factory-mixed, elastomeric-polymer primer for preparing base-coat surface for application of finish coat.
- J. Finish-Coat Materials: EIFS manufacturer's standard acrylic-based coating with enhanced mildew resistance.
 1. Colors: As selected by Architect from manufacturer's full range.
 2. Textures: As selected by Architect from manufacturer's full range.
- K. Trim Accessories: Type as designated or required to suit conditions indicated and to comply with EIFS manufacturer's written instructions; manufactured from UV-stabilized PVC; and complying with ASTM D 1784, manufacturer's standard cell class for use intended, and ASTM C 1063.

PART 3 - EXECUTION

3.1 EIFS INSTALLATION

- A. Comply with ASTM C 1397, ASTM E 2511, and EIFS manufacturer's written instructions for installation of EIFS as applicable to each type of substrate indicated.
- B. Trim: Apply trim accessories at perimeter of EIFS, at expansion joints, at windowsills, and elsewhere as indicated. Coordinate with installation of insulation.
- C. Board Insulation: Adhere insulation to substrate in compliance with ASTM C 1397 and the following:
 1. Apply adhesive to insulation by notched-trowel method, with notches oriented vertically to produce drainage channels that remain functional after the insulation is adhered to substrate.
 2. Coordinate installation of flashing and insulation to produce wall assembly that does not allow water to penetrate behind flashing and water-resistive barrier.
- D. Expansion Joints: Install at locations indicated and where required by EIFS manufacturer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- E. Waterproof Adhesive/Base Coat: To exposed surfaces of insulation, apply in minimum thickness recommended in writing by EIFS manufacturer over sloped surfaces, windowsills, parapets, and foam build-outs.
- F. Base Coat: Apply to exposed surfaces of insulation and foam build-outs in minimum thickness recommended in writing by EIFS manufacturer.
- G. Reinforcing Mesh: Embed reinforcing mesh in wet base coat to produce wrinkle-free installation with mesh continuous at corners, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C 1397 and EIFS manufacturer's written instructions. Do not lap reinforcing mesh within 8 inches of corners. Completely embed mesh, applying additional base-coat material if necessary, so reinforcing-mesh color and pattern are invisible.
- H. Double-Layer Reinforcing-Mesh Application: Where indicated or required, apply second base coat and second layer of reinforcing mesh, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C 1397 and EIFS manufacturer's written instructions in same manner as first application. Do not apply until first base coat has cured.
- I. Additional Reinforcing Mesh: Apply strip reinforcing mesh around openings, extending 4 inches beyond perimeter. Apply additional 9-by-12-inch strip reinforcing mesh diagonally at corners of openings (re-entrant corners). Apply 8-inch-wide, strip reinforcing mesh at both inside and outside corners unless base layer of mesh is lapped not less than 4 inches on each side of corners.
- J. Foam Build-Outs: Fully embed reinforcing mesh in base coat.
- K. Double Base-Coat Application: Where indicated, apply second base coat in same manner and thickness as first application, except without reinforcing mesh. Do not apply until first base coat has cured.
- L. Primer: Apply over dry base coat according to EIFS manufacturer's written instructions.
- M. Finish Coat: Apply over dry primed base coat, maintaining a wet edge at all times for uniform appearance, in thickness required by EIFS manufacturer to produce a uniform finish of color and texture matching approved sample and free of cold joints, shadow lines, and texture variations.

END OF SECTION 072419

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 072715 - NONBITUMINOUS SELF-ADHERING SHEET AIR BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Self-adhering, vapor-retarding, nonbituminous sheet air barriers.
2. Self-adhering, vapor-permeable, nonbituminous sheet air barriers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of nonbituminous self-adhering sheet air barrier.
- B. Product test reports.
- C. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Mockups: Build mockups to set quality standards for materials and execution.
 1. Build integrated mockups of exterior wall assembly, 48 sq. ft., incorporating backup wall construction, external cladding, window, storefront, door frame and sill, insulation, ties and other penetrations, and flashing to demonstrate surface preparation, crack and joint treatment, application of air barriers, and sealing of gaps, terminations, and penetrations of air-barrier assembly.
 - a. Coordinate construction of mockups to permit inspection and testing of air barrier before external insulation and cladding are installed.
 - b. Include junction with roofing membrane, building corner condition, and foundation wall intersection.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Air-Barrier Performance: Air-barrier assembly and seals with adjacent construction shall be capable of performing as a continuous air barrier and as a liquid-water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Air-barrier assemblies shall be capable of accommodating substrate movement and of sealing substrate expansion and control joints, construction material changes, penetrations, and transitions at perimeter conditions without deterioration and air leakage exceeding specified limits.
- B. Air-Barrier Assembly Air Leakage: Maximum 0.04 cfm/sq. ft. of surface area at 1.57 lbf/sq. ft., when tested according to ASTM E 2357.

2.2 NONBITUMINOUS SHEET AIR BARRIER

- A. Vapor-Retarding Nonbituminous Sheet: Minimum 10-mil- thick, self-adhering sheet consisting of 5 mils of air-barrier film and a 5-mil- thick, acrylic adhesive with release liner on adhesive side.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. 3M Industrial Adhesives and Tapes Division.
 - b. Carlisle Coatings & Waterproofing Inc.
 - 2. Physical and Performance Properties:
 - a. Air Permeance: Maximum 0.004 cfm/sq. ft. of surface area at 1.57-lbf/sq. ft. pressure difference; ASTM E 2178.
 - b. Puncture Resistance: Minimum 40 lbf; ASTM E 154/E 154M.
 - c. Vapor Permeance: Maximum 1.0 perm; ASTM E 96/E 96M, Desiccant Method.
 - d. Adhesion to Substrate: Minimum 16 lbf/sq. in. when tested according to ASTM D 4541 as modified by ABAA.
 - e. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
 - f. UV Resistance: Can be exposed to sunlight for 150 days according to manufacturer's written instructions.
- B. Vapor-Permeable Nonbituminous Sheet: Minimum 20-mil- thick, self-adhering sheet consisting of a breathable carrier film or fabric and an adhesive with release liner on adhesive side.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Carlisle Coatings & Waterproofing Inc.
2. Physical and Performance Properties:
 - a. Air Permeance: Maximum 0.004 cfm/sq. ft. of surface area at 1.57-lbf/sq. ft. pressure difference; ASTM E 2178.
 - b. Puncture Resistance: Minimum 40 lbf; ASTM E 154/E 154M.
 - c. Vapor Permeance: Minimum 15 perms; ASTM E 96/E 96M, Desiccant Method, Procedure A.
 - d. Adhesion to Substrate: Minimum 16 lbf/sq. in. when tested according to ASTM D 4541 as modified by ABAA.
 - e. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
 - f. UV Resistance: Can be exposed to sunlight for 150 days according to manufacturer's written instructions.

2.3 ACCESSORY MATERIALS

- A. Requirement: Provide primers, transition strips, termination strips, joint sealants, counterflashing strips, flashing sheets and metal termination bars, termination mastic, substrate patching materials, adhesives, tapes, foam sealants, lap sealants, and other accessory materials that are recommended in writing by air-barrier manufacturer to produce a complete air-barrier assembly and that are compatible with primary air-barrier material and adjacent construction to which they may seal.
- B. Primer: Liquid solvent-borne primer recommended for substrate by air-barrier material manufacturer.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Clean, prepare, treat, fill, and seal substrate and joints and cracks in substrate according to manufacturer's written instructions and details. Provide clean, dust-free, and dry substrate for air-barrier application.
- B. Mask off adjoining surfaces not covered by air barrier to prevent spillage and overspray affecting other construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- C. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids in concrete with substrate-patching membrane.
- D. Remove excess mortar from masonry ties, shelf angles, and other obstructions.
- E. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.
- F. Bridge isolation joints expansion joints and discontinuous wall-to-wall, deck-to-wall, and deck-to-deck joints with air-barrier accessory material that accommodates joint movement according to manufacturer's written instructions and details.

3.2 INSTALLATION

- A. Install materials according to air-barrier manufacturer's written instructions and details to form a seal with adjacent construction and ensure continuity of air and water barrier.
 - 1. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
- B. Apply primer to substrates at required rate and allow it to dry. Limit priming to areas that will be covered by air-barrier sheet on same day. Reprime areas exposed for more than 24 hours.
- C. Apply and firmly adhere air-barrier sheets over area to receive air barrier. Accurately align sheets and maintain uniform 2-1/2-inch- minimum lap widths and end laps. Overlap and seal seams, and stagger end laps to ensure airtight installation.
 - 1. Apply sheets in a shingled manner to shed water.
 - 2. Roll sheets firmly to enhance adhesion to substrate.
- D. Install air-barrier sheet and accessory materials to form a seal with adjacent construction and to maintain a continuous air barrier.
- E. Connect and seal exterior wall air-barrier sheet continuously to roofing-membrane air barrier, concrete below-grade structures, floor-to-floor construction, exterior glazing and window systems, glazed curtain-wall systems, storefront systems, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.
- F. Wall Openings: Prime concealed, perimeter frame surfaces of windows, curtain walls, storefronts, and doors. Apply transition strip so that a minimum of 3 inches of coverage is achieved over each substrate. Maintain 3 inches of contact over firm bearing to perimeter frames, with not less than 1 inch of full contact.
- G. Repair punctures, voids, and deficient lapped seams in air barrier. Slit and flatten fishmouths and blisters. Patch with air-barrier sheet extending 6 inches beyond repaired areas in all directions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- H. Do not cover air barrier until it has been tested and inspected by testing agency.
- I. Correct deficiencies in or remove air barrier that does not comply with requirements; repair substrates and reapply air-barrier components.

3.3 CLEANING AND PROTECTION

- A. Protect air-barrier system from damage during application and remainder of construction period, according to manufacturer's written instructions.

END OF SECTION 072715

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

SECTION 075419 - POLYVINYL-CHLORIDE (PVC) ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Adhered polyvinyl-chloride (PVC) roofing system.
2. Roof insulation at all Roof Areas.

1.2 DEFINITIONS

- ##### **A. Roofing Terminology:** Definitions in ASTM D 1079 and glossary in NRCA's "The NRCA Roofing and Waterproofing Manual" apply to work of this Section.

1.3 PREINSTALLATION MEETINGS

- ##### **A. Preinstallation Roofing Conference:** Conduct conference at Project site.

1.4 ACTION SUBMITTALS

- ##### **A. Product Data:** For each type of product.
- ##### **B. Shop Drawings:** For roofing system. Include plans, elevations, sections, details, and attachments to other work.
- ##### **C. Samples for Verification:** For the following products:
1. Sheet roofing, of color required.
 2. Walkway pads or rolls, of color required.

1.5 INFORMATIONAL SUBMITTALS

- ##### **A. Research/Evaluation Reports:** For components of roofing system, from ICC-ES.
- ##### **B. Sample Warranties:** For manufacturer's special warranties.

1.6 CLOSEOUT SUBMITTALS

- ##### **A. Maintenance Data:** For roofing system to include in maintenance manuals.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

1.7 QUALITY ASSURANCE

- A. **Installer Qualifications:** A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty.

1.8 WARRANTY

- A. **Special Warranty:** Manufacturer agrees to repair or replace components of roofing system that fail in materials or workmanship within specified warranty period.
 - 1. **Warranty Period:** 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. **Source Limitations:** Obtain components including roof insulation fasteners for roofing system from same manufacturer as membrane roofing or manufacturer approved by membrane roofing manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. **Accelerated Weathering:** Roofing system shall withstand 2000 hours of exposure when tested according to ASTM G 152, ASTM G 154, or ASTM G 155.
- B. **Impact Resistance:** Roofing system shall resist impact damage when tested according to ASTM D 3746 or ASTM D 4272.
- C. **Roofing System Design:** Tested by a qualified testing agency to resist the following uplift pressures:
 - 1. **Corner Uplift Pressure:** 225 psf.
 - 2. **Perimeter Uplift Pressure:** 150 psf.
 - 3. **Field-of-Roof Uplift Pressure:** 90 psf.
- D. **Energy Star Listing:** Roofing system shall be listed on the DOE's ENERGY STAR "Roof Products Qualified Product List" for low-slope roof products.
- E. **Energy Performance:** Roofing system shall have an initial solar reflectance of not less than 0.70 and an emissivity of not less than 0.75 when tested according to CRRC-1.
- F. **Exterior Fire-Test Exposure:** ASTM E 108 or UL 790, Class A; for application and roof slopes indicated; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

- G. Fire-Resistance Ratings: Comply with fire-resistance-rated assembly designs indicated. Identify products with appropriate markings of applicable testing agency.

2.3 MEMBRANE ROOFING

A. PVC Sheet: ASTM D 4434.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Carlisle SynTec Incorporated.
 - b. Sika Sarnafil
 - c. Versico Versiflex PVC
2. Thickness: 72 mils minimum.
3. Exposed Face Color: White.

B. KEE Sheet: ASTM D 6754.

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. FiberTite.
2. Thickness: 60 mils (1.5 mm), nominal.
3. Exposed Face Color: White.

2.4 AUXILIARY ROOFING MATERIALS

A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with roofing.

1. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.

B. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, and color as PVC sheet. Thickness: 60 mil minimum.

C. Bonding Adhesive: Manufacturer's standard.

D. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening roofing to substrate, and acceptable to roofing system manufacturer.

E. Miscellaneous Accessories: Provide metal termination bars, metal battens, pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, lap sealants, termination reglets, and other accessories.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

2.5 SUBSTRATE BOARDS at roof areas with architectural or architectural acoustic roof deck only.

- A. Substrate Board: ASTM C 1177/C 1177M, glass-mat, water-resistant gypsum substrate, Type X, 5/8 inch (16 mm) thick.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following, for inclusion in the membrane manufacturer's warranty:
 - a. Georgia-Pacific Building Products.
 - b. National Gypsum Company.
 - c. United States Gypsum Company.
- B. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening substrate board to roof deck.

2.6 ROOF INSULATION

- A. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, Class 1, Grade 2, glass-fiber mat facer on both major surfaces.
 - 1. Per membrane manufacturer, for inclusion in warranty.
- B. Tapered Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches (1:48) unless otherwise indicated.
- C. Provide preformed saddles, crickets, tapered edge strips, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.

2.7 INSULATION ACCESSORIES

- A. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.
- B. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- C. Cover Board: ASTM C 1177/C 1177M, glass-mat, water-resistant gypsum substrate, 1/2 inch (13 mm) thick, factory primed.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following, for inclusion in the membrane manufacturer's warranty:
 - a. Georgia-Pacific Building Products.
 - b. National Gypsum Company.
 - c. United States Gypsum Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

2.8 WALKWAYS

- A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway pads or rolls, approximately 3/16 inch (5 mm) thick and acceptable to roofing system manufacturer.

PART 3 - EXECUTION

3.1 ROOFING INSTALLATION, GENERAL

- A. Install roofing system according to roofing system manufacturer's written instructions.
- B. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at end of workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.
- C. Install roofing and auxiliary materials to tie in to existing roofing to maintain weathertightness of transition.

3.2 SUBSTRATE BOARD INSTALLATION

- A. Install substrate board with long joints in continuous straight lines, perpendicular to roof slopes with end joints staggered between rows. Tightly butt substrate boards together.
 - 1. Fasten substrate board to top flanges of steel deck to resist uplift pressure at corners, perimeter, and field of roof according to roofing system manufacturers' written instructions.

3.3 INSULATION INSTALLATION

- A. Coordinate installing roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.
- B. Install tapered insulation under area of roofing to conform to slopes indicated.
- C. Install insulation under area of roofing to achieve required thickness. Where overall insulation thickness is 2.7 inches or greater, install two or more layers with joints of each succeeding layer staggered from joints of previous layer a minimum of 6 inches (150 mm) in each direction.
- D. Adhered Insulation: Install each layer of insulation and adhere to substrate as follows (typical, unless noted otherwise):
 - 1. Prime surface of concrete deck with asphalt primer at rate of 3/4 gal./100 sq. ft. (0.3 L/sq. m), and allow primer to dry.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

2. Set each layer of insulation in insulation adhesive, firmly pressing and maintaining insulation in place.
- E. Mechanically Fastened and Adhered Insulation: Install substrate or layer of insulation to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type. See drawing sheet R2.0.
 1. Fasten substrate or first layer of insulation to resist uplift pressure at corners, perimeter, and field of roof.
 2. Set each subsequent layer of insulation in insulation adhesive, firmly pressing and maintaining insulation in place.
- F. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches (150 mm) in each direction. Loosely butt cover boards together.
 1. Adhere cover boards to resist uplift pressure at corners, perimeter, and field of roof.

3.4 ADHERED ROOFING INSTALLATION

- A. Adhere roofing over area to receive roofing according to roofing system manufacturer's written instructions. Unroll roofing and allow to relax before retaining.
 1. Install sheet according to ASTM D 5036.
- B. Accurately align roofing, and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- C. Bonding Adhesive: Apply to substrate and underside of roofing at rate required by manufacturer, and allow to partially dry before installing roofing. Do not apply to splice area of roofing.
- D. In addition to adhering, mechanically fasten roofing securely at terminations, penetrations, and perimeter of roofing.
- E. Seams: Clean seam areas, overlap roofing, and hot-air weld side and end laps of roofing and sheet flashings according to manufacturer's written instructions, to ensure a watertight seam installation.
 1. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of sheet.
 2. Verify field strength of seams a minimum of twice daily, and repair seam sample areas.
 3. Repair tears, voids, and lapped seams in roofing that do not comply with requirements.
- F. Spread sealant bed over deck-drain flange at roof drains, and securely seal roofing in place with clamping ring.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

3.5 BASE FLASHING INSTALLATION

- A. Install sheet flashings and preformed flashing accessories, and adhere to substrates according to roofing system manufacturer's written instructions.
- B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate, and allow to partially dry. Do not apply to seam area of flashing.
- C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.
- D. Clean seam areas, overlap, and firmly roll sheet flashings into the adhesive. Hot-air weld side and end laps to ensure a watertight seam installation.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.6 WALKWAY INSTALLATION

- A. Flexible Walkways: Install walkway products in locations indicated. Heat weld to substrate or adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

3.7 PROTECTING AND CLEANING

- A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction does not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect, Roofing Engineer of Record, and Owner.
- B. Correct deficiencies in or remove roofing system that does not comply with requirements, repair substrates, and repair or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.
- C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

END OF SECTION 075419

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manufactured reglets with counterflashing.
2. Formed roof-drainage sheet metal fabrications.
3. Formed low-slope roof sheet metal fabrications.
4. Formed steep-slope roof sheet metal fabrications.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For sheet metal flashing and trim.

1. Include plans, elevations, sections, and attachment details.
2. Distinguish between shop- and field-assembled work.
3. Include identification of finish for each item.
4. Include pattern of seams and details of termination points, expansion joints and expansion-joint covers, direction of expansion, roof-penetration flashing, and connections to adjoining work.

C. Samples: For each exposed product and for each color and texture specified.

1.3 INFORMATIONAL SUBMITTALS

A. Product certificates.

B. Product test reports.

C. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.
 - 1. For copings and roof edge flashings that are SPRI ES-1 tested, shop shall be listed as able to fabricate required details as tested and approved.
- B. Mockups: Build mockups to verify selections made under Sample submittals to demonstrate aesthetic effects and to set quality standards for fabrication and installation.
 - 1. Build mockup of typical roof eave, including built-in gutter, approximately 10 feet (3.0 m) long.

1.6 WARRANTY

- A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General: Sheet metal flashing and trim assemblies shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.
- B. Sheet Metal Standard for Flashing and Trim: Comply with NRCA's "The NRCA Roofing Manual" and SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.
- C. Sheet Metal Standard for Copper: Comply with CDA's "Copper in Architecture Handbook." Conform to dimensions and profiles shown unless more stringent requirements are indicated.
- D. SPRI Wind Design Standard: Manufacture and install copings and roof edge flashings tested according to SPRI ES-1 and capable of resisting the following design pressure:
 - 1. Design Pressure: Components and cladding pressures for 100 mph winds.
- E. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.2 SHEET METALS

- A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.
- B. Aluminum Sheet: ASTM B 209 (ASTM B 209M), alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required.
 1. Exposed Coil-Coated Finish:
 - a. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in both color coat and clear topcoat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - b. Provide polymer coated metal where required for heat welding of single-ply membrane.
 2. Color: As selected by Architect from manufacturer's full range.

2.3 UNDERLAYMENT MATERIALS

- A. Felt: ASTM D 226/D 226M, Type II (No. 30), asphalt-saturated organic felt; nonperforated.
- B. Slip Sheet: Rosin-sized building paper, 3 lb/100 sq. ft. (0.16 kg/sq. m) minimum.

2.4 MISCELLANEOUS MATERIALS

- A. General: Provide materials and types of fasteners, solder, protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal unless otherwise indicated.
- B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal.
 1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.
 - a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.
 - b. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
 - c. Spikes and Ferrules: Same material as gutter; with spike with ferrule matching internal gutter width.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

2. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.
 3. Fasteners for Stainless-Steel Sheet: Series 300 stainless steel.
 4. Fasteners for Zinc-Coated (Galvanized) Steel Sheet: Series 300 stainless steel or hot-dip galvanized steel according to ASTM A 153/A 153M or ASTM F 2329.
- C. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch (13 mm) wide and 1/8 inch (3 mm) thick.
- D. Elastomeric Sealant: ASTM C 920, elastomeric silicone polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.
- E. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.
- F. Epoxy Seam Sealer: Two-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior nonmoving joints, including riveted joints.
- G. Bituminous Coating: Cold-applied asphalt emulsion according to ASTM D 1187.
- H. Asphalt Roofing Cement: ASTM D 4586, asbestos free, of consistency required for application.

2.5 FABRICATION, GENERAL

- A. General: Custom fabricate sheet metal flashing and trim to comply with details shown and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required. Fabricate sheet metal flashing and trim in shop to greatest extent possible.
1. Obtain field measurements for accurate fit before shop fabrication.
 2. Form sheet metal flashing and trim to fit substrates without excessive oil canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
 3. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.
- B. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.
1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with butyl sealant concealed within joints.
 2. Use lapped expansion joints only where indicated on Drawings.
- C. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal to provide for proper installation of elastomeric sealant according to cited sheet metal standard.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

- D. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.
- E. Fabricate cleats and attachment devices of sizes as recommended by cited sheet metal standard for application, but not less than one thickness heavier than metal being secured.
- F. Seams (unless noted otherwise): Fabricate nonmoving seams with flat-lock seams. Tin edges to be seamed, form seams, and solder.
- G. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints where necessary for strength.

2.6 ROOF-DRAINAGE SHEET METAL FABRICATIONS

- A. Hanging Gutters: Fabricate to cross section required, complete with end pieces, outlet tubes, and other accessories as required. Fabricate in minimum 96-inch- (2400-mm-) long sections. Furnish flat-stock gutter brackets and gutter spacers and straps fabricated from same metal as gutters, of size recommended by cited sheet metal standard but with thickness as shown on the drawings. Fabricate expansion joints, expansion-joint covers, and gutter accessories from same metal as gutters. Shop fabricate interior and exterior corners.
- B. Downspouts: Fabricate rectangular downspouts to dimensions indicated, complete with mitered elbows. Furnish with metal hangers from as shown on the drawings. Shop fabricate elbows.
 - 1. Fabricate from the following materials:
 - a. At Connector: Aluminum: 0.040 inch thick.
 - b. Stainless Steel: thickness as shown on the drawings.
 - c. Galvanized Steel: 0.022 inch (0.56 mm) thick.
 - d. At Concourse: Aluminum-Zinc Alloy-Coated Steel: 0.022 inch (0.56 mm) thick.
- C. Parapet Scuppers: Fabricate scuppers to dimensions required, with closure flange trim to exterior, 4-inch- (100-mm-) wide wall flanges to interior, and base extending 4 inches (100 mm) beyond cant or tapered strip into field of roof. Fabricate from the following materials:
 - 1. Of the same material as metal wall panels.

2.7 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

- A. Roof Edge Flashing (Gravel Stop) and Fascia Cap: Fabricate in minimum 96-inch- (2400-mm-) long, but not exceeding 12-foot- (3.6-m-) long sections. Furnish with 6-inch- (150-mm-) wide, joint cover plates. Shop fabricate interior and exterior corners.
 - 1. Fabricate from the Following Materials:
 - a. Aluminum: 0.050 inch (1.27 mm) thick.
- B. Copings: Fabricate in minimum 96-inch- (2400-mm-) long, but not exceeding 12-foot- (3.6-m-) long, sections. Fabricate joint plates of same thickness as copings. Furnish with continuous cleats to support edge of external leg and interior leg. Miter corners, fasten and seal watertight. Shop fabricate interior and exterior corners.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

1. Fabricate from the Following Materials:
 - a. Aluminum: 0.050 inch (1.27 mm) thick.
- C. Counterflashing and Flashing Receivers: Fabricate from the following materials:
 1. Aluminum: 0.040 inch thick.
- D. Roof-Penetration Flashing: Fabricate from the following materials:
 1. Aluminum: 0.040 inch thick.
- E. Roof-Drain Flashing: Fabricate from the following materials:
 1. Copper: 12 oz./sq. ft. (0.41 mm thick).
 2. Stainless Steel: 0.016 inch (0.40 mm).

2.8 STEEP-SLOPE ROOF SHEET METAL FABRICATIONS

- A. Apron, Step, Cricket, and Backer Flashing: Fabricate from the following materials:
 1. Aluminum-Zinc Alloy-Coated Steel: **0.022 inch (0.56 mm)** thick.
- B. Drip Edges: Fabricate from the following materials:
 1. Aluminum-Zinc Alloy-Coated Steel: **0.022 inch (0.56 mm)** thick.
- C. Eave, Rake, Ridge, and Hip Flashing: Fabricate from the following materials:
 1. Aluminum-Zinc Alloy-Coated Steel: **0.022 inch (0.56 mm)** thick.

PART 3 - EXECUTION

3.1 UNDERLAYMENT INSTALLATION

- A. Felt Underlayment: Install felt underlayment, wrinkle free, using adhesive to minimize use of mechanical fasteners under sheet metal flashing and trim. Apply in shingle fashion to shed water, with lapped joints of not less than 2 inches (50 mm).

3.2 INSTALLATION, GENERAL

- A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, solder, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
 1. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
 2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

3. Space cleats not more than 12 inches (300 mm) apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
 4. Install exposed sheet metal flashing and trim with limited oil canning, and free of buckling and tool marks.
 5. Torch cutting of sheet metal flashing and trim is not permitted.
- B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.
1. Coat concealed side of stainless-steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.
 2. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.
- C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at maximum of 10 feet (3 m) unless shown otherwise on the drawings, with no joints within 24 inches (600 mm) of corner or intersection.
1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with sealant concealed within joints.
 2. Use lapped expansion joints only where indicated on Drawings.
- D. Fasteners: Use fastener sizes that penetrate wood blocking or sheathing not less than 1-1/4 inches (32 mm) for nails and not less than 3/4 inch (19 mm) for wood screws. Fasten to metal wall panels not less than recommended by metal wall panel manufacturer to resist wind pressures shown.
- E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.
- F. Seal joints as required for watertight construction. Prepare joints and apply sealants to comply with requirements in Section 079200 "Joint Sealants."
- G. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Pre-tin edges of sheets with solder to width of 1-1/2 inches (38 mm); however, reduce pre-tinning where pre-tinned surface would show in completed Work.
1. Do not solder metallic-coated steel and aluminum sheet.
 2. Do not use torches for soldering.
 3. Heat surfaces to receive solder, and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
 4. Stainless-Steel Soldering: Tin edges of uncoated sheets, using solder for stainless steel and acid flux. Promptly remove acid flux residue from metal after tinning and soldering. Comply with solder manufacturer's recommended methods for cleaning and neutralization.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

5. Copper Soldering: Tin edges of uncoated sheets, using solder for copper.

H. Rivets: Rivet joints in uncoated aluminum where necessary for strength.

3.3 ROOF-DRAINAGE SYSTEM INSTALLATION

- A. General: Install sheet metal roof-drainage items to produce complete roof-drainage system according to cited sheet metal standard unless otherwise indicated. Coordinate installation of roof perimeter flashing with installation of roof-drainage system.
- B. Hanging Gutters: Join sections with joints sealed with sealant. Provide for thermal expansion. Attach gutters at eave or fascia to firmly anchor them in position. Provide end closures and seal watertight with sealant. Slope to downspouts.
 - 1. Install gutter with expansion joints at locations indicated, but not exceeding, 50 feet (15.24 m) apart or as shown on the drawings. Install expansion-joint caps.
- C. Downspouts: Join sections with 1-1/2-inch (38-mm) telescoping joints. Provide hangers with fasteners designed to hold downspouts securely to walls. Locate hangers at top and bottom and at approximately 60 inches (1500 mm) o.c.
- D. Parapet Scuppers: Continuously support scupper, set to correct elevation, and seal flanges to interior wall face, over cants or tapered edge strips, and under roofing membrane.
- E. Expansion-Joint Covers: Install expansion-joint covers at locations and of configuration indicated. Lap joints minimum of 4 inches (100 mm) in direction of water flow.

3.4 ROOF FLASHING INSTALLATION

- A. General: Install sheet metal flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and cited sheet metal standard. Provide concealed fasteners where possible, and set units true to line, levels, and slopes. Install work with laps, joints, and seams that are permanently watertight and weather resistant.
- B. Roof Edge Flashing: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated. Interlock bottom edge of roof edge flashing with continuous cleat anchored to substrate.
- C. Copings: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated.
- D. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending minimum of 4 inches (100 mm) over base flashing. Install stainless-steel draw band and tighten.
- E. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Fleming and Associates, PA

AP#2207

July 31, 2023

counterflashing 4 inches (100 mm) over base flashing. Lap counterflashing joints minimum of 4 inches (100 mm).

- F. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof. Seal with elastomeric sealant and clamp flashing to pipes that penetrate roof.

3.5 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.
- B. Clean and neutralize flux materials. Clean off excess solder.
- C. Clean off excess sealants.
- D. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions.

END OF SECTION 076200

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 078443 - JOINT FIRESTOPPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Joints in or between fire-resistance-rated constructions.
2. Joints at exterior curtain-wall/floor intersections.
3. Joints in smoke barriers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Product Schedule: For each joint firestopping system. Include location, illustration of firestopping system, and design designation of qualified testing agency.

1. Engineering Judgments: Where Project conditions require modification to a qualified testing agency's illustration for a particular joint firestopping system condition, submit illustration, with modifications marked, approved by joint firestopping system manufacturer's fire-protection engineer as an engineering judgment or equivalent fire-resistance-rated assembly.

1.3 INFORMATIONAL SUBMITTALS

A. Product test reports.

1.4 CLOSEOUT SUBMITTALS

A. Installer Certificates: From Installer indicating that joint firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991, "Approval of Firestop Contractors," or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics:

1. Perform joint firestopping system tests by a qualified testing agency acceptable to authorities having jurisdiction.
2. Test per testing standards referenced in "Joint Firestopping Systems" Article. Provide rated systems complying with the following requirements:
 - a. Joint firestopping systems shall bear classification marking of a qualified testing agency.
 - 1) UL in its "Fire Resistance Directory."

2.2 JOINT FIRESTOPPING SYSTEMS

- A. Joint Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of assemblies in or between which joint firestopping systems are installed. Joint firestopping systems shall accommodate building movements without impairing their ability to resist the passage of fire and hot gases.
- B. Joints in or between Fire-Resistance-Rated Construction: Provide joint firestopping systems with ratings determined per ASTM E 1966 or UL 2079.
 1. Fire-Resistance Rating: Equal to or exceeding the fire-resistance rating of the wall, floor, or roof in or between which it is installed.
- C. Joints at Exterior Curtain-Wall/Floor Intersections: Provide joint firestopping systems with rating determined per ASTM E 2307.
 1. F-Rating: Equal to or exceeding the fire-resistance rating of the floor assembly.
- D. Joints in Smoke Barriers: Provide fire-resistive joint systems with ratings determined per UL 2079 based on testing at a positive pressure differential of 0.30-inch wg.
 1. L-Rating: Not exceeding 5.0 cfm/ft. of joint at both ambient and elevated temperatures.
- E. Exposed Joint Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
- F. Accessories: Provide components of fire-resistive joint systems, including primers and forming materials, that are needed to install elastomeric fill materials and to maintain ratings required. Use only components specified by joint firestopping system manufacturer and approved by the qualified testing agency for conditions indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for joint configurations, substrates, and other conditions affecting performance of the Work.
- B. General: Install fire-resistive joint systems to comply with manufacturer's written installation instructions and published drawings for products and applications indicated.
- C. Install forming materials and other accessories of types required to support elastomeric fill materials during their application and in position needed to produce cross-sectional shapes and depths required to achieve fire ratings indicated.
 - 1. After installing elastomeric fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not indicated as permanent components of fire-resistive joint system.
- D. Install elastomeric fill materials for fire-resistive joint systems by proven techniques to produce the following results:
 - 1. Elastomeric fill voids and cavities formed by joints and forming materials as required to achieve fire-resistance ratings indicated.
 - 2. Apply elastomeric fill materials so they contact and adhere to substrates formed by joints.
 - 3. For elastomeric fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.2 IDENTIFICATION

- A. Joint Identification: Identify joint firestopping systems with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches of joint edge so labels are visible to anyone seeking to remove or joint firestopping system. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:
 - 1. The words "Warning - Joint Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
 - 2. Contractor's name, address, and phone number.
 - 3. Designation of applicable testing agency.
 - 4. Date of installation.
 - 5. Manufacturer's name.
 - 6. Installer's name.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.3 FIELD QUALITY CONTROL

- A. Inspecting Agency: Owner will engage a qualified testing agency to perform tests and inspections according to ASTM E 2393.
- B. Where deficiencies are found or joint firestopping systems are damaged or removed due to testing, repair or replace joint firestopping systems so they comply with requirements.
- C. Proceed with enclosing joint firestopping systems with other construction only after inspection reports are issued and installations comply with requirements.

END OF SECTION 078443

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silicone joint sealants.

1.2 ACTION SUBMITTALS

- A. Product Data: For each joint-sealant product.
- B. Samples: For each kind and color of joint sealant required.

1.3 INFORMATIONAL SUBMITTALS

- A. Product test reports.
- B. Preconstruction laboratory test reports.
- C. Preconstruction field-adhesion-test reports.
- D. Field-adhesion-test reports.
- E. Sample warranties.

1.4 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.

1.5 WARRANTY

- A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Two years from date of Substantial Completion.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

- 1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

- A. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 SILICONE JOINT SEALANTS

- A. Silicone, S, NS, 100/50, NT: Single-component, non-sag, plus 100 percent and minus 50 percent movement capability, non-traffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 100/50, Use NT.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. GE Construction Sealants; Momenive Performance Materials Inc.

2.3 JOINT-SEALANT BACKING

- A. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- B. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer.

2.4 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials.
- C. Masking Tape: Non-staining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove laitance and form-release agents from concrete.
 - 2. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion.
- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces.

3.2 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with ASTM C 1193 and joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
- C. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- D. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Non-sag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants to form smooth, uniform beads of configuration indicated. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 1. Provide concave joint profile per Figure 8A in ASTM C 1193 unless otherwise indicated.

END OF SECTION 079200

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 079513.13 - INTERIOR EXPANSION JOINT COVER ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes interior expansion joint cover assemblies.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For each expansion joint cover assembly.
 - 1. Include plans, elevations, sections, details, splices, block-out requirement, attachments to other work, and line diagrams.
- C. Samples: For each expansion joint cover assembly and for each color and texture specified.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

- A. Furnish units in longest practicable lengths to minimize field splicing.
- B. Include factory-fabricated closure materials and transition pieces, T-joints, corners, curbs, cross-connections, and other accessories as required to provide continuous expansion joint cover assemblies.

2.2 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Expansion joint cover assemblies shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
- B. Fire-Resistance Ratings: Provide expansion joint cover assemblies with fire barriers identical to those of systems tested for fire resistance according to UL 2079 or ASTM E 1966 by a qualified testing agency.
- C. Expansion Joint Design Criteria:
 - 1. Type of Movement: Wind sway.
 - a. Nominal Joint Width: As indicated on Drawings.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- b. Minimum Joint Width: As indicated on Drawings.
- c. Maximum Joint Width: As indicated on Drawings.
- 2. Type of Movement: Seismic.
 - a. Joint Movement: As indicated on Drawings.

2.3 FLOOR EXPANSION JOINT COVERS

- A. Metal-Plate Floor Joint Cover: Metal cover plate fixed on one side of joint gap and free to slide on other.
 - 1. Application: Floor to floor.
 - 2. Installation: Recessed.
 - 3. Load Capacity:
 - a. Uniform Load: 50 lb/sq. ft..
 - b. Concentrated Load: 300 lb.
 - c. Maximum Deflection: 0.0625 inch.
 - 4. Cover-Plate Design: Recessed to accept field-applied finish materials.
 - a. Recess depth: Depth sufficient for continuation of adjacent flooring materials.
 - 5. Products: Basis-of-Design Construction Specialties, Inc. model SGR dual-elastomeric seal.
 - a. Alternate Manufacturers:
 - 1) Inpro Corp.
 - 2) Balco.

2.4 WALL EXPANSION JOINT COVERS

- A. Dual-Elastomeric-Seal Wall Joint Cover: Assembly consisting of dual-elastomeric seals and center plate anchored to frames fixed to sides of joint gap.
 - 1. Application: Wall to wall.
 - 2. Center-Plate Design: Recessed to accept gypsum board or wall tile.
 - 3. Exposed Metal:
 - a. Aluminum: Manufacturer's standard.
 - 1) Color: As selected by Architect from full range of industry colors and color densities.
 - 4. Seal: Preformed elastomeric membranes or extrusions.
 - a. Color: As selected by Architect from manufacturer's full range.

2.5 CEILING EXPANSION JOINT COVERS

- A. Elastomeric-Seal Ceiling Joint Cover: Assembly consisting of elastomeric seal anchored to frames fixed to sides of joint gap.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

1. Application: Ceiling to ceiling.
 - a. Aluminum: Manufacturer's standard.
2. Seal: Preformed elastomeric membranes or extrusions.
 - a. Color: As selected by Architect from manufacturer's full range.

2.6 MATERIALS

- A. Aluminum: ASTM B 221, Alloy 6063-T5 for extrusions; ASTM B 209, Alloy 6061-T6 for sheet and plate.
- B. Elastomeric Seals: Manufacturer's standard preformed elastomeric membranes or extrusions to be installed in metal frames.
- C. Moisture Barrier: Manufacturer's standard, flexible elastomeric material.
- D. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107/C 1107M.

2.7 ALUMINUM FINISHES

- A. Mill finish.
- B. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

2.8 ACCESSORIES

- A. Moisture Barriers: Manufacturer's standard continuous, waterproof membrane within joint and attached to substrate on sides of joint.
 1. Provide where indicated on Drawings.
- B. Manufacturer's standard attachment devices, as indicated or required for complete installations.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Prepare substrates according to expansion joint cover assembly manufacturer's written instructions.
- B. Coordinate and furnish anchorages, setting drawings, and instructions for installing expansion joint cover assemblies.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- C. Comply with manufacturer's written instructions for storing, handling, and installing expansion joint cover assemblies and materials unless more stringent requirements are indicated.
- D. Metal Frames: Perform cutting, drilling, and fitting required to install expansion joint cover assemblies.
 - 1. Repair or grout block out as required for continuous frame support using nonmetallic, shrinkage-resistant grout.
 - 2. Install frames in continuous contact with adjacent surfaces.
 - a. Shimming is not permitted.
 - 3. Install in true alignment and proper relationship to joints and adjoining finished surfaces measured from established lines and levels.
 - 4. Adjust for differences between actual structural gap and nominal design gap due to ambient temperature at time of installation.
 - 5. Cut and fit ends to accommodate thermal expansion and contraction of metal without buckling of frames.
 - 6. Locate anchors at interval recommended by manufacturer, but not less than 3 inches from each end and not more than 24 inches o.c.
- E. Seals: Install elastomeric seals and membranes in frames to comply with manufacturer's written instructions. Install with minimum number of end joints.
 - 1. Provide in continuous lengths for straight sections.
 - 2. Seal transitions. Vulcanize or heat-weld field-spliced joints as recommended by manufacturer.
 - 3. Installation: Mechanically lock seals into frames or adhere to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- F. Install with hairline mitered corners where expansion joint cover assemblies change direction or abut other materials.
- G. Terminate exposed ends of expansion joint cover assemblies with field- or factory-fabricated termination devices.
- H. Moisture Barrier Drainage: If indicated, provide drainage fittings and connect to drains.

3.2 PROTECTION

- A. Do not remove protective covering until finish work in adjacent areas is complete.
- B. Protect the installation from damage by work of other Sections.

END OF SECTION 079513.13

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes hollow-metal work.

1.2 DEFINITIONS

- A. Minimum Thickness: Minimum thickness of base metal without coatings according to NAAMM-HMMA 803 or SDI A250.8.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Include elevations, door edge details, frame profiles, metal thicknesses, preparations for hardware, and other details.
- C. Schedule: Prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings.

1.4 INFORMATIONAL SUBMITTALS

- A. Product test reports.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1. Ceco Door; ASSA ABLOY.
 - 2. Curries Company; ASSA ABLOY.
 - 3. Steelcraft; an Allegion brand.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.2 REGULATORY REQUIREMENTS

- A. Fire-Rated Assemblies: Complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings and temperature-rise limits indicated, based on testing at positive pressure according to NFPA 252 or UL 10C.
 - 1. Smoke- and Draft-Control Assemblies: Provide an assembly with gaskets listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing according to UL 1784 and installed in compliance with NFPA 105.
- B. Fire-Rated, Borrowed-Lite Assemblies: Complying with NFPA 80 and listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction for fire-protection ratings indicated, based on testing according to NFPA 257 or UL 9.

2.3 INTERIOR DOORS AND FRAMES

- A. Heavy-Duty Doors and Frames: SDI A250.8, Level 2.
 - 1. Physical Performance: Level B according to SDI A250.4.
 - 2. Doors:
 - a. Type: As indicated in the Door and Frame Schedule.
 - b. Thickness: 1-3/4 inches.
 - c. Edge Construction: Model 2, Seamless.
 - d. Core: Manufacturer's standard.
 - 3. Frames:
 - a. Materials: Uncoated, steel sheet, minimum thickness of 0.053 inch.
 - b. Sidelite and Transom Frames: Fabricated from same thickness material as adjacent door frame.
 - c. Construction: Full profile welded.
 - 4. Exposed Finish: Prime.

2.4 EXTERIOR HOLLOW-METAL DOORS AND FRAMES

- A. Extra-Heavy-Duty Doors and Frames: SDI A250.8, Level 3.
 - 1. Physical Performance: Level A according to SDI A250.4.
 - 2. Doors:
 - a. Type: As indicated in the Door and Frame Schedule.
 - b. Thickness: 1-3/4 inches.
 - c. Face: Metallic-coated steel sheet, minimum thickness of 0.053 inch, with minimum A40 coating.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- d. Edge Construction: Model 2, Seamless.
- e. Core: Manufacturer's standard insulation material.
- 3. Thermal-Rated Doors: Provide doors fabricated with thermal-resistance value (R-value) of not less than 2.1 deg F x h x sq. ft./Btu when tested according to ASTM C 1363.
- 4. Frames:
 - a. Materials: Metallic-coated steel sheet, minimum thickness of 0.053 inch, with minimum A40 coating.
 - b. Construction: Full profile welded.
- 5. Exposed Finish: Prime.

2.5 BORROWED LITES

- A. Hollow-metal frames of uncoated steel sheet, minimum thickness of 0.053 inch.
- B. Construction: Full profile welded.

2.6 FRAME ANCHORS

- A. Jamb Anchors:
 - 1. Masonry Type: Adjustable strap-and-stirrup or T-shaped anchors to suit frame size, not less than 0.042 inch thick, with corrugated or perforated straps not less than 2 inches wide by 10 inches long; or wire anchors not less than 0.177 inch thick.
 - 2. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.
 - 3. Compression Type for Drywall Slip-on Frames: Adjustable compression anchors.
 - 4. Postinstalled Expansion Type for In-Place Concrete or Masonry: Minimum 3/8-inch-diameter bolts with expansion shields or inserts. Provide pipe spacer from frame to wall, with throat reinforcement plate, welded to frame at each anchor location.
- B. Floor Anchors: Formed from same material as frames, minimum thickness of 0.042 inch, and as follows:
 - 1. Monolithic Concrete Slabs: Clip-type anchors, with two holes to receive fasteners.
 - 2. Separate Topping Concrete Slabs: Adjustable-type anchors with extension clips, allowing not less than 2-inch height adjustment. Terminate bottom of frames at finish floor surface.

2.7 MATERIALS

- A. Cold-Rolled Steel Sheet: ASTM A 1008/A 1008M, Commercial Steel (CS), Type B; suitable for exposed applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Hot-Rolled Steel Sheet: ASTM A 1011/A 1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.
- C. Metallic-Coated Steel Sheet: ASTM A 653/A 653M, Commercial Steel (CS), Type B.
- D. Frame Anchors: ASTM A 879/A 879M, Commercial Steel (CS), 04Z coating designation; mill phosphatized.
 - 1. For anchors built into exterior walls, steel sheet complying with ASTM A 1008/A 1008M or ASTM A 1011/A 1011M, hot-dip galvanized according to ASTM A 153/A 153M, Class B.
- E. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A 153/A 153M.
- F. Power-Actuated Fasteners in Concrete: From corrosion-resistant materials.
- G. Grout: ASTM C 476, except with a maximum slump of 4 inches, as measured according to ASTM C 143/C 143M.
- H. Mineral-Fiber Insulation: ASTM C 665, Type I (blankets without membrane facing).
- I. Glazing: Section 088000 "Glazing."

2.8 FABRICATION

- A. Fabricate hollow-metal work to be rigid and free of defects, warp, or buckle. Accurately form metal to required sizes and profiles, with minimum radius for metal thickness. Where practical, fit and assemble units in manufacturer's plant. To ensure proper assembly at Project site, clearly identify work that cannot be permanently factory assembled before shipment.
- B. Hollow-Metal Doors:
 - 1. Exterior Doors: Provide weep-hole openings in bottoms of exterior doors to permit moisture to escape. Seal joints in top edges of doors against water penetration.
 - 2. Astragals: Provide overlapping astragal on one leaf of pairs of doors where required by NFPA 80 for fire-performance rating or where indicated.
- C. Hollow-Metal Frames: Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of same thickness metal as frames.
 - 1. Sidelite and Transom Bar Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by butt welding.
 - 2. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 - 3. Grout Guards: Weld guards to frame at back of hardware mortises in frames to be grouted.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

4. Floor Anchors: Weld anchors to bottoms of jambs with at least four spot welds per anchor; however, for slip-on drywall frames, provide anchor clips or countersunk holes at bottoms of jambs.
 5. Jamb Anchors: Provide number and spacing of anchors as follows:
 - a. Masonry Type: Locate anchors not more than 16 inches from top and bottom of frame. Space anchors not more than 32 inches o.c., to match coursing, and as follows:
 - 1) Three anchors per jamb from 60 to 90 inches high.
 - b. Stud-Wall Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
 - 1) Four anchors per jamb from 60 to 90 inches high.
 6. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers.
 - a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
 - b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
- D. Hardware Preparation: Factory prepare hollow-metal work to receive templated mortised hardware; include cutouts, reinforcement, mortising, drilling, and tapping according to SDI A250.6, the Door Hardware Schedule, and templates.
1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
 2. Comply with applicable requirements in SDI A250.6 and BHMA A156.115 for preparation of hollow-metal work for hardware.
- E. Stops and Moldings: Provide stops and moldings around glazed lites and louvers where indicated. Form corners of stops and moldings with mitered hairline joints.
1. Single Glazed Lites: Provide fixed stops and moldings welded on secure side of hollow-metal work.
 2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
 3. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames.
 4. Provide loose stops and moldings on inside of hollow-metal work.
 5. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.

2.9 STEEL FINISHES

- A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.
1. Shop Primer: SDI A250.10.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.10 ACCESSORIES

- A. Louvers: Provide sightproof louvers for interior doors, where indicated, which comply with SDI 111C, with blades or baffles formed of 0.020-inch-thick, cold-rolled steel sheet set into 0.032-inch-thick steel frame.
 - 1. Fire-Rated Automatic Louvers: Movable blades closed by actuating fusible link, and listed and labeled for use in fire-rated door assemblies of type and fire-resistance rating indicated.
- B. Mullions and Transom Bars: Join to adjacent members by welding or rigid mechanical anchors.
- C. Grout Guards: Formed from same material as frames, not less than 0.016 inch thick.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Hollow-Metal Frames: Install hollow-metal frames for doors, transoms, sidelites, borrowed lites, and other openings, of size and profile indicated. Comply with SDI A250.11 or NAAMM-HMMA 840 as required by standards specified.
 - 1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, leaving surfaces smooth and undamaged.
 - a. At fire-rated openings, install frames according to NFPA 80.
 - b. Where frames are fabricated in sections because of shipping or handling limitations, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces.
 - c. Install frames with removable stops located on secure side of opening.
 - d. Install door silencers in frames before grouting.
 - e. Remove temporary braces necessary for installation only after frames have been properly set and secured.
 - f. Check plumb, square, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
 - 2. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor, and secure with postinstalled expansion anchors.
 - a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.
 - 3. Metal-Stud Partitions: Solidly pack mineral-fiber insulation inside frames.
 - 4. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

5. Concrete Walls: Solidly fill space between frames and concrete with mineral-fiber insulation.
 6. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
 7. In-Place Metal or Wood-Stud Partitions: Secure slip-on drywall frames in place according to manufacturer's written instructions.
 8. Installation Tolerances: Adjust hollow-metal door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.
- B. Hollow-Metal Doors: Fit hollow-metal doors accurately in frames, within clearances specified below. Shim as necessary.
1. Non-Fire-Rated Steel Doors:
 - a. Between Door and Frame Jambs and Head: 1/8 inch plus or minus 1/32 inch.
 - b. Between Edges of Pairs of Doors: 1/8 inch to 1/4 inch plus or minus 1/32 inch.
 - c. At Bottom of Door: 3/4 inch plus or minus 1/32 inch.
 - d. Between Door Face and Stop: 1/16 inch to 1/8 inch plus or minus 1/32 inch.
 2. Fire-Rated Doors: Install doors with clearances according to NFPA 80.
 3. Smoke-Control Doors: Install doors and gaskets according to NFPA 105.
- C. Glazing: Comply with installation requirements in Section 088000 "Glazing" and with hollow-metal manufacturer's written instructions.
1. Secure stops with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

3.2 ADJUSTING AND CLEANING

- A. Final Adjustments: Check and readjust operating hardware items immediately before final inspection. Leave work in complete and proper operating condition. Remove and replace defective work, including hollow-metal work that is warped, bowed, or otherwise unacceptable.
- B. Remove grout and other bonding material from hollow-metal work immediately after installation.
- C. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions.
- E. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-core doors with wood-veneer faces.
2. Factory finishing flush wood doors.
3. Factory fitting flush wood doors to frames and factory machining for hardware.

B. Related Requirements:

1. Section 088000 "Glazing" for glass view panels in flush wood doors.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of door. Include factory-finishing specifications.

B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each kind of door; construction details not covered in Product Data; and the following:

1. Dimensions and locations of blocking.
2. Dimensions and locations of mortises and holes for hardware.
3. Dimensions and locations of cutouts.
4. Undercuts.
5. Requirements for veneer matching.
6. Doors to be factory finished and finish requirements.
7. Fire-protection ratings for fire-rated doors.

1.3 INFORMATIONAL SUBMITTALS

A. Quality Standard Compliance Certificates: AWI Quality Certification Program certificates.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. Algoma Hardwoods, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Mohawk Flush Doors, Inc.

2.2 FLUSH WOOD DOORS, GENERAL

- A. Quality Standard: In addition to requirements specified, comply with AWI's, AWMAC's, and WI's "Architectural Woodwork Standards."
 1. Provide AWI Quality Certification Labels indicating that doors comply with requirements of grades specified.
- B. WDMA I.S.1-A Performance Grade:
 1. Extra Heavy Duty.
- C. Fire-Rated Wood Doors: Doors complying with NFPA 80 that are listed and labeled by a qualified testing agency, for fire-protection ratings indicated, based on testing at positive pressure according to NFPA 252.
 1. Cores: Provide core specified or mineral core as needed to provide fire-protection rating indicated.
 2. Edge Construction: Provide edge construction with intumescent seals concealed by outer stile. Comply with specified requirements for exposed edges.
 3. Pairs: Provide fire-retardant stiles that are listed and labeled for applications indicated without formed-steel edges and astragals. Provide stiles with concealed intumescent seals. Comply with specified requirements for exposed edges.
- D. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control, based on testing according to UL 1784.
- E. Particleboard-Core Doors:
 1. Particleboard: ANSI A208.1, Grade LD-1.
 2. Blocking: Provide wood blocking in particleboard-core doors as needed to eliminate through-bolting hardware.
 3. Provide doors with glued-wood-stave cores instead of particleboard cores for doors indicated to receive exit devices.

2.3 VENEER-FACED DOORS FOR TRANSPARENT FINISH

- A. Interior Solid-Core Doors:
 1. Grade: Premium, with Grade A faces.
 2. Species: Red oak.
 3. Cut: Rotary cut.
 4. Match between Veneer Leaves: Book match.
 5. Assembly of Veneer Leaves on Door Faces: Center-balance match.
 6. Pair and Set Match: Provide for doors hung in same opening or separated only by mullions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

7. Core: Particleboard.
8. Construction: Five or seven plies. Stiles and rails are bonded to core, then entire unit is abrasive planed before veneering. Faces are bonded to core using a hot press.
9. Construction: Seven plies, either bonded or nonbonded construction.

2.4 LIGHT FRAMES AND LOUVERS

- A. Metal Frames for Light Openings in Fire-Rated Doors: Manufacturer's standard frame formed of 0.048-inch-thick, cold-rolled steel sheet; factory primed for paint with baked-enamel- or powder-coated finish; and approved for use in doors of fire-protection rating indicated.

2.5 FABRICATION

- A. Factory fit doors to suit frame-opening sizes indicated. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.
 1. Comply with NFPA 80 requirements for fire-rated doors.
- B. Factory machine doors for hardware that is not surface applied.
- C. Openings: Factory cut and trim openings through doors.
 1. Light Openings: Trim openings with moldings of material and profile indicated.
 2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."

2.6 FACTORY FINISHING

- A. General: Comply with referenced quality standard for factory finishing. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
 1. Finish faces, all four edges, edges of cutouts, and mortises. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.
- B. Factory finish doors that are indicated to receive transparent finish.
- C. Transparent Finish:
 1. Grade: Premium.
 2. Finish: AWT's, AWMAC's, and WT's "Architectural Woodwork Standards" System 11, catalyzed polyurethane.
 3. Finish: WDMA TR-6 catalyzed polyurethane.
 4. Staining: As selected by Architect from manufacturer's full range.
 5. Sheen: Satin.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Hardware: For installation, see Section 087100 "Door Hardware."
- B. Installation Instructions: Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.
 - 1. Install fire-rated doors according to NFPA 80.
 - 2. Install smoke- and draft-control doors according to NFPA 105.
- C. Job-Fitted Doors: Align and fit doors in frames with uniform clearances and bevels as indicated below; do not trim stiles and rails in excess of limits set by manufacturer or permitted for fire-rated doors. Machine doors for hardware. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
 - 1. Clearances: Provide 1/8 inch at heads, jambs, and between pairs of doors. Provide 1/8 inch from bottom of door to top of decorative floor finish or covering unless otherwise indicated. Where threshold is shown or scheduled, provide 1/4 inch from bottom of door to top of threshold unless otherwise indicated.
 - a. Comply with NFPA 80 for fire-rated doors.
- D. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
- E. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

END OF SECTION 081416

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 084113 - ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Exterior storefront framing.
2. Exterior manual-swing entrance doors and door-frame units.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Include plans, elevations, sections, full-size details, and attachments to other work.

1. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.

C. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams.

1.3 INFORMATIONAL SUBMITTALS

A. Energy Performance Certificates: NFRC-certified energy performance values from manufacturer.

B. Product test reports.

C. Field quality-control reports.

D. Sample warranties.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.

1.6 WARRANTY

- A. Special Warranty: Installer agrees to repair or replace components of aluminum-framed entrances and storefronts that do not comply with requirements or that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Finish Warranty: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrances and storefronts representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.
 - 1. Aluminum-framed entrances and storefronts shall withstand movements of supporting structure including, but not limited to, story drift, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
 - 2. Failure also includes the following:
 - a. Thermal stresses transferring to building structure.
 - b. Glass breakage.
 - c. Noise or vibration created by wind and thermal and structural movements.
 - d. Loosening or weakening of fasteners, attachments, and other components.
 - e. Failure of operating units.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.2 MANUFACTURERS

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. US Aluminum
 - b. Kawneer

2.3 FRAMING

- A. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads. Use Kawneer Clearwall SBI system for all exterior wall units and Kawneer 450 system for all interior partition units as the basis of design.
 1. Construction: Thermally broken at all exterior units.
 2. Glazing System: Retained mechanically with gaskets on four sides.
 3. Glazing Plane: Front.
 4. Finish: Color anodic finish for all units located within the exterior wall and clear anodic finish for all units located entirely on the interior of the building.
 5. Fabrication Method: Field-fabricated stick system.
- B. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.
- C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.
- D. Materials:
 1. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
 - a. Sheet and Plate: ASTM B 209.
 - b. Extruded Bars, Rods, Profiles, and Tubes: ASTM B 221.
 - c. Extruded Structural Pipe and Tubes: ASTM B 429/B 429M.
 - d. Structural Profiles: ASTM B 308/B 308M.

2.4 ENTRANCE DOOR SYSTEMS

- A. Entrance Doors: Manufacturer's standard glazed entrance doors for manual-swing operation.
 1. Door Construction: 1-3/4-inch overall thickness, with minimum 0.125-inch- thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.

2. Door Design: Wide stile; 5-inch nominal width.
3. Glazing Stops and Gaskets: Beveled, snap-on, extruded-aluminum stops and preformed gaskets.

2.5 ENTRANCE DOOR HARDWARE

- A. General: Provide entrance door hardware and entrance door hardware sets indicated in door and frame schedule for each entrance door to comply with requirements in this Section.
 1. Entrance Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturers' products.
 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
 3. Opening-Force Requirements:
 - a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
 - b. Accessible Interior Doors: Not more than 5 lbf to fully open door.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of entrance door hardware are indicated in "Entrance Door Hardware Sets" Article. Products are identified by using entrance door hardware designations as follows:
 1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in "Entrance Door Hardware Sets" Article.
- C. Pivot Hinges: BHMA A156.4, Grade 1.
 1. Offset-Pivot Hinges: Provide top, bottom, and intermediate offset pivots at each door leaf.
- D. Manual Flush Bolts: BHMA A156.16, Grade 1.
- E. Panic Exit Devices: BHMA A156.3, Grade 1, listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305.
- F. Cylinders: As specified in Section 087100 "Door Hardware."
- G. Strikes: Provide strike with black-plastic dust box for each latch or lock bolt; fabricated for aluminum framing.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- H. Operating Trim: BHMA A156.6.
- I. Closers: BHMA A156.4, Grade 1, with accessories required for a complete installation, sized as required by door size, exposure to weather, and anticipated frequency of use; adjustable to comply with field conditions and requirements for opening force.
- J. Weather Stripping: Manufacturer's standard replaceable components.
- K. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.
- L. Silencers: BHMA A156.16, Grade 1.
- M. Thresholds: BHMA A156.21, raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.

2.6 GLAZING

- A. Glazing: Comply with Section 088000 "Glazing."
- B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.
- C. Glazing Sealants: As recommended by manufacturer.

2.7 FABRICATION

- A. Form or extrude aluminum shapes before finishing.
- B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.
- C. Fabricate components that, when assembled, have the following characteristics:
 - 1. Profiles that are sharp, straight, and free of defects or deformations.
 - 2. Accurately fitted joints with ends coped or mitered.
 - 3. Physical and thermal isolation of glazing from framing members.
 - 4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
 - 5. Provisions for field replacement of glazing from exterior.
 - 6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.
- D. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- E. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.
- F. Entrance Doors: Reinforce doors as required for installing entrance door hardware.
- G. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.
- H. After fabrication, clearly mark components to identify their locations in Project according to Shop Drawings.

2.8 ALUMINUM FINISHES

- A. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General:
 - 1. Comply with manufacturer's written instructions.
 - 2. Do not install damaged components.
 - 3. Fit joints to produce hairline joints free of burrs and distortion.
 - 4. Rigidly secure nonmovement joints.
 - 5. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
 - 6. Seal perimeter and other joints watertight unless otherwise indicated.
- B. Metal Protection:
 - 1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
 - 2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.
- C. Set continuous sill members and flashing in full sealant bed as specified in Section 079200 "Joint Sealants" to produce weathertight installation.
- D. Install components plumb and true in alignment with established lines and grades.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- E. Install operable units level and plumb, securely anchored, and without distortion. Adjust weather-stripping contact and hardware movement to produce proper operation.
- F. Install glazing as specified in Section 088000 "Glazing."
- G. Entrance Doors: Install doors to produce smooth operation and tight fit at contact points.
 - 1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
 - 2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware according to entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

END OF SECTION 084113

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Mechanical door hardware for the following:
 - a. Swinging doors.
2. Cylinders for door hardware specified in other Sections.
3. Electrified door hardware.

1.2 PREINSTALLATION MEETINGS

- ##### A. Keying Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- ##### A. Product Data: For each type of product.

- ##### B. Shop Drawings: For electrified door hardware.

1. Include diagrams for power, signal, and control wiring.
2. Include details of interface of electrified door hardware and building safety and security systems.

- ##### C. Door hardware schedule.

- ##### D. Keying schedule.

1.4 INFORMATIONAL SUBMITTALS

- ##### A. Sample warranty.

1.5 CLOSEOUT SUBMITTALS

- ##### A. Maintenance data.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Supplier of products and an employer of workers trained and approved by product manufacturers and of an Architectural Hardware Consultant who is available during the course of the Work to consult Contractor, Architect, and Owner about door hardware and keying.
 - 1. Scheduling Responsibility: Preparation of door hardware and keying schedule.
 - 2. Engineering Responsibility: Preparation of data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.
- B. Architectural Hardware Consultant Qualifications: A person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project and who is currently certified by DHI as an Architectural Hardware Consultant (AHC) and an Electrified Hardware Consultant (EHC).

1.7 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Three years from date of Substantial Completion unless otherwise indicated below:
 - a. Electromagnetic Locks: Five years from date of Substantial Completion.
 - b. Exit Devices: Two years from date of Substantial Completion.
 - c. Manual Closers: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Door Assemblies: Where fire-rated doors are indicated, provide door hardware complying with NFPA 80 that is listed and labeled by a qualified testing agency, for fire-protection ratings indicated, based on testing at positive pressure according to NFPA 252 or UL 10C.
- B. Smoke- and Draft-Control Door Assemblies: Where smoke- and draft-control door assemblies are required, provide door hardware that complies with requirements of assemblies tested according to UL 1784 and installed in compliance with NFPA 105.
 - 1. Air Leakage Rate: Maximum air leakage of 0.3 cfm/sq. ft. at the tested pressure differential of 0.3-inch wg of water.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- C. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- D. Means of Egress Doors: Latches do not require more than 15 lbf to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- E. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the DOT's "ADA Standards for Transportation Facilities".

2.2 SCHEDULED DOOR HARDWARE

- A. Provide products for each door that comply with requirements indicated in Part 2 and door hardware schedule.

- 1. Door hardware is scheduled on Drawings.

2.3 HINGES

- A. Hinges: BHMA A156.1. Provide template-produced hinges for hinges installed on hollow-metal doors and hollow-metal frames.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. Allegion plc.
 - b. McKinney Products Company; an ASSA ABLOY Group company.
 - c. Stanley Commercial Hardware; a division of Stanley Security Solutions.

2.4 MECHANICAL LOCKS AND LATCHES

- A. Lock Functions: As indicated in door hardware schedule.
- B. Lock Throw: Comply with testing requirements for length of bolts required for labeled fire doors, and as follows:

- 1. Bored Locks: Minimum 1/2-inch latchbolt throw.
 - 2. Mortise Locks: Minimum 3/4-inch latchbolt throw.
 - 3. Deadbolts: Minimum 1-inch bolt throw.

- C. Lock Backset: 2-3/4 inches unless otherwise indicated.

- D. Lock Trim:

- 1. Description: Basis of design shall be Allegion Schlage L9000-Series Mortise Lock.
 - 2. Levers: Forged.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. 03 Lever in Satin Stainless Steel.
- 3. Escutcheons (Roses): Forged.
- 4. Dummy Trim: Match lever lock trim and escutcheons.
- E. Strikes: Provide manufacturer's standard strike for each lock bolt or latchbolt complying with requirements indicated for applicable lock or latch and with strike box and curved lip extended to protect frame; finished to match lock or latch.
 - 1. Flat-Lip Strikes: For locks with three-piece antifriction latchbolts, as recommended by manufacturer.
 - 2. Extra-Long-Lip Strikes: For locks used on frames with applied wood casing trim.
 - 3. Aluminum-Frame Strike Box: Manufacturer's special strike box fabricated for aluminum framing.
 - 4. Rabbet Front and Strike: Provide on locksets for rabbeted meeting stiles.
- F. Mortise Locks: BHMA A156.13; Security Grade 1; stamped steel case with steel or brass parts; Series 1000.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allegion plc.
 - b. Best Access Systems; Stanley Security Solutions, Inc.
 - c. Yale Security Inc; an ASSA ABLOY Group company.

2.5 ELECTRIC STRIKES

- A. Electric Strikes: BHMA A156.31; [**Grade 1**] [**Grade 2**]; with faceplate to suit lock and frame.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allegion plc.
 - b. Hager Companies.
 - c. Stanley Commercial Hardware; a division of Stanley Security Solutions.

2.6 EXIT LOCKS AND EXIT ALARMS

- A. Exit Locks and Alarms: BHMA A156.29, Grade 1.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. SARGENT Manufacturing Company; ASSA ABLOY.

2.7 MANUAL FLUSH BOLTS

- A. Manual Flush Bolts: BHMA A156.16; minimum 3/4-inch throw; designed for mortising into door edge.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allegion plc.
 - b. Trimco.

2.8 EXIT DEVICES AND AUXILIARY ITEMS

- A. Exit Devices and Auxiliary Items: BHMA A156.3.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allegion plc.
 - b. Stanley Commercial Hardware; a division of Stanley Security Solutions.
 - c. Yale Security Inc; an ASSA ABLOY Group company.

2.9 LOCK CYLINDERS

- A. Lock Cylinders: Tumbler type, constructed from brass or bronze, stainless steel, or nickel silver. Provide cylinder from same manufacturer of locking devices.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Allegion plc.
 - b. Best Access Systems; Stanley Security Solutions, Inc.
 - c. Yale Security Inc; an ASSA ABLOY Group company.
- B. Standard Lock Cylinders: BHMA A156.5; Grade 1 permanent cores; face finished to match lockset.
 1. Core Type: Interchangeable.
- C. High-Security Lock Cylinders: BHMA A156.30; Grade 1 permanent cores that are removable; face finished to match lockset.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Type: M, mechanical.

- D. Construction Master Keys: Provide cylinders with feature that permits voiding of construction keys without cylinder removal. Provide 10 construction master keys.
- E. Construction Cores: Provide construction cores that are replaceable by permanent cores. Provide 10 construction master keys.

2.10 KEYING

- A. Keying System: Factory registered, complying with guidelines in BHMA A156.28, appendix. Provide one extra key blank for each lock. Incorporate decisions made in keying conference.

1. Master Key System: Change keys and a master key operate cylinders.
 - a. Provide three cylinder change keys and five master keys.
2. Grand Master Key System: Change keys, a master key, and a grand master key operate cylinders.
 - a. Provide three cylinder change keys and five each of master and grand master keys.
3. Existing System:
 - a. Master key or grand master key locks to Owner's existing system.
 - b. Re-key Owner's existing master key system into new keying system.
4. Keyed Alike: Key all cylinders to same change key.

- B. Keys: Brass.

1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: "DO NOT DUPLICATE."

2.11 OPERATING TRIM

- A. Operating Trim: BHMA A156.6; stainless steel unless otherwise indicated.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Hager Companies.
 - b. Schlage
 - c. Best

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.12 ACCESSORIES FOR PAIRS OF DOORS

- A. Astragals: BHMA A156.22.

2.13 SURFACE CLOSERS

- A. Surface Closers: BHMA A156.4; rack-and-pinion hydraulic type with adjustable sweep and latch speeds controlled by key-operated valves and forged-steel main arm. Comply with manufacturer's written instructions for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. DORMA USA, Inc.
- b. Norton Door Controls; an ASSA ABLOY Group company.
- c. SARGENT Manufacturing Company; ASSA ABLOY.
- d. Stanley Commercial Hardware; a division of Stanley Security Solutions.
- e. Yale Security Inc; an ASSA ABLOY Group company.

2.14 MECHANICAL STOPS AND HOLDERS

- A. Wall- and Floor-Mounted Stops: BHMA A156.16.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. Hager Companies.
- b. Rockwood Manufacturing Company; an ASSA ABLOY Group company.
- c. Trimco.

2.15 DOOR GASKETING

- A. Door Gasketing: BHMA A156.22; with resilient or flexible seal strips that are easily replaceable and readily available from stocks maintained by manufacturer.

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. Hager Companies.
- b. National Guard Products, Inc.
- c. Pemko Manufacturing Co.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Maximum Air Leakage: When tested according to ASTM E 283 with tested pressure differential of 0.3-inch wg, as follows:
1. Smoke-Rated Gasketing: 0.3 cfm/sq. ft. of door opening.
 2. Gasketing on Single Doors: 0.3 cfm/sq. ft. of door opening.
 3. Gasketing on Double Doors: 0.50 cfm per foot of door opening.

2.16 THRESHOLDS

- A. Thresholds: BHMA A156.21; fabricated to full width of opening indicated.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Hager Companies.
 - b. National Guard Products, Inc.
 - c. Pemko Manufacturing Co.

2.17 METAL PROTECTIVE TRIM UNITS

- A. Metal Protective Trim Units: BHMA A156.6; fabricated from 0.050-inch-thick stainless steel; with manufacturer's standard machine or self-tapping screw fasteners.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Hager Companies.
 - b. Rockwood Manufacturing Company; an ASSA ABLOY Group company.
 - c. Trimco.

2.18 AUXILIARY ELECTRIFIED DOOR HARDWARE

- A. Auxiliary Electrified Door Hardware:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. DORMA USA, Inc.
 - b. Hager Companies.
 - c. SARGENT Manufacturing Company; ASSA ABLOY.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.19 FINISHES

- A. Provide finishes complying with BHMA A156.18 as indicated in door hardware schedule.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights to comply with the following unless otherwise indicated or required to comply with governing regulations.
 - 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
 - 2. Custom Steel Doors and Frames: HMMA 831.
 - 3. Wood Doors: DHI's "Recommended Locations for Architectural Hardware for Wood Flush Doors."
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work. Do not install surface-mounted items until finishes have been completed on substrates involved.
- C. Hinges: Install types and in quantities indicated in door hardware schedule, but not fewer than the number recommended by manufacturer for application indicated or one hinge for every 30 inches of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.
- D. Lock Cylinders: Install construction cores to secure building and areas during construction period.
 - 1. Replace construction cores with permanent cores as directed by Owner.
 - 2. Furnish permanent cores to Owner for installation.
- E. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings. Verify location with Architect.
 - 1. Configuration: Provide one power supply for each door opening with electrified door hardware.
- F. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."
- G. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they will impede traffic.
- H. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Do not notch perimeter gasketing to install other surface-applied hardware.

I. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.

J. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

3.2 ADJUSTING

A. Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

3.3 DOOR HARDWARE SCHEDULE

A. See plans for door hardware schedule.

END OF SECTION 087100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes:

1. Glass for windows, doors, interior borrowed lites, storefront framing, and glazed curtain walls.
2. Glazing sealants and accessories.

1.2 COORDINATION

- ##### A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances.

1.3 ACTION SUBMITTALS

- ##### A. Product Data: For each type of product.
- ##### B. Glass Samples: For each type of glass product other than clear monolithic vision glass; 12 inches square.
- ##### C. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

- ##### A. Preconstruction adhesion and compatibility test report.

1.5 QUALITY ASSURANCE

- ##### A. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C 1021 to conduct the testing indicated.

1.6 WARRANTY

- ##### A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.

1. Warranty Period: 10 years from date of Substantial Completion.

- B. Manufacturer's Special Warranty for Laminated Glass: Manufacturer agrees to replace laminated-glass units that deteriorate within specified warranty period. Deterioration of laminated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning laminated glass contrary to manufacturer's written instructions. Defects include edge separation, delamination materially obstructing vision through glass, and blemishes exceeding those allowed by referenced laminated-glass standard.

1. Warranty Period: 10 years from date of Substantial Completion.

- C. Manufacturer's Special Warranty for Insulating Glass: Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is the obstruction of vision by dust, moisture, or film on interior surfaces of glass.

1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. Guardian Industries Corp.; SunGuard.
2. Pilkington North America.
3. PPG Flat Glass; PPG Industries, Inc.

- B. Tinted Annealed Float Glass: ASTM C 1036, Type I, Class 2 (tinted), Quality-Q3.

- C. Fully Tempered Float Glass: ASTM C 1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

2.2 LAMINATED GLASS

- A. Laminated Glass: ASTM C 1172. Use materials that have a proven record of no tendency to bubble, discolor, or lose physical and mechanical properties after fabrication and installation.

1. Construction: Laminate glass with polyvinyl butyral interlayer to comply with interlayer manufacturer's written instructions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Interlayer Thickness: Provide thickness not less than that indicated and as needed to comply with requirements.
3. Interlayer Color: Clear unless otherwise indicated.

2.3 INSULATING GLASS

- A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified according to ASTM E 2190.
1. Sealing System: Dual seals.
 2. Spacer: Manufacturer's standard spacer material and construction.

2.4 GLAZING SEALANTS

- A. General:
1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
 2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.
 3. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range.
- B. Glazing Sealant: Neutral-curing silicone glazing sealant complying with ASTM C 920, Type S, Grade NS, Class 100/50, Use NT.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Dow Corning Corporation.
 - b. Sika Corporation.
 - c. Tremco Incorporated.

2.5 GLAZING TAPES

- A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C 1281 and AAMA 800 for products indicated below:
1. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.6 MISCELLANEOUS GLAZING MATERIALS

- A. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.
- B. Setting Blocks: Elastomeric material with a Shore, Type A durometer hardness of 85, plus or minus 5.
- C. Spacers: Elastomeric blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
- D. Edge Blocks: Elastomeric material of hardness needed to limit glass lateral movement (side walking).
- E. Cylindrical Glazing Sealant Backing: ASTM C 1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

PART 3 - EXECUTION

3.1 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.
- B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Provide spacers for glass lites where length plus width is larger than 50 inches.
- G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and according to requirements in referenced glazing publications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.2 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Apply heel bead of elastomeric sealant.
- F. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- G. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.3 GASKET GLAZING (DRY)

- A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.
- B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.

3.4 SEALANT GLAZING (WET)

- A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.
- B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.
- C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.5 CLEANING AND PROTECTION

- A. Immediately after installation remove nonpermanent labels and clean surfaces.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.
 - 1. If, despite such protection, contaminating substances do come into contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.
- C. Remove and replace glass that is damaged during construction period.

3.6 MONOLITHIC GLASS SCHEDULE

- A. Glass Type GL-1: Ultraclear fully tempered float glass.
 - 1. Basis-of-Design Product: PPG Industries, Inc.; Starphire.
 - 2. Minimum Thickness: 0.25 inches
 - 3. Safety glazing required.
- B. Glass Type GL-2: Tinted fully tempered float glass.
 - 1. Basis-of-Design Product: PPG Industries, Inc.; Starphire.
 - 2. Tint Color: Gray.
 - 3. Minimum Thickness: 0.25 inches.
 - 4. Safety glazing required.

3.7 LAMINATED GLASS SCHEDULE

- A. Glass Type GL-3: Clear laminated glass with two plies of annealed float glass.
 - 1. Basis-of-Design Product: PPG Industries, Inc.; Starphire.
 - 2. Minimum Thickness of Each Glass Ply: 0.125 inches.
 - 3. Interlayer Thickness: 0.030 inch.
 - 4. Safety glazing required.

3.8 INSULATING GLASS SCHEDULE

- A. Glass Type GL-4: Low-E-coated, tinted insulating glass.
 - 1. Basis-of-Design Product: PPG Industries, Inc.; OPTIGRAY + SUNGATE 400.
 - 2. Overall Unit Thickness: 1 inch.
 - 3. Minimum Thickness of Each Glass Lite: 0.125 inches.
 - 4. Outdoor Lite: Tinted fully tempered float glass.
 - 5. Tint Color: Gray.
 - 6. Interspace Content: Argon.
 - 7. Indoor Lite: Clear fully tempered float glass.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

8. Low-E Coating: Pyrolytic on second surface.
9. Winter Nighttime U-Factor: U-0.45 maximum.
10. Summer Daytime U-Factor: U-0.45 maximum.
11. Safety glazing required.

3.9 INSULATING-LAMINATED-GLASS SCHEDULE

A. Glass Type GL-5: Low-E-coated, tinted, insulating laminated glass.

1. Basis-of-Design Product: PPG Industries, Inc.; OPTIGRAY + SUNGATE 400.
2. Overall Unit Thickness: 1 inch.
3. Minimum Thickness of Outdoor Lite: 0.125 inches.
4. Outdoor Lite: Tinted fully tempered float glass.
5. Tint Color: Gray.
6. Interspace Content: Argon.
7. Indoor Lite: Clear laminated glass with two plies of fully tempered float glass.
 - a. Minimum Thickness of Each Glass Ply: 0.125 inches.
 - b. Interlayer Thickness: 0.030 inch.
8. Low-E Coating: Pyrolytic on second surface.
9. Winter Nighttime U-Factor: U-0.45 maximum.
10. Summer Daytime U-Factor: U-0.45 maximum.
11. Safety glazing required.

END OF SECTION 088000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Non-load-bearing steel framing systems for interior partitions.
2. Suspension systems for interior ceilings and soffits.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

A. Evaluation reports for firestop tracks.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- ##### A. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, according to ASTM E 119 by an independent testing agency.

2.2 FRAMING SYSTEMS

A. Framing Members, General: Comply with ASTM C 754 for conditions indicated.

1. Steel Sheet Components: Comply with ASTM C 645 requirements for metal unless otherwise indicated.
2. Protective Coating: ASTM A 653/A 653M, G40, hot-dip galvanized unless otherwise indicated.

B. Studs and Runners: ASTM C 645.

1. Steel Studs and Runners:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - 1) MBA Building Supplies.
 - 2) MRI Steel Framing, LLC.
 - 3) Steel Network, Inc. (The).
 - b. Minimum Base-Metal Thickness: As indicated on Drawings.
 - c. Depth: As indicated on Drawings.
- C. Firestop Tracks: Top runner manufactured to allow partition heads to expand and contract with movement of structure while maintaining continuity of fire-resistance-rated assembly indicated; in thickness not less than indicated for studs and in width to accommodate depth of studs.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. CEMCO; California Expanded Metal Products Co.
 - b. ClarkDietrich Building Systems.
 - c. Steel Network, Inc. (The).
- D. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. ClarkDietrich Building Systems.
 - b. MRI Steel Framing, LLC.
 - 2. Minimum Base-Metal Thickness: 0.0269 inch.
- E. Cold-Rolled Channel Bridging: Steel, 0.0538-inch minimum base-metal thickness, with minimum 1/2-inch-wide flanges.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. ClarkDietrich Building Systems.
 - b. MRI Steel Framing, LLC.
 - 2. Depth: 1-1/2 inches.
 - 3. Clip Angle: Not less than 1-1/2 by 1-1/2 inches, 0.068-inch-thick, galvanized steel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

F. Hat-Shaped, Rigid Furring Channels: ASTM C 645.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. ClarkDietrich Building Systems.
 - b. MRI Steel Framing, LLC.
2. Minimum Base-Metal Thickness: As indicated on Drawings.
3. Depth: As indicated on Drawings.

2.3 SUSPENSION SYSTEMS

- A. Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch-diameter wire, or double strand of 0.048-inch-diameter wire.
- B. Hanger Attachments to Concrete:
1. Expansion Anchors: Fabricated from corrosion-resistant materials, with allowable load or strength design capacities calculated according to ICC-ES AC193 and ACI 318 greater than or equal to the design load, as determined by testing per ASTM E 488/E 488M conducted by a qualified testing agency.
 2. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with allowable load capacities calculated according to ICC-ES AC70, greater than or equal to the design load, as determined by testing per ASTM E 1190 conducted by a qualified testing agency.
- C. Wire Hangers: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.16 inch in diameter.
- D. Flat Hangers: Steel sheet, 1 by 3/16 inch by length indicated.
- E. Carrying Channels: Cold-rolled, commercial-steel sheet with a base-metal thickness of 0.0538 inch and minimum 1/2-inch-wide flanges.
1. Depth: 2-1/2 inches.
- F. Furring Channels (Furring Members):
1. Cold-Rolled Channels: 0.0538-inch uncoated-steel thickness, with minimum 1/2-inch-wide flanges, 3/4 inch deep.
 2. Steel Studs and Runners: ASTM C 645.
 - a. Minimum Base-Metal Thickness: As indicated on Drawings.
 - b. Depth: As indicated on Drawings.
 3. Hat-Shaped, Rigid Furring Channels: ASTM C 645, 7/8 inch deep.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Minimum Base-Metal Thickness: As indicated on Drawings.

2.4 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards.
 1. Fasteners for Metal Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.
- B. Isolation Strip at Exterior Walls: Provide the following:
 1. Asphalt-Saturated Organic Felt: ASTM D 226/D 226M, Type I (No. 15 asphalt felt), nonperforated.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Installation Standard: ASTM C 754.
 1. Gypsum Plaster Assemblies: Also comply with requirements in ASTM C 841 that apply to framing installation.
 2. Portland Cement Plaster Assemblies: Also comply with requirements in ASTM C 1063 that apply to framing installation.
 3. Gypsum Veneer Plaster Assemblies: Also comply with requirements in ASTM C 844 that apply to framing installation.
 4. Gypsum Board Assemblies: Also comply with requirements in ASTM C 840 that apply to framing installation.
- B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.
- C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.
- D. Install bracing at terminations in assemblies.
- E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.2 INSTALLING FRAMED ASSEMBLIES

- A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.
- C. Install studs so flanges within framing system point in same direction.
- D. Install tracks (runners) at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.
 - 1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
 - 2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install runner track section (for cripple studs) at head and secure to jamb studs.
 - a. Install two studs at each jamb unless otherwise indicated.
 - b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch clearance from jamb stud to allow for installation of control joint in finished assembly.
 - c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.
 - 3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
 - 4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.
 - a. Firestop Track: Where indicated, install to maintain continuity of fire-resistance-rated assembly indicated.
 - 5. Curved Partitions:
 - a. Bend track to uniform curve and locate straight lengths so they are tangent to arcs.
 - b. Begin and end each arc with a stud, and space intermediate studs equally along arcs. On straight lengths of no fewer than two studs at ends of arcs, place studs 6 inches o.c.
- E. Direct Furring:
 - 1. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.

3.3 INSTALLING SUSPENSION SYSTEMS

- A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.
- C. Suspend hangers from building structure as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.
 - a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.
 - a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.
 - 3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 - 4. Flat Hangers: Secure to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices and fasteners that are secure and appropriate for structure and hanger, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 - 5. Do not attach hangers to steel roof deck.
 - 6. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
 - 7. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
 - 8. Do not connect or suspend steel framing from ducts, pipes, or conduit.
- D. Fire-Resistance-Rated Assemblies: Wire tie furring channels to supports.
- E. Seismic Bracing: Sway-brace suspension systems with hangers used for support.
- F. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

END OF SECTION 092216

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior gypsum board.
2. Exterior gypsum board for ceilings and soffits.
3. Tile backing panels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- ##### A. Fire-Resistance-Rated Assemblies:
- For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 119 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

- ##### A. Size:
- Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

A. Gypsum Board, Type X: ASTM C 1396/C 1396M.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Gypsum.
 - b. CertainTeed Corporation.
 - c. Georgia-Pacific Building Products.
 - d. United States Gypsum Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Thickness: 5/8 inch.
3. Long Edges: Tapered and featured (rounded or beveled) for prefilling.

B. Mold-Resistant Gypsum Board: ASTM C 1396/C 1396M. With moisture- and mold-resistant core and paper surfaces.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Gypsum.
 - b. CertainTeed Corporation.
 - c. Georgia-Pacific Building Products.
 - d. United States Gypsum Company.
2. Core: 5/8 inch, Type X.
3. Long Edges: Tapered.
4. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.4 EXTERIOR GYPSUM BOARD FOR CEILINGS AND SOFFITS

A. Exterior Gypsum Soffit Board: ASTM C 1396/C 1396M, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Gypsum.
 - b. CertainTeed Corporation.
 - c. Georgia-Pacific Building Products.
 - d. United States Gypsum Company.
2. Core: 5/8 inch, Type X.

B. Glass-Mat Gypsum Sheathing Board: ASTM C 1177/C 1177M, with fiberglass mat laminated to both sides and with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Gypsum.
 - b. CertainTeed Corporation.
 - c. Georgia-Pacific Building Products.
 - d. United States Gypsum Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Core: 5/8 inch, Type X.

2.5 TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A118.9 and ASTM C 1288 or ASTM C 1325, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

- a. CertainTeed Corporation.
- b. National Gypsum Company.
- c. United States Gypsum Company.

2. Thickness: 1/2 inch.
3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.6 TRIM ACCESSORIES

- A. Interior Trim: ASTM C 1047.

1. Material: Galvanized or aluminum-coated steel sheet, rolled zinc, plastic, or paper-faced galvanized-steel sheet.
2. Shapes:
 - a. Cornerbead.
 - b. Bullnose bead.
 - c. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - d. L-Bead: L-shaped; exposed long flange receives joint compound.
 - e. U-Bead: J-shaped; exposed short flange does not receive joint compound.
 - f. Expansion (control) joint.

- B. Exterior Trim: ASTM C 1047.

1. Material: Hot-dip galvanized-steel sheet, plastic, or rolled zinc.
2. Shapes:
 - a. Cornerbead.
 - b. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - c. Expansion (Control) Joint: One-piece, rolled zinc with V-shaped slot and removable strip covering slot opening.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.7 JOINT TREATMENT MATERIALS

- A. General: Comply with ASTM C 475/C 475M.
- B. Joint Tape:
 - 1. Interior Gypsum Board: Paper.
 - 2. Exterior Gypsum Soffit Board: Paper.
 - 3. Glass-Mat Gypsum Sheathing Board: 10-by-10 glass mesh.
 - 4. Tile Backing Panels: As recommended by panel manufacturer.
- C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.
 - 1. Prefilling: At open joints and damaged surface areas, use setting-type taping compound.
 - 2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.
 - a. Use setting-type compound for installing paper-faced metal trim accessories.
 - 3. Fill Coat: For second coat, use setting-type, sandable topping compound.
 - 4. Finish Coat: For third coat, use setting-type, sandable topping compound.
 - 5. Skim Coat: For final coat of Level 5 finish, use setting-type, sandable topping compound.
- D. Joint Compound for Exterior Applications:
 - 1. Exterior Gypsum Soffit Board: Use setting-type taping compound and setting-type, sandable topping compound.
 - 2. Glass-Mat Gypsum Sheathing Board: As recommended by sheathing board manufacturer.
- E. Joint Compound for Tile Backing Panels:
 - 1. Glass-Mat, Water-Resistant Backing Panel: As recommended by backing panel manufacturer.
 - 2. Cementitious Backer Units: As recommended by backer unit manufacturer.

2.8 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.
- B. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.
- C. Steel Drill Screws: ASTM C 1002 unless otherwise indicated.
 - 1. Use screws complying with ASTM C 954 for fastening panels to steel members from 0.033 to 0.112 inch thick.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.
- D. Acoustical Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Hilti, Inc.
 - b. Pecora Corporation.
 - c. United States Gypsum Company.
- E. Thermal Insulation: As specified in Section 072100 "Thermal Insulation."
- F. Vapor Retarder: As specified in Section 072600 "Vapor Retarders."

PART 3 - EXECUTION

3.1 APPLYING AND FINISHING PANELS

- A. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- B. Comply with ASTM C 840.
- C. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide 1/4- to 1/2-inch- wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.
- D. For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.
- E. Prefill open joints and damaged surface areas.
- F. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.
- G. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C 840:
 1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
 2. Level 2: Panels that are substrate for tile.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3. Level 3: Where indicated on Drawings.
4. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.
 - a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."
5. Level 5: Where indicated on Drawings.
 - a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."
- H. Glass-Mat Gypsum Sheathing Board: Finish according to manufacturer's written instructions for use as exposed soffit board.
- I. Glass-Mat Faced Panels: Finish according to manufacturer's written instructions.
- J. Cementitious Backer Units: Finish according to manufacturer's written instructions.

3.2 PROTECTION

- A. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- B. Remove and replace panels that are wet, moisture damaged, and mold damaged.

END OF SECTION 092900

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ceramic wall tile.
2. Tile backing panels.
3. Metal edge strips.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples:

1. Each type and composition of tile and for each color and finish required. For ceramic mosaic tile in color blend patterns, provide samples of each color blend.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Installer is a five-star member of the National Tile Contractors Association or a Trowel of Excellence member of the Tile Contractors' Association of America.
2. Installer's supervisor for Project holds the International Masonry Institute's Foreman Certification.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

3. Installer employs Ceramic Tile Education Foundation Certified Installers or installers recognized by the U.S. Department of Labor as Journeyman Tile Layers.
- B. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 1. Build mockup of floor tile installation.
 2. Build mockup of wall tile installation.
 3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

PART 2 - PRODUCTS

2.1 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide Standard-grade tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.
- B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.

2.2 TILE PRODUCTS

- A. As indicated on Drawing Finish Notes, Schedule and Legend.

2.3 TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A118.9 or ASTM C 1325, Type A.
 1. Thickness: 5/8 inch.

2.4 SETTING MATERIALS

- A. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.02.
- B. Standard Dry-Set Mortar (Thinset): ANSI A118.1.
 1. For wall applications, provide non-sagging mortar.

2.5 GROUT MATERIALS

- A. Water-Cleanable Epoxy Grout: ANSI A118.3.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- B. Grout for PregROUTED Tile Sheets: Same product used in factory to pregROUT tile sheets.

2.6 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.
- B. Metal Edge Strips: As indicated on Drawing Finish Schedule, Legend and Notes.
- C. Floor Sealer: Manufacturer's standard product for sealing grout joints and that does not change color or appearance of grout.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with thinset mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.
- B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.
- C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

3.3 CERAMIC TILE INSTALLATION

- A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.
- B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
- E. Where accent tile differs in thickness from field tile, vary setting bed thickness so that tiles are flush.
- F. Jointing Pattern: Lay tile in pattern shown on drawings. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
- G. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
 - 1. Ceramic Wall Tile: 1/8 inch.
- H. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
- I. Metal Edge Strips: Install at locations indicated.
- J. Install tile backing panels and treat joints according to ANSI A108.11 and manufacturer's written instructions for type of application indicated. Use modified dry-set mortar for bonding material unless otherwise directed in manufacturer's written instructions.

END OF SECTION 093013

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes acoustical panels and exposed suspension systems for interior ceilings.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each exposed product and for each color and texture specified.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plans, drawn to scale, and coordinated with each other, using input from installers of the items involved.
- B. Product test reports.
- C. Research reports.
- D. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: Class A according to ASTM E 1264.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

2. Smoke-Developed Index: 450 or less.

2.2 ACOUSTICAL PANELS

- A. Basis-of-Design Manufacturer: USG Mars Clima Plus SLT 24"x24".
- B. Alternate Manufacturers:
 1. Armstrong Ceilings.
 2. Certainteed.

2.3 METAL SUSPENSION SYSTEM

- A. Basis-of-Design Manufacturer: USG DX/DXL 15/16" Suspension Grid.
- B. Alternate Manufacturers:
 1. Armstrong Ceilings.
 2. Certainteed.

2.4 ACCESSORIES

- A. Attachment Devices: Size for five times the design load indicated in ASTM C 635/C 635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
- B. Hold-Down Clips: Manufacturer's standard hold-down.
- C. Impact Clips: Manufacturer's standard impact-clip system designed to absorb impact forces against acoustical panels.

2.5 METAL EDGE MOLDINGS AND TRIM

- A. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders unless otherwise indicated.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- B. Layout openings for penetrations centered on the penetrating items.

3.2 INSTALLATION

- A. Install acoustical panel ceilings according to ASTM C 636/C 636M and manufacturer's written instructions.
- B. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.
 - 1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
 - 2. Do not use exposed fasteners, including pop rivets, on moldings and trim.
 - 3. Arrange directionally patterned acoustical panels as follows:
 - a. As indicated on reflected ceiling plans.
 - 4. Install hold-down impact clips in areas indicated; space according to panel manufacturer's written instructions unless otherwise indicated.

END OF SECTION 095113

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Resilient base.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, not less than 12 inches long.

PART 2 - PRODUCTS

2.1 VINYL BASE

A. Basis-of-Design Product: Flexco Rubber Flooring Rubber Base

1. Height: 4".
2. Base type: Coved.
3. Color: #078 Umber.

B. Alternate Manufacturer:

1. Allstate.
2. Johnsonite.

2.2 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 3 - EXECUTION

3.1 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Do not install resilient products until they are the same temperature as the space where they are to be installed.
- C. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.2 RESILIENT BASE INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient base.
- B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
- C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.
- D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
- E. Do not stretch resilient base during installation.
- F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.
- G. Preformed Corners: Install preformed corners before installing straight pieces.

3.3 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.
- B. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 096519 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Vinyl composition floor tile.
 - 2. Electrostatic-dissipative floor tile.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For each type of floor tile. Include floor tile layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.
 - 1. Show details of special patterns.
- C. Samples: Full-size units of each color and pattern of floor tile required.

1.3 CLOSEOUT SUBMITTALS

- A. Maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics: For resilient tile flooring, as determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

2.2 VINYL COMPOSITION FLOOR TILE

- A. Basis-of-Design Product: Armstrong Imperial Texture Standard Excelon Vinyl Composition Tile.
 - 1. Color No.: 51927 Field Grey.
 - 2. Size: 12"x12".
- B. Alternate Manufacturers:

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

1. Mannington.
2. Flexco.

2.3 ELECTROSTATIC DISSIPATIVE FLOOR TILE

- A. Basis-of-Design Product: Flexco Delane Electrostatic Dissipative Vinyl Composition Tile.
 1. Color No.: 40 White/Gray.
 2. Size: 12"x12".
- B. Alternate Manufacturers:
 1. Mannington EDVC Tile.
 2. Armstrong Excelon EDVC Tile.

2.4 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by floor tile manufacturer for applications indicated.
- B. Adhesives: Water-resistant type recommended by floor tile and adhesive manufacturers to suit floor tile and substrate conditions indicated.
- C. Floor Polish: Provide protective, liquid floor-polish products recommended by floor tile manufacturer.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Prepare substrates according to floor tile manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates: Prepare according to ASTM F 710.
 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by floor tile manufacturer. Do not use solvents.
 3. Alkalinity and Adhesion Testing: Perform tests recommended by floor tile manufacturer. Proceed with installation only after substrate alkalinity falls within range on pH scale recommended by manufacturer in writing, but not less than 5 or more than 9 pH.
 4. Moisture Testing: Proceed with installation only after substrates pass testing according to floor tile manufacturer's written recommendations, but not less stringent than the following:

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- a. Perform anhydrous calcium chloride test according to ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
- b. Perform relative humidity test using in situ probes according to ASTM F 2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level.
- C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.
- D. Do not install floor tiles until they are the same temperature as the space where they are to be installed.
- E. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient floor tile.

3.2 FLOOR TILE INSTALLATION

- A. Comply with manufacturer's written instructions for installing floor tile.
- B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.
 - 1. Lay tiles square with room axis.
- C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.
 - 1. Lay tiles with grain direction alternating in adjacent tiles (basket-weave pattern).
- D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
- E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent marking device.
- G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in finished floor areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- H. Adhere floor tiles to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.3 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting floor tile.
- B. Floor Polish: Remove soil, adhesive, and blemishes from floor tile surfaces before applying liquid floor polish.
 - 1. Apply one coat(s).
- C. Cover floor tile until Substantial Completion.

END OF SECTION 096519

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 096813 - TILE CARPETING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes modular carpet tile.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For carpet tile installation, plans showing the following:
 - 1. Columns, doorways, enclosing walls or partitions, built-in cabinets, and locations where cutouts are required in carpet tiles.
 - 2. Carpet tile type, color, and dye lot.
 - 3. Type of subfloor.
 - 4. Type of installation.
 - 5. Pattern of installation.
 - 6. Pattern type, location, and direction.
 - 7. Pile direction.
 - 8. Type, color, and location of insets and borders.
 - 9. Type, color, and location of edge, transition, and other accessory strips.
 - 10. Transition details to other flooring materials.
- C. Samples: For each exposed product and for each color and texture required.

1.4 INFORMATIONAL SUBMITTALS

- A. Product test reports.
- B. Sample warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance data.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Certified by the International Certified Floorcovering Installers Association at the Commercial II certification level.

1.7 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.

- 1. Warranty Period: Not Applicable

PART 2 - PRODUCTS

2.1 CARPET TILE

- A. Basis-of-Design Product: Shaw Contract
 - 1. Style: Construct Tile 5T104
 - 2. Color: Emblem 03753
 - 3. Size: 24"x24".
 - 4. Installation: Quarter turned.

2.2 INSTALLATION ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.
- B. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive type to suit products and subfloor conditions indicated, that comply with flammability requirements for installed carpet tile, and are recommended by carpet tile manufacturer for releasable installation.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Concrete Slabs:
 - 1. Moisture Testing: Perform tests so that each test area does not exceed 200 sq. ft., and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- a. Anhydrous Calcium Chloride Test: ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - b. Relative Humidity Test: Using in situ probes, ASTM F 2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.
 - c. Perform additional moisture tests recommended in writing by adhesive and carpet tile manufacturers. Proceed with installation only after substrates pass testing.
- B. Wood Subfloors: Verify that underlayment surface is free of irregularities and substances that may interfere with adhesive bond or show through surface.
- C. Metal Subfloors: Verify that underlayment surface is free of irregularities and substances that may interfere with adhesive bond or show through surface.
- D. Painted Subfloors: Perform bond test recommended in writing by adhesive manufacturer.
1. Access Flooring Systems: Verify access floor substrate is compatible with carpet tile and adhesive, if any, and underlayment surface is gaps greater than 1/8 inch and protrusions more than 1/32 inch.

3.2 PREPARATION

- A. General: Comply with CRI's "CRI Carpet Installation Standards" and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile.
- B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch wide or wider, and protrusions more than 1/32 inch unless more stringent requirements are required by manufacturer's written instructions.
- C. Concrete Substrates: Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturers.
- D. Metal Substrates: Clean grease, oil, soil and rust, and prime if recommended in writing by adhesive manufacturer. Rough sand painted metal surfaces and remove loose paint. Sand aluminum surfaces, to remove metal oxides, immediately before applying adhesive.
- E. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

- A. General: Comply with CRI's "CRI Carpet Installation Standard," Section 18, "Modular Carpet" and with carpet tile manufacturer's written installation instructions.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- B. Installation Method: As recommended in writing by carpet tile manufacturer.
- C. Maintain dye-lot integrity. Do not mix dye lots in same area.
- D. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.
- E. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on carpet tile as marked on subfloor. Use nonpermanent, nonstaining marking device.
- G. Install pattern parallel to walls and borders.
- H. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 096813

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 099113 - EXTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes surface preparation and the application of paint systems on the following exterior substrates:
 - 1. Steel.

1.2 DEFINITIONS

- A. MPI Gloss Level 1: Not more than five units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. MPI Gloss Level 3: 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- C. MPI Gloss Level 4: 20 to 35 units at 60 degrees and not less than 35 units at 85 degrees, according to ASTM D 523.
- D. MPI Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.
- E. MPI Gloss Level 6: 70 to 85 units at 60 degrees, according to ASTM D 523.
- F. MPI Gloss Level 7: More than 85 units at 60 degrees, according to ASTM D 523.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include preparation requirements and application instructions.
 - 1. Include printout of current "MPI Approved Products List" for each product category specified, with the proposed product highlighted.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Benjamin Moore & Co.
2. PPG Architectural Coatings.
3. Sherwin-Williams Company (The).

- B. Products: Subject to compliance with requirements, provide one of the products listed in the Exterior Painting Schedule for the paint category indicated.

2.2 PAINT, GENERAL

- A. MPI Standards: Products shall comply with MPI standards indicated and shall be listed in its "MPI Approved Products Lists."
- B. Material Compatibility:
1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- C. Proceed with coating application only after unsatisfactory conditions have been corrected.
1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates and paint systems indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

3.3 APPLICATION

- A. Apply paints according to manufacturer's written instructions and recommendations in "MPI Manual."
- B. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

3.4 CLEANING AND PROTECTION

- A. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- B. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 EXTERIOR PAINTING SCHEDULE

A. Steel Substrates:

1. Water-Based Light Industrial Coating System:

- a. Prime Coat: Primer, alkyd, anti-corrosive for metal.
 - 1) Benjamin Moore: Super Spec HP Alkyd Metal Primer, P06/KP06.
 - 2) PPG: Speedhide Interior/Exterior Rush Inhibitive Steel Primer, 6-212
 - 3) Sherwin-Williams: Kem Kromik Universal Metal Primer, B50NZ1
- b. Intermediate Coat: Light industrial coating, exterior, water based, matching topcoat.
- c. Topcoat: Light industrial coating, exterior, water based, Gloss
 - 1) Benjamin Moore: Ultra Spec HP DTM 100% Acrylic Latex Gloss, HP28/FP28.
 - 2) PPG: Pitt-Tech Plus Int./Ext. High Gloss DTM Industrial Enamel, 90-1310.
 - 3) Sherwin-Williams: Pro Industrial Acrylic Gloss Coating, B66W006611.

END OF SECTION 099113

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes surface preparation and the application of paint systems on the following interior substrates:
 - 1. Concrete.
 - 2. Concrete masonry units (CMUs).
 - 3. Steel.
 - 4. Exposed interior steel columns.
 - 5. Gypsum board.

1.2 DEFINITIONS

- A. MPI Gloss Level 1: Not more than five units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. MPI Gloss Level 2: Not more than 10 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- C. MPI Gloss Level 3: 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- D. MPI Gloss Level 4: 20 to 35 units at 60 degrees and not less than 35 units at 85 degrees, according to ASTM D 523.
- E. MPI Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.
- F. MPI Gloss Level 6: 70 to 85 units at 60 degrees, according to ASTM D 523.
- G. MPI Gloss Level 7: More than 85 units at 60 degrees, according to ASTM D 523.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include preparation requirements and application instructions.
 - 1. Include Printout of current "MPI Approved Products List" for each product category specified, with the proposed product highlighted.
- B. Samples: For each type of paint system and in each color and gloss of topcoat.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

1.4 QUALITY ASSURANCE

- A. Mockups: Apply mockups of each paint system indicated and each color and finish selected to verify preliminary selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Architect will select one surface to represent surfaces and conditions for application of each paint system.
 - a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft..
 - b. Other Items: Architect will designate items or areas required.
 - 2. Final approval of color selections will be based on mockups.
 - a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the products listed in the Interior Painting Schedule for the paint category indicated.
- B. Basis-of-Design Manufacturer all paints including exposed interior steel columns: Sherwin-Williams.
 - 1. Alternate Manufacturers.
 - a. Benjamin Moore & Co.
 - b. PPG Architectural Finishes, Inc.

2.2 PAINT, GENERAL

- A. MPI Standards: Products shall comply with MPI standards indicated and shall be listed in its "MPI Approved Products Lists."
- B. Material Compatibility:
 - 1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.
- C. Colors: As selected by Architect from manufacturer's full range.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - 1. Concrete and Masonry (CMU): 12 percent.
 - 2. Gypsum Board: 12 percent.
- C. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- D. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates and paint systems indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.

3.3 APPLICATION

- A. Apply paints according to manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual."
- B. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

3.4 INTERIOR PAINTING SCHEDULE

- A. Concrete and CMU Substrates:
 - 1. Acrylic Finish: Two finish coats over a primer/
 - a. Primer: Interior concrete and masonry primer.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- 1) Sherwin-Williams, Loxon Concrete & Masonry Primer, A24W8300.
- b. Finish Coats: Interior low-luster acrylic enamel. Finish as scheduled.
 - 1) Flat (Gloss Level 1).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Flat, B30W2600 Series.
 - 2) Egg-Shell (Gloss Level 3).
 - a) Sherwin-Williams, ProMar200 Zero VOC Interior Latex Egg-Shell, B20W4026 Series.
 - 3) Semi-Gloss (Gloss Level 5).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Latex Semi-Gloss, B34W2600 Series.

B. Steel Substrates and Exposed Interior Steel Columns.

- 1. Alkyd System. Anticorrosive.
 - a. Prime Coat: Quick-drying alkyd metal primer.
 - 1) Sherwin-Williams, Industrial & marine, Ken Kromik Universal Alkyd Primer, B50NZ6.
 - b. Intermediate Coat: Interior alkyd matching topcoat.
 - 1) Sherwin-Williams, ProMar 200, Alkyd Semi-Gloss, B34W251.
 - c. Topcoat: Interior (finish as scheduled.)
 - 1) Sherwin-Williams, ProMar 200, Alkyd Semi-Gloss, B34W251.

C. Gypsum Board Substrates.

- 1. Latex System.
 - a. Prime Coat: Interior latex primer/sealer.
 - 1) Sherwin-Williams, ProMar 200 Interior Latex Primer B28W08200.
 - b. Intermediate Coat: Interior latex matching topcoat.
 - 1) Flat (Gloss Level 1).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Flat, B30W2600 Series.
 - 2) Egg-Shell (Gloss Level 3).
 - a) Sherwin-Williams, ProMar200 Zero VOC Interior Latex Egg-Shell, B20W4026 Series.
 - 3) Semi-Gloss (Gloss Level 5).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Latex Semi-Gloss, B34W2600 Series.
 - c. Topcoat: Interior latex (finish as scheduled).
 - 1) Flat (Gloss Level 1).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Flat, B30W2600 Series.
 - 2) Egg-Shell (Gloss Level 3).
 - a) Sherwin-Williams, ProMar200 Zero VOC Interior Latex Egg-Shell, B20W4026 Series.
 - 3) Semi-Gloss (Gloss Level 5).
 - a) Sherwin-Williams, ProMar 200 Zero VOC Interior Latex Semi-Gloss, B34W2600 Series.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Public and Private-use washroom accessories.
2. Under-lavatory guards.
3. Custodial accessories.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

A. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

1.5 WARRANTY

A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.2 PUBLIC AND PRIVATE-USE WASHROOM ACCESSORIES

A. Toilet Tissue (Roll) Dispenser (TP):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Description: Roll-in-reserve dispenser cabinet with hinged front secured with tumbler lockset.
3. Mounting: Surface mounted.
4. Operation: Non-control delivery with theft-resistant spindle.
5. Capacity: Designed for 4-1/2- or 5-inch- diameter tissue rolls.
6. Material and Finish: Stainless steel, No. 4 finish (satin).

B. Paper Towel (Folded) Dispenser (PT):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc. Model #9452 (basis of design)
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Mounting: Recessed mounted.
3. Minimum Capacity: 600 C-fold or 800 multifold towels.
4. Material and Finish: Stainless steel, No. 4 finish (satin).
5. Lockset: Tumbler type.
6. Refill Indicator: Pierced slots at front.

C. Liquid-Soap Dispenser (SD) surface mounted to be provided by Owner installed by Contractor.

D. Grab Bar:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
4. Outside Diameter: 1-1/2 inches.
5. Configuration and Length: As indicated on Drawings.

E. Sanitary-Napkin Disposal Unit (SN):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc. Model #0852 (basis of design)
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Mounting: Surface mounted.
3. Door or Cover: Self-closing, disposal-opening cover and hinged face panel with tumbler lockset.
4. Receptacle: Removable.
5. Material and Finish: Stainless steel, No. 4 finish (satin).

F. Mirror Unit (MR):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Frame: Stainless-steel channel.
 - a. Corners: Welded and ground smooth.
3. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.
 - a. One-piece, galvanized-steel, wall-hanger device with spring-action locking mechanism to hold mirror unit in position with no exposed screws or bolts.
4. Size: 18" X 36" unless otherwise noted.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

G. Baby Changing Station (BCS):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc. Model #9013-9 (basis of design)
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Frame: Stainless-steel exterior sides and end panels polished to a #4 satin finish.
 - a. Corners: Welded and ground smooth.
3. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.
 - a. One-piece, galvanized-steel, wall-hanger device with spring-action locking mechanism to hold Baby Changing Station unit in position with no exposed screws or bolts.
4. Size: 25.25" tall X 37" wide X 4" deep unless otherwise noted.

H. Waste Receptacle (WR):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc. Model #B-2280 21 gal. open top (basis of design)
 - c. Bradley Corporation.
2. Frame/exterior material: 304 22ga. Stainless-steel polished to #4 satin finish.
 - a. Corners: Welded and ground smooth.
3. Size: 29.25" tall X 14.875" square unless otherwise noted.

2.3 UNDERLAVATORY GUARDS

A. Underlavatory Guard at each sink:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Plumberex Specialty Products, Inc.
 - b. Truebro by IPS Corporation.
2. Description: Insulating pipe covering for supply and drain piping assemblies that prevents direct contact with and burns from piping; allow service access without removing coverings.
3. Material and Finish: Antimicrobial, molded plastic, white.

2.4 CUSTODIAL ACCESSORIES

A. Utility Shelf at each Janitor's Room:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Description: With exposed edges turned down not less than 1/2 inch and supported by two triangular brackets welded to shelf underside.
3. Size: 16 inches long by 6 inches deep.
4. Material and Finish: Not less than nominal 0.05-inch- thick stainless steel, No. 4 finish (satin).

B. Mop and Broom Holder at each Janitor's Room:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
2. Description: Unit with shelf, hooks, holders, and rod suspended beneath shelf.
3. Length: 36 inches.
4. Hooks: Four.
5. Mop/Broom Holders: Three, spring-loaded, rubber hat, cam type.
6. Material and Finish: Stainless steel, No. 4 finish (satin).

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- a. Shelf: Not less than nominal 0.05-inch- thick stainless steel.
- b. Rod: Approximately 1/4-inch- diameter stainless steel.

C. Paper Towel (Folded) Dispenser (PT):

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Specialties, Inc.
 - b. Bobrick Washroom Equipment, Inc.
 - c. Bradley Corporation.
- 2. Mounting: Surface mounted.
- 3. Minimum Capacity: 400 C-fold or 525 multifold towels.
- 4. Material and Finish: Stainless steel, No. 4 finish (satin).
- 5. Lockset: Tumbler type.
- 6. Refill Indicator: Pierced slots at sides or front.

D. Liquid-Soap Dispenser (SD to be provided by Owner) installed by Contractor:

2.5 FABRICATION

- A. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
- B. Grab Bars: Install to withstand a downward load of at least 250 lbf, when tested according to ASTM F 446.

END OF SECTION 102800

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 104413 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes fire-protection cabinets for portable fire extinguishers.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For fire-protection cabinets.

1.3 CLOSEOUT SUBMITTALS

- A. Maintenance data.

1.4 COORDINATION

- A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.
- B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

PART 2 - PRODUCTS

2.1 FIRE-PROTECTION CABINET

- A. Cabinet Type: Suitable for fire extinguisher.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Specialties, Inc.
 - b. JL Industries, Inc.; a division of the Activar Construction Products Group.
 - c. Larsens Manufacturing Company.
- B. Cabinet Construction: Nonrated.
- C. Cabinet Material: Cold-rolled steel sheet.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- D. Semirecessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface with exposed trim face and wall return at outer edge (backbend).
 - 1. Rolled-Edge Trim: 2-1/2-inch backbend depth.
- E. Cabinet Trim Material: Stainless-steel sheet.
- F. Door Material: Stainless-steel sheet.
- G. Door Style: Center glass panel with frame.
- H. Door Glazing: Acrylic sheet.
 - 1. Acrylic Sheet Color: Clear transparent acrylic sheet.
- I. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.
- J. Accessories:
 - 1. Door Lock: Cam lock that allows door to be opened during emergency by pulling sharply on door handle.
 - 2. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as directed by Architect.
 - a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER."
 - 1) Location: Applied to cabinet door.
 - 2) Application Process: Pressure-sensitive vinyl letters.
 - 3) Lettering Color: Red.
 - 4) Orientation: Vertical.
- K. Materials:
 - 1. Cold-Rolled Steel: ASTM A 1008/A 1008M, Commercial Steel (CS), Type B.
 - a. Finish: Baked enamel or powder coat.
 - b. Color: White.
 - 2. Stainless Steel: ASTM A 666, Type 304.
 - a. Finish: No. 4 directional satin finish.
 - 3. Transparent Acrylic Sheet: ASTM D 4802, Category A-1 (cell-cast sheet), 6 mm thick, with Finish 1 (smooth or polished).

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

2.2 FABRICATION

- A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Prepare recesses for semirecessed fire-protection cabinets as required by type and size of cabinet and trim style.
- B. Install fire-protection cabinets in locations and at mounting heights indicated
- C. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.
- D. Identification: Apply vinyl lettering at locations indicated.
- E. Adjust fire-protection cabinet doors to operate easily without binding. Verify that integral locking devices operate properly.

END OF SECTION 104413

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes portable, hand-carried fire extinguishers.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and maintenance data.

1.5 COORDINATION

- A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

1.6 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace fire extinguishers that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Six years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP#2207

July 31, 2023

- B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

- A. Fire Extinguishers: Type, size, and capacity for each fire-protection cabinet indicated.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
 - a. Amerex Corporation.
 - b. JL Industries, Inc.; a division of the Activar Construction Products Group.
 - c. Larsens Manufacturing Company.
 - 2. Instruction Labels: Include pictorial marking system complying with NFPA 10, Appendix B.
- B. Multipurpose Dry-Chemical Type: UL-rated 10lb. nominal capacity, with monoammonium phosphate-based dry chemical in manufacturer's standard enameled container.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine fire extinguishers for proper charging and tagging.
 - 1. Remove and replace damaged, defective, or undercharged fire extinguishers.
- B. Install fire extinguishers in locations indicated and in compliance with requirements of authorities having jurisdiction.

END OF SECTION 104416

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 122113 - HORIZONTAL LOUVER BLINDS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Horizontal louver blinds with aluminum slats.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For horizontal louver blinds, include fabrication and installation details.
- C. Samples: For each exposed product and for each color and texture specified, 12 inches long.

1.3 INFORMATIONAL SUBMITTALS

- A. Product test reports.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance data.

PART 2 - PRODUCTS

2.1 HORIZONTAL LOUVER BLINDS, ALUMINUM SLATS

- A. Slats: Aluminum; alloy and temper recommended by producer for type of use and finish indicated; with crowned profile and radius corners.
 1. Width: 1 inch.
 2. Thickness: Manufacturer's standard.
 3. Features:
 - a. Lift-Cord Rout Holes: Minimum size required for lift cord and located near back (outside) edge of slat to maximize slat overlap and minimize light gaps between slats.
 - b. Perforated Slats: Openness factor of 6 to 7 percent.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

- B. Headrail: Formed steel or extruded aluminum; long edges returned or rolled. Headrails fully enclose operating mechanisms on three sides.
 - 1. Manual Lift Mechanism:
 - a. Lift-Cord Lock: Top locking; stops lift cord when blind is in fully opened or fully closed positions only; equipped with ring pull not more than 4 inches long.
 - b. Operator: Extension of lift cord(s) through lift-cord lock mechanism to form cord pull.
 - 2. Manual Tilt Mechanism: Enclosed worm-gear mechanism and linkage rod that adjusts ladders.
 - a. Tilt: Full.
 - b. Operator: Clear-plastic wand.
 - 3. Manual Lift-Operator and Tilt-Operator Lengths: Manufacturer's standard.
- C. Bottom Rail: Formed-steel or extruded-aluminum tube that secures and protects ends of ladders and lift cords and has plastic- or metal-capped ends.
 - 1. Type: Manufacturer's standard.
- D. Ladders: Reinforced vinyl tape, manufacturer's standard width.
- E. Valance: Manufacturer's standard.
- F. Mounting Brackets: With spacers and shims required for blind placement and alignment indicated.
- G. Side Channels and Perimeter Light Gap Seals: Manufacturer's standard.
- H. Colors, Textures, Patterns, and Gloss:
 - 1. Slats: As selected by Architect from manufacturer's full range.
 - 2. Components: Provide rails, cords, ladders, and materials exposed to view matching or coordinating with slat color unless otherwise indicated.

2.2 HORIZONTAL LOUVER BLIND FABRICATION

- A. Product Safety Standard: Fabricate horizontal louver blinds to comply with WCMA A 100.1 including requirements for corded, flexible, looped devices; lead content of components; and warning labels.
- B. Unit Sizes: Fabricate units in sizes to fill window and other openings as follows, measured at 74 deg F:
 - 1. Between (Inside) Jamb Installation: Width equal to jamb-to-jamb dimension of opening in which blind is installed less 1/4 inch per side or 1/2 inch total, plus or minus 1/8 inch. Length equal to head-to-sill dimension of opening in which blind is installed less 1/4 inch, plus or minus 1/8 inch.

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install horizontal louver blinds level and plumb, aligned and centered on openings, and aligned with adjacent units according to manufacturer's written instructions.
 - 1. Locate so exterior slat edges are not closer than 1 inch from interior faces of glass and not closer than 1/2 inch from interior faces of glazing frames through full operating ranges of blinds.
 - 2. Install mounting and intermediate brackets to prevent deflection of headrails.
 - 3. Install with clearances that prevent interference with adjacent blinds, adjacent construction, and operating hardware of glazed openings, other window treatments, and similar building components and furnishings.
- B. Adjust horizontal louver blinds to operate free of binding or malfunction through full operating ranges.
- C. Clean horizontal louver blind surfaces after installation according to manufacturer's written instructions.

3.2 SCHEDULE

- A. Provide blinds for full window covering at exterior windows in the following locations:
 - 1. Room A132 Office.
 - 2. Room A136 Office.
 - 3. Room A137 Office.

END OF SECTION 122113

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

SECTION 123661.16 - SOLID SURFACING COUNTERTOPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid surface material countertops.
2. Solid surface material backsplashes.
3. Solid surface material end splashes.
4. Solid surface material apron fronts.
5. Solid surface material sinks.

1.2 ACTION SUBMITTALS

- A. Product Data: For countertop materials and sinks.
- B. Shop Drawings: For countertops. Show materials, finishes, edge and backsplash profiles, methods of joining, and cutouts for plumbing fixtures.
- C. Samples: For each type of material exposed to view.

1.3 QUALITY ASSURANCE

- A. Fabricator Qualifications: Certified participant in AWI's Quality Certification Program.
- B. Installer Qualifications: Certified participant in AWI's Quality Certification Program.

PART 2 - PRODUCTS

2.1 SOLID SURFACE COUNTERTOP MATERIALS

- A. Solid Surface Material: Homogeneous-filled plastic resin complying with ICPA SS-1. Corian Clam Shell is an approved equal to that specified herein.
 1. Type: Provide Standard type unless Special Purpose type is indicated.
 2. Integral Sink Bowls: Comply with CSA B45.5/IAPMO Z124.
 3. Colors and Patterns: Wilsonart "Jovian 9211CM".

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

2.2 COUNTERTOP FABRICATION

- A. Fabricate countertops according to solid surface material manufacturer's written instructions and to the AWI/AWMAC/WT's "Architectural Woodwork Standards."
 - 1. Grade: Premium.
- B. Configuration:
 - 1. Front: Straight, slightly eased at top with separate apron, 6 inches high, recessed 1/4-inch behind front edge.
 - 2. Backsplash: Straight, slightly eased at corner.
 - 3. End Splash: Matching backsplash.
- C. Countertops: 1/2-inch- thick, solid surface material.
- D. Backsplashes: 1/2-inch- thick, solid surface material.
- E. Joints: Fabricate countertops without joints.
- F. Cutouts and Holes:
 - 1. Undercounter Plumbing Fixtures: Make cutouts for fixtures in shop using template or pattern furnished by fixture manufacturer. Form cutouts to smooth, even curves.

2.3 INSTALLATION MATERIALS

- A. Adhesive: Product recommended by solid surface material manufacturer.
- B. Sealant for Countertops: Comply with applicable requirements in Section 079200 "Joint Sealants."

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Pre-drill holes for screws as recommended by manufacturer.
- B. Install backsplashes and end splashes by adhering to wall and countertops with adhesive.
- C. Install aprons to backing and countertops with adhesive.
- D. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts to prevent damage while cutting. Make cutouts to accurately fit items to be installed, and at right angles to

Fayetteville Regional Airport - Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

AP# 2207

July 31, 2023

finished surfaces unless beveling is required for clearance. Ease edges slightly to prevent snipping.

- E. Apply sealant to gaps at walls; comply with Section 079200 "Joint Sealants."

END OF SECTION 123661.16

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 210517 - SLEEVES AND SLEEVE SEALS FOR FIRE-SUPPRESSION PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Sleeves.
 - 2. Grout.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Cast-Iron Wall Pipes: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral water stop unless otherwise indicated.
- B. Galvanized-Steel Wall Pipes: ASTM A 53/A 53M, Schedule 40, with plain ends and welded steel collar; zinc coated.
- C. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.
- D. PVC-Pipe Sleeves: ASTM D 1785, Schedule 40.

2.2 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
 - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
 - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 - 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 3. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants specified in Division 07 Section "Joint Sealants."
- E. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Division 07 Section "Penetration Firestopping."

3.2 SLEEVE AND SLEEVE-SEAL SCHEDULE

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
 - 1. Interior Partitions:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

- a. Piping Smaller Than NPS 6: Galvanized-steel-pipe sleeves.
- b. Piping NPS 6 and Larger: Galvanized-steel-sheet sleeves.

END OF SECTION 210517

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 210518 - ESCUTCHEONS FOR FIRE-SUPPRESSION PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Escutcheons.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.
- C. One-Piece, Stamped-Steel Type: With chrome-plated finish and spring-clip fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. Escutcheons for New Piping:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
- b. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
- c. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, stamped-steel type.
- d. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
- e. Bare Piping in Unfinished Service Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
- f. Bare Piping in Equipment Rooms: One-piece, cast-brass type with polished, chrome-plated finish.

3.2 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 210518

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 211000 - WATER-BASED FIRE-SUPPRESSION SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following fire-suppression piping inside the building:
 - 1. Wet-pipe sprinkler systems.
- B. Related Sections include the following:
 - 1. Division 10 Section "Fire Extinguisher Cabinets" and "Fire Extinguishers" for cabinets and fire extinguishers.
 - 2. Division 28 Section "Fire Detection and Alarm" for alarm devices not specified in this Section.
- C. The work performed shall be complete in every respect. Each system that has been installed or modified shall be complete in accordance with the applicable codes, standards, Owner's Insurance Underwriter requirements, Manufacturer's recommendations and Underwriters Laboratories, Inc. (UL) listings.

1.3 DEFINITIONS

- A. CPVC: Chlorinated polyvinyl chloride plastic.
- B. CR: Chlorosulfonated polyethylene synthetic rubber.
- C. High-Pressure Piping System: Fire-suppression piping system designed to operate at working pressure higher than standard 175 psig.
- D. PE: Polyethylene plastic.
- E. Underground Service-Entrance Piping: Underground service piping below the building.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.4 SYSTEM DESCRIPTIONS

- A. Wet-Pipe Sprinkler System: Automatic sprinklers are attached to piping containing water and that is connected to water supply. Water discharges immediately from sprinklers when they are opened. Sprinklers open when heat melts fusible link or destroys frangible device. Hose connections are included if indicated.

1.5 PERFORMANCE REQUIREMENTS

- A. Standard Piping System Component Working Pressure: Listed for at least 175 psig.
- B. Fire-suppression sprinkler system design shall be approved by authorities having jurisdiction. Secure all required approvals and inspection from City of Fayetteville and the State of North Carolina.
 - 1. Margin of Safety for Available Water Flow and Pressure: 10 percent, including losses through water-service piping, valves, and backflow preventers.
 - 2. Sprinkler Occupancy Hazard Classifications: Revise first 20 subparagraphs below to suit authorities having jurisdiction. See Appendix A in NFPA 13 for recommended hazard classifications.
 - a. Building Service Areas: Ordinary Hazard, Group 1.
 - b. Electrical Equipment Rooms: Ordinary Hazard, Group 1.
 - c. General Storage Areas: Ordinary Hazard, Group 1.
 - d. Office and Public Areas: Light Hazard.
 - e. All other areas, unless noted otherwise: Light Hazard.
 - 3. Minimum Density for Automatic-Sprinkler Piping Design:
 - a. Light-Hazard Occupancy: 0.10 gpm over 1500-sq. ft. area.
 - b. Ordinary-Hazard, Group 1 Occupancy: 0.15 gpm over 1500-sq. ft. area.
 - 4. Maximum Protection Area per Sprinkler: Per UL listing.
- C. Seismic Performance: Fire-suppression piping shall be capable of withstanding the effects of earthquake motions determined according to NFPA 13 and ASCE 7, "Minimum Design Loads for Buildings and Other Structures": Section 9, "Earthquake Loads."

1.6 SUBMITTALS

- A. Product Data: For the following:
 - 1. Piping materials, including sprinkler specialty fittings.
 - 2. Pipe hangers and supports, including seismic restraints.
 - 3. Valves, including listed fire-protection valves, unlisted general-duty valves, and specialty

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- valves and trim.
- 4. Sprinklers, escutcheons, and guards. Include sprinkler flow characteristics, mounting, finish, and other pertinent data.
- B. Approved Sprinkler Piping Drawings: Working plans, prepared according to NFPA 13, that have been approved by authorities having jurisdiction, including hydraulic calculations, if applicable.
- C. Field Test Reports and Certificates: Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13. Include "Contractor's Material and Test Certificate for Aboveground Piping" and "Contractor's Material and Test Certificate for Underground Piping."
- D. Welding certificates.
- E. Field quality-control test reports.
- F. Operation and Maintenance Data: For sprinkler specialties to include in emergency, operation, and maintenance manuals.
- G. Work Schedule:
 - 1. The Contractor shall submit a proposed work schedule. This schedule shall indicate the time necessary for the following:
 - a. Project Start Up
 - b. Property Survey
 - c. Design
 - d. Shop drawing and calculation submittals
 - e. Approvals, all parties
 - f. Installation, identifying specific areas or floors
 - g. Final acceptance tests
 - 2. The proposed work schedule shall be reviewed and finalized during the pre-construction meeting and shall be updated at each weekly construction coordination meeting.
- H. Shop Drawings:
 - 1. The Contractor shall submit electronic copies (PDF) of AutoCAD prepared shop drawings, catalog cuts and hydraulic calculations to the Architect/Engineer for approval prior to being submitted to any City/County or State Agencies. Shop drawings shall show light fixtures, ducts, mechanical equipment, structural elements, and all other items which may affect the layout of sprinkler heads and piping. Plans showing sprinkler work shall be not less than 1/8 inch per foot.
 - a. The AutoCAD prepared shop drawings shall be consistent and compatible with AUTOCAD format being used for the overall project.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. The Contractor shall directly submit the required quantity of shop drawings and calculations to the Owner's Insurance Underwriter for approval in accordance with the shop drawing submittal schedule. The Owner's insurance underwriter shall be given a minimum of thirty (30) days to review shop drawings.
- c. Shop drawing shall show all of the information required by NFPA Standard 13 for working plans and shall include drawings showing the location of all equipment, controls, piping, valves, and drains.
- d. The shop drawings shall indicate all areas to be sprinklered and type of hazard, locations and sizes of water supply pipe, major drains and tests, alarm check valve and water motor gong, risers and other main piping and valves, and the location of fire department connections. Complete riser diagrams shall also be submitted. The drawings shall locate by dimension all fire protection piping and sprinkler heads. The installation of the fire pump shall be clearly defined and any details necessary to show all the work to be installed shall be provided.
- e. Provide all electrical wiring diagrams of air compressors, flow switches, alarms, and supervising equipment for coordination under Division 26. All wiring shall be provided under Division 26, ELECTRICAL.

I. Drawing Approval by Code Authority:

- 1. The Contractor shall provide the Owner and Architect/Engineer/Designer with one copy of all documents that are reviewed and approved by the local code authorities and insurance underwriters. These documents shall include, but not be limited to, the following items:
 - a. Site inspection forms
 - b. Permit drawings
 - c. Final inspection forms
- 2. All documents must include all required approval stamps, signatures, or other information necessary to properly certify that the installation has been reviewed and accepted by the City of Fayetteville Building and Fire Departments.

1.7 QUALITY ASSURANCE

A. Installer Qualifications:

- 1. Installer's responsibilities include designing, fabricating, and installing fire-suppression systems and providing professional engineering services needed to assume engineering responsibility. Base calculations on results of fire-hydrant flow test.
 - a. Engineering Responsibility: Preparation of working plans, calculations, and field test reports by a NICET Level III technician.
- 2. The Contractor shall have at least five (5) years of experience in installation of systems of this type and be familiar with all applicable local, State, and Federal laws and regulations.
- 3. The Contractor shall provide a job site supervisor who shall be present at all times that

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

work is actively in progress.

4. Project List:

- a. Contractor shall submit with his bid a list of similar projects which he has completed in the past five (5) years and a list of sprinkler systems installed within the past five (5) years. Projects listed must be of a size comparable to the proposed project.

- B. NFPA Standards: Fire-suppression-system equipment, specialties, accessories, installation, and testing shall comply with the following:

1. NFPA 13, "Installation of Sprinkler Systems."

- C. During the installation and warranty period, the Contractor shall provide emergency repair service for the sprinkler system within four (4) hours of a request by the Owner for such service. This service shall be provided on a twenty-four (24) hour per day, seven (7) days per week basis.

1.8 COORDINATION

- A. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.
- B. It shall be the Contractor's responsibility to inspect the job site and become familiar with the conditions under which the work will be performed. Inspection of the building may be made by appointment with the Owner.
- C. The Contractor shall be responsible for attending a pre-construction meeting and weekly construction coordination meetings with the Owner and Architect/Engineer.
- D. The Contractor shall be responsible for prior coordination of all work. Due to the need for maximizing area availability, only portions of floors will be available for construction. Multiple hydrostatic tests may be required on a single sprinkler zone.
- E. The work will be performed within an operating building. Noise producing work must be properly coordinated with the Owner's staff. The Contractor shall be responsive to all staff noise complaints. If responding to noise complaints impacts schedule or fees, the Owner and Architect/Engineer shall be immediately notified in writing.

1.9 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Existing Sprinkler Cabinets: Confirm there is a minimum of four of each type for spare sprinklers plus two of each type of sprinkler wrench or other tools. Add a spare sprinklers as required to maintain the minimum of number of sprinklers required by NFPA 13 and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

sprinkler wrench. Include separate cabinet with sprinklers and wrench for each type of sprinkler on Project.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 STEEL PIPE AND FITTINGS

- A. Threaded-End, Standard-Weight Steel Pipe: ASTM A 53/A 53M, ASTM A 135, or ASTM A 795, with factory- or field-formed threaded ends.
 - 1. Cast-Iron Threaded Flanges: ASME B16.1.
 - 2. Malleable-Iron Threaded Fittings: ASME B16.3.
 - 3. Gray-Iron Threaded Fittings: ASME B16.4.
 - 4. Steel Threaded Pipe Nipples: ASTM A 733, made of ASTM A 53/A 53M or ASTM A 106, Schedule 40, seamless steel pipe. Include ends matching joining method.
 - 5. Steel Threaded Couplings: ASTM A 865.
- B. Grooved-End, Standard-Weight Steel Pipe: ASTM A 53/A 53M, ASTM A 135, or ASTM A 795, with Factory- or field-formed, roll-grooved ends.
 - 1. Grooved-Joint Piping Systems:
 - a. Available Manufacturers:
 - 1) Anvil International, Inc.
 - 2) Central Sprinkler Corp.
 - 3) Ductilic, Inc.
 - 4) JDH Pacific, Inc.
 - 5) National Fittings, Inc.
 - 6) Victaulic Co. of America.
 - 7) Ward Manufacturing.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Grooved-End Fittings: UL-listed, ASTM A 536, ductile-iron casting with OD matching steel-pipe OD.
 - c. Grooved-End-Pipe Couplings: UL 213 and AWWA C606, rigid pattern, unless otherwise indicated; gasketed fitting matching steel-pipe OD. Include ductile-iron housing with keys matching steel-pipe and fitting grooves, rubber gasket listed for use with housing, and steel bolts and nuts.
- C. Plain-End, Schedule 10 Steel Pipe: ASTM A 135 or ASTM A 795, Schedule 10 in NPS 5 and smaller; and NFPA 13-specified wall thickness in NPS 6 to NPS 10.
- D. Grooved-End, Schedule 10 Steel Pipe: ASTM A 135 or ASTM A 795, Schedule 10 in NPS 5 and smaller; and NFPA 13-specified wall thickness in NPS 6 to NPS 10; with factory- or field-formed, roll-grooved ends.
 - 1. Grooved-Joint Piping Systems:
 - a. Available Manufacturers:
 - 1) Anvil International, Inc.
 - 2) Central Sprinkler Corp.
 - 3) Ductilic, Inc.
 - 4) JDH Pacific, Inc.
 - 5) National Fittings, Inc.
 - 6) Victaulic Co. of America.
 - 7) Ward Manufacturing.
 - b. Grooved-End Fittings: UL-listed, ASTM A 536, ductile-iron casting with OD matching steel-pipe OD.
 - c. Grooved-End-Pipe Couplings: UL 213 and AWWA C606, rigid pattern, unless otherwise indicated; gasketed fitting matching steel-pipe OD. Include ductile-iron housing with keys matching steel-pipe and fitting grooves, rubber gasket listed for use with housing, and steel bolts and nuts.

2.3 SPRINKLERS

- A. Sprinklers shall be UL listed or FMG approved, with 175-psig minimum pressure rating.
- B. Available Manufacturers:
 - 1. AFAC Inc.
 - 2. Central Sprinkler Corp.
 - 3. Firematic Sprinkler Devices, Inc.
 - 4. Globe Fire Sprinkler Corporation.
 - 5. Grinnell Fire Protection.
 - 6. Reliable Automatic Sprinkler Co., Inc.
 - 7. Star Sprinkler Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

8. Venus Fire Protection, Ltd.
 9. Victaulic Co. of America.
 10. Viking Corp.
- C. Automatic Sprinklers: With heat-responsive element complying with the following:
1. UL 199, for nonresidential applications.
 2. UL 1767, for early-suppression, fast-response applications.
- D. Sprinkler Types and Categories: Nominal 1/2-inch orifice for "Ordinary" temperature classification rating, unless otherwise indicated or required by application.
1. Open Sprinklers: UL 199, without heat-responsive element.
 - a. Orifice: 1/2 inch, with discharge coefficient K between 5.3 and 5.8.
 - b. Orifice: 17/32 inch, with discharge coefficient K between 7.4 and 8.2.
- E. Match existing sprinkler types, features, and options as follows:
1. Concealed ceiling sprinklers, including cover plate.
 2. Extended-coverage sprinklers.
 3. Flush ceiling sprinklers, including escutcheon.
 4. Pendent sprinklers.
 5. Quick-response sprinklers.
 6. Recessed sprinklers, including escutcheon.
 7. Sidewall sprinklers.
 8. Upright sprinklers.
- F. Sprinkler Finishes: Chrome plated, bronze, and painted.
- G. Sprinkler Escutcheons: Materials, types, and finishes for the following sprinkler mounting applications. Escutcheons for concealed, flush, and recessed-type sprinklers are specified with sprinklers.
1. Ceiling Mounting: Chrome-plated steel, one piece, flat.
 2. Sidewall Mounting: Chrome-plated steel, one piece, flat.
- H. Sprinkler Guards: Wire-cage type, including fastening device for attaching to sprinkler.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for hose connections and stations to verify actual locations of piping connections before installation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Examine walls and partitions for suitable thicknesses, fire- and smoke-rated construction, framing for hose-station cabinets, and other conditions where hose connections and stations are to be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PIPING APPLICATIONS, GENERAL

- A. Do not use welded joints.
- B. Flanges, flanged fittings, unions, nipples, and transition and special fittings with finish and pressure ratings same as or higher than system's pressure rating may be used in aboveground applications, unless otherwise indicated.
- C. Piping between Fire Department Connections and Check Valves: Galvanized, standard-weight steel pipe with threaded ends; cast- or malleable-iron threaded fittings; and threaded joints.

3.3 SPRINKLER SYSTEM PIPING APPLICATIONS

- A. Standard-Pressure, Wet-Pipe Sprinkler System, 175-psig Maximum Working Pressure:
 - 1. Sprinkler-Piping Fitting Option: Specialty sprinkler fittings, NPS 2 and smaller, including mechanical-T and -cross fittings, may be used downstream from sprinkler zone valves.
 - 2. NPS 1-1/2 and Smaller: Threaded-end, black, standard-weight steel pipe; cast- or malleable-iron threaded fittings; and threaded joints.
 - 3. NPS 2: Threaded-end, black, standard-weight steel pipe; cast- or malleable-iron threaded fittings; and threaded joints.
 - 4. NPS 2-1/2 to NPS 3-1/2: Threaded-end, black, standard-weight steel pipe; cast- or malleable-iron threaded fittings; and threaded joints.

3.4 JOINT CONSTRUCTION

- A. Threaded Joints: Comply with NFPA 13 for pipe thickness and threads. Do not thread pipe smaller than NPS 8 (DN 200) with wall thickness less than Schedule 40 unless approved by authorities having jurisdiction and threads are checked by a ring gage and comply with ASME B1.20.1.

3.5 PIPING INSTALLATION

- A. Locations and Arrangements: Drawing plans, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated, as far as practical.
 - 1. Deviations from approved working plans for piping require written approval from

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

authorities having jurisdiction. File written approval with Architect before deviating from approved working plans.

- B. Use approved fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.
- C. Install unions adjacent to each valve in pipes NPS 2 and smaller. Unions are not required on flanged devices or in piping installations using grooved joints.
- D. Install flanges or flange adapters on valves, apparatus, and equipment having NPS 2-1/2 and larger connections.
- E. Hangers and Supports: Comply with NFPA 13 for hanger materials.
 - 1. Install sprinkler system piping according to NFPA 13.
- F. Earthquake Protection: Install piping according to NFPA 13 to protect from earthquake damage.
- G. Fill wet-pipe sprinkler system piping with water.

3.6 SPRINKLER APPLICATIONS

- A. Drawings indicate sprinkler types to be used. Where specific types are not indicated, use the following sprinkler types:
 - 1. Rooms without Ceilings: Upright sprinklers.
 - 2. Rooms with Suspended Ceilings: Concealed sprinklers.
 - 3. Wall Mounting: Sidewall sprinklers.
 - 4. Spaces Subject to Freezing: Upright, pendent, dry sprinklers; and sidewall, dry sprinklers as indicated.
 - 5. Special Applications: Extended-coverage and quick-response sprinklers where indicated.
 - 6. Sprinkler Finishes:
 - a. Upright, Pendent, and Sidewall Sprinklers: Chrome plated in finished spaces exposed to view; rough bronze in unfinished spaces not exposed to view; wax coated where exposed to acids, chemicals, or other corrosive fumes.
 - b. Concealed Sprinklers: Rough brass, with factory-painted cover plate; coordinate color with architect.
 - c. Flush Sprinklers: Bright chrome, with painted white escutcheon.
 - d. Recessed Sprinklers: Bright chrome, with bright chrome escutcheon.

3.7 SPRINKLER INSTALLATION

- A. Install sprinklers in suspended ceilings in center of narrow dimension of acoustical ceiling panels and tiles.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Do not install pendent or sidewall, wet-type sprinklers in areas subject to freezing. Use dry-type sprinklers with water supply from heated space.

3.8 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment to allow service and maintenance.

3.9 LABELING AND IDENTIFICATION

- A. Install labeling and pipe markers on equipment and piping according to requirements in NFPA 13.

3.10 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
 - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Once all leaks have been repaired, the contractor shall perform the hydrostatic test in accordance with NFPA-13, 2013 in the presence of the engineer and the fire inspector.
 - a. The test pressure is 200 psi at the low point of the
 - b. The test duration is 2 hours.
 - 3. Flush, test, and inspect sprinkler systems according to NFPA 13, "Systems Acceptance" Chapter.
 - 4. Coordinate with fire alarm tests. Operate as required.
- B. Report test results promptly and in writing to Architect and authorities having jurisdiction.

3.11 CLEANING AND PROTECTION

- A. Clean dirt and debris from sprinklers.
- B. Remove and replace sprinklers with paint other than factory finish.
- C. Protect sprinklers from damage until Substantial Completion.

END OF SECTION 211000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Sleeves.
 - 2. Stack-sleeve fittings.
 - 3. Sleeve-seal systems.
 - 4. Sleeve-seal fittings.
 - 5. Grout.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Cast-Iron Wall Pipes: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.
- B. Galvanized-Steel Wall Pipes: ASTM A 53/A 53M, Schedule 40, with plain ends and welded steel collar; zinc coated.
- C. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.
- D. PVC-Pipe Sleeves: ASTM D 1785, Schedule 40.
- E. Galvanized-Steel-Sheet Sleeves: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- F. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

nailing flange for attaching to wooden forms.

- G. Molded-PVC Sleeves: With nailing flange for attaching to wooden forms.

2.2 STACK-SLEEVE FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. Description: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring, bolts, and nuts for membrane flashing.
 - 1. Underdeck Clamp: Clamping ring with setscrews.

2.3 SLEEVE-SEAL SYSTEMS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. Description: Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.
 - 1. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
 - 2. Pressure Plates: Carbon steel.
 - 3. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements.

2.4 SLEEVE-SEAL FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Presealed Systems.
- B. Description: Manufactured plastic, sleeve-type, waterstop assembly made for imbedding in concrete slab or wall. Unit has plastic or rubber waterstop collar with center opening to match piping OD.

2.5 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
 - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
 - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 - 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 3. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants specified in Division 07 Section "Joint Sealants."
- E. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Division 07 Section "Penetration Firestopping."

3.2 STACK-SLEEVE-FITTING INSTALLATION

- A. Install stack-sleeve fittings in new slabs as slabs are constructed.
 - 1. Install fittings that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 2. Secure flashing between clamping flanges for pipes penetrating floors with membrane

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

waterproofing. Comply with requirements for flashing specified in Division 07 Section "Sheet Metal Flashing and Trim."

3. Install section of cast-iron soil pipe to extend sleeve to 2 inches above finished floor level.
4. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
5. Using grout, seal the space around outside of stack-sleeve fittings.

- B. Fire-Barrier Penetrations: Maintain indicated fire rating of floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Division 07 Section "Penetration Firestopping."

3.3 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.
- B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.4 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.
- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

3.5 SLEEVE AND SLEEVE-SEAL SCHEDULE

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
1. Exterior Concrete Walls above Grade:
 - a. Piping Smaller Than NPS 6: Cast-iron wall sleeves.
 - b. Piping NPS 6 and Larger: Cast-iron wall sleeves.
 2. Exterior Concrete Walls below Grade:
 - a. Piping Smaller Than NPS 6: Cast-iron wall sleeves with sleeve-seal system.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

- 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
- b. Piping NPS 6 and Larger: Cast-iron wall sleeves with sleeve-seal system.
 - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
3. Concrete Slabs-on-Grade:
 - a. Piping Smaller Than NPS 6: Cast-iron wall sleeves with sleeve-seal system.
 - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
4. Concrete Slabs above Grade:
 - a. Piping Smaller Than NPS 6: Galvanized-steel-pipe sleeves.
 - b. Piping NPS 6 and Larger: Galvanized-steel-pipe sleeves.
5. Interior Partitions:
 - a. Piping Smaller Than NPS 6: Galvanized-steel-pipe sleeves.
 - b. Piping NPS 6 and Larger: Galvanized-steel-sheet sleeves.

END OF SECTION 220517

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220518 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Escutcheons.
 - 2. Floor plates.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.
- C. One-Piece, Stamped-Steel Type: With chrome-plated finish and spring-clip fasteners.
- D. Split-Casting Brass Type: With polished, chrome-plated finish and with concealed hinge and setscrew.
- E. Split-Plate, Stamped-Steel Type: With chrome-plated finish, concealed hinge, and spring-clip fasteners.

2.2 FLOOR PLATES

- A. One-Piece Floor Plates: Cast-iron flange with holes for fasteners.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Split-Casting Floor Plates: Cast brass with concealed hinge.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of insulated piping and with OD that completely covers opening.
1. Escutcheons for New Piping:
 - a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
 - b. Chrome-Plated Piping: One-piece, cast-brass type with polished, chrome-plated finish.
 - c. Insulated Piping: One-piece, stamped-steel type.
 - d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - e. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - f. Bare Piping in Unfinished Service Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - g. Bare Piping in Equipment Rooms: One-piece, cast-brass type with polished, chrome-plated finish.
 2. Escutcheons for Existing Piping:
 - a. Insulated Piping: Split-plate, stamped-steel type with concealed hinge.
 - b. Bare Piping at Wall and Floor Penetrations in Finished Spaces: Split-casting brass type with polished, chrome-plated finish.
 - c. Bare Piping at Ceiling Penetrations in Finished Spaces: Split-casting brass type with polished, chrome-plated finish.
 - d. Bare Piping in Unfinished Service Spaces: Split-casting brass type with polished, chrome-plated finish.
 - e. Bare Piping in Equipment Rooms: Split-casting brass type with polished, chrome-plated finish.
- C. Install floor plates for piping penetrations of equipment-room floors.
- D. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
1. New Piping: One-piece, floor-plate type.
 2. Existing Piping: Split-casting, floor-plate type.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 220518

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220523 - GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Bronze ball valves.
 - 2. Bronze swing check valves.
- B. Related Sections:
 - 1. Division 22 Section "Identification for Plumbing Piping and Equipment" for valve tags and schedules.
 - 2. Division 33 water distribution piping Sections for general-duty and specialty valves for site construction piping.

1.3 DEFINITIONS

- A. CWP: Cold working pressure.
- B. EPDM: Ethylene propylene copolymer rubber.
- C. NBR: Acrylonitrile-butadiene, Buna-N, or nitrile rubber.
- D. NRS: Nonrising stem.
- E. OS&Y: Outside screw and yoke.
- F. RS: Rising stem.
- G. SWP: Steam working pressure.

1.4 SUBMITTALS

- A. Product Data: For each type of valve indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 QUALITY ASSURANCE

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.
- B. ASME Compliance:
 - 1. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
 - 2. ASME B31.1 for power piping valves.
 - 3. ASME B31.9 for building services piping valves.
- C. NSF Compliance: NSF 61 for valve materials for potable-water service.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Set angle, gate, and globe valves closed to prevent rattling.
 - 4. Set ball and plug valves open to minimize exposure of functional surfaces.
 - 5. Set butterfly valves closed or slightly open.
 - 6. Block check valves in either closed or open position.
- B. Use the following precautions during storage:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher than ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Refer to valve schedule articles for applications of valves.
- B. Valve Pressure and Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- C. Valve Sizes: Same as upstream piping unless otherwise indicated.
- D. Valve Actuator Types:
 - 1. Hand lever: For quarter-turn valves NPS 6 and smaller except plug valves.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Valves in Insulated Piping: With 2-inch stem extensions and the following features:
 - 1. Ball Valves: With extended operating handle of non-thermal-conductive material, and protective sleeve that allows operation of valve without breaking the vapor seal or disturbing insulation.
- F. Valve-End Connections:
 - 1. Solder Joint: With sockets according to ASME B16.18.
 - 2. Threaded: With threads according to ASME B1.20.1.
- G. Valve Bypass and Drain Connections: MSS SP-45.

2.2 BRONZE BALL VALVES

- A. Three-Piece, Full-Port, Bronze Ball Valves with Stainless-Steel Trim:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. Jamesburg.
 - c. Milwaukee Valve Company.
 - d. NIBCO INC.
 - e. Watts Regulator Co.
 - 2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig.
 - c. CWP Rating: 600 psig.
 - d. Body Design: Three piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Full.

2.3 BRONZE SWING CHECK VALVES

- A. Class 150, Bronze Swing Check Valves with Bronze Disc:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Crane Co.; Crane Valve Group; Crane Valves.
- c. Crane Co.; Crane Valve Group; Jenkins Valves.
- d. Crane Co.; Crane Valve Group; Stockham Division.
- e. Milwaukee Valve Company.
- f. NIBCO INC.

2. Description:

- a. Standard: MSS SP-80, Type 3.
- b. CWP Rating: 300 psig.
- c. Body Design: Horizontal flow.
- d. Body Material: ASTM B 62, bronze.
- e. Ends: Threaded.
- f. Disc: Bronze.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install check valves for proper direction of flow and as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Swing Check Valves: In horizontal position with hinge pin level.

3.3 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valve applications are not indicated, use the following:
 1. Shutoff Service: Ball valves.
 2. Throttling Service: Ball valves.
- B. If valves with specified SWP classes or CWP ratings are not available, the same types of valves with higher SWP classes or CWP ratings may be substituted.
- C. Select valves, except wafer types, with the following end connections:
 1. For Copper Tubing, NPS 2 and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules below.
 2. For Copper Tubing, NPS 2-1/2 to NPS 4: Flanged ends except where threaded valve-end option is indicated in valve schedules below.
 3. For Copper Tubing, NPS 5 and Larger: Flanged ends.

3.5 DOMESTIC, HOT- AND COLD-WATER VALVE SCHEDULE

- A. Pipe NPS 2 and Smaller:
 1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
 2. Bronze Ball Valves: Three piece, full port, bronze with stainless-steel trim.
 3. Bronze Swing Check Valves: Class 150, bronze disc.

END OF SECTION 220523

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following hangers and supports for plumbing system piping and equipment:
 - 1. Steel pipe hangers and supports.
 - 2. Trapeze pipe hangers.
 - 3. Metal framing systems.
 - 4. Thermal-hanger shield inserts.
 - 5. Fastener systems.
 - 6. Pipe positioning systems.
- B. Related Sections include the following:
 - 1. Division 21 Section "Water-Based Fire-Suppression Systems" for pipe hangers for fire-suppression piping.
 - 2. Division 22 Section "Vibration and Seismic Controls for Plumbing Piping and Equipment" for vibration isolation devices.

1.3 DEFINITIONS

- A. MSS: Manufacturers Standardization Society for The Valve and Fittings Industry Inc.
- B. Terminology: As defined in MSS SP-90, "Guidelines on Terminology for Pipe Hangers and Supports."

1.4 PERFORMANCE REQUIREMENTS

- A. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.
- B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Design seismic-restraint hangers and supports for piping and equipment and obtain approval from authorities having jurisdiction.

1.5 SUBMITTALS

- A. Product Data: For the following:
 - 1. Steel pipe hangers and supports.
 - 2. Fiberglass pipe hangers.
 - 3. Thermal-hanger shield inserts.
 - 4. Pipe positioning systems.
- B. Shop Drawings: Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze pipe hangers. Include Product Data for components.
 - 2. Metal framing systems. Include Product Data for components.
 - 3. Fiberglass strut systems. Include Product Data for components.
 - 4. Equipment supports.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 STEEL PIPE HANGERS AND SUPPORTS

- A. Description: MSS SP-58, Types 1 through 58, factory-fabricated components. Refer to Part 3 "Hanger and Support Applications" Article for where to use specific hanger and support types.
- B. Available Manufacturers:
 - 1. AAA Technology & Specialties Co., Inc.
 - 2. Bergen-Power Pipe Supports.
 - 3. B-Line Systems, Inc.; a division of Cooper Industries.
 - 4. Carpenter & Paterson, Inc.
 - 5. Empire Industries, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

6. ERICO/Michigan Hanger Co.
7. Globe Pipe Hanger Products, Inc.
8. Grinnell Corp.
9. GS Metals Corp.
10. National Pipe Hanger Corporation.
11. PHD Manufacturing, Inc.
12. PHS Industries, Inc.
13. Piping Technology & Products, Inc.
14. Tolco Inc.

- C. Galvanized, Metallic Coatings: Pregalvanized or hot dipped.
- D. Nonmetallic Coatings: Plastic coating, jacket, or liner.
- E. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion for support of bearing surface of piping.

2.3 TRAPEZE PIPE HANGERS

- A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural-steel shapes with MSS SP-58 hanger rods, nuts, saddles, and U-bolts.

2.4 THERMAL-HANGER SHIELD INSERTS

- A. Description: 100-psig- minimum, compressive-strength insulation insert encased in sheet metal shield.
- B. Available manufacturers:
1. Carpenter & Paterson, Inc.
 2. ERICO/Michigan Hanger Co.
 3. PHS Industries, Inc.
 4. Pipe Shields, Inc.
 5. Rilco Manufacturing Company, Inc.
 6. Value Engineered Products, Inc.
- C. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with vapor barrier.
- D. Insulation-Insert Material for Hot Piping: ASTM C 552, Type II cellular glass.
- E. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- F. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- G. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.5 FASTENER SYSTEMS

- A. Mechanical-Expansion Anchors: Insert-wedge-type zinc-coated steel, for use in hardened Portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

1. Available Manufacturers:

- a. B-Line Systems, Inc.; a division of Cooper Industries.
- b. Empire Industries, Inc.
- c. Hilti, Inc.
- d. ITW Ramset/Red Head.
- e. MKT Fastening, LLC.
- f. Powers Fasteners.

2.6 PIPE POSITIONING SYSTEMS

- A. Description: IAPMO PS 42, system of metal brackets, clips, and straps for positioning piping in pipe spaces for plumbing fixtures for commercial applications.

B. Available Manufacturers:

1. C & S Mfg. Corp.
2. HOLDRITE Corp.; Hubbard Enterprises.
3. Samco Stamping, Inc.

2.7 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
1. Properties: Nonstaining, noncorrosive, and nongaseous.
 2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT APPLICATIONS

- A. Specific hanger and support requirements are specified in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe hanger selections and applications that are not specified in piping system Sections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Use hangers and supports with galvanized, metallic coatings for piping and equipment that will not have field-applied finish.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use padded hangers for piping that is subject to scratching.
- F. Pipe guides shall not be used as supports.
- G. In no case shall wire or perforated strap be used for pipe or conduit support.
- H. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated stationary pipes, NPS 1/2 to NPS 30.
 - 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of 120 to 450 deg F pipes, NPS 4 to NPS 16, requiring up to 4 inches of insulation.
 - 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes, NPS 3/4 to NPS 24, requiring clamp flexibility and up to 4 inches of insulation.
 - 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes, NPS 1/2 to NPS 24, if little or no insulation is required.
 - 5. Pipe Hangers (MSS Type 5): For suspension of pipes, NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
 - 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated stationary pipes, NPS 3/4 to NPS 8.
 - 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 8.
 - 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 8.
 - 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 2.
 - 10. Split Pipe-Ring with or without Turnbuckle-Adjustment Hangers (MSS Type 11): For suspension of noninsulated stationary pipes, NPS 3/8 to NPS 8.
 - 11. Extension Hinged or 2-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated stationary pipes, NPS 3/8 to NPS 3.
 - 12. U-Bolts (MSS Type 24): For support of heavy pipes, NPS 1/2 to NPS 30.
 - 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
 - 14. Pipe Saddle Supports (MSS Type 36): For support of pipes, NPS 4 to NPS 36, with steel pipe base stanchion support and cast-iron floor flange.
 - 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes, NPS 4 to NPS 36, with steel pipe base stanchion support and cast-iron floor flange and with U-bolt to retain pipe.
 - 16. Adjustable, Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes, NPS 2-1/2 to NPS 36, if vertical adjustment is required, with steel pipe base stanchion support and cast-iron floor flange.
 - 17. Single Pipe Rolls (MSS Type 41): For suspension of pipes, NPS 1 to NPS 30, from 2 rods

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- if longitudinal movement caused by expansion and contraction might occur.
18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes, NPS 2-1/2 to NPS 20, from single rod if horizontal movement caused by expansion and contraction might occur.
 19. Complete Pipe Rolls (MSS Type 44): For support of pipes, NPS 2 to NPS 42, if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes, NPS 2 to NPS 24, if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.
 21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes, NPS 2 to NPS 30, if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.
- I. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers, NPS 3/4 to NPS 20.
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers, NPS 3/4 to NPS 20, if longer ends are required for riser clamps.
- J. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
- K. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
 2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction to attach to top flange of structural shape.
 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
 6. C-Clamps (MSS Type 23): For structural shapes.
 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- beams for heavy loads.
- 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
- 11. Malleable Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
- 12. Welded-Steel Brackets: For support of pipes from below, or for suspending from above by using clip and rod. Use one of the following for indicated loads:
 - a. Light (MSS Type 31): 750 lb.
 - b. Medium (MSS Type 32): 1500 lb.
 - c. Heavy (MSS Type 33): 3000 lb.
- 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
- 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
- 15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- L. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Steel Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 - 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 - 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- M. Comply with MSS SP-69 for trapeze pipe hanger selections and applications that are not specified in piping system Sections.
- N. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.
- O. Use pipe positioning systems in pipe spaces behind plumbing fixtures to support supply and waste piping for plumbing fixtures.

3.2 HANGER AND SUPPORT INSTALLATION

- A. Steel Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- B. Trapeze Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified above for individual pipe hangers.
 - 2. Field fabricate from ASTM A 36/A 36M, steel shapes selected for loads being supported.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Weld steel according to AWS D1.1.

- C. Metal Framing System Installation: Arrange for grouping of parallel runs of piping and support together on field-assembled metal framing systems.
- D. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- E. Fastener System Installation:
 - 1.
 - 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- F. Pipe Positioning System Installation: Install support devices to make rigid supply and waste piping connections to each plumbing fixture. Refer to Division 22 Section "Plumbing Fixtures" for plumbing fixtures.
- G. Install hangers and supports complete with necessary inserts, bolts, rods, nuts, washers, and other accessories.
- H. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- I. Install lateral bracing with pipe hangers and supports to prevent swaying.
- J. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.
- K. Load Distribution: Install hangers and supports so piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- L. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and so maximum pipe deflections allowed by ASME B31.9 (for building services piping) are not exceeded.
- M. Insulated Piping: Comply with the following:
 - 1. Attach clamps and spacers to piping.
 - a. Piping Operating above Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits according to ASME B31.9 for building services piping.
 - 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
4. Shield Dimensions for Pipe: Not less than the following:
 - a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
 - b. NPS 4: 12 inches long and 0.06 inch thick.
 - c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
 - d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
 - e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.
5. Pipes NPS 8 and Larger: Include wood inserts.
6. Insert Material: Length at least as long as protective shield.
7. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.3 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.4 PAINTING

- A. Touch Up: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.
- B. Touch Up: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal are specified in Division 09 painting Sections.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 220529

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Pipe labels.
- 2. Valve tags.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Valve numbering scheme.
- D. Valve Schedules: For each piping system to include in maintenance manuals.

1.4 COORDINATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

indicating service, and showing flow direction.

- B. Pretensioned Pipe Labels: Pre-coiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings, pipe size, and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions, or as separate unit on each pipe label to indicate flow direction.
 - 2. Lettering Size: At least 1-1/2 inches high.

2.2 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
 - 1. Tag Material: Brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
 - 2. Fasteners: Brass wire-link chain.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 - 1. Valve-tag schedule shall be included in operation and maintenance data.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 PIPE LABEL INSTALLATION

- A. Piping Color-Coding: Painting of piping is specified in Division 09 Section "Interior Painting."
- B. Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Near each valve and control device.
2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
4. At access doors, manholes, and similar access points that permit view of concealed piping.
5. Near major equipment items and other points of origination and termination.
6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.

C. Pipe Label Color Schedule:

1. Domestic Cold Water Piping:
 - a. Background Color: Green
 - b. Letter Color: White.
2. Domestic Hot Water and Hot Water Recirculating Piping:
 - a. Background Color: Yellow.
 - b. Letter Color: Black.
3. Sanitary Waste and Storm Drainage Piping:
 - a. Background Color: Green.
 - b. Letter Color: White.

3.3 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves; valves within factory-fabricated equipment units; shutoff valves; faucets; convenience and lawn-watering hose connections; and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:
 1. Valve-Tag Size and Shape:
 - a. Cold Water: 1-1/2 inches round.
 - b. Hot Water (includes recirculating HW): 1-1/2 inches round.

END OF SECTION 220553

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes insulating the following plumbing piping services:
 - 1. Domestic cold-water piping.
 - 2. Domestic hot-water piping.
 - 3. Domestic recirculating hot-water piping.
 - 4. Roof drains and rainwater leaders.
 - 5. Supplies and drains for handicap-accessible lavatories and sinks.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied, if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 - 2. Detail attachment and covering of heat tracing inside insulation.
 - 3. Detail insulation application at pipe expansion joints for each type of insulation.
 - 4. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
 - 5. Detail removable insulation at piping specialties, equipment connections, and access panels.
 - 6. Detail application of field-applied jackets.
 - 7. Detail application at linkages of control devices.
- C. Qualification Data: For qualified Installer.
- D. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84 by a testing agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
 - 2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less.
- C. Comply with the following applicable standards and other requirements specified for miscellaneous components:
 - 1. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Division 22 Section "Hangers and Supports for Plumbing Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- F. Flexible Elastomeric Insulation: Closed-cell, sponge- or expanded-rubber materials. Comply with ASTM C 534, Type I for tubular materials.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Aeroflex USA, Inc.; Aerocel.
 - b. Armacell LLC; AP Armaflex.
 - c. K-Flex USA; Insul-Lock, Insul-Tube, and K-FLEX LS.
- G. Mineral-Fiber, Preformed Pipe Insulation:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Fibrex Insulations Inc.; Coreplus 1200.
 - b. Johns Manville; Micro-Lok.
 - c. Knauf Insulation; 1000-Degree Pipe Insulation.
 - d. Manson Insulation Inc.; Alley-K.
 - e. Owens Corning; Fiberglas Pipe Insulation.
 - 2. Type I, 850 Deg F Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 INSULATING CEMENTS

A. Mineral-Fiber Insulating Cement: Comply with ASTM C 195.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Ramco Insulation, Inc.; Super-Stik.

2.3 ADHESIVES

A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated, unless otherwise indicated.

B. Flexible Elastomeric Adhesive: Comply with MIL-A-24179A, Type II, Class I.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Aeroflex USA, Inc.; Aeroseal.
 - b. Armacell LLC; Armaflex 520 Adhesive.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-75.
 - d. K-Flex USA; R-373 Contact Adhesive.
2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

C. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-127.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-60/85-70.
 - d. Mon-Eco Industries, Inc.; 22-25.
2. For indoor applications, use adhesive that has a VOC content of 80 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. ASJ Adhesive, and FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-82.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-20.
 - d. Mon-Eco Industries, Inc.; 22-25.
 2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

2.4 MASTICS

- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
1. For indoor applications, use mastics that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Vapor-Barrier Mastic: Water based; suitable for indoor use on below-ambient services.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-80/30-90.
 - b. Vimasco Corporation; 749.
 2. Water-Vapor Permeance: ASTM E 96/E 96M, Procedure B, 0.013 perm at 43-mil dry film thickness.
 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 4. Solids Content: ASTM D 1644, 58 percent by volume and 70 percent by weight.
 5. Color: White.
- C. Breather Mastic: Water based; suitable for indoor and outdoor use on above-ambient services.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-10.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Eagle Bridges - Marathon Industries; 550.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 46-50.
 - d. Mon-Eco Industries, Inc.; 55-50.
 - e. Vimasco Corporation; WC-1/WC-5.
2. Water-Vapor Permeance: ASTM F 1249, 1.8 perms at 0.0625-inch dry film thickness.
 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 4. Solids Content: 60 percent by volume and 66 percent by weight.
 5. Color: White.

2.5 LAGGING ADHESIVES

- A. Description: Comply with MIL-A-3316C, Class I, Grade A, and shall be compatible with insulation materials, jackets, and substrates.
1. For indoor applications, use lagging adhesives that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 2. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-50 AHV2.
 - b. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-36.
 - c. Vimasco Corporation; 713 and 714.
 3. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over pipe insulation.
 4. Service Temperature Range: 0 to plus 180 deg F.
 5. Color: White.

2.6 SEALANTS

- A. Joint Sealants:
1. Materials shall be compatible with insulation materials, jackets, and substrates.
 2. Permanently flexible, elastomeric sealant.
 3. Service Temperature Range: Minus 100 to plus 300 deg F.
 4. Color: White or gray.
 5. For indoor applications, use sealants that have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 6. Use sealants that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- B. ASJ Flashing Sealants, and Vinyl, PVDC, and PVC Jacket Flashing Sealants:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-76.
2. Materials shall be compatible with insulation materials, jackets, and substrates.
3. Fire- and water-resistant, flexible, elastomeric sealant.
4. Service Temperature Range: Minus 40 to plus 250 deg F.
5. Color: White.
6. For indoor applications, use sealants that have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
7. Use sealants that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

2.7 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
 1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C 1136, Type I.

2.8 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.
 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ABI, Ideal Tape Division; 428 AWF ASJ.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0836.
 - c. Compac Corporation; 104 and 105.
 - d. Venture Tape; 1540 CW Plus, 1542 CW Plus, and 1542 CW Plus/SQ.
 2. Width: 3 inches.
 3. Thickness: 11.5 mils.
 4. Adhesion: 90 ounces force/inch in width.
 5. Elongation: 2 percent.
 6. Tensile Strength: 40 lbf/inch in width.
 7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.
- B. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABI, Ideal Tape Division; 370 White PVC tape.
 - b. Compac Corporation; 130.
 - c. Venture Tape; 1506 CW NS.
2. Width: 2 inches.
3. Thickness: 6 mils.
4. Adhesion: 64 ounces force/inch in width.
5. Elongation: 500 percent.
6. Tensile Strength: 18 lbf/inch in width.

2.9 PROTECTIVE SHIELDING GUARDS

A. Protective Shielding Pipe Covers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Engineered Brass Company.
 - b. Insul-Tect Products Co.; a subsidiary of MVG Molded Products.
 - c. McGuire Manufacturing.
 - d. Plumberex.
 - e. Truebro; a brand of IPS Corporation.
 - f. Zurn Industries, LLC; Tubular Brass Plumbing Products Operation.
2. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 1. Verify that systems to be insulated have been tested and are free of defects.
 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.
- B. Surface Preparation: Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:
 - 1. Carbon Steel: Coat carbon steel operating at a service temperature between 32 and 300 deg F with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
- C. Coordinate insulation installation with the trade installing heat tracing. Comply with requirements for heat tracing that apply to insulation.
- D. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless-steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.
- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during application and finishing.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.
- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:
1. Draw jacket tight and smooth.
 2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
 - a. For below-ambient services, apply vapor-barrier mastic over staples.
 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- P. For above-ambient services, do not install insulation to the following:
1. Vibration-control devices.
 2. Testing agency labels and stamps.
 3. Nameplates and data plates.
 4. Cleanouts.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 - 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- C. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
 - 1. Comply with requirements in Division 07 Section "Penetration Firestopping" for firestopping and fire-resistive joint sealers.
- D. Insulation Installation at Floor Penetrations:
 - 1. Pipe: Install insulation continuously through floor penetrations.
 - 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 07 Section "Penetration Firestopping."

3.5 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:
 - 1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
 - 2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece shall be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
 - 3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
8. For services not specified to receive a field-applied jacket except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
9. Stencil or label the outside insulation jacket of each union with the word "union." Match size and color of pipe labels.

3.6 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

- A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- B. Insulation Installation on Pipe Flanges:
 1. Install pipe insulation to outer diameter of pipe flange.
 2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
 3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as pipe insulation.
 4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- C. Insulation Installation on Pipe Fittings and Elbows:
 1. Install mitered sections of pipe insulation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed valve covers manufactured of same material as pipe insulation when available.
2. When preformed valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.7 INSTALLATION OF MINERAL-FIBER INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above-ambient surfaces, secure laps with outward clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install preformed pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with mineral-fiber blanket insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.8 FINISHES

- A. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.
- B. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

3.9 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 1. Inspect pipe, fittings, strainers, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.
- D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.10 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.
- B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:
 1. Drainage piping located in crawl spaces.
 2. Underground piping.
 3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.11 INDOOR PIPING INSULATION SCHEDULE

A. Domestic Cold Water:

1. NPS 1 and Smaller: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.
2. NPS 1-1/4 and Larger: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.

B. Domestic Hot and Recirculated Hot Water:

1. NPS 1-1/4 and Smaller: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.
2. NPS 1-1/2 and Larger: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.

C. Horizontal Stormwater and Overflow:

1. All Pipe Sizes: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.

D. Roof Drain and Overflow Drain Bodies:

1. All Pipe Sizes: Insulation shall be the following:
 - a. Flexible Elastomeric: 1 inch thick.

E. Exposed Sanitary Drains, Domestic Water, Domestic Hot Water, and Stops for Plumbing Fixtures for People with Disabilities:

1. All Pipe Sizes: Insulation shall be the following:
 - a. Protective shielding pipe guards.

END OF SECTION 220719

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 221116 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Aboveground domestic water pipes, tubes, fittings, and specialties inside the building.

1.3 SUBMITTALS

- A. Product Data: For the following products:
 - 1. Piping materials.
- B. Water Samples: Specified in "Cleaning" Article.
- C. Coordination Drawings: For piping in toilet rooms and other congested areas, drawn to scale, on which the following items are shown and coordinated with each other, using input from Installers of the items involved:
 - 1. Fire-suppression-water piping.
 - 2. Domestic water piping.
 - 3. HVAC hydronic piping.
- D. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF 14 for plastic, potable domestic water piping and components.
- C. Comply with NSF 61 for potable domestic water piping and components.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 PROJECT CONDITIONS

- A. Interruption of Existing Water Service: Do not interrupt water service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water service according to requirements indicated:
 - 1. Notify Owner no fewer than two days in advance of proposed interruption of water service.
 - 2. Do not proceed with interruption of water service without Architect's written permission.

1.6 COORDINATION

- A. Coordinate sizes and locations of concrete bases with actual equipment provided.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.2 COPPER TUBE AND FITTINGS

- A. Hard Copper Tube: ASTM B 88, Type L water tube, drawn temper.
 - 1. Cast-Copper Solder-Joint Fittings: ASME B16.18, pressure fittings.
 - 2. Wrought-Copper Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.
 - 3. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends.
 - 4. Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces, and solder-joint or threaded ends.
- B. Soft Copper Tube: ASTM B 88, Type K water tube, annealed temper.
 - 1. Copper Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.

2.3 PIPING JOINING MATERIALS

- A. Pipe-Flange Gasket Materials: AWWA C110, rubber, flat face, 1/8 inch thick or ASME B16.21, nonmetallic and asbestos free, unless otherwise indicated; full-face or ring type unless otherwise indicated.
- B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.
- C. Solder Filler Metals: ASTM B 32, lead-free alloys. Include water-flushable flux according to ASTM B 813.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.

2.4 TRANSITION FITTINGS

A. General Requirements:

- 1. Same size as pipes to be joined.
- 2. Pressure rating at least equal to pipes to be joined.
- 3. End connections compatible with pipes to be joined.

B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.

C. Plastic-to-Metal Transition Fittings:

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Charlotte Pipe and Foundry Company.
 - b. Harvel Plastics, Inc.
 - c. Spears Manufacturing Company.
- 2. Description: PVC one-piece fitting with manufacturer's Schedule 80 equivalent dimensions; one end with threaded brass insert and one solvent-cement-socket or threaded end.

PART 3 - EXECUTION

3.1 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.
- B. Install copper tubing under building slab according to CDA's "Copper Tube Handbook."
- C. Install shutoff valve immediately upstream of each dielectric fitting.
- D. Install domestic water piping level without pitch and plumb.
- E. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- G. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.
- H. Install piping adjacent to equipment and specialties to allow service and maintenance.
- I. Install piping to permit valve servicing.
- J. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than system pressure rating used in applications below unless otherwise indicated.
- K. Install piping free of sags and bends.
- L. Install fittings for changes in direction and branch connections.
- M. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.
- N. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Division 22 Section "Sleeves and Sleeve Seals for Plumbing Piping."
- O. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Division 22 Section "Sleeves and Sleeve Seals for Plumbing Piping."
- P. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Division 22 Section "Escutcheons for Plumbing Piping."

3.2 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- C. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- D. Brazed Joints: Join copper tube and fittings according to CDA's "Copper Tube Handbook," "Braze Joints" Chapter.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

- E. Soldered Joints: Apply ASTM B 813, water-flushable flux to end of tube. Join copper tube and fittings according to ASTM B 828 or CDA's "Copper Tube Handbook."
- F. Dissimilar-Material Piping Joints: Make joints using adapters compatible with materials of both piping systems.

3.3 VALVE INSTALLATION

- A. General-Duty Valves: Comply with requirements in Division 22 Section "General-Duty Valves for Plumbing Piping" for valve installations.
- B. Install shutoff valve close to water main on each branch and riser serving plumbing fixtures or equipment, on each water supply to equipment, and on each water supply to plumbing fixtures that do not have supply stops. Use ball or gate valves for piping NPS 2 and smaller. Use butterfly or gate valves for piping NPS 2-1/2 and larger.
- C. Install balancing valve in each hot-water circulation return branch and discharge side of each pump and circulator. Set balancing valves partly open to restrict but not stop flow. Use ball valves for piping NPS 2 and smaller and butterfly valves for piping NPS 2-1/2 and larger. Comply with requirements in Division 22 Section "Domestic Water Piping Specialties" for balancing valves.
- D. Install calibrated balancing valves in each hot-water circulation return branch and discharge side of each pump and circulator. Set calibrated balancing valves partly open to restrict but not stop flow. Comply with requirements in Division 22 Section "Domestic Water Piping Specialties" for calibrated balancing valves.

3.4 TRANSITION FITTING INSTALLATION

- A. Install transition couplings at joints of dissimilar piping.
- B. Transition Fittings in Aboveground Domestic Water Piping NPS 2 and Smaller: Plastic-to-metal transition fittings.

3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements in Division 22 Section "Vibration and Seismic Controls for Plumbing Piping and Equipment" for seismic-restraint devices.
- B. Comply with requirements in Division 22 Section "Hangers and Supports for Plumbing Piping and Equipment" for pipe hanger and support products and installation.
 - 1. Vertical Piping: MSS Type 8 or 42, clamps.
 - 2. Individual, Straight, Horizontal Piping Runs:
 - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Feet If Indicated: MSS Type 49, spring cushion rolls.
- 3. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
- 4. Base of Vertical Piping: MSS Type 52, spring hangers.
- C. Support vertical piping and tubing at base and at each floor.
- D. Rod diameter may be reduced one size for double-rod hangers, to a minimum of 3/8 inch.
- E. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:
 - 1. NPS 3/4 and Smaller: 60 inches with 3/8-inch rod.
 - 2. NPS 1 and NPS 1-1/4: 72 inches with 3/8-inch rod.
 - 3. NPS 1-1/2 and NPS 2: 96 inches with 3/8-inch rod.
 - 4. NPS 2-1/2: 108 inches with 1/2-inch rod.
 - 5. NPS 3 to NPS 5: 10 feet with 1/2-inch rod.
 - 6. NPS 6: 10 feet with 5/8-inch rod.
 - 7. NPS 8: 10 feet with 3/4-inch rod.
- F. Install supports for vertical copper tubing every 10 feet.
- G. Install supports for vertical steel piping every 15 feet.
- H. Support piping and tubing not listed in this article according to MSS SP-69 and manufacturer's written instructions.

3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment and machines to allow service and maintenance.
- C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.
- D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:
 - 1. Plumbing Fixtures: Cold- and hot-water supply piping in sizes indicated, but not smaller than required by plumbing code. Comply with requirements in Division 22 plumbing fixture Sections for connection sizes.
 - 2. Equipment: Cold- and hot-water supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection. Use flanges instead of unions for NPS 2-1/2 and larger.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.7 IDENTIFICATION

- A. Identify system components. Comply with requirements in Division 22 Section "Identification for Plumbing Piping and Equipment" for identification materials and installation.
- B. Label pressure piping with system operating pressure.

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Piping Inspections:
 - 1. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
 - 2. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:
 - a. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
 - b. Final Inspection: Arrange final inspection for authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
 - 3. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
 - 4. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- C. Piping Tests:
 - 1. Fill domestic water piping from a potable water source. Check components to determine that they are not air bound and that piping is full of water.
 - 2. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
 - 3. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 - 4. Cap and subject piping to a minimum static water pressure of 85 psig, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for a minimum two hours. Leaks and loss in test pressure constitute defects that must be repaired. This test must be witnessed by the engineer.
 - 5. Repair leaks and defects with new materials and retest piping or portion thereof until satisfactory results are obtained.
 - 6. Prepare reports for tests and for corrective action required.
- D. Domestic water piping will be considered defective if it does not pass tests and inspections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Prepare test and inspection reports.

3.9 ADJUSTING

- A. Perform the following adjustments before operation:

1. Close drain valves, hydrants, and hose bibbs.
2. Open shutoff valves to fully open position.
3. Open throttling valves to proper setting.
4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
 - a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide flow of hot water in each branch.
 - b. Adjust calibrated balancing valves to flows indicated.
5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.
8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.10 CLEANING

- A. Clean and disinfect potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Fill and isolate system according to either of the following:
 - 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
 - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.
 - c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
 - d. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.

- B. Clean non-potable domestic water piping as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging procedures prescribed by authorities having jurisdiction or; if methods are not prescribed, follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.
- C. Prepare and submit reports of purging and disinfecting activities.
- D. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

3.11 PIPING SCHEDULE

- A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
- B. Flanges and unions may be used for aboveground piping joints unless otherwise indicated.
- C. Fitting Option: Extruded-tee connections and brazed joints may be used on aboveground copper tubing.
- D. Under-building-slab, domestic water, building service piping, NPS 3 and smaller shall be the following:
 1. Soft copper tube, ASTM B 88, Type K with no joints below slab.
- E. Under-building-slab, domestic water piping, NPS 2 and smaller, shall be the following:
 1. Soft copper tube, ASTM B 88, Type K with no joints below the slab.
- F. Aboveground domestic water piping, NPS 2 and smaller, shall be the following:
 1. Hard copper tube, ASTM B 88, Type L wrought-copper solder-joint fittings; and soldered joints.
- G. Aboveground domestic water piping, NPS 2-1/2 and larger, shall be the following:
 1. Hard copper tube, ASTM B 88, Type L wrought-copper solder-joint fittings; and brazed joints.

3.12 VALVE SCHEDULE

- A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Shutoff Duty: Use ball valves for piping NPS 2 and smaller.
2. Throttling Duty: Use ball valves for piping NPS 2 and smaller.
3. Hot-Water Circulation Piping, Balancing Duty: Calibrated balancing valves.
4. Drain Duty: Hose-end drain valves.

- B. Use check valves to maintain correct direction of domestic water flow to and from equipment.

END OF SECTION 221116

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following domestic water piping specialties:

1. Backflow preventers.
2. Strainers.
3. Outlet boxes.
4. Hose bibbs.
5. Drain valves.
6. Water hammer arresters.
7. Air vents.
8. Trap-seal primer valves.

1.3 PERFORMANCE REQUIREMENTS

- A. Minimum Working Pressure for Domestic Water Piping Specialties: 125 psig, unless otherwise indicated.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Diagram power, signal, and control wiring.
- C. Field quality-control test reports.
- D. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

intended use.

B. NSF Compliance:

1. Comply with NSF 14, "Plastics Piping Components and Related Materials," for plastic domestic water piping components.
2. Comply with NSF 61, "Drinking Water System Components - Health Effects; Sections 1 through 9."

PART 2 - PRODUCTS

2.1 BACKFLOW PREVENTERS

A. Reduced-Pressure-Principle Backflow Preventers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.
 - b. FEBCO; SPX Valves & Controls.
 - c. Watts Industries, Inc.; Water Products Div.
2. Standard: ASSE 1013.
3. Operation: Continuous-pressure applications.
4. Pressure Loss: 12 psig maximum, through middle 1/3 of flow range.
5. Size: Same as pipe, see drawings.
6. Pressure Loss at Design Flow Rate: 10 psig for sizes NPS 2 and smaller; 10 psig for NPS 2-1/2 and larger.
7. Body: Bronze for NPS 2 and smaller; stainless steel for NPS 2-1/2 and larger.
8. End Connections: Threaded for NPS 2 and smaller; flanged for NPS 2-1/2 and larger.
9. Configuration: Designed for horizontal, straight through flow.
10. Accessories:
 - a. Valves: Ball type with threaded ends on inlet and outlet of NPS 2 and smaller; outside screw and yoke gate-type with flanged ends on inlet and outlet of NPS 2-1/2 and larger.
 - b. Air-Gap Fitting: ASME A112.1.2, matching backflow-preventer connection.

B. Hose-Connection Backflow Preventers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.
 - b. Watts Industries, Inc.; Water Products Div.
 - c. Woodford Manufacturing Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Standard: ASSE 1052.
3. Operation: Up to 10-foot head of water back pressure.
4. Inlet Size: NPS 1/2 or NPS 3/4.
5. Outlet Size: Garden-hose thread complying with ASME B1.20.7.
6. Capacity: At least 3-gpm flow.

C. Backflow-Preventer Test Kits:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.
 - b. FEBCO; SPX Valves & Controls.
 - c. Watts Industries, Inc.; Water Products Div.
2. Description: Factory calibrated, with gages, fittings, hoses, and carrying case with test-procedure instructions.

2.2 BALANCING VALVES

A. Copper-Alloy Calibrated Balancing Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armstrong International, Inc.
 - b. ITT Industries; Bell & Gossett Div.
 - c. NIBCO INC.
 - d. Watts Industries, Inc.; Water Products Div.
2. Type: Ball valve with two readout ports and memory setting indicator.
3. Body: Bronze,
4. Size: Same as connected piping, but not larger than NPS 2.
5. Accessories: Meter hoses, fittings, valves, differential pressure meter, and carrying case.

B. Cast-Iron Calibrated Balancing Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armstrong International, Inc.
 - b. ITT Industries; Bell & Gossett Div.
 - c. NIBCO INC.
 - d. Watts Industries, Inc.; Water Products Div.
2. Type: Adjustable with Y-pattern globe valve, two readout ports, and memory-setting indicator.
3. Size: Same as connected piping, but not smaller than NPS 2-1/2.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Accessories: Meter hoses, fittings, valves, differential pressure meter, and carrying case.

C. Memory-Stop Balancing Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Co.; Crane Valve Group; Stockham Div.
 - b. Hammond Valve.
 - c. Milwaukee Valve Company.
 - d. NIBCO INC.
2. Standard: MSS SP-110 for two-piece, copper-alloy ball valves.
3. Pressure Rating: 400-psig minimum CWP.
4. Size: NPS 2 or smaller.
5. Body: Copper alloy.
6. Port: Standard or full port.
7. Ball: Chrome-plated brass.
8. Seats and Seals: Replaceable.
9. End Connections: Solder joint or threaded.
10. Handle: Vinyl-covered steel with memory-setting device.

2.3 STRAINERS FOR DOMESTIC WATER PIPING

A. Y-Pattern Strainers:

1. Pressure Rating: 125 psig minimum, unless otherwise indicated.
2. Body: Bronze for NPS 2 and smaller; cast iron with interior lining complying with AWWA C550 or FDA-approved, epoxy coating and for NPS 2-1/2 and larger.
3. End Connections: Threaded for NPS 2 and smaller; flanged for NPS 2-1/2 and larger.
4. Screen: Stainless steel with round perforations, unless otherwise indicated.
5. Perforation Size:
 - a. Strainers NPS 2 and Smaller: 0.033 inch.
 - b. Strainers NPS 2-1/2 to NPS 4: 0.062 inch.
 - c. Strainers NPS 5 and Larger: 0.125 inch.
6. Drain: Factory-installed, hose-end drain valve.

2.4 OUTLET BOXES

A. Refrigerator, Ice Maker and Dishwasher Outlet Boxes:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Acorn Engineering Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. IPS Corporation.
 - c. LSP Products Group, Inc.
 - d. Oatey.
 - e. Plastic Oddities; a division of Diverse Corporate Technologies.
2. Mounting: Recessed.
 3. Material and Finish: Stainless-steel box and faceplate.
 4. Faucet: Valved fitting complying with ASME A112.18.1. Include NPS 1/2 or smaller copper tube outlet.
 5. Supply Shutoff Fitting: NPS 1/2 gate, globe, or ball valve and NPS 1/2 copper, water tubing.

2.5 HOSE BIBBS

A. Hose Bibbs:

1. Standard: ASME A112.18.1 for sediment faucets.
2. Body Material: Bronze.
3. Seat: Bronze, replaceable.
4. Supply Connections: NPS 1/2 threaded or solder-joint inlet.
5. Outlet Connection: Garden-hose thread complying with ASME B1.20.7.
6. Pressure Rating: 125 psig.
7. Vacuum Breaker: Integral, nonremovable, drainable, hose-connection vacuum breaker complying with ASSE 1011.
8. Finish for Equipment Rooms: Rough bronze, or chrome or nickel plated.
9. Finish for Service Areas: Chrome or nickel plated.
10. Finish for Finished Rooms: Chrome or nickel plated.
11. Operation for Equipment Rooms: Wheel handle or operating key.
12. Operation for Service Areas: Wheel handle.
13. Operation for Finished Rooms: Operating key.
14. Include operating key with each operating-key hose bibb.
15. Include integral wall flange with each chrome- or nickel-plated hose bibb.

2.6 DRAIN VALVES

A. Ball-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-110 for standard-port, two-piece ball valves.
2. Pressure Rating: 400-psig minimum CWP.
3. Size: NPS 3/4.
4. Body: Copper alloy.
5. Ball: Chrome-plated brass.
6. Seats and Seals: Replaceable.
7. Handle: Vinyl-covered steel.
8. Inlet: Threaded or solder joint.
9. Outlet: Threaded, short nipple with garden-hose thread complying with ASME B1.20.7

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

and cap with brass chain.

B. Stop-and-Waste Drain Valves:

1. Standard: MSS SP-110 for ball valves or MSS SP-80 for gate valves.
2. Pressure Rating: 200-psig minimum CWP or Class 125.
3. Size: NPS 3/4.
4. Body: Copper alloy or ASTM B 62 bronze.
5. Drain: NPS 1/8 side outlet with cap.

2.7 WATER HAMMER ARRESTERS

A. Water Hammer Arresters:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Josam Company.
 - b. Sioux Chief Manufacturing Company, Inc.
 - c. Zurn Plumbing Products Group; Specification Drainage Operation.
2. Standard: ASSE 1010 or PDI-WH 201.
3. Type: Copper tube with piston.
4. Size: ASSE 1010, Sizes AA and A through F or PDI-WH 201, Sizes A through F.

2.8 AIR VENTS

A. Welded-Construction Automatic Air Vents:

1. Body: Stainless steel.
2. Pressure Rating: 150-psig minimum pressure rating.
3. Float: Replaceable, corrosion-resistant metal.
4. Mechanism and Seat: Stainless steel.
5. Size: NPS 3/8 minimum inlet.
6. Inlet and Vent Outlet End Connections: Threaded.

2.9 TRAP-SEAL PRIMER VALVES

A. Supply-Type, Trap-Seal Primer Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Sioux Chief Manufacturing Company, Inc.
 - b. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - c. Watts Industries, Inc.; Water Products Div.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Standard: ASSE 1018.
3. Pressure Rating: 125 psig minimum.
4. Body: Bronze.
5. Inlet and Outlet Connections: NPS 1/2 threaded, union, or solder joint.
6. Gravity Drain Outlet Connection: NPS 1/2 threaded or solder joint.
7. Finish: Chrome plated, or rough bronze for units used with pipe or tube that is not chrome finished.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install backflow preventers in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with authorities having jurisdiction.
 1. Locate backflow preventers in same room as connected equipment or system.
 2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe to floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are not acceptable for this application.
 3. Do not install bypass piping around backflow preventers.
- B. Install balancing valves in locations where they can easily be adjusted.
- C. Install Y-pattern strainers for water on supply side of each control valve, water pressure-reducing valve and pump.
- D. Install outlet boxes recessed in wall. Install 2-by-4-inch fire-retardant-treated-wood blocking wall reinforcement between studs. Fire-retardant-treated-wood blocking is specified in Division 06 Section "Rough Carpentry."
- E. Install water hammer arresters in water piping according to PDI-WH 201.
- F. Install air vents at high points of water piping. Install drain piping and discharge onto floor drain.
- G. Install supply-type, trap-seal primer valves with outlet piping pitched down toward drain trap a minimum of 1 percent, and connect to floor-drain body, trap, or inlet fitting. Adjust valve for proper flow.

3.2 CONNECTIONS

- A. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate general arrangement of piping and specialties.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.3 LABELING AND IDENTIFYING

- A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
 - 1. Reduced-pressure-principle backflow preventers.
 - 2. Calibrated balancing valves.
 - 3. Outlet boxes.
 - 4. Supply-type, trap-seal primer valves.
- B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Division 22 Section "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and prepare test reports:
 - 1. Test each pressure vacuum breaker and reduced-pressure-principle backflow preventer according to authorities having jurisdiction and the device's reference standard.
- B. Remove and replace malfunctioning domestic water piping specialties and retest as specified above.

3.5 ADJUSTING

- A. Set field-adjustable flow set points of balancing valves.

END OF SECTION 221119

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following for soil, waste, and vent piping inside the building:
 - 1. Pipe, tube, and fittings.
 - 2. Special pipe fittings.

1.3 DEFINITIONS

- A. ABS: Acrylonitrile-butadiene-styrene plastic.
- B. EPDM: Ethylene-propylene-diene terpolymer rubber.
- C. LLDPE: Linear, low-density polyethylene plastic.
- D. NBR: Acrylonitrile-butadiene rubber.
- E. PE: Polyethylene plastic.
- F. PVC: Polyvinyl chloride plastic.
- G. TPE: Thermoplastic elastomer.

1.4 PERFORMANCE REQUIREMENTS

- A. Components and installation shall be capable of withstanding the following minimum working pressure, unless otherwise indicated:
 - 1. Soil, Waste, and Vent Piping: 10-foot head of water.

1.5 SUBMITTALS

- A. Product Data: For pipe, tube, fittings, and couplings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Field quality-control inspection and test reports.

1.6 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF 14, "Plastics Piping Systems Components and Related Materials," for plastic piping components. Include marking with "NSF-dwv" for plastic drain, waste, and vent piping; "NSF-drain" for plastic drain piping; "NSF-tubular" for plastic continuous waste piping; and "NSF-sewer" for plastic sewer piping.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 PIPING MATERIALS

- A. Refer to Part 3 "Piping Applications" Article for applications of pipe, tube, fitting, and joining materials.

2.3 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 74, Service class.
- B. Gaskets: ASTM C 564, rubber.
- C. Calking Materials: ASTM B 29, pure lead and oakum or hemp fiber.

2.4 HUBLESS CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 888 or CISPI 301.
- B. Sovent Stack Fittings: ASME B16.45 or ASSE 1043, hubless, cast-iron aerator and deaerator drainage fittings.
- C. Shielded Couplings: ASTM C 1277 assembly of metal shield or housing, corrosion-resistant fasteners, and rubber sleeve with integral, center pipe stop.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Standard, Shielded, Stainless-Steel Couplings: CISPI 310, with stainless-steel corrugated shield; stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve.
 - a. Manufacturers:
 - 1) ANACO.
 - 2) Mission Rubber Co.
 - 3) Tyler Pipe; Soil Pipe Div.
2. Heavy-Duty, Shielded, Stainless-Steel Couplings: With stainless-steel shield, stainless-steel bands and tightening devices, and ASTM C 564, rubber sleeve.
 - a. Manufacturers:
 - 1) ANACO.
 - 2) Mission Rubber Co.
 - 3) Tyler Pipe; Soil Pipe Div.

PART 3 - EXECUTION

3.1 EXCAVATION

- A. Refer to Division 31 Section "Earth Moving" for excavating, trenching, and backfilling.

3.2 PIPING APPLICATIONS

- A. Flanges and unions may be used on aboveground pressure piping, unless otherwise indicated.
- B. Aboveground, soil and waste piping shall be the following:
 1. Hubless cast-iron soil pipe and fittings heavy-duty shielded, stainless-steel couplings; and hubless-coupling joints.
- C. Aboveground, vent piping shall be the following:
 1. Hubless cast-iron soil pipe and fittings heavy-duty shielded, stainless-steel couplings; and hubless-coupling joints.
- D. Underground, soil, waste, and vent piping shall be the following:
 1. Service class, cast-iron soil piping; gaskets; and gasketed joints.

3.3 PIPING INSTALLATION

- A. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook,"

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."

1. Install encasement on underground piping according to ASTM A 674 or AWWA C105.
- B. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn, double Y-branch and 1/8-bend fittings if 2 fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- C. Lay buried building drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- D. Install soil and waste drainage and vent piping at the following minimum slopes, unless otherwise indicated:
 1. Building Sanitary Drain: 2 percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
 2. Horizontal Sanitary Drainage Piping: 2 percent downward in direction of flow.
 3. Vent Piping: 1 percent down toward vertical fixture vent or toward vent stack.
- E. Sleeves are not required for cast-iron soil piping passing through concrete slabs-on-grade if slab is without membrane waterproofing.
- F. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- G. Cut pipes accurately to measurements established in the field in a neat and workmanlike manner without damage or without forcing or springing.
- H. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Division 22 Section "Sleeves and Sleeve Seals for Plumbing Piping."
- I. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Division 22 Section "Sleeves and Sleeve Seals for Plumbing Piping."
- J. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Division 22 Section "Escutcheons for Plumbing Piping."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 JOINT CONSTRUCTION

- A. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Join hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-coupling joints.

3.5 HANGER AND SUPPORT INSTALLATION

- A. Seismic-restraint devices are specified in Division 22 Section "Vibration and Seismic Controls for Plumbing Piping and Equipment."
- B. Pipe hangers and supports are specified in Division 22 Section "Hangers and Supports for Plumbing Piping and Equipment." Install the following:
 - 1. Vertical Piping: MSS Type 8 or Type 42, clamps.
 - 2. Install individual, straight, horizontal piping runs according to the following:
 - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
 - b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Feet, if Indicated: MSS Type 49, spring cushion rolls.
 - 3. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
 - 4. Base of Vertical Piping: MSS Type 52, spring hangers.
- C. Install supports according to Division 22 Section "Hangers and Supports for Plumbing Piping and Equipment."
- D. Support vertical piping and tubing at base and at each floor.
- E. Rod diameter may be reduced 1 size for double-rod hangers, with 3/8-inch minimum rods.
- F. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
 - 1. NPS 1-1/2 and NPS 2: 60 inches with 3/8-inch rod.
 - 2. NPS 3: 60 inches with 1/2-inch rod.
 - 3. NPS 4 and NPS 5: 60 inches with 5/8-inch rod.
 - 4. NPS 6: 60 inches with 3/4-inch rod.
 - 5. NPS 8 to NPS 12: 60 inches with 7/8-inch rod.
- G. Install supports for vertical cast-iron soil piping every 15 feet.
- H. Install supports for vertical copper tubing every 10 feet.
- I. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

instructions.

3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect drainage and vent piping to the following:
 - 1. Plumbing Fixtures: Connect drainage piping in sizes indicated, but not smaller than required by plumbing code.
 - 2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
 - 3. Plumbing Specialties: Connect drainage and vent piping in sizes indicated, but not smaller than required by plumbing code.
 - 4. Equipment: Connect drainage piping as indicated. Provide shutoff valve, if indicated, and union for each connection. Use flanges instead of unions for connections NPS 2-1/2 and larger.

3.7 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
 - 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
 - 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test sanitary drainage and vent piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
 - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
 - 2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 - 3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping, except outside leaders, on completion of roughing-in. Close openings in piping system and fill with water

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks. The test shall be witnessed by the Engineer.

4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1-inch wg. Use U-tube or manometer inserted in trap of water closet to measure this pressure. Air pressure must remain constant without introducing additional air throughout period of inspection. Inspect plumbing fixture connections for gas and water leaks.
5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained. Caulking of welded or screwed joints, cracks, or holes is not acceptable. Correct leaks in screwed sittings by remarking joints. Cut out and reweld.
6. Prepare reports for tests and required corrective action.

3.8 CLEANING

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

3.9 PROTECTION

- A. During construction all openings in piping shall be closed with caps or plugs to keep out all foreign matter.

END OF SECTION 221316

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following sanitary drainage piping specialties:
 - 1. Cleanouts.
 - 2. Floor drains.
 - 3. Through-penetration firestop assemblies.
 - 4. Miscellaneous sanitary drainage piping specialties.
 - 5. Flashing materials.

1.3 DEFINITIONS

- A. ABS: Acrylonitrile-butadiene-styrene plastic.
- B. FOG: Fats, oils, and greases.
- C. FRP: Fiberglass-reinforced plastic.
- D. HDPE: High-density polyethylene plastic.
- E. PE: Polyethylene plastic.
- F. PP: Polypropylene plastic.
- G. PVC: Polyvinyl chloride plastic.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated. Include rated capacities, operating characteristics, and accessories.
- B. Field quality-control test reports.
- C. Operation and Maintenance Data: For drainage piping specialties to include in emergency,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF 14, "Plastics Piping Components and Related Materials," for plastic sanitary piping specialty components.

1.6 COORDINATION

- A. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.
- B. Coordinate size and location of roof penetrations.

PART 2 - PRODUCTS

2.1 CLEANOUTS

A. Exposed Metal Cleanouts:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Josam Company; Josam Div.
 - b. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - c. Watts Drainage Products Inc.
 - d. Zurn Plumbing Products Group; Specification Drainage Operation.
- 2. Standard: ASME A112.36.2M for cast iron for cleanout test tee.
- 3. Size: Same as connected drainage piping
- 4. Body Material: Hubless, cast-iron soil pipe test tee as required to match connected piping.
- 5. Closure: Countersunk, brass plug.
- 6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
- 7. Closure: Stainless-steel plug with seal.

B. Metal Floor Cleanouts:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Josam Company; Josam Div.
 - b. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - c. Watts Drainage Products Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- d. Zurn Plumbing Products Group; Specification Drainage Operation.
- 2. Standard: ASME A112.36.2M for cast-iron soil pipe with cast-iron ferrule cleanout.
- 3. Size: Same as connected branch.
- 4. Type: Cast-iron soil pipe with cast-iron ferrule.
- 5. Body or Ferrule: Cast iron.
- 6. Clamping Device: Not required.
- 7. Outlet Connection: Spigot.
- 8. Closure: Brass plug with straight threads and gasket.
- 9. Adjustable Housing Material: Cast iron with threads.
- 10. Frame and Cover Material and Finish: Polished bronze.
- 11. Frame and Cover Shape: Round.
- 12. Top Loading Classification: Medium Duty.
- 13. Riser: ASTM A 74, Service class, cast-iron drainage pipe fitting and riser to cleanout.
- 14. Standard: ASME A112.3.1.
- 15. Size: Same as connected branch.
- 16. Housing: Stainless steel.
- 17. Closure: Stainless steel with seal.
- 18. Riser: Stainless-steel drainage pipe fitting to cleanout.

C. Cast-Iron Wall Cleanouts:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Josam Company; Josam Div.
 - b. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - c. Watts Drainage Products Inc.
 - d. Zurn Plumbing Products Group; Specification Drainage Operation.
- 2. Standard: ASME A112.36.2M. Include wall access.
- 3. Size: Same as connected drainage piping.
- 4. Body: Hubless, cast-iron soil pipe test tee as required to match connected piping.
- 5. Closure: Countersunk, brass plug.
- 6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
- 7. Wall Access: Round, flat, chrome-plated brass or stainless-steel cover plate with screw.

2.2 FLOOR DRAINS

A. Cast-Iron Floor Drains:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Josam Company; Josam Div.
 - b. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - c. Watts Drainage Products Inc.
 - d. Zurn Plumbing Products Group; Specification Drainage Operation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Standard: ASME A112.6.3.
3. Pattern: Floor drain.
4. Body Material: Gray iron.
5. Seepage Flange: Required.
6. Anchor Flange: Required.
7. Clamping Device: Required.
8. Outlet: Bottom.
9. Coating on Interior and Exposed Exterior Surfaces: Not required.
10. Sediment Bucket: Not required.
11. Top or Strainer Material: Nickel bronze.
12. Top of Body and Strainer Finish: Nickel bronze.
13. Top Shape: Round.
14. Top Loading Classification: Medium Duty.
15. Funnel: See drawings for locations where required.
16. Inlet Fitting: Gray iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
17. Trap Material: Cast iron.
18. Trap Pattern: Standard P-trap.
19. Trap Features: Trap-seal primer valve drain connection.

2.3 ROOF FLASHING ASSEMBLIES

A. Roof Flashing Assemblies:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Acorn Engineering Company; Elmdor/Stoneman Div.
 - b. Thaler Metal Industries Ltd.

B. Description: Manufactured assembly made of 6.0-lb/sq. ft., 0.0938-inch- thick, lead flashing collar and skirt extending at least 6 inches from pipe, with galvanized-steel boot reinforcement and counterflashing fitting.

1. Open-Top Vent Cap: Without cap.
2. Low-Silhouette Vent Cap: With vandal-proof vent cap.
3. Extended Vent Cap: With field-installed, vandal-proof vent cap.

2.4 THROUGH-PENETRATION FIRESTOP ASSEMBLIES

A. Through-Penetration Firestop Assemblies:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Hilti
 - b. 3M

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

c. ProSet Systems Inc.

2. Standard: UL 1479 assembly of sleeve and stack fitting with firestopping plug.
3. Size: Same as connected soil, waste, or vent stack.
4. Sleeve: Molded PVC plastic, of length to match slab thickness and with integral nailing flange on one end for installation in cast-in-place concrete slabs.
5. Stack Fitting: ASTM A 48/A 48M, gray-iron, hubless-pattern, wye branch with neoprene O-ring at base and gray-iron plug in thermal-release harness. Include PVC protective cap for plug.
6. Special Coating: Corrosion resistant on interior of fittings.

2.5 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Open Drains:

1. Description: Shop or field fabricate from ASTM A 74, Service class, hub-and-spigot, cast-iron, soil-pipe fittings. Include P-trap, hub-and-spigot riser section; and where required, increaser fitting joined with ASTM C 564, rubber gaskets.
2. Size: Same as connected waste piping.

B. Floor-Drain, Trap-Seal Primer Fittings:

1. Description: Cast iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
2. Size: Same as floor drain outlet with NPS 1/2 side inlet.

C. Air-Gap Fittings:

1. Standard: ASME A112.1.2, for fitting designed to ensure fixed, positive air gap between installed inlet and outlet piping.
2. Body: Bronze or cast iron.
3. Inlet: Opening in top of body.
4. Outlet: Larger than inlet.
5. Size: Same as connected waste piping and with inlet large enough for associated indirect waste piping.

D. Expansion Joints:

1. Standard: ASME A112.21.2M.
2. Body: Cast iron with bronze sleeve, packing, and gland.
3. End Connections: Matching connected piping.
4. Size: Same as connected soil, waste, or vent piping.

2.6 FLASHING MATERIALS

- A. Lead Sheet: ASTM B 749, Type L51121, copper bearing, with the following minimum weights and thicknesses, unless otherwise indicated:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. General Use: 4.0-lb/sq. ft., 0.0625-inch thickness.
 2. Vent Pipe Flashing: 3.0-lb/sq. ft., 0.0469-inch thickness.
 3. Burning: 6-lb/sq. ft., 0.0938-inch thickness.
- B. Copper Sheet: ASTM B 152/B 152M, of the following minimum weights and thicknesses, unless otherwise indicated:
1. General Applications: 12 oz./sq. ft..
 2. Vent Pipe Flashing: 8 oz./sq. ft..
- C. Zinc-Coated Steel Sheet: ASTM A 653/A 653M, with 0.20 percent copper content and 0.04-inch minimum thickness, unless otherwise indicated. Include G90 hot-dip galvanized, mill-phosphatized finish for painting if indicated.
- D. Elastic Membrane Sheet: ASTM D 4068, flexible, chlorinated polyethylene, 40-mil minimum thickness.
- E. Fasteners: Metal compatible with material and substrate being fastened.
- F. Metal Accessories: Sheet metal strips, clamps, anchoring devices, and similar accessory units required for installation; matching or compatible with material being installed.
- G. Solder: ASTM B 32, lead-free alloy.
- H. Bituminous Coating: SSPC-Paint 12, solvent-type, bituminous mastic.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install backwater valves in building drain piping. For interior installation, provide cleanout deck plate flush with floor and centered over backwater valve cover, and of adequate size to remove valve cover for servicing.
- B. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:
1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
 2. Locate at each change in direction of piping greater than 45 degrees.
 3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
 4. Locate at base of each vertical soil and waste stack.
 5. Cleanouts shall consist of Y branches with cleanout plugs and covers.
- C. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- E. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.
 - 1. Position floor drains for easy access and maintenance.
 - 2. Set floor drains below elevation of surrounding finished floor to allow floor drainage. Set with grates depressed according to the following drainage area radii:
 - a. Radius, 30 Inches or Less: Equivalent to 1 percent slope, but not less than 1/4-inch total depression.
 - b. Radius, 30 to 60 Inches: Equivalent to 1 percent slope.
 - c. Radius, 60 Inches or Larger: Equivalent to 1 percent slope, but not greater than 1-inch total depression.
 - 3. Install floor-drain flashing collar or flange so no leakage occurs between drain and adjoining flooring. Maintain integrity of waterproof membranes where penetrated.
 - 4. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.
 - 5. Drains installed in water-proofing membranes shall have a flashing clamp device.
- F. Install roof flashing assemblies on sanitary stack vents and vent stacks that extend through roof.
- G. Install flashing fittings on sanitary stack vents and vent stacks that extend through roof.
- H. Install through-penetration firestop assemblies in plastic conductors and stacks at floor penetrations.
- I. Assemble open drain fittings and install with top of hub 2 inches above floor.
- J. Install floor-drain, trap-seal primer fittings on inlet to floor drains that require trap-seal primer connection.
 - 1. Exception: Fitting may be omitted if trap has trap-seal primer connection.
 - 2. Size: Same as floor drain inlet.
- K. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.
- L. Install sleeve flashing device with each riser and stack passing through floors with waterproof membrane.
- M. Install wood-blocking reinforcement for wall-mounting-type specialties.

3.2 CONNECTIONS

- A. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

general arrangement of piping, fittings, and specialties.

- B. Install piping adjacent to equipment to allow service and maintenance.

3.3 FLASHING INSTALLATION

- A. Fabricate flashing from single piece unless large pans, sumps, or other drainage shapes are required. Join flashing according to the following if required:
 - 1. Lead Sheets: Burn joints of lead sheets 6.0-lb/sq. ft., 0.0938-inch thickness or thicker. Solder joints of lead sheets 4.0-lb/sq. ft., 0.0625-inch thickness or thinner.
 - 2. Copper Sheets: Solder joints of copper sheets.
- B. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.
 - 1. Pipe Flashing: Sleeve type, matching pipe size, with minimum length of 10 inches, and skirt or flange extending at least 8 inches around pipe.
 - 2. Sleeve Flashing: Flat sheet, with skirt or flange extending at least 8 inches around sleeve.
 - 3. Embedded Specialty Flashing: Flat sheet, with skirt or flange extending at least 8 inches around specialty.
- C. Set flashing on floors and roofs in solid coating of bituminous cement.
- D. Secure flashing into sleeve and specialty clamping ring or device.
- E. Install flashing for piping passing through roofs with counterflashing or commercially made flashing fittings, according to Division 07 Section "Sheet Metal Flashing and Trim."
- F. Extend flashing up vent pipe passing through roofs and turn down into pipe, or secure flashing into cast-iron sleeve having calking recess.
- G. Fabricate and install flashing and pans, sumps, and other drainage shapes.

3.4 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.
- B. Tests and Inspections:
 - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.5 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 224000 - PLUMBING FIXTURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following conventional plumbing fixtures and related components:

1. Faucets for lavatories, showers and sinks.
2. Flushometers.
3. Toilet seats.
4. Protective shielding guards.
5. Fixture supports.
6. Water closets.
7. Lavatories.
8. Commercial sinks.
9. Individual showers.

- B. Related Sections include the following:

1. Division 10 Section "Toilet, Bath, and Laundry Accessories."
2. Division 22 Section "Domestic Water Piping Specialties" for backflow preventers, floor drains, and specialty fixtures not included in this Section.

1.3 DEFINITIONS

- A. ABS: Acrylonitrile-butadiene-styrene plastic.
- B. Accessible Fixture: Plumbing fixture that can be approached, entered, and used by people with disabilities.
- C. Cast Polymer: Cast-filled-polymer-plastic material. This material includes cultured-marble and solid-surface materials.
- D. Cultured Marble: Cast-filled-polymer-plastic material with surface coating.
- E. Fitting: Device that controls the flow of water into or out of the plumbing fixture. Fittings specified in this Section include supplies and stops, faucets and spouts, shower heads and tub spouts, drains and tailpieces, and traps and waste pipes. Piping and general-duty valves are

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

included where indicated.

- F. FRP: Fiberglass-reinforced plastic.
- G. PMMA: Polymethyl methacrylate (acrylic) plastic.
- H. PVC: Polyvinyl chloride plastic.
- I. Solid Surface: Nonporous, homogeneous, cast-polymer-plastic material with heat-, impact-, scratch-, and stain-resistance qualities.

1.4 SUBMITTALS

- A. Product Data: For each type of plumbing fixture indicated. Include selected fixture and trim, fittings, accessories, appliances, appurtenances, equipment, and supports. Indicate materials and finishes, dimensions, construction details, and flow-control rates.
- B. Shop Drawings: Diagram power, signal, and control wiring.
- C. Operation and Maintenance Data: For plumbing fixtures to include in emergency, operation, and maintenance manuals.
- D. Warranty: Special warranty specified in this Section.

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain plumbing fixtures, faucets, and other components of each category through one source from a single manufacturer.
 - 1. Exception: If fixtures, faucets, or other components are not available from a single manufacturer, obtain similar products from other manufacturers specified for that category.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- C. Regulatory Requirements: Comply with requirements of Public Law 90-480, "Architectural Barriers Act" ; and Public Law 101-336, "Americans with Disabilities Act" ; for plumbing fixtures for people with disabilities.
- D. Regulatory Requirements: Comply with requirements in Public Law 102-486, "Energy Policy Act," about water flow and consumption rates for plumbing fixtures.
- E. NSF Standard: Comply with NSF 61, "Drinking Water System Components--Health Effects," for fixture materials that will be in contact with potable water.
- F. Select combinations of fixtures and trim, faucets, fittings, and other components that are

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

compatible.

- G. Comply with the following applicable standards and other requirements specified for plumbing fixtures:
1. Enameled, Cast-Iron Fixtures: ASME A112.19.1M.
 2. Porcelain-Enameled, Formed-Steel Fixtures: ASME A112.19.4M.
 3. Solid-Surface-Material Lavatories and Sinks: ANSI/ICPA SS-1.
 4. Stainless-Steel Commercial, Handwash Sinks: NSF 2 construction.
 5. Stainless-Steel Residential Sinks: ASME A112.19.3.
 6. Vitreous-China Fixtures: ASME A112.19.2M.
 7. Water-Closet, Flush Valve, Tank Trim: ASME A112.19.5.
- H. Comply with the following applicable standards and other requirements specified for lavatory and sink faucets:
1. Backflow Protection Devices for Faucets with Side Spray: ASME A112.18.3M.
 2. Backflow Protection Devices for Faucets with Hose-Thread Outlet: ASME A112.18.3M.
 3. Diverter Valves for Faucets with Hose Spray: ASSE 1025.
 4. Faucets: ASME A112.18.1.
 5. Hose-Connection Vacuum Breakers: ASSE 1011.
 6. Hose-Coupling Threads: ASME B1.20.7.
 7. Integral, Atmospheric Vacuum Breakers: ASSE 1001.
 8. NSF Potable-Water Materials: NSF 61.
 9. Pipe Threads: ASME B1.20.1.
 10. Sensor-Actuated Faucets and Electrical Devices: UL 1951.
 11. Supply Fittings: ASME A112.18.1.
 12. Brass Waste Fittings: ASME A112.18.2.
- I. Comply with the following applicable standards and other requirements specified for shower faucets:
1. Backflow Protection Devices for Hand-Held Showers: ASME A112.18.3M.
 2. Combination, Pressure-Equalizing and Thermostatic-Control Antiscald Faucets: ASSE 1016.
 3. Faucets: ASME A112.18.1.
 4. Hand-Held Showers: ASSE 1014.
 5. High-Temperature-Limit Controls for Thermal-Shock-Preventing Devices: ASTM F 445.
 6. Hose-Coupling Threads: ASME B1.20.7.
 7. Manual-Control Antiscald Faucets: ASTM F 444.
 8. Pipe Threads: ASME B1.20.1.
 9. Pressure-Equalizing-Control Antiscald Faucets: ASTM F 444 and ASSE 1016.
 10. Sensor-Actuated Faucets and Electrical Devices: UL 1951.
 11. Thermostatic-Control Antiscald Faucets: ASTM F 444 and ASSE 1016.
- J. Comply with the following applicable standards and other requirements specified for miscellaneous fittings:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Atmospheric Vacuum Breakers: ASSE 1001.
2. Brass and Copper Supplies: ASME A112.18.1.
3. Dishwasher Air-Gap Fittings: ASSE 1021.
4. Manual-Operation Flushometers: ASSE 1037.
5. Plastic Tubular Fittings: ASTM F 409.
6. Brass Waste Fittings: ASME A112.18.2.
7. Sensor-Operation Flushometers: ASSE 1037 and UL 1951.

K. Comply with the following applicable standards and other requirements specified for miscellaneous components:

1. Disposers: ASSE 1008 and UL 430.
2. Dishwasher Air-Gap Fittings: ASSE 1021.
3. Flexible Water Connectors: ASME A112.18.6.
4. Floor Drains: ASME A112.6.3.
5. Hose-Coupling Threads: ASME B1.20.7.
6. Hot-Water Dispensers: ASSE 1023 and UL 499.
7. Off-Floor Fixture Supports: ASME A112.6.1M.
8. Pipe Threads: ASME B1.20.1.
9. Plastic Toilet Seats: ANSI Z124.5.
10. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.6 WARRANTY

A. Special Warranties: Manufacturer's standard form in which manufacturer agrees to repair or replace components of whirlpools that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:
 - a. Structural failures of unit shell.
 - b. Faulty operation of controls, blowers, pumps, heaters, and timers.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal use.
2. Warranty Period for Commercial Applications: Three years from date of Substantial Completion.

1.7 EXTRA MATERIALS

A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Faucet Washers and O-Rings: Equal to 10 percent of amount of each type and size installed.
2. Faucet Cartridges and O-Rings: Equal to 10 percent of amount of each type and size installed.
3. Flushometer Valve, Repair Kits: Equal to 10 percent of amount of each type installed, but

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

no fewer than 10 of each type.

4. Provide hinged-top wood or metal box, or individual metal boxes, with separate compartments for each type and size of extra materials listed above.
5. Toilet Seats: Equal to 5 percent of amount of each type installed, but no less than 3.

1.8 FIXTURE CONNECTIONS

- A. Provide all plumbing connections required by fixtures which is provided on this project. Certain items of fixtures shall be provided under this section and certain items will be furnished and set under other sections of the specifications. In all cases, provide valved water supplies, waste and vent lines, and, unless noted otherwise, make final connections after fixtures is in place.

PART 2 - PRODUCTS

2.1 LAVATORY FAUCETS

- A. Lavatory Faucets, (P-2, P-3):

1. Manufacturers: Subject to compliance with requirements, provide Loan SF-2350 sensor faucet or equivalent products by one of the following:
 - a. Chicago Faucets.
 - b. Delta Faucet Company.
 - c. Kohler Co.
2. Description: Single-control temperature mixing valve. Coordinate faucet inlets with supplies and fixture holes; coordinate outlet with spout and fixture receptor.
 - a. Body Material: Commercial, solid brass.
 - b. Finish: Polished chrome plate.
 - c. Maximum Flow Rate: 0.5 gpm.
 - d. Maximum Flow: 0.25 gal.
 - e. Centers: 4 inches.
 - f. Mounting: Deck, exposed.
 - g. Valve Handle(s): Not applicable.
 - h. Inlet(s): NPS 3/8 tubing, plain end.
 - i. Spout: Rigid type.
 - j. Spout Outlet: Vandal-proof aerator.
 - k. Operation: Sensor.
 - l. Drain: Grid.
 - m. Tempering Device: Thermostatic.

2.2 SHOWER FAUCETS

- A. Shower Faucets, (P-5):

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Manufacturers: Subject to compliance with requirements, provide Symmons Temptrol C-96-500-B30-V or equivalent products by one of the following:
 - a. Powers; a Watts Industries Co.
 - b. Bradley.
 - c. T & S Brass and Bronze Works, Inc.
2. Description: Single-handle thermostatic and pressure-balance valve. Include hot- and cold-water indicators; check stops; and shower head, arm, and flange. Coordinate faucet inlets with supplies and outlet with diverter valve.
 - a. Body Material: Solid brass.
 - b. Finish: Polished chrome plate.
 - c. Maximum Flow Rate: 1.5 gpm, unless otherwise indicated.
 - d. Diverter Valve: Not integral with mixing valve.
 - e. Mounting: Exposed.
 - f. Backflow Protection Device for Hand-Held Shower: Required.
 - g. Operation: Compression, manual.
 - h. Antiscald Device: Integral with mixing valve.
 - i. Check Stops: Check-valve type, integral with or attached to body; on hot- and cold-water supply connections.
 - j. Supply Connections: NPS 1/2.
 - k. Shower Head Type: Ball joint and hand-held, slide-bar mounted.
 - l. Shower Head Material: Metallic with chrome-plated finish.
 - m. Spray Pattern: Adjustable.
 - n. Integral Volume Control: Required.
 - o. Shower-Arm Flow-Control Fitting: 1.5 gpm.
 - p. Temperature Indicator: Not required.

2.3 SINK FAUCETS

A. Sink Faucets, (P-4):

1. Manufacturers: Subject to compliance with requirements, provide Delta model 400-DST or comparable products by one of the following:
 - a. Chicago Faucets.
 - b. Kohler Co.
 - c. Moen, Inc.
2. Description: Kitchen faucet with spray, four-hole fixture. Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture holes; coordinate outlet with spout and fixture receptor.
 - a. Body Material: Commercial, solid brass.
 - b. Finish: Polished chrome plate.
 - c. Maximum Flow Rate: 2.2 gpm, unless otherwise indicated.
 - d. Mixing Valve: Single control.
 - e. Backflow Protection Device for Side Spray: Required.
 - f. Centers: 8 inches.
 - g. Mounting: Deck, exposed.
 - h. Handle: Lever.
 - i. Inlet(s): NPS 3/8 tubing with NPS 1/2 male adapter.
 - j. Spout Type: Swing, solid brass.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- k. Spout Outlet: Swivel aerator/spray.
- l. Vacuum Breaker: Not required.
- m. Operation: Compression, manual.
- n. Drain: Grid.

2.4 FLUSHOMETERS

A. Flushometers, (P-1):

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Standard Company.
 - b. Sloan Valve Company.
 - c. Zurn Plumbing Products Group; Commercial Brass Operation.
- 2. Description: Flushometer for high efficiency water-closet-type fixture. Include brass body with corrosion-resistant internal components, non-hold-open feature, control stop with check valve, vacuum breaker, copper or brass tubing, and polished chrome-plated finish on exposed parts.
 - a. Internal Design: Diaphragm operation.
 - b. Style: Exposed.
 - c. Inlet Size: NPS 1.
 - d. Trip Mechanism: Oscillating, lever-handle actuator.
 - e. Consumption: 1.28 gal./flush.
 - f. Tailpiece Size: NPS 1-1/2.

2.5 TOILET SEATS

A. Toilet Seats, (P-1):

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Bemis Manufacturing Company.
 - b. Church Seats.
 - c. Olsonite Corp.
- 2. Description: Toilet seat for water-closet-type fixture.
 - a. Material: Molded, solid plastic.
 - b. Configuration: Open front without cover.
 - c. Size: Elongated.
 - d. Hinge Type: CK, check.
 - e. Class: Heavy-duty commercial.
 - f. Color: White.

2.6 PROTECTIVE SHIELDING GUARDS

A. Protective Shielding Pipe Covers:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. McGuire Manufacturing Co., Inc.
 - b. TRUEBRO, Inc.
 - c. Zurn Plumbing Products Group; Tubular Brass Plumbing Products Operation.
2. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

2.7 FIXTURE SUPPORTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Josam Company.
 2. MIFAB Manufacturing Inc.
 3. Smith, Jay R. Mfg. Co.
- B. Water-Closet Supports, (P-1):
 1. Description: Combination carrier designed for accessible and standard mounting height of wall-mounting, water-closet-type fixture. Include single or double, vertical or horizontal, hub-and-spigot or hubless waste fitting as required for piping arrangement; faceplates; couplings with gaskets; feet; and fixture bolts and hardware matching fixture. Include additional extension coupling, faceplate, and feet for installation in wide pipe space.
- C. Lavatory Supports, (P-2):
 1. Description: Type II, lavatory carrier with concealed arms and tie rod for wall-mounting, lavatory-type fixture. Include steel uprights with feet.
 2. Accessible-Fixture Support: Include rectangular steel uprights.

2.8 WATER CLOSETS

- A. Water Closets, (P-1):
 1. Manufacturers: Subject to compliance with requirements, provide American Standard Aftall FloWise or comparable products by one of the following:
 - a. Sloan.
 - b. Crane Plumbing, L.L.C./Fiat Products.
 - c. Eljer.
 - d. Kohler Co.
 2. Description Accessible, wall, back-outlet, vitreous-china fixture designed for flushometer valve operation.
 - a. Supply: NPS 1 chrome-plated brass or copper with screwdriver stop.
 - b. Style: Flushometer valve.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 1) Bowl Type: Elongated with siphon-jet design.
- 2) Design Consumption: 1.28 gal./flush.
- 3) Color: White.

- c. Flushometer: (P-1, P-1A).
- d. Toilet Seat: (P-1, P-1A).
- e. Fixture Support: Water-closet support (P-1, P-1A) combination carrier.

B. Water Closets, (P-1B):

1. Manufacturers: Subject to compliance with requirements, provide American Standard Madera 16-1/2" Height FlowWise or comparable products by one of the following:
 - a. American Standard Companies, Inc.
 - b. Crane Plumbing, L.L.C./Fiat Products.
 - c. Eljer.
 - d. Kohler Co.
2. Description: Accessible, floor-mounting, floor-outlet, vitreous-china fixture designed for flushometer valve operation.
 - a. Style: Flushometer valve.
 - 1) Bowl Type: Elongated with siphon-jet design. Include bolt caps matching fixture.
 - 2) Height: Accessible.
 - 3) Design Consumption: 1.28 gal./flush.
 - 4) Color: White.
 - b. Flushometer: (P-1A).
 - c. Toilet Seat: (P-1A).

2.9 LAVATORIES

A. Lavatories, (P-2):

1. Manufacturers: Subject to compliance with requirements, provide American Standard Lucerne or comparable products by one of the following:
 - a. Crane Plumbing, L.L.C./Fiat Products.
 - b. Eljer.
 - c. Kohler Co.
2. Description: Accessible, wall-mounting, vitreous-china fixture.
 - a. Type: Ledge back.
 - b. Size: 20 by 18 inches rectangular.
 - c. Faucet Hole Punching: One hole.
 - d. Faucet Hole Location: Top.
 - e. Pedestal: Not required.
 - f. Color: White.
 - g. Faucet: Lavatory (P-4).
 - h. Supplies: NPS 3/8 chrome-plated copper with stops.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- i. Drain: Grid.
 - 1) Location: Near back of bowl.
- j. Drain Piping: NPS 1-1/4 by NPS 1-1/2 chrome-plated, cast-brass P-trap; NPS 1-1/2, 0.032-inch-thick tubular brass waste to wall; and wall escutcheon.
- k. Protective Shielding Guard(s): Required.
- l. Fixture Support: Lavatory (P-4).

B. Lavatories, (P-3):

- 1. Manufacturers: Subject to compliance with requirements, provide Wilsonart BV1512 or comparable products by one of the following:
 - a. American Standard Companies, Inc.
 - b. Crane Plumbing, L.L.C./Fiat Products.
 - c. Eljer.
 - d. Kohler Co.
- 2. Description: Accessible, under counter-mounting, solid-surface fixture.
 - a. Type: Self-rimming.
 - b. Oval Lavatory Size: 15 by 15 inches.
 - c. Faucet Hole Punching: One hole in counter.
 - d. Faucet Hole Location: Top.
 - e. Color: Ceam.
 - f. Faucet: Lavatory (P-3).
 - g. Supplies: NPS 3/8 chrome-plated copper with stops.
 - h. Drain: Grid.
 - 1) Location: Near back of bowl.
 - i. Drain Piping: NPS 1-1/4 by NPS 1-1/2 chrome-plated, cast-brass P-trap; NPS 1-1/2, 0.032-inch-thick tubular brass waste to wall; and wall escutcheon.
 - j. Hair Interceptor: Not required.
 - k. Protective Shielding Guards: Required.

2.10 COMMERCIAL SINKS

A. Commercial Sinks, (P-4):

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Advance Tabco.
 - b. Elkay Manufacturing Co.
 - c. Just Manufacturing Company.
- 2. Description: Two-compartment, counter-mounting, stainless-steel commercial sink with backsplash.
 - a. Overall Dimensions: 33" x 22"

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Metal Thickness: 0.050 inch.
- c. Each Compartment:
 - 1) Dimensions: 16" x 16" x 7" deep and 13-1/2" x 16" x 7" deep.
 - 2) Drain: Grid with NPS 2 tailpiece and twist drain.
 - a) Location: Near back of compartment.
- d. Faucet: Sink (P-4).
 - 1) Number Required: One.
 - 2) Mounting: Deck.
- e. Supplies: NPS 1/2 chrome-plated copper with stops or shutoff valves.
- f. Drain Piping: NPS 2 chrome-plated, cast-brass P-trap; 0.045-inch- thick tubular brass waste to wall; and wall escutcheon(s).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before plumbing fixture installation.
- B. Examine cabinets, counters, floors, and walls for suitable conditions where fixtures will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Assemble plumbing fixtures, trim, fittings, and other components according to manufacturers' written instructions.
- B. All exposed metal parts of all fixtures, including all trim and fittings shall be brass.
- C. Install off-floor supports, affixed to building substrate, for wall-mounting fixtures.
 - 1. Use carrier supports with waste fitting and seal for back-outlet fixtures.
 - 2. Use carrier supports without waste fitting for fixtures with tubular waste piping.
 - 3. Use chair-type carrier supports with rectangular steel uprights for accessible fixtures.
 - 4. No wood grounds, wood plugs, or expansion bolts shall be permitted for fixture support.
- D. Install back-outlet, wall-mounting fixtures onto waste fitting seals and attach to supports.
- E. Install floor-mounting fixtures on closet flanges or other attachments to piping or building substrate.
- F. Install wall-mounting fixtures with tubular waste piping attached to supports.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- G. Install floor-mounting, back-outlet water closets attached to building floor substrate and wall bracket and onto waste fitting seals.
- H. Install counter-mounting fixtures in and attached to casework.
- I. Install fixtures level and plumb according to roughing-in drawings.
- J. Install water-supply piping with stop on each supply to each fixture to be connected to water distribution piping. Attach supplies to supports or substrate within pipe spaces behind fixtures. Install stops in locations where they can be easily reached for operation. All nipples shall be chrome plated brass.
 - 1. Exception: Use ball, gate, or globe valves if supply stops are not specified with fixture. Valves are specified in Division 22 Section "General-Duty Valves for Plumbing Piping."
- K. Install trap and tubular waste piping on drain outlet of each fixture to be directly connected to sanitary drainage system.
- L. Install tubular waste piping on drain outlet of each fixture to be indirectly connected to drainage system.
- M. Install flushometer valves for accessible water closets and urinals with handle mounted on wide side of compartment. Install other actuators in locations that are easy for people with disabilities to reach.
- N. Install toilet seats on water closets.
- O. Install faucet-spout fittings with specified flow rates and patterns in faucet spouts if faucets are not available with required rates and patterns. Include adapters if required.
- P. Install water-supply flow-control fittings with specified flow rates in fixture supplies at stop valves.
- Q. Install faucet flow-control fittings with specified flow rates and patterns in faucet spouts if faucets are not available with required rates and patterns. Include adapters if required.
- R. Install shower flow-control fittings with specified maximum flow rates in shower arms.
- S. Install traps on fixture outlets.
 - 1. Exception: Omit trap on fixtures with integral traps.
 - 2. Exception: Omit trap on indirect wastes, unless otherwise indicated.
- T. Install disposer in outlet of each sink indicated to have disposer. Install switch where indicated or in wall adjacent to sink if location is not indicated.
- U. Install dishwasher air-gap fitting at each sink indicated to have air-gap fitting. Install in sink deck. Connect inlet hose to dishwasher and outlet hose to disposer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- V. Install escutcheons at piping wall ceiling penetrations in exposed, finished locations and within cabinets and millwork. Use deep-pattern escutcheons if required to conceal protruding fittings. Escutcheons are specified in Division 22 Section "Escutcheons for Plumbing Piping."
- W. Set service basins in leveling bed of cement grout. Grout is specified in Division 22 Section "Common Work Results for Plumbing."
- X. Seal joints between fixtures and walls, floors, and countertops using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Sealants are specified in Division 07 Section "Joint Sealants."
- Y. All faucet handles, where possible, shall have color coded "indexes" identifying the service used.
- Z. Water supplies for handicapped lavatories and sinks shall be insulated. Waste lines for handicapped lavatories and sinks shall be offset and insulated.
- AA. Water supplies for handicapped water closets shall be roughed-in for flush valve handle to be operated from the accessible side of the water closet. Contractor shall coordinate and provide flush handle on the accessible side of all tank type handicapped water closets.
- BB. Provide backflow devices on all faucets and fittings requiring backflow prevention. Devices may be inline type when not provided integral with the faucet.

3.3 CONNECTIONS

- A. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- C. Ground equipment according to Division 26 Section "Grounding and Bonding for Electrical Systems."
- D. Connect wiring according to Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."

3.4 FIELD QUALITY CONTROL

- A. Verify that installed plumbing fixtures are categories and types specified for locations where installed.
- B. Check that plumbing fixtures are complete with trim, faucets, fittings, and other specified components.
- C. Inspect installed plumbing fixtures for damage. Replace damaged fixtures and components.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Test installed fixtures after water systems are pressurized for proper operation. Replace malfunctioning fixtures and components, then retest. Repeat procedure until units operate properly.
- E. Install fresh batteries in sensor-operated mechanisms.

3.5 ADJUSTING

- A. Operate and adjust faucets and controls. Replace damaged and malfunctioning fixtures, fittings, and controls.
- B. Adjust water pressure at faucets and flushometer valves to produce proper flow and stream.
- C. Replace washers and seals of leaking and dripping faucets and stops.
- D. Install fresh batteries in sensor-operated mechanisms.

3.6 CLEANING

- A. Clean fixtures, faucets, and other fittings with manufacturers' recommended cleaning methods and materials. Do the following:
 - 1. Remove faucet spouts and strainers, remove sediment and debris, and reinstall strainers and spouts.
 - 2. Remove sediment and debris from drains.
- B. After completing installation of exposed, factory-finished fixtures, faucets, and fittings, inspect exposed finishes and repair damaged finishes.

3.7 PROTECTION

- A. Provide protective covering for installed fixtures and fittings.
- B. Do not allow use of plumbing fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224000

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230513 - COMMON MOTOR REQUIREMENTS FOR HVAC EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes general requirements for single-phase and polyphase, general-purpose, horizontal, small and medium, squirrel-cage induction motors for use on ac power systems up to 600 V and installed at equipment manufacturer's factory or shipped separately by equipment manufacturer for field installation.

1.3 COORDINATION

- A. Coordinate features of motors, installed units, and accessory devices to be compatible with the following:
 - 1. Motor controllers.
 - 2. Torque, speed, and horsepower requirements of the load.
 - 3. Ratings and characteristics of supply circuit and required control sequence.
 - 4. Ambient and environmental conditions of installation location.

PART 2 - PRODUCTS

2.1 GENERAL MOTOR REQUIREMENTS

- A. Comply with NEMA MG 1 unless otherwise indicated.
- B. Comply with IEEE 841 for severe-duty motors.

2.2 MOTOR CHARACTERISTICS

- A. Duty: Continuous duty at ambient temperature of 40 deg C and at altitude of 3300 feet above sea level.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Capacity and Torque Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, at installed altitude and environment, with indicated operating sequence, and without exceeding nameplate ratings or considering service factor.

2.3 POLYPHASE MOTORS

- A. Description: NEMA MG 1, Design B, medium induction motor.
- B. Efficiency: Energy efficient, as defined in NEMA MG 1.
- C. Service Factor: 1.15.
- D. Multispeed Motors: Variable torque.
 - 1. For motors with 2:1 speed ratio, consequent pole, single winding.
 - 2. For motors with other than 2:1 speed ratio, separate winding for each speed.
- E. Multispeed Motors: Separate winding for each speed.
- F. Rotor: Random-wound, squirrel cage.
- G. Bearings: Regreasable, shielded, antifriction ball bearings suitable for radial and thrust loading.
- H. Temperature Rise: Match insulation rating.
- I. Insulation: Class F.
- J. Code Letter Designation:
 - 1. Motors 15 HP and Larger: NEMA starting Code F or Code G.
 - 2. Motors Smaller than 15 HP: Manufacturer's standard starting characteristic.
- K. Enclosure Material: Cast iron for motor frame sizes 324T and larger; rolled steel for motor frame sizes smaller than 324T.

2.4 POLYPHASE MOTORS WITH ADDITIONAL REQUIREMENTS

- A. Motors Used with Reduced-Voltage and Multispeed Controllers: Match wiring connection requirements for controller with required motor leads. Provide terminals in motor terminal box, suited to control method.
- B. Motors Used with Variable Frequency Controllers: Ratings, characteristics, and features coordinated with and approved by controller manufacturer.
 - 1. Windings: Copper magnet wire with moisture-resistant insulation varnish, designed and tested to resist transient spikes, high frequencies, and short time rise pulses produced by pulse-width modulated inverters.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Energy- and Premium-Efficient Motors: Class B temperature rise; Class F insulation.
3. Inverter-Duty Motors: Class F temperature rise; Class H insulation.
4. Thermal Protection: Comply with NEMA MG 1 requirements for thermally protected motors.

- C. Severe-Duty Motors: Comply with IEEE 841, with 1.15 minimum service factor.

2.5 SINGLE-PHASE MOTORS

- A. Motors larger than 1/20 hp shall be one of the following, to suit starting torque and requirements of specific motor application:
1. Permanent-split capacitor.
 2. Split phase.
 3. Capacitor start, inductor run.
 4. Capacitor start, capacitor run.
- B. Multispeed Motors: Variable-torque, permanent-split-capacitor type.
- C. Bearings: Pre-lubricated, antifriction ball bearings or sleeve bearings suitable for radial and thrust loading.
- D. Motors 1/20 HP and Smaller: Shaded-pole type.
- E. Thermal Protection: Internal protection to automatically open power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal-protection device shall automatically reset when motor temperature returns to normal range.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 230513

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230517 - SLEEVES AND SLEEVE SEALS FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Sleeves.
 - 2. Grout.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Cast-Iron Wall Pipes: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.
- B. Galvanized-Steel Wall Pipes: ASTM A 53/A 53M, Schedule 40, with plain ends and welded steel collar; zinc coated.
- C. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.
- D. PVC-Pipe Sleeves: ASTM D 1785, Schedule 40.
- E. Galvanized-Steel-Sheet Sleeves: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- F. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with nailing flange for attaching to wooden forms.
- G. Molded-PVC Sleeves: With nailing flange for attaching to wooden forms.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
 - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
 - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 - 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 3. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants specified in Division 07 Section "Joint Sealants."
- E. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Division 07 Section "Penetration Firestopping."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 SLEEVE AND SLEEVE-SEAL SCHEDULE

A. Use sleeves and sleeve seals for the following piping-penetration applications:

1. Exterior Concrete Walls above Grade:
 - a. Piping Smaller Than NPS 6: Cast-iron wall sleeves.
 - b. Piping NPS 6 and Larger: Cast-iron wall sleeves.
2. Concrete Slabs above Grade:
 - a. Piping Smaller Than NPS 6: Galvanized-steel-pipe sleeves.
 - b. Piping NPS 6 and Larger: Galvanized-steel-pipe sleeves.
3. Interior Partitions:
 - a. Piping Smaller Than NPS 6: Galvanized-steel-pipe sleeves.
 - b. Piping NPS 6 and Larger: Galvanized-steel-sheet sleeves.

END OF SECTION 230517

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230518 - ESCUTCHEONS FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Escutcheons.
 - 2. Floor plates.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With polished, chrome-plated and rough-brass finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.
- C. One-Piece, Stamped-Steel Type: With chrome-plated finish and spring-clip fasteners.
- D. Split-Casting Brass Type: With polished, chrome-plated and rough-brass finish and with concealed hinge and setscrew.
- E. Split-Plate, Stamped-Steel Type: With chrome-plated finish, concealed hinge, and spring-clip fasteners.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 FLOOR PLATES

- A. One-Piece Floor Plates: Cast-iron flange with holes for fasteners.
- B. Split-Casting Floor Plates: Cast brass with concealed hinge.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. Escutcheons for New Piping:
 - a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
 - b. Chrome-Plated Piping: One-piece, cast-brass type with polished, chrome-plated finish.
 - c. Insulated Piping: One-piece, stamped-steel type or split-plate, stamped-steel type with concealed hinge.
 - d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - e. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - f. Bare Piping in Unfinished Service Spaces: One-piece, cast-brass or split-casting brass type with rough-brass finish.
 - g. Bare Piping in Equipment Rooms: One-piece, cast-brass type with rough-brass finish.
 - 2. Escutcheons for Existing Piping:
 - a. Chrome-Plated Piping: Split-casting brass type with polished, chrome-plated finish.
 - b. Insulated Piping: Split-plate, stamped-steel type with concealed hinge.
 - c. Bare Piping at Wall and Floor Penetrations in Finished Spaces: Split-casting brass type with polished, chrome-plated finish.
 - d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: Split-plate, stamped-steel type with concealed hinge.
 - e. Bare Piping at Ceiling Penetrations in Finished Spaces: Split-casting brass type with polished, chrome-plated finish.
 - f. Bare Piping in Unfinished Service Spaces: Split-casting brass type with rough-brass finish.
 - g. Bare Piping in Equipment Rooms: Split-casting brass type with rough-brass finish.
 - h. Bare Piping in Equipment Rooms: Split-plate, stamped-steel type with concealed hinge.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Install floor plates for piping penetrations of equipment-room floors.
- D. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. New Piping: One-piece, floor-plate type.
 - 2. Existing Piping: Split-casting, floor-plate type.

3.2 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 230518

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230519 - METERS AND GAGES FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Thermometers.
 - 2. Test plugs.

1.3 DEFINITIONS

- A. CR: Chlorosulfonated polyethylene synthetic rubber.
- B. EPDM: Ethylene-propylene-diene terpolymer rubber.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated; include performance curves.
- B. Shop Drawings: Schedule for thermometers, gages and flowmeters indicating manufacturer's number, scale range, and location for each.
- C. Product Certificates: For each type of thermometer, gage and flowmeter, signed by product manufacturer.
- D. Operation and Maintenance Data: For flowmeters to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 METAL-CASE, LIQUID-IN-GLASS THERMOMETERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Palmer - Wahl Instruments Inc.
2. Trerice, H. O. Co.
3. Weiss Instruments, Inc.
4. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.

- B. Case: Die-cast aluminum, 7 inches long.
- C. Tube: Red or blue reading, mercury or organic-liquid filled, with magnifying lens.
- D. Tube Background: Satin-faced, nonreflective aluminum with permanently etched scale markings.
- E. Window: Glass.
- F. Connector: Adjustable type, 180 degrees in vertical plane, 360 degrees in horizontal plane, with locking device.
- G. Stem: Copper-plated steel, aluminum, or brass for thermowell installation and of length to suit installation.
- H. Accuracy: Plus or minus 1 percent of range or plus or minus 1 scale division to maximum of 1.5 percent of range.

2.2 THERMOWELLS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. AMETEK, Inc.; U.S. Gauge Div.
 2. Ashcroft Commercial Instrument Operations; Dresser Industries; Instrument Div.
 3. Ernst Gage Co.
 4. Marsh Bellofram.
 5. Miljoco Corp.
 6. Palmer - Wahl Instruments Inc.
 7. REO TEMP Instrument Corporation.
 8. Tel-Tru Manufacturing Company.
 9. Trerice, H. O. Co.
 10. Weiss Instruments, Inc.
 11. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.
- B. Manufacturers: Same as manufacturer of thermometer being used.
- C. Description: Pressure-tight, socket-type metal fitting made for insertion into piping and of type, diameter, and length required to hold thermometer.

2.3 TEST PLUGS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

following:

1. Flow Design, Inc.
 2. Peterson Equipment Co., Inc.
 3. Sisco Manufacturing Co.
 4. Trerice, H. O. Co.
 5. Watts Industries, Inc.; Water Products Div.
- B. Description: Corrosion-resistant brass or stainless-steel body with core inserts and gasketed and threaded cap, with extended stem for units to be installed in insulated piping.
- C. Minimum Pressure and Temperature Rating: 1000 psig at 200 deg F.
- D. Core Inserts: One or two self-sealing rubber valves.
1. Insert material for air, water, oil, or gas service at 20 to 200 deg F shall be CR.
 2. Insert material for air or water service at minus 30 to plus 275 deg F shall be EPDM.
- E. Test Kit: Furnish one test kit containing one pressure gage and adaptor, two thermometer, and carrying case. Pressure gage, adapter probes, and thermometer sensing elements shall be of diameter to fit test plugs and of length to project into piping.
1. Pressure Gage: Small bourdon-tube insertion type with 2- to 3-inch-diameter dial and probe. Dial range shall be 0 to 200 psig.
 2. Low-Range Thermometer: Small bimetallic insertion type with 1- to 2-inch-diameter dial and tapered-end sensing element. Dial ranges shall be 25 to 125 deg F.
 3. High-Range Thermometer: Small bimetallic insertion type with 1- to 2-inch-diameter dial and tapered-end sensing element. Dial ranges shall be 0 to 220 deg F.
 4. Carrying case shall have formed instrument padding.

PART 3 - EXECUTION

3.1 THERMOMETER APPLICATIONS

- A. Install liquid-in-glass thermometers in the following locations:
1. Inlet and outlet of each hydronic zone.
 2. Inlet and outlet of each hydronic boiler and chiller.
 3. Inlet and outlet of each hydronic coil in air-handling units and built-up central systems.
- B. Provide the following temperature ranges for thermometers:
1. Heating Hot Water: 30 to 240 deg F, with 2-degree scale divisions.
 2. Chilled Water: 0 to 100 deg F, with 2-degree scale divisions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 INSTALLATIONS

- A. Install direct-mounting thermometers and adjust vertical and tilted positions.
- B. Install thermowells with socket extending to center of pipe and in vertical position in piping tees where thermometers are indicated.
- C. Install needle-valve and snubber fitting in piping for each pressure gage for fluids (except steam).
- D. Install test plugs in tees in piping.
- E. Assemble and install connections, tubing, and accessories between flow-measuring elements and flowmeters as prescribed by manufacturer's written instructions.

3.3 CONNECTIONS

- A. Install meters and gages adjacent to machines and equipment to allow service and maintenance for meters, gages, machines, and equipment.

3.4 ADJUSTING

- A. Calibrate meters according to manufacturer's written instructions, after installation.
- B. Adjust faces of meters and gages to proper angle for best visibility.

END OF SECTION 230519

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230523 - GENERAL-DUTY VALVES FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Bronze ball valves.
 - 2. Bronze swing check valves.
 - 3. Bronze globe valves.

- B. Related Sections:

- 1. Division 23 HVAC piping Sections for specialty valves applicable to those Sections only.
 - 2. Division 23 Section "Identification for HVAC Piping and Equipment" for valve tags and schedules.

1.3 DEFINITIONS

- A. CWP: Cold working pressure.
- B. EPDM: Ethylene propylene copolymer rubber.
- C. NBR: Acrylonitrile-butadiene, Buna-N, or nitrile rubber.
- D. NRS: Nonrising stem.
- E. OS&Y: Outside screw and yoke.
- F. RS: Rising stem.
- G. SWP: Steam working pressure.

1.4 SUBMITTALS

- A. General: Submit the following in accordance with conditions of Contract and Division 01 Specification Sections.
- B. Product Data: For each type of valve indicated.
- C. Shop Drawings: Submit manufacturer's assembly-type (exploded view) shop drawings for each

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

type of valve, indicating dimensions, weights, materials, and methods of assembly of components.

- D. Maintenance Data; Submit maintenance data and spare parts lists for each type of valve. Include this data, product data, and shop drawings in Maintenance Manual; in accordance with requirements of Division 01.

1.5 QUALITY ASSURANCE

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.
- B. ASME Compliance:
 - 1. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
 - 2. ASME B31.1 for power piping valves.
 - 3. ASME B31.9 for building services piping valves.
- C. Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) Compliance: Comply with the various MSS Standard Practices referenced.
- D. ANSI Compliance: For face-to-face and end-to-end dimensions of flanged or welded-end valve bodies, comply with ANSI B16.10 "Face-to-Face and End-to-End Dimensions of Ferrous Valves".

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Set angle, gate, and globe valves closed to prevent rattling.
 - 4. Set ball and plug valves open to minimize exposure of functional surfaces.
 - 5. Set butterfly valves closed or slightly open.
 - 6. Block check valves in either closed or open position.
- B. Use the following precautions during storage:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher than ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Refer to HVAC valve schedule articles for applications of valves.
- B. Valve Pressure and Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- C. Valve Sizes: Same as upstream piping unless otherwise indicated.
- D. Valve Actuator Types:
 - 1. Handwheel: For valves other than quarter-turn types.
 - 2. Handlever: For quarter-turn valves NPS 6 and smaller except plug valves.
- E. Valves in Insulated Piping: With 2-inch stem extensions and the following features:
 - 1. Ball Valves: With extended operating handle of non-thermal-conductive material, and protective sleeve that allows operation of valve without breaking the vapor seal or disturbing insulation.
- F. Valve-End Connections:
 - 1. Flanged: With flanges according to ASME B16.1 for iron valves.
 - 2. Solder Joint: With sockets according to ASME B16.18.
 - 3. Threaded: With threads according to ASME B1.20.1.
- G. Valve Bypass and Drain Connections: MSS SP-45.
- H. Flanges: Comply with ASTM A-216 for steel and ANSI B16.24 for bronze valves.
- I. Provide valves with features indicated and, where not otherwise indicated, provide proper valve features as determined by Installer for installation requirements. Comply with ASME B31.1 for Power Piping.
- J. Valve Design: Select and install valves with outside screw and yoke stems, except provide inside screw non-rising stem valves where headroom prevents full opening of OS&Y valves.
- K. Non-Metallic Disc: Limit selection and installation of valves with non-metallic discs to locations indicated and where foreign materials in piping system can be expected to prevent tight shutoff of metal seated valves.
- L. Renewable Seats: Select and install valves with renewable seats, except where otherwise indicated.
- M. Fluid Control: Except as otherwise indicated, install ball valves to comply with ANSI B31.9. Where throttling is indicated or recognized as principal reason for valve, install globe valves.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 BRONZE BALL VALVES

A. Three-Piece, Full-Port, Bronze Ball Valves with Stainless-Steel Trim:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. Hammond Valve.
 - c. Milwaukee Valve Company.
 - d. NIBCO INC.
2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig.
 - c. CWP Rating: 600 psig.
 - d. Body Design: Three piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Full.

2.3 BRONZE SWING CHECK VALVES

A. Class 150, Bronze Swing Check Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. Kitz Corporation.
 - f. Milwaukee Valve Company.
 - g. NIBCO INC.
 - h. Red-White Valve Corporation.
 - i. Zy-Tech Global Industries, Inc.
2. Description:
 - a. Standard: MSS SP-80, Type 3.
 - b. CWP Rating: 300 psig.
 - c. Body Design: Horizontal flow.
 - d. Body Material: ASTM B 62, bronze.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- e. Ends: Threaded.
- f. Disc: Bronze.

2.4 BRONZE GLOBE VALVES

A. Class 125, Bronze Globe Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Stockham Division.
 - c. Hammond Valve.
 - d. Kitz Corporation.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC.
 - g. Powell Valves.
 - h. Red-White Valve Corporation.
 - i. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - j. Zy-Tech Global Industries, Inc.
2. Description:
 - a. Standard: MSS SP-80, Type 1.
 - b. CWP Rating: 200 psig.
 - c. Body Material: ASTM B 62, bronze with integral seat and screw-in bonnet.
 - d. Ends: Threaded or solder joint.
 - e. Stem and Disc: Bronze.
 - f. Packing: Asbestos free.
 - g. Handwheel: Malleable iron.

PART 3 - - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. General Application: Use gate and ball valves for shut-off duty; globe and ball valves for throttling duty as indicated on the contract drawings. Refer to piping system specification sections for specific valve applications and arrangements.
- B. Installation of Swing Check Valves: Install for proper direction of flow and in horizontal position or vertical position with flow direction upwards, and with hinge pin level.
- C. Insulation: Where insulation is indicated for the service, provide valves with extended stems, arranged in manner to receive insulation. Handles shall operate over full range without damaging insulation or vapor barrier seals.
- D. Install valves and unions for each fixture and item of equipment arranged to allow equipment removal without system shutdown. Unions are not required on flanged devices.
- E. Install by-pass and drain valves per MSS SP-45 or as indicated on the Contract Drawings.
- F. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- G. Locate valves for easy access and provide separate support where necessary.
- H. Install valves in horizontal piping with stem at or above center of pipe.
- I. Install valves in position to allow full stem movement.
- J. Install check valves for proper direction of flow and as follows:
 - 1. Swing Check Valves: In horizontal position with hinge pin level.

3.3 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valve applications are not indicated, use the following:
 - 1. Shutoff Service: Ball valves.
 - 2. Throttling Service: Globe or ball valves.
- B. If valves with specified SWP classes or CWP ratings are not available, the same types of valves with higher SWP classes or CWP ratings may be substituted.
- C. Select valves, except wafer types, with the following end connections:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. For Copper Tubing, NPS 2 and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules below.
2. For Copper Tubing, NPS 2-1/2 to NPS 4: Flanged ends except where threaded valve-end option is indicated in valve schedules below.
3. For Copper Tubing, NPS 5 and Larger: Flanged ends.
4. For Steel Piping, NPS 2 and Smaller: Threaded ends.
5. For Steel Piping, NPS 2-1/2 to NPS 4: Flanged ends except where threaded valve-end option is indicated in valve schedules below.
6. For Steel Piping, NPS 5 and Larger: Flanged ends.

3.5 CHILLED-WATER VALVE SCHEDULE

A. Pipe NPS 2 and Smaller:

1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
2. Bronze Angle Valves: Class 150, bronze disc.
3. Ball Valves: Three piece, full port, bronze with stainless-steel trim.
4. Bronze Swing Check Valves: Class 150, bronze disc.

3.6 HEATING-WATER VALVE SCHEDULE

A. Pipe NPS 2 and Smaller:

1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
2. Bronze Angle Valves: Class 150, bronze disc.
3. Ball Valves: Three piece, full port, bronze with stainless-steel trim.
4. Bronze Swing Check Valves: Class 150, bronze disc.

3.7 SOCKET WELD CONNECTIONS

- #### A. Make all socket weld connections in accordance with ASME Power Piping Code B31.1.

3.8 THREADED CONNECTIONS

- #### A. Note the internal length of threads in valve ends, and proximity of valve internal seat or wall, to determine how far pipe should be threaded into valve.
- #### B. Align threads at point of assembly.
- #### C. Apply appropriate tape or thread compound to the external pipe threads (except where dry seal threading is specified).
- #### D. Assemble joint, wrench tight. Wrench on valve shall be on the valve end into which the pipe is being threaded.

3.9 FLANGED CONNECTIONS

- #### A. Align flange surfaces parallel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Assemble joints by sequencing bolt tightening to make initial contact of flanges and gaskets as flat and parallel as possible. Use suitable lubricants on bolt threads. Tighten bolts gradually and uniformly with a torque wrench.
- C. For dead-end service, butterfly valves require flanges both upstream and downstream for proper shutoff and retention.

3.10 FIELD QUALITY CONTROL

- A. Tests: After piping systems have been tested and put into service, but before final adjusting and balancing, inspect valves for leaks. Adjust or replace packing to stop leaks; replace valves if leak persists.

3.11 ADJUSTING AND CLEANING

- A. Valve Adjustment: After piping systems have been tested and put into service, but before final testing, adjusting, and balancing, inspect each valve for possible leaks. Adjust or replace packing to stop leaks, replace valve if leak persists.
- B. Valve Identification: Tag each valve with non-corrosive tag and Owner approved numbering scheme.
- C. Cleaning: Clean mill scale, grease, and protective coatings from exterior of valves and prepare valves to receive finish painting or insulation.

END OF SECTION 230523

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following hangers and supports for HVAC system piping and equipment:
 - 1. Steel pipe hangers and supports.
 - 2. Trapeze pipe hangers.
 - 3. Metal framing systems.
 - 4. Thermal-hanger shield inserts.
 - 5. Fastener systems.
 - 6. Pipe stands.
 - 7. Equipment supports.
- B. Related Sections include the following:
 - 1. Division 21 Section "Water-Based Fire-Suppression Systems" for pipe hangers for fire-protection piping.
 - 2. Division 23 Section "Vibration and Seismic Controls for HVAC Piping and Equipment" for vibration isolation devices.
 - 3. Division 23 Section "Metal Ducts" for duct hangers and supports.

1.3 DEFINITIONS

- A. MSS: Manufacturers Standardization Society for The Valve and Fittings Industry Inc.
- B. Terminology: As defined in MSS SP-90, "Guidelines on Terminology for Pipe Hangers and Supports."

1.4 PERFORMANCE REQUIREMENTS

- A. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.
- B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 SUBMITTALS

- A. Product Data: For the following:
 - 1. Steel pipe hangers and supports.
 - 2. Fiberglass pipe hangers.
 - 3. Thermal-hanger shield inserts.
- B. Shop Drawings: Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze pipe hangers. Include Product Data for components.
 - 2. Metal framing systems. Include Product Data for components.
 - 3. Fiberglass strut systems. Include Product Data for components.
 - 4. Pipe stands. Include Product Data for components.
 - 5. Equipment supports.
- C. Welding certificates.

1.6 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1, "Structural Welding Code--Steel."
 - 2. AWS D1.3, "Structural Welding Code--Sheet Steel."
 - 3. AWS D1.4, "Structural Welding Code--Reinforcing Steel."
 - 4. ASME Boiler and Pressure Vessel Code: Section IX.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 STEEL PIPE HANGERS AND SUPPORTS

- A. Description: MSS SP-58, Types 1 through 58, factory-fabricated components. Refer to Part 3 "Hanger and Support Applications" Article for where to use specific hanger and support types.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

B. Available Manufacturers:

1. AAA Technology & Specialties Co., Inc.
2. Bergen-Power Pipe Supports.
3. B-Line Systems, Inc.; a division of Cooper Industries.
4. Carpenter & Paterson, Inc.
5. Empire Industries, Inc.
6. ERICO/Michigan Hanger Co.
7. Globe Pipe Hanger Products, Inc.
8. Grinnell Corp.
9. GS Metals Corp.
10. National Pipe Hanger Corporation.
11. PHD Manufacturing, Inc.
12. PHS Industries, Inc.
13. Piping Technology & Products, Inc.
14. Tolco Inc.

C. Galvanized, Metallic Coatings: Pregalvanized or hot dipped.

D. Nonmetallic Coatings: Plastic coating, jacket, or liner.

E. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion for support of bearing surface of piping.

2.3 TRAPEZE PIPE HANGERS

A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural-steel shapes with MSS SP-58 hanger rods, nuts, saddles, and U-bolts.

2.4 METAL FRAMING SYSTEMS

A. Description: MFMA-3, shop- or field-fabricated pipe-support assembly made of steel channels and other components.

B. Manufacturers:

1. B-Line Systems, Inc.; a division of Cooper Industries.
2. ERICO/Michigan Hanger Co.; ERISTRUT Div.
3. GS Metals Corp.
4. Power-Strut Div.; Tyco International, Ltd.
5. Thomas & Betts Corporation.
6. Tolco Inc.
7. Unistrut Corp.; Tyco International, Ltd.

C. Coatings: Manufacturer's standard finish, unless bare metal surfaces are indicated.

D. Nonmetallic Coatings: Plastic coating, jacket, or liner.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.5 THERMAL-HANGER SHIELD INSERTS

- A. Description: 100-psig- minimum, compressive-strength insulation insert encased in sheet metal shield.
- B. Manufacturers:
 - 1. Carpenter & Paterson, Inc.
 - 2. ERICO/Michigan Hanger Co.
 - 3. PHS Industries, Inc.
 - 4. Pipe Shields, Inc.
 - 5. Rilco Manufacturing Company, Inc.
 - 6. Value Engineered Products, Inc.
- C. Insulation-Insert Material for Cold Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate or ASTM C 552, Type II cellular glass with vapor barrier.
- D. Insulation-Insert Material for Hot Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate or ASTM C 552, Type II cellular glass.
- E. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- F. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- G. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.6 FASTENER SYSTEMS

- A. Mechanical-Expansion Anchors: Insert-wedge-type zinc-coated steel, for use in hardened Portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.
 - 1. Manufacturers:
 - a. B-Line Systems, Inc.; a division of Cooper Industries.
 - b. Empire Industries, Inc.
 - c. Hilti, Inc.
 - d. ITW Ramset/Red Head.
 - e. MKT Fastening, LLC.
 - f. Powers Fasteners.

2.7 PIPE STAND FABRICATION

- A. Pipe Stands, General: Shop or field-fabricated assemblies made of manufactured corrosion-resistant components to support roof-mounted piping.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Compact Pipe Stand: One-piece plastic unit with integral-rod-roller, pipe clamps, or V-shaped cradle to support pipe, for roof installation without membrane penetration.

1. Available Manufacturers:

- a. ERICO/Michigan Hanger Co.
- b. MIRO Industries.

- C. Low-Type, Single-Pipe Stand: One-piece stainless-steel base unit with plastic roller, for roof installation without membrane penetration.

1. Available Manufacturers:

- a. MIRO Industries.

D.

2.8 EQUIPMENT SUPPORTS

- A. Description: Welded, shop- or field-fabricated equipment support made from structural-steel shapes.

2.9 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
- 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 - 2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT APPLICATIONS

- A. Specific hanger and support requirements are specified in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized, metallic coatings for piping and equipment that will not have field-applied finish.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use padded hangers for piping that is subject to scratching.
- F. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated stationary pipes, NPS 1/2 to NPS 30.
 - 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of 120 to 450 deg F pipes, NPS 4 to NPS 16, requiring up to 4 inches of insulation.
 - 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes, NPS 3/4 to NPS 24, requiring clamp flexibility and up to 4 inches of insulation.
 - 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes, NPS 1/2 to NPS 24, if little or no insulation is required.
 - 5. Pipe Hangers (MSS Type 5): For suspension of pipes, NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
 - 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated stationary pipes, NPS 3/4 to NPS 8.
 - 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 8.
 - 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 8.
 - 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 2.
 - 10. Split Pipe-Ring with or without Turnbuckle-Adjustment Hangers (MSS Type 11): For suspension of noninsulated stationary pipes, NPS 3/8 to NPS 8.
 - 11. Extension Hinged or 2-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated stationary pipes, NPS 3/8 to NPS 3.
 - 12. U-Bolts (MSS Type 24): For support of heavy pipes, NPS 1/2 to NPS 30.
 - 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
 - 14. Pipe Saddle Supports (MSS Type 36): For support of pipes, NPS 4 to NPS 36, with steel pipe base stanchion support and cast-iron floor flange.
 - 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes, NPS 4 to NPS 36, with steel pipe base stanchion support and cast-iron floor flange and with U-bolt to retain pipe.
 - 16. Adjustable, Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes, NPS 2-1/2 to NPS 36, if vertical adjustment is required, with steel pipe base stanchion support and cast-iron floor flange.
 - 17. Single Pipe Rolls (MSS Type 41): For suspension of pipes, NPS 1 to NPS 30, from 2 rods if longitudinal movement caused by expansion and contraction might occur.
 - 18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes, NPS 2-1/2 to NPS 20, from single rod if horizontal movement caused by expansion and contraction might occur.
 - 19. Complete Pipe Rolls (MSS Type 44): For support of pipes, NPS 2 to NPS 42, if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
 - 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes, NPS 2 to NPS 24, if small

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.

21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes, NPS 2 to NPS 30, if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.
- G. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers, NPS 3/4 to NPS 20.
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers, NPS 3/4 to NPS 20, if longer ends are required for riser clamps.
- H. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
- I. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
 2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction to attach to top flange of structural shape.
 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
 6. C-Clamps (MSS Type 23): For structural shapes.
 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
 11. Malleable Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
 12. Welded-Steel Brackets: For support of pipes from below, or for suspending from above by using clip and rod. Use one of the following for indicated loads:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Light (MSS Type 31): 750 lb.
 - b. Medium (MSS Type 32): 1500 lb.
 - c. Heavy (MSS Type 33): 3000 lb.
13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- J. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Steel Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- K. Spring Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Restraint-Control Devices (MSS Type 47): Where indicated to control piping movement.
 2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches.
 3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41 roll hanger with springs.
 4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
 5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load and limit variability factor to 25 percent to absorb expansion and contraction of piping system from hanger.
 6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load and limit variability factor to 25 percent to absorb expansion and contraction of piping system from base support.
 7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load and limit variability factor to 25 percent to absorb expansion and contraction of piping system from trapeze support.
 8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:
 - a. Horizontal (MSS Type 54): Mounted horizontally.
 - b. Vertical (MSS Type 55): Mounted vertically.
 - c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.
- L. Comply with MSS SP-69 for trapeze pipe hanger selections and applications that are not specified in piping system Sections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- M. Comply with MFMA-102 for metal framing system selections and applications that are not specified in piping system Sections.
- N. Use powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where required in concrete construction.

3.2 HANGER AND SUPPORT INSTALLATION

- A. Steel Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- B. Trapeze Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified above for individual pipe hangers.
 - 2. Field fabricate from ASTM A 36/A 36M, steel shapes selected for loads being supported. Weld steel according to AWS D1.1.
- C. Metal Framing System Installation: Arrange for grouping of parallel runs of piping and support together on field-assembled metal framing systems.
- D. Fiberglass Strut System Installation: Arrange for grouping of parallel runs of piping and support together on field-assembled fiberglass struts.
- E. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- F. Fastener System Installation:
 - 1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
 - 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- G. Pipe Stand Installation:
 - 1. Pipe Stand Types except Curb-Mounting Type: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.
 - 2. Curb-Mounting-Type Pipe Stands: Assemble components or fabricate pipe stand and mount on permanent, stationary roof curb. Refer to Division 07 Section "Roof Accessories" for curbs.
- H. Install hangers and supports complete with necessary inserts, bolts, rods, nuts, washers, and other accessories.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- I. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- J. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- K. Install lateral bracing with pipe hangers and supports to prevent swaying.
- L. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.
- M. Load Distribution: Install hangers and supports so piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- N. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and so maximum pipe deflections allowed by ASME B31.1 (for power piping) and ASME B31.9 (for building services piping) are not exceeded.
- O. Insulated Piping: Comply with the following:
 - 1. Attach clamps and spacers to piping.
 - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
 - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits according to ASME B31.1 for power piping and ASME B31.9 for building services piping.
 - 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 4. Shield Dimensions for Pipe: Not less than the following:
 - a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
 - b. NPS 4: 12 inches long and 0.06 inch thick.
 - c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
 - d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

5. Pipes NPS 8 and Larger: Include wood inserts.
6. Insert Material: Length at least as long as protective shield.
7. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.3 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make smooth bearing surface.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.4 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1 procedures for shielded metal arc welding, appearance and quality of welds, and methods used in correcting welding work, and with the following:
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. Finish welds at exposed connections so no roughness shows after finishing and contours of welded surfaces match adjacent contours.

3.5 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.6 PAINTING

- A. Touch Up: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.
- B. Touch Up: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal are specified in Division 09 Painting Sections.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 230529

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230548 - VIBRATION AND SEISMIC CONTROLS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Spring hangers.
 - 2. Spring hangers with vertical-limit stops.

1.3 DEFINITIONS

- A. IBC: International Building Code.
- B. ICC-ES: ICC-Evaluation Service.
- C. OSHPD: Office of Statewide Health Planning and Development for the State of California.

1.4 PERFORMANCE REQUIREMENTS

- A. Wind-Restraint Loading:
 - 1. Basic Wind Speed: 100 MPH.
 - 2. Building Classification Category: III.
 - 3. Minimum 10 lb/sq. ft. multiplied by the maximum area of the HVAC component projected on a vertical plane that is normal to the wind direction, and 45 degrees either side of normal.
- B. Seismic-Restraint Loading:
 - 1. Seismic Design Category: C.
 - 2. Assigned Seismic Use Group or Building Category as Defined in the IBC: III.
 - a. Component Importance Factor: 1.0 (Seismic Restraints are exempt).
 - b. Component Response Modification Factor: 2.5.
 - c. Component Amplification Factor: 1.0.
 - 3. Site Classification: D
 - 4. Design Spectral Response Acceleration at Short Periods (0.2 Second): 47.7%g.
 - 5. Design Spectral Response Acceleration at 1-Second Period: 24.7%g.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 SUBMITTALS

- A. Product Data: For the following:
 - 1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
- B. Welding certificates.
- C. Qualification Data: For testing agency.
- D. Field quality-control test reports.
- E. Operation and Maintenance Data: For air-mounting systems to include in operation and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated, that is a nationally recognized testing laboratory (NRTL) as defined by OSHA in 29 CFR 1910.7, and that is acceptable to authorities having jurisdiction.
- B. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

PART 2 - PRODUCTS

2.1 VIBRATION ISOLATORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Ace Mountings Co., Inc.
 - 2. Amber/Booth Company, Inc.
 - 3. California Dynamics Corporation.
 - 4. Isolation Technology, Inc.
 - 5. Kinetics Noise Control.
 - 6. Mason Industries.
 - 7. Vibration Eliminator Co., Inc.
 - 8. Vibration Isolation.
 - 9. Vibration Mountings & Controls, Inc.
 - 10. B-Line System, Inc.
- B. Spring Hangers: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
 2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
 4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene. Steel-washer-reinforced cup to support spring and bushing projecting through bottom of frame.
 7. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.
- C. Spring Hangers with Vertical-Limit Stop: Combination coil-spring and elastomeric-insert hanger with spring and insert in compression and with a vertical-limit stop.
1. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
 2. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
 4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
 7. Adjustable Vertical Stop: Steel washer with neoprene washer "up-stop" on lower threaded rod.
 8. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.

2.2 FACTORY FINISHES

- A. Finish: Manufacturer's standard prime-coat finish ready for field painting.
- B. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.
1. Powder coating on springs and housings.
 2. All hardware shall be galvanized. Hot-dip galvanize metal components for exterior use.
 3. Baked enamel or powder coat for metal components on isolators for interior use.
 4. Color-code or otherwise mark vibration isolation and wind-control devices to indicate capacity range.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and equipment to receive vibration isolation and wind-control devices for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

- A. Multiple Pipe Supports: Secure pipes to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.

3.3 VIBRATION-CONTROL AND SEISMIC-RESTRAINT DEVICE INSTALLATION

- A. Comply with requirements in Division 07 Section "Roof Accessories" for installation of roof curbs, equipment supports, and roof penetrations.
- B. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.
- C. Drilled-in Anchors:
 - 1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
 - 2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
 - 3. Wedge Anchors: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors shall be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
 - 4. Adhesive Anchors: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
 - 5. Set anchors to manufacturer's recommended torque, using a torque wrench.
 - 6. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 - 1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
 - 2. Schedule test with Owner, through Architect, before connecting anchorage device to restrained component (unless post-connection testing has been approved), and with at least seven days' advance notice.
 - 3. Obtain Architect's approval before transmitting test loads to structure. Provide temporary load-spreading members.
 - 4. Test at least four of each type and size of installed anchors and fasteners selected by Architect.
 - 5. Test to 90 percent of rated proof load of device.
 - 6. Measure isolator restraint clearance.
 - 7. Measure isolator deflection.
 - 8. Verify snubber minimum clearances.
 - 9. If a device fails test, modify all installations of same type and retest until satisfactory results are achieved.
- D. Remove and replace malfunctioning units and retest as specified above.
- E. Prepare test and inspection reports.

3.5 ADJUSTING

- A. Adjust isolators after piping system is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Adjust active height of spring isolators.
- D. Adjust restraints to permit free movement of equipment within normal mode of operation.
- E. Adjust snubbers according to manufacturer's recommendations.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain air-mounting systems. Refer to Division 01 Section "Demonstration And Training."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

3.7 HVAC VIBRATION-CONTROL AND SEISMIC-RESTRAINT DEVICE SCHEDULE

Vibration Isolation Schedule

Equipment	Isolation Type	Base Deflection	Type	Remarks
Suspended Fans	Hanger Spring Neoprene	1.5"	---	-----
Piping Hangers Within 50 Feet of Isolated Equipment	Spring Hangers	1.5"	---	-----
First Two (2) Pipe Hangers near Non- Isolated Equipment	Spring Hangers	1.0"	---	-----

END OF SECTION 230548

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230553 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Equipment labels.
 - 2. Warning signs and labels.
 - 3. Pipe labels.
 - 4. Duct labels.
 - 5. Valve tags.
 - 6. Warning tags.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- D. Valve numbering scheme.
- E. Valve Schedules: For each piping system to include in maintenance manuals.

1.4 COORDINATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

1. Material and Thickness: Polished brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
2. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 1 inch.
3. Minimum Letter Size: 3/4 inch for name of units. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
4. Fasteners: Stainless-steel rivets or self-tapping screws.
5. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Plastic Labels for Equipment:

1. Material and Thickness: ASTM D 709, type I cellulose, phenolic-resin-laminate engraving stock; Grade ES-s, black surface, black phenolic core, with white membrane sub-core and having predrilled holes for attachment hardware.
2. Letter Color: White.
3. Background Color: Black.
4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
5. Minimum Label Size: Length and width vary for required label content, but not less than 1-1/2 inches by 4 inches.
6. Minimum Letter Size: 1/2 inch for name of units. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
7. Fasteners: Stainless steel self-tapping screws.
8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

C. Label Content: Include equipment's Drawing designation or unique equipment number.

D. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 WARNING SIGNS AND LABELS

A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch thick, and having predrilled holes for attachment hardware.

B. Letter Color: White.

C. Background Color: Red.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 1 inch.
- F. Minimum Letter Size: 3/4 inch for name of units. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- G. Fasteners: Stainless-steel rivets or self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Label Content: Include caution and warning information, plus emergency notification instructions.

2.3 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.
- B. Pretensioned Pipe Labels: Pre-coiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings, pipe size, and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
 - 2. Lettering Size: At least 1-1/2 inches high.

2.4 DUCT LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch (3.2 mm) thick.
- B. Letter Color: Yellow.
- C. Background Color: Black.
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F (71 deg C).
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 1 inch (64 by 25 mm).

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Minimum Letter Size: 3/4 inch (20 mm) for name of units. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- G. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- H. Duct Label Contents: Include identification of duct service using same designations or abbreviations as used on Drawings, duct size, and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with duct system service lettering to accommodate both directions, or as separate unit on each duct label to indicate flow direction.
 - 2. Lettering Size: At least 1-1/2 inches (38 mm) high.

2.5 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
 - 1. Tag Material: Polished brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
 - 2. Fasteners: Brass wire-link chain.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 - 1. Valve-tag schedule shall be included in operation and maintenance data.

2.6 WARNING TAGS

- A. Warning Tags: Preprinted or partially preprinted, accident-prevention tags, of plasticized card stock with matte finish suitable for writing.
 - 1. Size: 3 by 5-1/4 inches minimum.
 - 2. Fasteners: Brass grommet and wire.
 - 3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."
 - 4. Color: Yellow background with black lettering.

PART 3 - - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 EQUIPMENT LABEL INSTALLATION

- A. Install or permanently fasten labels on each major item of mechanical equipment.
- B. Locate equipment labels where accessible and visible.
- C. Provide minimum 3/4" round stick-on dots on the ceiling grid for identification of equipment hidden above the ceiling. Color code as follows:
 - 1. Yellow: HVAC equipment.
 - 2. Red: Fire dampers/smoke dampers.
 - 3. Green: Plumbing valves.
 - 4. Blue: Heating/cooling valves.

3.3 PIPE LABEL INSTALLATION

- A. Piping Color-Coding: Painting of piping is specified in Division 09 Section "Interior Painting."
- B. Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
 - 1. Near each valve and control device.
 - 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
 - 3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
 - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
 - 5. Near major equipment items and other points of origination and termination.
 - 6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
 - 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.
- C. Pipe Label Color Schedule:
 - 1. Chilled-Water Piping (CHWS/CHWR):
 - a. Background Color: Safety Blue (DC 9800).
 - b. Letter Color: Black.
 - 2. Heating Water Piping (HWS/HWR):
 - a. Background Color: Oxide Yellow (DC 8800).
 - b. Letter Color: Black.

3.4 DUCT LABEL INSTALLATION

- A. Install self-adhesive duct labels with permanent adhesive on air ducts in the following color codes:
 - 1. Blue: For ducts.
 - 2. Green: For exhaust-, outside-, relief-, return-, and mixed-air ducts.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Stenciled Duct Label Option: Stenciled labels, showing service and flow direction, may be provided instead of plastic-laminated duct labels, at Installer's option, if lettering larger than 1 inch (25 mm) high is needed for proper identification because of distance from normal location of required identification.
- C. Locate labels near points where ducts enter into concealed spaces and at maximum intervals of 50 feet (15 m) in each space where ducts are exposed or concealed by removable ceiling system.

3.5 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves; valves within factory-fabricated equipment units; shutoff valves; faucets; convenience and lawn-watering hose connections; and HVAC terminal devices and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:
 - 1. Valve-Tag Size and Shape:
 - a. Chilled Water: 1-1/2 inches, round.
 - b. Refrigerant: 1-1/2 inches, round.
 - c. Hot Water: 1-1/2 inches, round.
 - d. Natural Gas: 1-1/2 inches, round.
 - 2. Valve-Tag Color: N/A, brass tags are used
 - 3. Letter Color:
 - a. Chilled Water: Black.
 - b. Refrigerant: Black.
 - c. Hot Water: Black.

3.6 WARNING-TAG INSTALLATION

- A. Write required message on, and attach warning tags to, equipment and other items where required.

END OF SECTION 230553

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes TAB to produce design objectives for the following:
 - 1. Balancing Air Systems:
 - a. Variable-air-volume systems.
 - b. Witness all high and medium pressure duct leakage tests, leakage tests on all field erected AHU's, all sectionally shipped factory fabricated AHU's and all low-pressure duct mains, and low-pressure duct risers.
 - 2. Balancing Hydronic Piping Systems:
 - a. Variable-flow systems.
 - b. Primary-secondary systems.
 - 3. HVAC equipment quantitative-performance settings.
 - 4. Existing systems impacted by the renovation TAB.
 - 5. Verifying that automatic control devices are functioning properly.
 - 6. Reporting results of activities and procedures specified in this Section.

1.3 DEFINITIONS

- A. AABC: Associated Air Balance Council.
- B. Adjust: To regulate fluid flow rate and air patterns at the terminal equipment, such as to reduce fan speed or adjust a damper.
- C. Balance: To proportion flows within the distribution system, including submains, branches, and terminals, according to indicated quantities.
- D. Barrier or Boundary: Construction, either vertical or horizontal, such as walls, floors, and ceilings that are designed and constructed to restrict the movement of airflow, smoke, odors, and other pollutants.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Draft: A current of air, when referring to localized effect caused by one or more factors of high air velocity, low ambient temperature, or direction of airflow, whereby more heat is withdrawn from a person's skin than is normally dissipated.
- F. NEBB: National Environmental Balancing Bureau.
- G. NC: Noise criteria.
- H. Procedure: An approach to and execution of a sequence of work operations to yield repeatable results.
- I. RC: Room criteria.
- J. Report Forms: Test data sheets for recording test data in logical order.
- K. Smoke-Control System: An engineered system that uses fans to produce airflow and pressure differences across barriers to limit smoke movement.
- L. Smoke-Control Zone: A space within a building that is enclosed by smoke barriers and is a part of a zoned smoke-control system.
- M. Stair Pressurization System: A type of smoke-control system that is intended to positively pressurize stair towers with outdoor air by using fans to keep smoke from contaminating the stair towers during an alarm condition.
- N. Static Head: The pressure due to the weight of the fluid above the point of measurement. In a closed system, static head is equal on both sides of the pump.
- O. Suction Head: The height of fluid surface above the centerline of the pump on the suction side.
- P. System Effect: A phenomenon that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
- Q. System Effect Factors: Allowances used to calculate a reduction of the performance ratings of a fan when installed under conditions different from those presented when the fan was performance tested.
- R. TAB: Testing, adjusting, and balancing.
- S. TABB: Testing, Adjusting, and Balancing Bureau.
- T. TAB Specialist: An entity engaged to perform TAB Work.
- U. Terminal: A point where the controlled medium, such as fluid or energy, enters or leaves the distribution system.
- V. Test: A procedure to determine quantitative performance of systems or equipment.
- W. Testing, Adjusting, and Balancing (TAB) Firm: The entity responsible for performing and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

reporting TAB procedures.

1.4 SUBMITTALS

- A. Qualification Data: Within 30 days from Contractor's Notice to Proceed, submit copies of evidence that TAB firm and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.
- B. Contract Documents Examination Report: Within 45 days from Contractor's Notice to Proceed, submit copies of the Contract Documents review report as specified in Part 3.
- C. Strategies and Procedures Plan: Within 60 days from Contractor's Notice to Proceed, submit copies of TAB strategies and step-by-step procedures as specified in Part 3 "Preparation" Article. Include a complete set of report forms intended for use on this Project.
- D. Certified TAB Reports: Submit copies of reports as required prepared, as specified in this Section, on approved forms certified by TAB firm.
- E. Sample Report Forms: Submit two sets of sample TAB report forms.
- F. Instrument calibration reports, to include the following:
 - 1. Instrument type and make.
 - 2. Serial number.
 - 3. Application.
 - 4. Dates of use.
 - 5. Dates of calibration.
- G. Warranties specified in this Section.

1.5 QUALITY ASSURANCE

- A. TAB Firm Qualifications: Engage a TAB firm certified by AABC.
- B. TAB Conference: Meet with Owner's and Architect's representatives on approval of TAB strategies and procedures plan to develop a mutual understanding of the details. Ensure the participation of TAB team members, equipment manufacturers' authorized service representatives, HVAC controls installers, and other support personnel. Provide seven days' advance notice of scheduled meeting time and location.
 - 1. Agenda Items: Include at least the following:
 - a. Submittal distribution requirements.
 - b. The Contract Documents examination report.
 - c. TAB plan.
 - d. Work schedule and Project-site access requirements.
 - e. Coordination and cooperation of trades and subcontractors.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- f. Coordination of documentation and communication flow.
 - C. Certification of TAB Reports: Certify TAB field data reports. This certification includes the following:
 - 1. Review field data reports to validate accuracy of data and to prepare certified TAB reports.
 - 2. Certify that TAB team complied with approved TAB plan and the procedures specified and referenced in this Specification.
 - D. TAB Report Forms: Use standard forms from AABC's "National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning Systems."
 - E. Instrumentation Type, Quantity, and Accuracy: As described in ASHRAE 111, Section 5, "Instrumentation."
 - F. Instrumentation Calibration: Calibrate instruments at least every six months or more frequently if required by instrument manufacturer.
 - 1. Keep an updated record of instrument calibration that indicates date of calibration and the name of party performing instrument calibration.
- 1.6 PROJECT CONDITIONS
- A. Full Owner Occupancy: Owner may occupy the site and existing building during entire TAB period. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.
 - B. Partial Owner Occupancy: Owner may occupy completed areas of building before Substantial Completion. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.
- 1.7 COORDINATION
- A. Coordinate the efforts of factory-authorized service representatives for systems and equipment, HVAC controls installers, and other mechanics to operate HVAC systems and equipment to support and assist TAB activities.
 - B. Notice: Provide seven days' advance notice for each test. Include scheduled test dates and times.
 - C. Perform TAB after leakage and pressure tests on air and water distribution systems have been satisfactorily completed.
- 1.8 WARRANTY
- A. National Project Performance Guarantee: Provide a guarantee on AABC's "National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning Systems" forms stating that

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

AABC will assist in completing requirements of the Contract Documents if TAB firm fails to comply with the Contract Documents. Guarantee includes the following provisions:

1. The certified TAB firm has tested and balanced systems according to the Contract Documents.
2. Systems are balanced to optimum performance capabilities within design and installation limits.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems' designs that may preclude proper TAB of systems and equipment.
 1. Contract Documents are defined in the General and Supplementary Conditions of Contract.
 2. Verify that balancing devices, such as test ports, gage cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers, are required by the Contract Documents. Verify that quantities and locations of these balancing devices are accessible and appropriate for effective balancing and for efficient system and equipment operation.
- B. Examine approved submittal data of HVAC systems and equipment.
- C. Examine Project Record Documents described in Division 01 Section "Project Record Documents."
- D. Examine design data, including HVAC system descriptions, statements of design assumptions for environmental conditions and systems' output, and statements of philosophies and assumptions about HVAC system and equipment controls.
- E. Examine equipment performance data including fan and pump curves. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system. Calculate system effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from those presented when the equipment was performance tested at the factory. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," Sections 7 through 10; or in SMACNA's "HVAC Systems--Duct Design," Sections 5 and 6. Compare this data with the design data and installed conditions.
- F. Examine system and equipment installations to verify that they are complete and that testing, cleaning, adjusting, and commissioning specified in individual Sections have been performed.
- G. Examine test reports specified in individual system and equipment Sections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- H. Examine HVAC system and equipment installations to verify that indicated balancing devices, such as test ports, gage cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers, are properly installed, and that their locations are accessible and appropriate for effective balancing and for efficient system and equipment operation.
- I. Examine systems for functional deficiencies that cannot be corrected by adjusting and balancing.
- J. Examine HVAC equipment to ensure that clean filters have been installed, bearings are greased, belts are aligned and tight, and equipment with functioning controls is ready for operation.
- K. Examine terminal units, such as variable-air-volume boxes, to verify that they are accessible and their controls are connected and functioning.
- L. Examine strainers. Verify that startup screens are replaced by permanent screens with indicated perforations.
- M. Examine heat-transfer coils for correct piping connections and for clean and straight fins.
- N. Examine system pumps to ensure absence of entrained air in the suction piping.
- O. Examine equipment for installation and for properly operating safety interlocks and controls.
- P. Examine automatic temperature system components to verify the following:
 - 1. Dampers, valves, and other controlled devices are operated by the intended controller.
 - 2. Dampers and valves are in the position indicated by the controller.
 - 3. Integrity of valves and dampers for free and full operation and for tightness of fully closed and fully open positions. This includes dampers in multizone units, mixing boxes, and variable-air-volume terminals.
 - 4. Automatic modulating and shutoff valves, including two-way valves and three-way mixing and diverting valves, are properly connected.
 - 5. Thermostats and humidistats are located to avoid adverse effects of sunlight, drafts, and cold walls.
 - 6. Sensors are located to sense only the intended conditions.
 - 7. Sequence of operation for control modes is according to the Contract Documents.
 - 8. Controller set points are set at indicated values.
 - 9. Interlocked systems are operating.
 - 10. Changeover from heating to cooling mode occurs according to indicated values.
- Q. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.2 PREPARATION

- A. Prepare a TAB plan that includes strategies and step-by-step procedures.
- B. Complete system readiness checks and prepare system readiness reports. Verify the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Permanent electrical power wiring is complete.
2. Hydronic systems are filled, clean, and free of air.
3. Automatic temperature-control systems are operational.
4. Equipment and duct access doors are securely closed.
5. Balance, smoke, and fire dampers are open.
6. Isolating and balancing valves are open and control valves are operational.
7. Ceilings are installed in critical areas where air-pattern adjustments are required and access to balancing devices is provided.
8. Windows and doors can be closed so indicated conditions for system operations can be met.

3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

- A. Perform testing and balancing procedures on each system according to the procedures contained in AABC's "National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning Systems" and in this Section.
 1. Comply with requirements in ASHRAE 62.1-2004, Section 7.2.2, "Air Balancing."
- B. Cut insulation, ducts, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary for TAB procedures.
 1. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
 2. After testing and balancing, install test ports and duct access doors that comply with requirements in Division 23 Section "Air Duct Accessories."
 3. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish according to Division 23 Section "HVAC Insulation."
 4. Do not place holes in bottom of wet ductwork.
- C. Mark equipment and balancing device settings with paint or other suitable, permanent identification material, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, to show final settings.
- D. Take and report testing and balancing measurements in inch-pound (IP) units.

3.4 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

- A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.
- B. Prepare schematic diagrams of systems' "as-built" duct layouts.
- C. For variable-air-volume systems, develop a plan to simulate diversity.
- D. Determine the best locations in main and branch ducts for accurate duct airflow measurements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Check airflow patterns from the outside-air louvers and dampers and the return- and exhaust-air dampers, through the supply-fan discharge and mixing dampers.
- F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.
- G. Verify that motor starters are equipped with properly sized thermal protection.
- H. Check dampers for proper position to achieve desired airflow path.
- I. Check for airflow blockages.
- J. Check condensate drains for proper connections and functioning.
- K. Check for proper sealing of air-handling unit components.
- L. Verify that air duct system is sealed as specified in Division 23 Section "Metal Ducts."

3.5 PROCEDURES FOR CONSTANT-VOLUME AIR SYSTEMS

- A. Adjust fans to deliver total indicated airflows within the maximum allowable fan speed listed by fan manufacturer.
 - 1. Measure total airflow.
 - a. Where sufficient space in ducts is unavailable for Pitot-tube traverse measurements, measure airflow at terminal outlets and inlets and calculate the total airflow.
 - 2. Measure fan static pressures to determine actual static pressure as follows:
 - a. Measure outlet static pressure as far downstream from the fan as practicable and upstream from restrictions in ducts such as elbows and transitions.
 - b. Measure static pressure directly at the fan outlet or through the flexible connection.
 - c. Measure inlet static pressure of single-inlet fans in the inlet duct as near the fan as possible, upstream from flexible connection and downstream from duct restrictions.
 - d. Measure inlet static pressure of double-inlet fans through the wall of the plenum that houses the fan.
 - 3. Measure static pressure across each component that makes up an air-handling unit, rooftop unit, and other air-handling and -treating equipment.
 - a. Simulate dirty filter operation and record the point at which maintenance personnel must change filters.
 - 4. Measure static pressures entering and leaving other devices such as sound traps, heat recovery equipment, and air washers, under final balanced conditions.
 - 5. Compare design data with installed conditions to determine variations in design static pressures versus actual static pressures. Compare actual system effect factors with calculated system effect factors to identify where variations occur. Recommend corrective

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- action to align design and actual conditions.
 - 6. Obtain approval from Architect for adjustment of fan speed higher or lower than indicated speed. Make required adjustments to pulley sizes, motor sizes, and electrical connections to accommodate fan-speed changes.
 - 7. Do not make fan-speed adjustments that result in motor overload. Consult equipment manufacturers about fan-speed safety factors. Modulate dampers and measure fan-motor amperage to ensure that no overload will occur. Measure amperage in full cooling, full heating, economizer, and any other operating modes to determine the maximum required brake horsepower.
- B. Adjust volume dampers for main duct, submain ducts, and major branch ducts to indicated airflows within specified tolerances.
- 1. Measure static pressure at a point downstream from the balancing damper and adjust volume dampers until the proper static pressure is achieved.
 - a. Where sufficient space in submain and branch ducts is unavailable for Pitot-tube traverse measurements, measure airflow at terminal outlets and inlets and calculate the total airflow for that zone.
 - 2. Remeasure each submain and branch duct after all have been adjusted. Continue to adjust submain and branch ducts to indicated airflows within specified tolerances.
- C. Measure terminal outlets and inlets without making adjustments.
- 1. Measure terminal outlets using a direct-reading hood or outlet manufacturer's written instructions and calculating factors.
- D. Adjust terminal outlets and inlets for each space to indicated airflows within specified tolerances of indicated values. Make adjustments using volume dampers rather than extractors and the dampers at air terminals.
- 1. Adjust each outlet in same room or space to within specified tolerances of indicated quantities without generating noise levels above the limitations prescribed by the Contract Documents.
 - 2. Adjust patterns of adjustable outlets for proper distribution without drafts.
- 3.6 PROCEDURES FOR VARIABLE-AIR-VOLUME SYSTEMS
- A. Compensating for Diversity: When the total airflow of all terminal units is more than the indicated airflow of the fan, place a selected number of terminal units at a maximum set-point airflow condition until the total airflow of the terminal units equals the indicated airflow of the fan. Select the reduced airflow terminal units so they are distributed evenly among the branch ducts.
- B. Pressure-Independent, Variable-Air-Volume Systems: After the fan systems have been adjusted, adjust the variable-air-volume systems as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Set outside-air dampers at minimum, and return- and exhaust-air dampers at a position that simulates full-cooling load.
2. Select the terminal unit that is most critical to the supply-fan airflow and static pressure. Measure static pressure. Adjust system static pressure so the entering static pressure for the critical terminal unit is not less than the sum of terminal-unit manufacturer's recommended minimum inlet static pressure plus the static pressure needed to overcome terminal-unit discharge system losses.
3. Measure total system airflow. Adjust to within indicated airflow.
4. Set terminal units at maximum airflow and adjust controller or regulator to deliver the designed maximum airflow. Use terminal-unit manufacturer's written instructions to make this adjustment. When total airflow is correct, balance the air outlets downstream from terminal units as described for constant-volume air systems.
5. Set terminal units at minimum airflow and adjust controller or regulator to deliver the designed minimum airflow. Check air outlets for a proportional reduction in airflow as described for constant-volume air systems.
 - a. If air outlets are out of balance at minimum airflow, report the condition but leave outlets balanced for maximum airflow.
6. Remeasure the return airflow to the fan while operating at maximum return airflow and minimum outside airflow. Adjust the fan and balance the return-air ducts and inlets as described for constant-volume air systems.
7. Measure static pressure at the most critical terminal unit and adjust the static-pressure controller at the main supply-air sensing station to ensure that adequate static pressure is maintained at the most critical unit.
8. Record the final fan performance data.

3.7 GENERAL PROCEDURES FOR HYDRONIC SYSTEMS

- A. Prepare test reports with pertinent design data and number in sequence starting at pump to end of system. Check the sum of branch-circuit flows against approved pump flow rate. Correct variations that exceed plus or minus 5 percent.
- B. Prepare schematic diagrams of systems' "as-built" piping layouts.
- C. Prepare hydronic systems for testing and balancing according to the following, in addition to the general preparation procedures specified above:
 1. Open all manual valves for maximum flow.
 2. Check expansion tank liquid level.
 3. Check makeup-water-station pressure gage for adequate pressure for highest vent.
 4. Check flow-control valves for specified sequence of operation and set at indicated flow.
 5. Set differential-pressure control valves at the specified differential pressure. Do not set at fully closed position when pump is positive-displacement type unless several terminal valves are kept open.
 6. Set system controls so automatic valves are wide open to heat exchangers.
 7. Check pump-motor load. If motor is overloaded, throttle main flow-balancing device so

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

motor nameplate rating is not exceeded.

8. Check air vents for a forceful liquid flow exiting from vents when manually operated.

3.8 PROCEDURES FOR HYDRONIC SYSTEMS

- A. Measure water flow at pumps. Use the following procedures, except for positive-displacement pumps:
 1. Verify impeller size by operating the pump with the discharge valve closed. Read pressure differential across the pump. Convert pressure to head and correct for differences in gage heights. Note the point on manufacturer's pump curve at zero flow and verify that the pump has the intended impeller size.
 - a. If impeller sizes must be adjusted to achieve pump performance, obtain approval from Engineer and comply with requirements in Division 23 Section "Hydronic Pumps."
 2. Check system resistance. With all valves open, read pressure differential across the pump and mark pump manufacturer's head-capacity curve. Adjust pump discharge valve until indicated water flow is achieved.
 - a. Monitor motor performance during procedures and do not operate motors in overload conditions.
 3. Verify pump-motor brake horsepower. Calculate the intended brake horsepower for the system based on pump manufacturer's performance data. Compare calculated brake horsepower with nameplate data on the pump motor. Report conditions where actual amperage exceeds motor nameplate amperage.
 4. Report flow rates that are not within plus or minus 5 percent of design.
- B. Measure flow at all automatic flow control valves to verify that valves are functioning as designed.
- C. Measure flow at all pressure-independent characterized control valves, with valves in fully open position, to verify that valves are functioning as designed.
- D. Set calibrated balancing valves, if installed, at calculated presettings.
- E. Measure flow at all stations and adjust, where necessary, to obtain first balance.
 1. System components that have Cv rating or an accurately cataloged flow-pressure-drop relationship may be used as a flow-indicating device.
- F. Measure flow at main balancing station and set main balancing device to achieve flow that is 5 percent greater than indicated flow.
- G. Adjust balancing stations to within specified tolerances of indicated flow rate as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Determine the balancing station with the highest percentage over indicated flow.
 2. Adjust each station in turn, beginning with the station with the highest percentage over indicated flow and proceeding to the station with the lowest percentage over indicated flow.
 3. Record settings and mark balancing devices.
- H. Measure pump flow rate and make final measurements of pump amperage, voltage, rpm, pump heads, and systems' pressures and temperatures including outdoor-air temperature.
- I. Measure the differential-pressure control valve settings existing at the conclusions of balancing.
- J. Check settings and operation of each safety valve. Record settings.

3.9 PROCEDURES FOR VARIABLE-FLOW HYDRONIC SYSTEMS

- A. Balance systems with automatic two- and three-way control valves by setting systems at maximum flow through heat-exchange terminals and proceed as specified above for hydronic systems.

3.10 PROCEDURES FOR MOTORS

- A. Motors, 1/2 HP and Larger: Test at final balanced conditions and record the following data:
1. Manufacturer, model, and serial numbers.
 2. Motor horsepower rating.
 3. Motor rpm.
 4. Efficiency rating.
 5. Nameplate and measured voltage, each phase.
 6. Nameplate and measured amperage, each phase.
 7. Starter thermal-protection-element rating.
- B. Motors Driven by Variable-Frequency Controllers: Test for proper operation at speeds varying from minimum to maximum. Test the manual bypass for the controller to prove proper operation. Record observations, including controller manufacturer, model and serial numbers, and nameplate data.

3.11 PROCEDURES FOR HEAT-TRANSFER COILS

- A. Water Coils: Measure the following data for each coil:
1. Entering- and leaving-water temperature.
 2. Water flow rate.
 3. Water pressure drop.
 4. Dry-bulb temperature of entering and leaving air.
 5. Wet-bulb temperature of entering and leaving air for cooling coils.
 6. Airflow.
 7. Air pressure drop.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.12 PROCEDURES FOR TEMPERATURE MEASUREMENTS

- A. During TAB, report the need for adjustment in temperature regulation within the automatic temperature-control system.
- B. Measure indoor wet- and dry-bulb temperatures every other hour for a period of two successive eight-hour days, in each separately controlled zone, to prove correctness of final temperature settings. Measure when the building or zone is occupied.
- C. Measure outside-air, wet- and dry-bulb temperatures.

3.13 PROCEDURES FOR INDOOR-AIR QUALITY MEASUREMENTS

- A. After air balancing is complete and with HVAC systems operating at indicated conditions, perform indoor-air quality testing.
- B. Observe and record the following conditions for each HVAC system:
 - 1. The distance between the outside-air intake and the closest exhaust fan discharge, flue termination, or vent termination.
 - 2. Specified filters are installed. Check for leakage around filters.
 - 3. Cooling coil drain pans have a positive slope to drain.
 - 4. Cooling coil condensate drain trap maintains an air seal.
 - 5. Evidence of water damage.
 - 6. Insulation in contact with the supply, return, and outside air is dry and clean.
- C. Measure and record indoor conditions served by each HVAC system. Make measurements at multiple locations served by the system if required to satisfy the following:
 - 1. Most remote area.
 - 2. One location per floor.
 - 3. One location for every 5000 sq. ft.
- D. Measure and record the following indoor conditions for each location two times at two-hour intervals, and in accordance with ASHRAE 113:
 - 1. Temperature.
 - 2. Relative humidity.
 - 3. Air velocity.
 - 4. Concentration of carbon dioxide (ppm).
 - 5. Concentration of carbon monoxide (ppm).
 - 6. Nitrogen oxides (ppm).
 - 7. Formaldehyde (ppm).

3.14 PROCEDURES FOR TESTING, ADJUSTING, AND BALANCING EXISTING SYSTEMS

- A. Existing systems to be balanced is limited to existing systems modified under this contract. The

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

chilled water and heating piping systems will need to be re-balanced as well as any duct systems modified by this renovation. Existing air systems that are not affected by the renovation are not intended to be re-balanced.

- B. Perform a preconstruction inspection of existing equipment that is to remain and be reused.
 - 1. Measure and record the operating speed, airflow, and static pressure of each fan.
 - 2. Measure motor voltage and amperage. Compare the values to motor nameplate information.
 - 3. Check the condition of filters.
 - 4. Check the condition of coils.
 - 5. Check the operation of the drain pan and condensate drain trap.
 - 6. Check bearings and other lubricated parts for proper lubrication.
 - 7. Report on the operating condition of the equipment and the results of the measurements taken. Report deficiencies.
- C. Before performing testing and balancing of existing systems, inspect existing equipment that is to remain and be reused to verify that existing equipment has been cleaned and refurbished.
 - 1. New filters are installed.
 - 2. Coils are clean and fins combed.
 - 3. Drain pans are clean.
 - 4. Fans are clean.
 - 5. Bearings and other parts are properly lubricated.
 - 6. Deficiencies noted in the preconstruction report are corrected.
- D. Perform testing and balancing of existing systems to the extent that existing systems are affected by the renovation work.
 - 1. Compare the indicated airflow of the renovated work to the measured fan airflows and determine the new fan, speed, filter, and coil face velocity.
 - 2. Verify that the indicated airflows of the renovated work result in filter and coil face velocities and fan speeds that are within the acceptable limits defined by equipment manufacturer.
 - 3. If calculations increase or decrease the airflow and water flow rates by more than 5 percent, make equipment adjustments to achieve the calculated airflow and water flow rates. If 5 percent or less, equipment adjustments are not required.
 - 4. Air balance each air outlet.

3.15 TEMPERATURE-CONTROL VERIFICATION

- A. Verify that controllers are calibrated and commissioned.
- B. Check transmitter and controller locations and note conditions that would adversely affect control functions.
- C. Record controller settings and note variances between set points and actual measurements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Check the operation of limiting controllers (i.e., high- and low-temperature controllers).
- E. Check free travel and proper operation of control devices such as damper and valve operators.
- F. Check the sequence of operation of control devices. Note air pressures and device positions and correlate with airflow and water flow measurements. Note the speed of response to input changes.
- G. Check the interaction of electrically operated switch transducers.
- H. Check the interaction of interlock and lockout systems.
- I. Check main control supply-air pressure and observe compressor and dryer operations.
- J. Record voltages of power supply and controller output. Determine whether the system operates on a grounded or non-grounded power supply.
- K. Note operation of electric actuators using spring return for proper fail-safe operations.

3.16 TOLERANCES

- A. Set HVAC system's air flow rates and water flow rates within the following tolerances:
 - 1. Supply, Return, and Exhaust Fans and Equipment with Fans: Plus or minus 10 percent.
 - 2. Air Outlets and Inlets: Plus or minus 10 percent.
 - 3. Heating-Water Flow Rate: Plus or minus 10 percent.
 - 4. Cooling-Water Flow Rate: Plus or minus 10 percent.

3.17 REPORTING

- A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for systems' balancing devices. Recommend changes and additions to systems' balancing devices to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance measuring and balancing devices.
- B. Status Reports: Prepare biweekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

3.18 FINAL REPORT

- A. General: Typewritten, or computer printout in letter-quality font, on standard bond paper, in three-ring binder, tabulated and divided into sections by tested and balanced systems.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Include a certification sheet in front of binder signed and sealed by the certified testing and balancing engineer.
 - 1. Include a list of instruments used for procedures, along with proof of calibration.
- C. Final Report Contents: In addition to certified field report data, include the following:
 - 1. Pump curves.
 - 2. Fan curves.
 - 3. Manufacturers' test data.
 - 4. Field test reports prepared by system and equipment installers.
 - 5. Other information relative to equipment performance, but do not include Shop Drawings and Product Data.
- D. General Report Data: In addition to form titles and entries, include the following data in the final report, as applicable:
 - 1. Title page.
 - 2. Name and address of TAB firm.
 - 3. Project name.
 - 4. Project location.
 - 5. Architect's name and address.
 - 6. Engineer's name and address.
 - 7. Contractor's name and address.
 - 8. Report date.
 - 9. Signature of TAB firm who certifies the report.
 - 10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
 - 11. Summary of contents including the following:
 - a. Indicated versus final performance.
 - b. Notable characteristics of systems.
 - c. Description of system operation sequence if it varies from the Contract Documents.
 - 12. Nomenclature sheets for each item of equipment.
 - 13. Data for terminal units, including manufacturer, type size, and fittings.
 - 14. Notes to explain why certain final data in the body of reports varies from indicated values.
 - 15. Test conditions for fans and pump performance forms as required by AABC.
 - a. Settings for outside-, return-, and exhaust-air dampers.
- E. Vibration Measurement Reports:
 - 1. Date and time of test.
 - 2. Vibration meter manufacturer, model number, and serial number.
 - 3. Equipment designation, location, equipment, speed, motor speed, and motor horsepower.
 - 4. Diagram of equipment showing the vibration measurement locations.
 - 5. Measurement readings for each measurement location.
 - 6. Calculate isolator efficiency using measurements taken.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

7. Description of predominant vibration source.

F. Indoor-Air Quality Measurement Reports for Each HVAC System:

1. HVAC system designation.
2. Date and time of test.
3. Outdoor temperature, relative humidity, wind speed, and wind direction at start of test.
4. Room number or similar description for each location.
5. Measurements at each location.
6. Observed deficiencies.

G. Instrument Calibration Reports:

1. Report Data:
 - a. Instrument type and make.
 - b. Serial number.
 - c. Application.
 - d. Dates of use.
 - e. Dates of calibration.

H. Thermal performance of each item of heat exchange equipment. Agency is to perform measurements and certify to 5% thermal balance.

3.19 INSPECTIONS

A. Initial Inspection:

1. After testing and balancing are complete, operate each system and randomly check measurements to verify that the system is operating according to the final test and balance readings documented in the Final Report.
2. Randomly check the following for each system:
 - a. Measure airflow of at least 10 percent of air outlets.
 - b. Measure water flow of at least 5 percent of terminals.
 - c. Measure room temperature at each thermostat/temperature sensor. Compare the reading to the set point.
 - d. Measure sound levels at two locations.
 - e. Measure space pressure of at least 10 percent of locations.
 - f. Verify that balancing devices are marked with final balance position.
 - g. Note deviations to the Contract Documents in the Final Report.

B. Final Inspection:

1. After initial inspection is complete and evidence by random checks verifies that testing and balancing are complete and accurately documented in the final report, request that a final inspection be made by Engineer.
2. TAB firm test and balance engineer shall conduct the inspection in the presence of the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Engineer.

3. Engineer shall randomly select measurements documented in the final report to be rechecked. The rechecking shall be limited to either 10 percent of the total measurements recorded, or the extent of measurements that can be accomplished in a normal 8-hour business day.
 4. If the rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."
 5. If the number of "FAILED" measurements is greater than 10 percent of the total measurements checked during the final inspection, the testing and balancing shall be considered incomplete and shall be rejected.
 6. TAB firm shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes and resubmit the final report.
 7. Request a second final inspection. If the second final inspection also fails, Owner shall contract the services of another TAB firm to complete the testing and balancing in accordance with the Contract Documents and deduct the cost of the services from the final payment.
- C. TAB Work will be considered defective if it does not pass final inspections. If TAB Work fails, proceed as follows:
1. Recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection.
 2. If the second final inspection also fails, Owner may contract the services of another TAB contractor to complete TAB Work according to the Contract Documents and deduct the cost of the services from the original TAB contractor's final payment.
- D. Prepare test and inspection reports.

3.20 ADDITIONAL TESTS

- A. Within 90 days of completing TAB, perform additional testing and balancing to verify that balanced conditions are being maintained throughout and to correct unusual conditions.
- B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional testing, inspecting, and adjusting during near-peak summer and winter conditions.

END OF SECTION 230593

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes insulating the following duct services:
 - 1. Indoor, concealed supply, return, exhaust and outdoor air.
 - 2. Indoor, exposed supply, return, exhaust and outdoor air.
- B. Related Sections:
 - 1. Division 23 Section "HVAC Equipment Insulation."
 - 2. Division 23 Section "HVAC Piping Insulation."

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 - 2. Detail insulation application at elbows, fittings, dampers, specialties and flanges for each type of insulation.
 - 3. Detail application of field-applied jackets.
 - 4. Detail application at linkages of control devices.
- C. Samples: For each type of insulation and jacket indicated. Identify each Sample, describing product and intended use. Sample sizes are as follows:
 - 1. Sheet Form Insulation Materials: 12 inches square.
 - 2. Sheet Jacket Materials: 12 inches square.
 - 3. Manufacturer's Color Charts: For products where color is specified, show the full range of colors available for each type of finish material.
- D. Qualification Data: For qualified Installer.
- E. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.

- F. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Division 23 Section "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with duct Installer for duct insulation application. Before preparing ductwork Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Duct Insulation Schedule, General," "Indoor Duct and Plenum Insulation Schedule," and "Aboveground, Outdoor Duct and Plenum Insulation Schedule" articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- F. Mineral-Fiber Blanket Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type II and ASTM C 1290, Type III with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. CertainTeed Corp.; SoftTouch Duct Wrap.
 - b. Johns Manville; Microlite.
 - c. Knauf Insulation; Friendly Feel Duct Wrap.
 - d. Manson Insulation Inc.; Alley Wrap.
 - e. Owens Corning; SOFTR All-Service Duct Wrap.
- G. Mineral-Fiber Board Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 612, Type IA or Type IB. For duct and plenum applications, provide insulation with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. CertainTeed Corp.; Commercial Board.
 - b. Fibrex Insulations Inc.; FBX.
 - c. Johns Manville; 800 Series Spin-Glas.
 - d. Knauf Insulation; Insulation Board.
 - e. Manson Insulation Inc.; AK Board.
 - f. Owens Corning; Fiberglas 700 Series.

2.2 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-127.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-60/85-70.
 - d. Mon-Eco Industries, Inc.; 22-25.
 2. For indoor applications, use adhesive that has a VOC content of 80 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- C. FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-82.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-50.
 - d. Mon-Eco Industries, Inc.; 22-25.
 2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- 2.3 MASTICS
- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
1. For indoor applications, use mastics that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Vapor-Barrier Mastic: Water based; suitable for indoor use on below ambient services.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-80/30-90.
 - b. Vimasco Corporation; 749.
 2. Water-Vapor Permeance: ASTM E 96/E 96M, Procedure B, 0.013 perm at 43-mil dry film thickness.
 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 4. Solids Content: ASTM D 1644, 58 percent by volume and 70 percent by weight.
 5. Color: White.
- C. Breather Mastic: Water based; suitable for indoor and outdoor use on above ambient services.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-10.
 - b. Eagle Bridges - Marathon Industries; 550.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 46-50.
 - d. Mon-Eco Industries, Inc.; 55-50.
 - e. Vimasco Corporation; WC-1/WC-5.
 2. Water-Vapor Permeance: ASTM F 1249, 1.8 perms at 0.0625-inch dry film thickness.
 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 4. Solids Content: 60 percent by volume and 66 percent by weight.
 5. Color: White.

2.4 LAGGING ADHESIVES

- A. Description: Comply with MIL-A-3316C, Class I, Grade A and shall be compatible with insulation materials, jackets, and substrates.
1. For indoor applications, use lagging adhesives that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 2. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-50 AHV2.
 - b. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-36.
 - c. Vimasco Corporation; 713 and 714.
 3. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over duct insulation.
 4. Service Temperature Range: 0 to plus 180 deg F.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

5. Color: White.

2.5 SEALANTS

A. FSK and Metal Jacket Flashing Sealants:

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-76.
 - b. Eagle Bridges - Marathon Industries; 405.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 95-44.
 - d. Mon-Eco Industries, Inc.; 44-05.
2. Materials shall be compatible with insulation materials, jackets, and substrates.
3. Fire- and water-resistant, flexible, elastomeric sealant.
4. Service Temperature Range: Minus 40 to plus 250 deg F.
5. Color: Aluminum.
6. For indoor applications, use sealants that have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
7. Use sealants that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

2.6 FACTORY-APPLIED JACKETS

A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C 1136, Type II.

2.7 TAPES

A. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C 1136.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ABI, Ideal Tape Division; 491 AWF FSK.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0827.
 - c. Compac Corporation; 110 and 111.
 - d. Venture Tape; 1525 CW NT, 1528 CW, and 1528 CW/SQ.
2. Width: 3 inches.
3. Thickness: 6.5 mils.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Adhesion: 90 ounces force/inch in width.
5. Elongation: 2 percent.
6. Tensile Strength: 40 lbf/inch in width.
7. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.

2.8 SECUREMENTS

A. Bands:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ITW Insulation Systems; Gerrard Strapping and Seals.
 - b. RPR Products, Inc.; Insul-Mate Strapping, Seals, and Springs.
2. Stainless Steel: ASTM A 167 or ASTM A 240/A 240M, Type 304; 0.015 inch thick, 3/4 inch wide with closed seal.

B. Insulation Pins and Hangers:

1. Capacitor-Discharge-Weld Pins: Copper- or zinc-coated steel pin, fully annealed for capacitor-discharge welding, 0.135-inch-diameter shank, length to suit depth of insulation indicated.
 - a. Products: Subject to compliance with requirements, provide one of the following:
 - 1) AGM Industries, Inc.; CWP-1.
 - 2) GEMCO; CD.
 - 3) Midwest Fasteners, Inc.; CD.
 - 4) Nelson Stud Welding; TPA, TPC, and TPS.
2. Cupped-Head, Capacitor-Discharge-Weld Pins: Copper- or zinc-coated steel pin, fully annealed for capacitor-discharge welding, 0.135-inch-diameter shank, length to suit depth of insulation indicated with integral 1-1/2-inch galvanized carbon-steel washer.
 - a. Products: Subject to compliance with requirements, provide one of the following:
 - 1) AGM Industries, Inc.; CHP-1.
 - 2) GEMCO; Cupped Head Weld Pin.
 - 3) Midwest Fasteners, Inc.; Cupped Head.
 - 4) Nelson Stud Welding; CHP.
3. Metal, Adhesively Attached, Perforated-Base Insulation Hangers: Baseplate welded to projecting spindle that is capable of holding insulation, of thickness indicated, securely in position indicated when self-locking washer is in place. Comply with the following requirements:
 - a. Products: Subject to compliance with requirements, provide one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 1) AGM Industries, Inc.; Tactoo Perforated Base Insul-Hangers.
 - 2) GEMCO; Perforated Base.
 - 3) Midwest Fasteners, Inc.; Spindle.
 - b. Baseplate: Perforated, galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.
 - c. Spindle: Copper- or zinc-coated, low-carbon steel, fully annealed, 0.106-inch-diameter shank, length to suit depth of insulation indicated.
 - d. Adhesive: Recommended by hanger manufacturer. Product with demonstrated capability to bond insulation hanger securely to substrates indicated without damaging insulation, hangers, and substrates.
4. Self-Sticking-Base Insulation Hangers: Baseplate welded to projecting spindle that is capable of holding insulation, of thickness indicated, securely in position indicated when self-locking washer is in place. Comply with the following requirements:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) AGM Industries, Inc.; Tactoo Self-Adhering Insul-Hangers.
 - 2) GEMCO; Peel & Press.
 - 3) Midwest Fasteners, Inc.; Self Stick.
 - b. Baseplate: Galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.
 - c. Spindle: Copper- or zinc-coated, low-carbon steel, fully annealed, 0.106-inch-diameter shank, length to suit depth of insulation indicated.
 - d. Adhesive-backed base with a peel-off protective cover.
5. Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch- thick, galvanized-steel sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) AGM Industries, Inc.; RC-150.
 - 2) GEMCO; R-150.
 - 3) Midwest Fasteners, Inc.; WA-150.
 - 4) Nelson Stud Welding; Speed Clips.
 - b. Protect ends with capped self-locking washers incorporating a spring steel insert to ensure permanent retention of cap in exposed locations.
6. Nonmetal Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch-thick nylon sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- 1) GEMCO.
- 2) Midwest Fasteners, Inc.

- C. Staples: Outward-clinching insulation staples, nominal 3/4-inch- wide, stainless steel or Monel.

2.9 CORNER ANGLES

- A. Aluminum Corner Angles: 0.040-inch thick, minimum 1 by 1 inch, aluminum according to ASTM B 209, Alloy 3003, 3005, 3105, or 5005; Temper H-14.
- B. Stainless-Steel Corner Angles: 0.024-inch thick, minimum 1 by 1 inch, stainless steel according to ASTM A 167 or ASTM A 240/A 240M, Type 304.

PART 3 - - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 - 1. Verify that systems to be insulated have been tested and are free of defects.
 - 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.
- B. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Keep insulation materials dry during application and finishing.
- G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- H. Install insulation with least number of joints practical.
- I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
- J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- K. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth.
 - 2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
 - a. For below ambient services, apply vapor-barrier mastic over staples.
 - 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 - 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.
- L. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- M. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- N. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 - 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
 - 4. Seal jacket to wall flashing with flashing sealant.
- C. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- D. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire damper sleeves for fire-rated wall and partition penetrations. Externally insulate damper sleeves to match adjacent insulation and overlap duct insulation at least 2 inches.
 - 1. Comply with requirements in Division 07 Section "Penetration Firestopping" firestopping and fire-resistive joint sealers.
- E. Insulation Installation at Floor Penetrations:
 - 1. Duct: For penetrations through fire-rated assemblies, terminate insulation at fire damper sleeves and externally insulate damper sleeve beyond floor to match adjacent duct insulation. Overlap damper sleeve and duct insulation at least 2 inches.
 - 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 07 Section "Penetration Firestopping."

3.5 INSTALLATION OF MINERAL-FIBER INSULATION

- A. Blanket Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.
 2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
 3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:
 - a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
 - b. On duct sides with dimensions larger than 18 inches, place pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
 - c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
 - d. Do not overcompress insulation during installation.
 - e. Impale insulation over pins and attach speed washers.
 - f. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
 4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
 - a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
 - b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops shall consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
 5. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
 6. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
 7. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch- wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.
- B. Board Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.
2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:
 - a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
 - b. On duct sides with dimensions larger than 18 inches, space pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
 - c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
 - d. Do not over-compress insulation during installation.
 - e. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1-inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
 - a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
 - b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops shall consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
5. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
6. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch- wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

C. Tests and Inspections:

1. Inspect ductwork, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to one location for each duct system defined in the "Duct Insulation Schedule, General" Article.

- D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.7 DUCT INSULATION SCHEDULE, GENERAL

A. Plenums and Ducts Requiring Insulation:

1. Indoor, concealed supply, return, exhaust and outdoor air.
2. Indoor, exposed supply, return, exhaust and outdoor air.

B. Items Not Insulated:

1. Factory-insulated flexible ducts.
2. Factory-insulated plenums and casings.
3. Flexible connectors.
4. Vibration-control devices.
5. Factory-insulated access panels and doors.

3.8 INDOOR DUCT AND PLENUM INSULATION SCHEDULE

A. Concealed, round and flat-oval, supply-air duct insulation shall be the following:

1. Mineral-Fiber Blanket: 2 inches thick and 3-lb/cu. ft. nominal density.

B. Concealed, round and flat-oval, return-air duct insulation shall be the following:

1. Mineral-Fiber Blanket: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.

C. Concealed, round and flat-oval, outdoor-air duct insulation shall be the following:

1. Mineral-Fiber Blanket: 2 inches thick and 3-lb/cu. ft. nominal density.

D. Concealed, round and flat-oval, exhaust-air duct insulation shall be the following:

1. Mineral-Fiber Blanket: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.

E. Concealed, rectangular, supply-air duct insulation shall be the following:

1. Mineral-Fiber Blanket: 2 inches thick and 3-lb/cu. ft. nominal density.

F. Concealed, rectangular, return-air duct insulation shall be the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Mineral-Fiber Blanket: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- G. Concealed, rectangular, outdoor-air duct insulation shall be the following:
1. Mineral-Fiber Blanket: 2 inches thick and 3-lb/cu. ft. nominal density.
- H. Concealed, rectangular, exhaust-air duct insulation shall be the following:
1. Mineral-Fiber Blanket: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- I. Concealed, return-air plenum insulation shall be one of the following:
1. Mineral-Fiber Blanket: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
 2. Mineral-Fiber Board: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- J. Exposed supply-air duct insulation shall be the following:
1. Mineral-Fiber Board: 2 inches thick and 3-lb/cu. ft. nominal density.
- K. Exposed return-air duct insulation shall be the following:
1. Mineral-Fiber Board: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- L. Exposed, rectangular, outdoor-air duct insulation shall be the following:
1. Mineral-Fiber Board: 2 inches thick and 3-lb/cu. ft. nominal density.
- M. Exposed exhaust-air duct insulation shall be the following:
1. Mineral-Fiber Board: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- N. Exposed, return-air plenum insulation shall be the following:
1. Mineral-Fiber Board: 1-1/2 inches thick and 3-lb/cu. ft. nominal density.
- O. Exposed, outdoor-air plenum insulation shall be the following:
1. Mineral-Fiber Board: 2 inches thick and 3-lb/cu. ft. nominal density.
- P. Exposed, exhaust-air plenum insulation shall be the following:
1. Mineral-Fiber Board: 2 inches thick and 3-lb/cu. ft. nominal density.

END OF SECTION 230713

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230719 - HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes insulating the following HVAC piping systems:

1. Condensate drain piping, indoors.
2. Chilled-water piping, indoors.
3. Heating hot-water piping, indoors.

- B. Related Sections:

1. Division 23 Section "Duct Insulation."

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory and field applied if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 2. Detail attachment and covering of heat tracing inside insulation.
 3. Detail insulation application at pipe expansion joints for each type of insulation.
 4. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
 5. Detail removable insulation at piping specialties.
 6. Detail application of field-applied jackets.
 7. Detail application at linkages of control devices.
- C. Qualification Data: For qualified Installer.
- D. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.
- E. Field quality-control reports.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84, by a testing and inspecting agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
 - 2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Division 23 Section "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- F. Cellular Glass: Inorganic, incombustible, foamed or cellulated glass with annealed, rigid, hermetically sealed cells. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
 - 1. Block Insulation: ASTM C 552, Type I.
 - 2. Special-Shaped Insulation: ASTM C 552, Type III.
 - 3. Board Insulation: ASTM C 552, Type IV.
 - 4. Preformed Pipe Insulation without Jacket: Comply with ASTM C 552, Type II, Class 1.
 - 5. Preformed Pipe Insulation with Factory-Applied ASJ: Comply with ASTM C 552, Type II, Class 2.
 - 6. Factory fabricate shapes according to ASTM C 450 and ASTM C 585.
- G. Flexible Elastomeric Insulation: Closed-cell, sponge- or expanded-rubber materials, lap seal. Comply with ASTM C 534, Type I for tubular materials.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Aeroflex USA, Inc.; Aerocel.
 - b. Armacell LLC; AP Armaflex.
 - c. K-Flex USA; Insul-Lock, Insul-Tube, and K-FLEX LS.
- H. Mineral-Fiber, Preformed Pipe Insulation:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Fibrex Insulations Inc.; Coreplus 1200.
 - b. Johns Manville; Micro-Lok.
 - c. Knauf Insulation; 1000-Degree Pipe Insulation.
 - d. Manson Insulation Inc.; Alley-K.
 - e. Owens Corning; Fiberglas Pipe Insulation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

2. Type I, 850 deg F Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.2 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.
- B. Cellular-Glass Adhesive: Two-component, thermosetting urethane adhesive containing no flammable solvents, with a service temperature range of minus 100 to plus 200 deg F.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 81-84.
 2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- C. Flexible Elastomeric Adhesive: Comply with MIL-A-24179A, Type II, Class I.
 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Aeroflex USA, Inc.; Aeroseal.
 - b. Armacell LLC; Armaflex 520 Adhesive.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-75.
 - d. K-Flex USA; R-373 Contact Adhesive.
 2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- D. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.
 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-127.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-60/85-70.
 - d. Mon-Eco Industries, Inc.; 22-25.
 - 2. For indoor applications, use adhesive that has a VOC content of 80 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.
- E. ASJ Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
- 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-82.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-50.
 - d. Mon-Eco Industries, Inc.; 22-25.
 - 2. For indoor applications, use adhesive that has a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 3. Use adhesive that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

2.3 MASTICS

- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
- 1. For indoor applications, use mastics that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Vapor-Barrier Mastic: Water based; suitable for indoor use on below-ambient services.
- 1. Water-Vapor Permeance: ASTM E 96/E 96M, Procedure B, 0.013 perm at 43-mil dry film thickness.
 - 2. Service Temperature Range: Minus 20 to plus 180 deg F.
 - 3. Solids Content: ASTM D 1644, 58 percent by volume and 70 percent by weight.
 - 4. Color: White.
- C. Breather Mastic: Water based; suitable for indoor and outdoor use on above-ambient services.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-10.
 - b. Eagle Bridges - Marathon Industries; 550.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 46-50.
 - d. Mon-Eco Industries, Inc.; 55-50.
 - e. Vimasco Corporation; WC-1/WC-5.
2. Water-Vapor Permeance: ASTM F 1249, 1.8 perms at 0.0625-inch dry film thickness.
3. Service Temperature Range: Minus 20 to plus 180 deg F.
4. Solids Content: 60 percent by volume and 66 percent by weight.
5. Color: White.

2.4 LAGGING ADHESIVES

- A. Description: Comply with MIL-A-3316C, Class I, Grade A and shall be compatible with insulation materials, jackets, and substrates.
 1. For indoor applications, use lagging adhesives that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 2. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-50 AHV2.
 - b. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-36.
 - c. Vimasco Corporation; 713 and 714.
 3. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over pipe insulation.
 4. Service Temperature Range: 0 to plus 180 deg F.
 5. Color: White.

2.5 SEALANTS

- A. Joint Sealants:
 1. Joint Sealants for Cellular-Glass, Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-76.
 - b. Eagle Bridges - Marathon Industries; 405.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-45.
 - d. Mon-Eco Industries, Inc.; 44-05.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

e. Pittsburgh Corning Corporation; Pittseal 444.

B. ASJ Flashing Sealants:

1. Materials shall be compatible with insulation materials, jackets, and substrates.
2. Fire- and water-resistant, flexible, elastomeric sealant.
3. Service Temperature Range: Minus 40 to plus 250 deg F.
4. Color: White.
5. For indoor applications, use sealants that have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
6. Use sealants that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers," including 2004 Addenda.

2.6 FACTORY-APPLIED JACKETS

A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C 1136, Type I.

2.7 TAPES

A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ABI, Ideal Tape Division; 428 AWF ASJ.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0836.
 - c. Compac Corporation; 104 and 105.
 - d. Venture Tape; 1540 CW Plus, 1542 CW Plus, and 1542 CW Plus/SQ.
2. Width: 3 inches.
3. Thickness: 11.5 mils.
4. Adhesion: 90 ounces force/inch in width.
5. Elongation: 2 percent.
6. Tensile Strength: 40 lbf/inch in width.
7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

2.8 SECUREMENTS

A. Bands:

1. Stainless Steel: ASTM A 167 or ASTM A 240/A 240M, Type 304; 0.015 inch thick, 3/4 inch wide with closed seal.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Staples: Outward-clinching insulation staples, nominal 3/4-inch- wide, stainless steel or Monel.
- C. Wire: 0.062-inch soft-annealed, stainless steel.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. C & F Wire.

PART 3 - - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 - 1. Verify that systems to be insulated have been tested and are free of defects.
 - 2. Verify that surfaces to be insulated are clean and dry.
 - 3. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.
- B. Surface Preparation: Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:
 - 1. Stainless Steel: Coat 300 series stainless steel with an epoxy primer 5 mils thick and an epoxy finish 5 mils thick if operating in a temperature range between 140 and 300 deg F. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
 - 2. Carbon Steel: Coat carbon steel operating at a service temperature between 32 and 300 deg F with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
- C. Coordinate insulation installation with the trade installing heat tracing. Comply with requirements for heat tracing that apply to insulation.
- D. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless-steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during application and finishing.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.
- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth.
 - 2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
 - a. For below-ambient services, apply vapor-barrier mastic over staples.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- P. For above-ambient services, do not install insulation to the following:
1. Vibration-control devices.
 2. Testing agency labels and stamps.
 3. Nameplates and data plates.
 4. Handholes.
 5. Cleanouts.

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
1. Seal penetrations with flashing sealant.
 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Underground Exterior Wall Penetrations: Terminate insulation flush with sleeve seal. Seal terminations with flashing sealant.
- C. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
1. Seal penetrations with flashing sealant.
 2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
 4. Seal jacket to wall flashing with flashing sealant.
- D. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- E. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
1. Comply with requirements in Division 07 Section "Penetration Firestopping" for firestopping and fire-resistive joint sealers.
- F. Insulation Installation at Floor Penetrations:
1. Pipe: Install insulation continuously through floor penetrations.
 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 07 Section "Penetration Firestopping."

3.5 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:
1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
 2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece shall be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
 3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
 4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
 5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
 7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
 8. For services not specified to receive a field-applied jacket except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
 9. Stencil or label the outside insulation jacket of each union with the word "union." Match size and color of pipe labels.
- C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.
- D. Install removable insulation covers at locations indicated. Installation shall conform to the following:
1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as adjoining pipe insulation.
 2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union long at least two times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless-steel or aluminum bands. Select band material compatible with insulation and jacket.
 3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
 4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless-steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.

3.6 INSTALLATION OF CELLULAR-GLASS INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of insulation to pipe with wire or bands and tighten bands without deforming insulation materials.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above-ambient services, secure laps with outward-clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below-ambient services, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install preformed pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of cellular-glass block insulation of same thickness as pipe insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available. Secure according to manufacturer's written instructions.
2. When preformed sections of insulation are not available, install mitered sections of cellular-glass insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of cellular-glass insulation to valve body.
2. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.

3.7 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

- A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

B. Insulation Installation on Pipe Flanges:

1. Install pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as pipe insulation.
4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install mitered sections of pipe insulation.
2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed valve covers manufactured of same material as pipe insulation when available.
2. When preformed valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.8 INSTALLATION OF MINERAL-FIBER INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above-ambient surfaces, secure laps with outward-clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install preformed pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with mineral-fiber blanket insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville

Fayetteville, North Carolina

RMF#: 02230515.A0

Gordon Johnson Architecture

July 31, 2023

2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.9 FINISHES

A. Pipe Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Division 09 painting Sections.

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.

C. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

D. Do not field paint aluminum or stainless-steel jackets.

3.10 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Inspect pipe, fittings, strainers, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.

D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.11 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.

3.12 INDOOR PIPING INSULATION SCHEDULE

- A. Condensate and Equipment Drain Water below 60 Deg F:
 - 1. All Pipe Sizes: Insulation shall be one of the following:
 - a. Cellular Glass: 1-1/2 inches thick.
 - b. Flexible Elastomeric: 1 inch thick.
- B. Chilled Water, above 40 Deg F:
 - 1. NPS 12 and Smaller: Insulation shall be one of the following:
 - a. Flexible Elastomeric: 2 inch thick.
- C. Heating-Hot-Water Supply and Return, 200 Deg F and Below:
 - 1. NPS 12 and Smaller: Insulation shall be one of the following:
 - a. Cellular Glass: 2 inches thick.
 - b. Mineral-Fiber, Preformed Pipe, Type I: 2 inches thick.

3.13 INDOOR, FIELD-APPLIED JACKET SCHEDULE

- A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.
- B. If more than one material is listed, selection from materials listed is Contractor's option.
- C. Piping, Concealed:
 - 1. None.
- D. Piping, Exposed:
 - 1. 0.03-inch pre-colored PVC jacket, color to match piping system color described in specification 230553.

END OF SECTION 230719

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 230900 – BUILDING AUTOMATION SYSTEM

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes control equipment and installation for HVAC systems and components, including control components for terminal heating and cooling units not supplied with factory-furnished controls.

1.2 RELATED DOCUMENTS

- A. Drawings and Specification Sections of the Contract, including General and Supplementary Conditions, apply to this Section.
 - 1. Division 01 – General and Special Requirements
 - 2. Division01 – Submittal Requirements
 - 3. Division01 – Materials and Equipment
 - 4. Section 26 – Variable Frequency Drives
 - 5. Division23 – Testing, Adjusting, and Balancing for HVAC
 - 6. Division26 – General Electrical Provisions for Electrical Work
 - 7. Division26 – Common Work Results for Electrical
 - 8. Division26 – Low Voltage Electrical Power Conductors and Cables
 - 9. Division26 – Hangers and Supports for Electrical Systems
 - 10. Division26 – Raceway and Boxes for Electrical Systems
 - 11. Division26 – Identification for Electrical Systems
 - 12. Division 26 – Wiring Devices

1.3 ABBREVIATIONS

- A. AAC: Advanced Application Controller
- B. AHU: Air Handling Unit.
- C. ALN: Automation Level Network
- D. ASC: Application Specific Controller
- E. ASHRAE: American Society of Heating Refrigerating and Air-Conditioning Engineers
- F. BAS: Building Automation System
- G. BC: Building Controller

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- H. BIBB: BACnet Interoperability Building Blocks
- I. BIM: Building Information Modeling
- J. BMS: Building Management System.
- K. CFM: Cubic Feet per Minute.
- L. DCV: Demand Controlled Ventilation
- M. DDC: Direct digital controls
- N. EIA: Electronics Industries Alliance
- O. EMI: Electro-Magnetic Interference
- P. EP: Electric-to-Pneumatic
- Q. FAS: Fire Alarm System.
- R. FLN: Floor Level Network
- S. FCU: Fan Coil Unit
- T. HMI: Human Machine Interface
- U. HVAC: Heating, Ventilating and Air Conditioning.
- V. IEEE: Institute of Electrical and Electronic Engineers
- W. I/O: Input/Output
- X. IP: Internet Protocol
- Y. IT: Information Technology
- Z. LAN: Local area network.
- AA. LCD: Liquid Crystal Display
- BB. LED: Light Emitting Diode
- CC. MER: Mechanical Equipment Room.
- DD. MLN: Management Level Network
- EE. MS/TP: Master-slave/token-passing.
- FF. NEMA: National Electric Manufacturers' Association

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- GG. NFPA: National Fire Protection Association
- HH. OEM: Operator Equipment Manufacturer
- II. PC: Personal Computer
- JJ. PICS: Protocol Implementation Conformance Statement
- KK. PID: Proportional Integral Derivative.
- LL. POT: Portable Operators Terminal.
- MM. RAM: Random Access Memory
- NN. RFI: Radio Frequency Interference
- OO. RTD: Resistance Temperature Device
- PP. TAB: Testing and Balancing
- QQ. TCP: Transfer Control Protocol
- RR. UDP: User Datagram Protocol
- SS. UL: Underwriters Laboratories
- TT. UPS: Uninterruptable Power Supply
- UU. VAV: Variable Air Volume
- VV. VFD: Variable Frequency Drive.
- WW. WAN: Wide Area Network.

1.4 DEFINITIONS

- A. BACnet: An industry standard data communication protocol for Building Automation and Control Networks. Refer to the latest version of AHSRAE standard 135.
- B. Scope Terminology
 - 1. Provide = Furnish equipment, engineer, program and install
 - 2. Furnish = Furnish equipment, engineer and program
 - 3. Mount = securely fasten or pipe
 - 4. Install = mount and wire
 - 5. Wire = wire only

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 WORK INCLUDED

- A. The BAS Contractor shall provide a complete and operational system that will perform the sequences of operation as described herein and be fully compatible with and integrated into the airport's existing Siemens BAS..
- B. Furnish a complete distributed direct digital control system in accordance with this specification section. This includes all system controllers, logic controllers, and all input/output devices. Items of work included are as follows:
 - 1. Provide a submittal that meets the requirements below for approval.
 - 2. Coordinate installation schedule with the mechanical contractor and general contractor.
 - 3. Provide installation of all panels and devices unless otherwise stated.
 - 4. Provide power for panels and control devices unless otherwise stated.
 - 5. Provide all low voltage control wiring for the DDC system.
 - 6. Provide miscellaneous control wiring for HVAC and related systems regardless of voltage.
 - 7. Provide engineering and technician labor to program and commission software for each system and operator interface. Submit commissioning reports for approval.
 - 8. Provide testing, demonstration and training as specified below.
- C. The installation of the control system shall be performed under the direct supervision of the controls manufacturer with the shop drawings, flow diagrams, bill of materials, component designation, or identification number and sequence of operation all bearing the name of the manufacturer.

1.6 SUBMITTALS

- A. Provide submittals for fast track items that need to be approved and released to meet the schedule of the project. Provide submittals for the following items separately upon request:
 - 1. Valve schedule and product data
 - 2. Damper schedule and product data
 - 3. Mounting and wiring diagrams for factory-installed control components
 - 4. Thermostat locations
- B. Provide a complete submittal with all controls system information for approval before construction starts. Include the following:
 - 1. Schematic flow diagrams showing fans, pumps, coils, dampers, valves, and control devices.
 - 2. Wiring Diagrams: Power, signal, and control wiring. Detail the wiring of the control devices and the panels. Show point-to-point wiring from field devices to the control panel. Show point-to-point wiring of hardwired interlocks. Show a ladder diagram or schematic of wiring internal to the panels, including numbered terminals. Clearly designate wiring that is done at a factory, at a panel shop or in the field.
 - 3. Details of control panel faces, including sizes, controls, instruments, and labeling.
 - 4. Schedule of dampers and actuators including size, leakage, and flow characteristics. If

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- dampers are furnished by other, submit a damper actuator schedule coordinating actuator sizes with the damper schedule.
5. Schedule of valves including leakage and flow characteristics.
 6. Written description of the Sequence of Operations.
 7. Network riser diagram showing wiring types, network protocols, locations of floor penetrations and number of control panels. Label control panels with network addresses and BACnet device instance numbers. Show all routers, switches, hubs and repeaters.
 8. Point list for each system controller including both inputs and outputs (I/O), point numbers, controlled device associated with each I/O point, and location of I/O device.
 9. Starter and variable frequency drive wiring details of all automatically controlled motors.
 10. Reduced size floor plan drawings showing locations of control panels, thermostats and any devices mounted in occupied space.
 11. Product Data: Include manufacturer's technical literature for each control device indicated, labeled with setting or adjustable range of control. Indicate dimensions, capacities, performance characteristics, electrical characteristics, finishes for materials, and installation and startup instructions for each type of product indicated. Submit a write-up of the application software that will be used on the operator workstation including revision level, functionality and software applications required to meet the specifications.
 12. Submit BACnet Protocol Implementation Conformance Statements (PICS) for all direct digital controllers, software and other system components that will communicate on the BAS utilizing BACnet.
- C. Wireless Communication: If wireless sensors and / or network are used, submit a radio signal layout showing the signal reach of every wireless mesh device. Show where repeaters are needed so that wireless signals overlap.
- D. Submit a description of the application software that will be used on the operator workstation including revision level, functionality and software applications required to meet the specifications.
- E. Submit blank field check-out and commissioning test reports, customized for each panel or system, which will be filled out by the technician during start-up.
- F. Variance letter: Submit a letter detailing each item in the submission that varies from the contract specification or sequence of operation in any way.
- G. After the BAS system is approved for construction, submit sample operator workstation graphics for typical systems for approval. Print and submit the graphics that the operator will use to view the systems, change setpoints, modify parameters and issue manual commands. Programming shall not commence until typical graphics are approved.
- H. Operation and Maintenance Data: In addition to items specified in Division 1 Section "Operation and Maintenance Data," include the following:
1. Product data with installation details, maintenance instructions and lists of spare parts for each type of control device.
 2. Keyboard illustrations and step-by-step procedures indexed for each operator function.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Inspection period, cleaning methods, cleaning materials recommended and calibration tolerances.
4. Calibration records and list of set points.

1.7 PROJECT RECORD DOCUMENTS

- A. Project Record Documents: Submit three (3) copies of record (as-built) documents upon completion of installation. Submittal shall consist of:
 1. Project Record Drawings. As-built versions of the submittal shop drawings provided as AutoCAD compatible files in electronic format and as 11 x 17-inch prints.
 2. Testing and Commissioning Reports and Checklists. Completed versions of reports, checklists, and trend logs used to meet requirements in the Control System Demonstration and Acceptance section of this specification.
 3. Operation and Maintenance (O & M) Manual.
 - a. As-built versions of the submittal product data.
 - b. Names, addresses, and 24-hour telephone numbers of installing contractors and service representatives for equipment and control systems.
 - c. Operator's Manual with procedures for operating control systems, logging on and off, handling alarms, producing point reports, trending data, overriding computer control, and changing setpoints and variables.
 - d. Programming manual or set of manuals with description of programming language and of statements for algorithms and calculations used, of point database creation and modification, of program creation and modification, and of editor use.
 - e. Engineering, installation, and maintenance manual or set of manuals that explains how to design and install new points, panels, and other hardware; how to perform preventive maintenance and calibration; how to debug hardware problems; and how to repair or replace hardware.
 - f. Documentation of all programs created using custom programming language, including setpoints, tuning parameters, and object database.
 - g. Graphic files, programs, and database on electronic media.
 - h. List of recommended spare parts with part numbers and suppliers.
 - i. Complete original-issue documentation, installation, and maintenance information for furnished third-party hardware, including computer equipment and sensors.
 - j. Complete original original-issue copies of furnished software, including operating systems, custom programming language, operator workstation software, and graphics software.
 - k. Licenses, guarantees, and warranty documents for equipment and systems.
- B. Operating manual to serve as training and reference manual for all aspects of day-to-day operation of the system. As a minimum include the following:
 1. Sequence of operation for automatic and manual operating modes for all building systems. The sequences shall cross-reference the system point names.
 2. Description of manual override operation of all control points in system.
 3. BMS system manufacturers complete operating manuals.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Provide maintenance manual to serve as training and reference manual for all aspects of day-to-day maintenance and major system repairs. As a minimum include the following:
 - 1. Complete as-built installation drawings for each building system.
 - 2. Overall system electrical power supply schematic indicating source of electrical power for each system component. Indicate all battery backup provisions.
 - 3. Photographs and/or drawings showing installation details and locations of equipment.
 - 4. Routine preventive maintenance procedures, corrective diagnostics troubleshooting procedures, and calibration procedures.
 - 5. Parts list with manufacturer's catalog numbers and ordering information.
 - 6. Lists of ordinary and special tools, operating materials supplies and test equipment recommended for operation and servicing.
 - 7. Manufacturer's operation, set-up, maintenance and catalog literature for each piece of equipment.
 - 8. Maintenance and repair instructions.
 - 9. Recommended spare parts.
- D. Provide Programming Manual to serve as training and reference manual for all aspects of system programming. As a minimum include the following:
 - 1. Complete programming manuals, and reference guides.
 - 2. Details of any custom software packages and compilers supplied with system.
 - 3. Information and access required for independent programming of system.

1.8 QUALITY ASSURANCE

A. Codes

- 1. Perform all wiring in accordance with Division 26, NEC, local codes and Owner's requirements.
- 2. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- 3. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilation Systems."
- 4. Comply with ASHRAE 135-2010 BACnet: A Data Communication Protocol for Building Automation and Control Networks.
- 5. Comply with ASHRAE 90.1-[2007][2010][2013] Energy Standard for Buildings Except Low-Rise Residential Buildings.
- 6. All equipment shall be UL listed and approved and shall meet with all applicable NFPA standards, including UL 916 - PAZX Energy Management Systems,
 - a. Provide written approvals and certifications after installation has been completed.
- 7. All electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference and be so labeled.
- 8. The manufacturer of the building automation system shall provide documentation supporting compliance with ISO-9002 (Model for Quality Assurance in Production,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Installation, and Servicing) and ISO-140001 (The application of well-accepted business management principles to the environment). The intent of this specification requirement is to ensure that the products from the manufacturer are delivered through a Quality System and Framework that will assure consistency in the products delivered for this project.

B. Qualifications

1. Installing contractor shall be in the business of installing and servicing DDC controls for mechanical systems, temperature and ventilation control, environmental control, lighting control, access and security, life safety and energy management as their primary business.
2. Installer Qualifications: An experienced installer who is the authorized representative of the automatic control system manufacturer for both installation and maintenance of controls required for this Project.
3. Engineering, drafting, programming, and graphics generation shall be performed by the local branch engineers and technicians directly employed by the Building Automation System Contractor.
4. Supervision, checkout and commissioning of the system shall be by the local branch engineers and technicians directly employed by the Building Automation System Contractor. They shall perform commissioning and complete testing of the BAS system.

- C. The BAS contractor shall maintain a service organization consisting of factory trained service personnel and provide a list of ten (10) projects, similar in size and scope to this project, completed within the last five years.
- D. Final determination of compliance with these specifications shall rest solely with the Engineers and Owner who will require proof of prior satisfactory performance.
- E. For any BAS system and equipment submitted for approval, the BAS contractor shall state what, if any, specific points of system operation differ from these specifications.
- F. All portions of the system must be designed, furnished, installed, commissioned and serviced by manufacturer approved, factory trained employees.
- G. The system shall have a documented history of compatibility by design for a minimum of 15 years. Future compatibility shall be supported for no less than 10 years. Compatibility shall be defined as the ability for any existing control system component including but not limited to building controllers, advanced application controllers, application specific, personal operator workstations and portable operator's terminals, to be connected and directly communicate with any new BAS system equipment without bridges, routers or protocol converters.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Factory-Mounted Components: Where control devices specified in this Section are indicated to be factory mounted on equipment, arrange for shipping of control devices to unit manufacturer.
- B. Deliver, store, protect, and handle products to site under provisions of the contract Documents.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Coordinate all site delivers with Construction project Manager.

- C. Protect products from construction operations, dust, and debris, by storing materials inside, protected from weather in a conditioned space.

1.10 COORDINATION

- A. Coordinate IP drops, network connections, user interfaces, firewall, etc with Owner's IT representative.
- B. Coordinate location of thermostats, humidistats, panels, and other exposed control components with plans and room details before installation.
- C. Coordinate equipment with Division 28 "Fire Alarm" to achieve compatibility with equipment that interfaces with that system.
- D. Coordinate power for control units and operator workstation with electrical contractor.
- E. Coordinate equipment with provider of starters and drives to achieve compatibility with motor starter control coils and VFD control wiring.
- F. Coordinate scheduling with the mechanical contractor and general contractor. Submit a schedule for approval based upon the installation schedule of the mechanical equipment.
- G. Coordinate installation of taps, valves, airflow stations, etc. with the mechanical contractor.
- H. Products Furnished but Not Installed Under This Section

1. Hydronic and Refrigerant Piping accessories:

- a. Control Valves
- b. Temperature Sensor Wells and Sockets
- c. Pressure Sensor Wells and Sockets
- d. Flow Switches
- e. Flow Meters
- f. Differential Pressure Transmitters

2. Sheet metal accessories

- a. Dampers
- b. Airflow Stations
- c. Terminal Unit Controls

I. Products Installed but Not Furnished Under This Section

1. Refrigeration Equipment:

- a. Refrigerant Leak Detection System

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Proof of flow pressure switches
- 2. Rooftop Air Handling Equipment:
 - a. Thermostats
 - b. Duct Static Pressure Sensors
- J. Products Integrated To but Not Furnished or Installed Under This Section
 - 1. Lighting Control panels

1.11 WARRANTY

- A. Provide warranty per Division 20 Section “General Mechanical Requirements” and as supplemented in this section.
- B. Warranty shall cover all costs for parts, labor, associated travel, and expenses for a period of 12 months from completion of system demonstration.
- C. Hardware and software personnel supporting this warranty agreement shall provide on-site or off-site service in a timely manner after failure notification to the vendor. The maximum acceptable response time to provide this service at the site shall be 24 hours.
- D. During normal building occupied hours, failure of items that are critical for system operation shall be provided within 4 hours of notification from the Owner’s Representative.
- E. This warranty shall apply equally to both hardware and software.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. The Building Automation System (BAS) contractor shall furnish and install a networked system of HVAC controls. The contractor shall incorporate direct digital control (DDC) for central plant equipment, building ventilation equipment, supplemental heating and cooling equipment, and terminal units.
- B. Provide networking to new DDC equipment using industry accepted communication standards. System shall utilize BACnet communication according to ANSI/ASHRAE standard 135-2010 for interoperability with smart equipment, for the main IP communication trunk to the BAS Server and for peer-to-peer communication between DDC panels and devices. The system shall not be limited to only standard protocols and shall also be able to integrate to a wide variety of third-party devices and applications via drivers and gateways.
- C. Provide controls integrated with the existing Siemens BAS.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 BUILDING AUTOMATION SYSTEM NETWORK

- A. All networked control products provided for this project shall be comprised of an industry standard open protocol internetwork. Communication involving control components (i.e. all types of controllers and operator interfaces) shall conform to ASHRAE 135-2010 BACnet standard. Networks and protocols proprietary to one company or distributed by one company are prohibited.
- B. Access to system data shall not be restricted by the hardware configuration of the building management system. The hardware configuration of the BMS network shall be totally transparent to the user when accessing data or developing control programs.
 - 1. Software applications, features, and functionality, including administrative configurations, shall not be separated into several network control engines working together.
- C. Provide at a minimum 1 operator interface to be designated as the BAS Server with server application software. Additional operator interfaces shall use operator workstation licenses or connect via a thick or thin-client application.
- D. BAS Server shall be capable of simultaneous direct connection and communication with BACnet/IP, OPC and TCP/IP corporate level networks without the use of interposing devices.
- E. Any break in Ethernet communication from the server to the controllers on the Primary Network shall result in a notification at the server.
- F. Any break in Ethernet communication between the server and standard client workstations on the Primary Network shall result in a notification at each workstation.
- G. The network architecture shall consist of three levels of networks:
 - 1. The Management Level Network (MLN) shall utilize BACnet/IP over Ethernet along with other standardized protocol, such as web services, html, JAVA, SOAP, XML, etc., to transmit data to non-BAS software applications and databases. The BAS Server and Operator Workstations shall reside on this level of the network architecture.
 - 2. The Automation Level Network (ALN) shall utilize BACnet/IP over Ethernet. It shall connect BACnet Building Controllers to the BAS Server and Operator Workstations. Controllers for central plant equipment and large infrastructure air handlers shall reside on the ALN backbone BACnet/IP network. The building's Ethernet LAN shall be utilized for the ALN backbone and all ALN devices shall be connected to the building's LAN. Coordinate IP drops with Owner.
 - 3. The Floor Level Network shall utilize BACnet/IP over Ethernet or BACnet MS/TP over RS-485 to connect all of the DDC-controlled terminal heating and cooling equipment on a floor or in a system that are controlled with BACnet Advanced Application Controllers or BACnet Application Specific Controllers. FLN devices are networked to a router that connects to the Automaton Level Network backbone.
- H. Provide a router for each RS-485 subnetwork to connect them to the base building backbone level network. The router shall connect BACnet MS/TP subnetworks to BACnet over Ethernet.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Routers shall be capable of handling all of the BACnet BIBBs that are listed for the controller that reside on the subnetwork.

- I. The Building Level Controllers shall be able to support subnetwork protocols that may be needed depending on the type of equipment or application. Subnetworks shall be limited to:
 - 1. BACnet MS/TP
 - 2. Apogee FLN
 - 3. Modbus
 - 4. Wireless Mesh network compatible with Apogee FLN
- J. BACnet MSTP Setup rules
 - 1. Addressing for the MSTP devices shall start at 00 and continue sequentially for the number of devices on the subnetwork.
 - 2. No gaps shall be allowed in the addresses.
 - 3. Set the MaxMaster property to the highest address of the connected device.
 - 4. MaxMaster property shall be adjusted when devices are added to the subnetwork.
- K. Provide all communication media, connectors, repeaters, bridges, switches, and routers necessary for the internetwork.
- L. Controllers and software shall be BTL listed at the time of installation.
- M. The system shall meet peer-to-peer communication services such that the values in any one BACnet Building Controller or BACnetAdvanced Application Controller can be read or changed from all other controllers without the need for intermediary devices. The software shall provide transparent transfer of all data, control programs, schedules, trends, and alarms from any one controller through the internetwork to any other controller, regardless of subnetwork routers.
- N. Systems that use variations of BACnet using Point-to-Point (PTP) between controllers, gateways, bridges or networks that are not peer-to-peer are not allowed.
- O. Remote Communications: Provide a TCP/IP compatible communication port for connection to the Owner's network for remote communications. Provide coordination with the Owner for addressing and router configuration on both ends of the remote network.
- P. The system shall be installed with a 10% spare capacity on each subnetwork for the addition of future controllers.
- Q. On each floor, wing or major mechanical room provide an Ethernet RJ45 connection that allows connection to the BACnet network. An open port shall always be available and shall not require any part of the network to be disconnected. The location shall be accessible to the base building personnel and not in a location where the tenant can restrict the access.
- R. Distributed Control Requirements:
 - 1. The loss of any one DDC controller shall not affect the operation of other HVAC

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- systems, only for the points connected to the DDC controller.
2. The system shall be scalable in nature and shall permit expansion of both capacity and functionality through the addition of sensors, actuators, DDC Controllers, and operator devices.
 3. System architectural design shall eliminate dependence upon any single device for alarm reporting and control execution. Each DDC Controller shall operate independently by performing its own specified control, alarm management, operator I/O, and data collection. The failure of any single component or network connection shall not interrupt the execution of any control strategy, reporting, alarming and trending function, or any function at any operator interface device.
 4. DDC Controllers shall be able to access any data from, or send control commands and alarm reports directly to, any other DDC Controller on the network without dependence upon a central processing device. DDC Controllers shall also be able to send alarms to multiple operator workstations without dependence upon a central or intermediate processing device.
 5. Operators shall have the ability to make database changes at the central system server while operator workstations are on-line without disrupting other system operations.
 6. The DDC control panel shall be mounted in the same mechanical room as the equipment being controlled, or an adjacent utility room.
 7. Multiple systems can be programmed on the same controller as long as they are in the same room. Systems on separate floors shall have separate controllers.
 8. VAV boxes subnetworks shall be connected to the AHU controller that feeds those boxes. If multiple subnetworks are needed, then the VAV shall be grouped into subnetworks in an orderly method, such as per floor, per wing, etc.
 9. Remote sensors shall be wired to the control panel of the equipment it is controlling, not across the network.
 10. Signals to remote motor control centers shall be hard wired to the control panel, not across the network.
 11. Terminal units shall each have their own controller. Only exceptions are:
 - a. Groups of reheat coils
 - b. Groups of exhaust fans
 - c. Groups of chilled beams serving same zone or several adjacent zones

2.3 BUILDING AUTOMATION SYSTEM SERVER HARDWARE

- A. BAS Server application and database shall be installed on an Owner-provided server.

2.4 BACNET ADVANCED WORKSTATION SOFTWARE

- A. Interface Description

1. The software shall provide, as a minimum, the following functionality:
 - a. Real-time graphical viewing and control of the BMS environment.
 - b. Reporting of both real-time and historical information.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- c. Scheduling and override of building operations.
 - d. Collection and analysis of historical data.
 - e. Point database editing, storage and downloading of controller databases.
 - f. Configuration of and navigation through default and personalized hierarchical “tree” views that include workstation and control system objects.
 - g. Event reporting, routing, messaging, and acknowledgment.
 - h. Definition and construction of dynamic color graphic displays.
 - i. Online, context-sensitive help, including an index, glossary of terms, and the capability to search help via keyword or phrase.
 - j. On-screen access to User Documentation, via online help or PDF-format electronic file.
 - k. Automatic database backup at the operator interface for database changes initiated at Building Controllers.
 - l. Display dynamic trend data graphical plot.
 - 1) Must be able to run multiple plots simultaneously.
 - 2) Each plot must be capable of supporting 10 pts/plot minimum.
 - 3) Must be able to command points from selection on dynamic trend plots.
 - 4) Must be able to plot real-time data without prior configuration.
 - 5) Must be able to plot both real-time and historical trend data simultaneously.
 - m. Program editing
 - n. Transfer trend data to third-party spreadsheet software
 - o. Scheduling reports
 - p. Operator Activity Log
- 2. Operator interface software shall minimize operator training through the use of user-friendly and interactive graphical applications.
 - 3. Users must be able to build multiple, separate, personalized hierarchical “tree” views that represent the workstation, control systems, geographical facility layouts, and mechanical equipment relationships.
 - 4. 256-character point identification (names) must be supported to provide clearly descriptive identification.
 - 5. On-line help must be available.
 - 6. The user interface shall display relevant information for a selection in multiple panes of a single window without the need for opening multiple overlapping windows on the desktop
 - 7. Provide a graphical user interface that shall minimize the use of keyboard through the use of a mouse or similar pointing device, with a “point and click” approach to menu selection and a “drag and drop” approach to inter-application navigation.
 - 8. Software navigation shall be user friendly by utilizing “forward & back” capability between screens and embedded links to graphics, documents, drawings, trends, schedules, as well as external documents (.doc, .pdf, .xls, etc.) or web addresses that are related to any selected object.
 - 9. Primary selection of objects in the operator interface software shall be available from user defined hierarchical Views, from graphics, or from events in an Event List.
 - 10. Secondary selection of objects in the operator interface software shall be available from links to any objects or external documents related to the primary selection.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

11. Links to information related to any selected objects shall be displayed in a consistent manner and automatically defined based on where an object is used in the system.
12. The operator workstation shall be capable of displaying web pages and common document formats (.doc, .xls, .pdf) within the operator workstation application.
13. The software shall provide a multi-tasking type environment that allows the user to run several applications simultaneously.
14. System database parameters shall be stored within an object-oriented database.
15. Standard Windows applications shall run simultaneously with the BMS software.
16. The operator shall be able to work in Microsoft Word, Excel, and other Windows based software packages, while concurrently annunciating on-line BMS alarms and monitoring information.
17. Provide automatic backup and restore of all Building Controller databases on the workstation hard disk.
18. System configuration, programming, editing, graphics generation shall be performed on-line from the operator workstation software.
19. User shall be able to edit point configuration of any configurable BACnet point that resides in a devices that supports external editing.
20. The software shall also allow the user to configure the alarm management strategy for each point.
21. Users shall have the ability to view the program(s) that is\are currently running in a Building Controller. The display shall mark the program lines with the following: disabled, comment, unresolved, and trace bits.

B. Certifications and Approvals

1. BAS software shall have been tested against the following norms and standards:
 - a. BACnet Revision 1.13, certified by BACnet Testing Laboratory as BACnet Advanced Workstation Software (BTL B-AWS)
 - b. IT security compliant with the ISA-99/IEC 62443 Security Level: SL1
 - c. OPC DA V2.05a and V3.0 Server, certified by the OPC Foundation certification program
 - d. UL-listed to UL864 9th edition Standard for Control Units and Accessories (when installed on a UL-approved computer)

C. Client-Server Connectivity

1. Client sessions must be allowed to run on the server and on other devices connected to the server via Intranet, Extranet, or Internet connections.
2. Internet connections, ISP services, as well as necessary firewalls or proxy servers shall be provided by the owner as required to support remote access features.
3. The following client options must be supported
 - a. Installed Client.
 - 1) Software application installed from installation media on to the client machine.
 - 2) Installed client software must be configurable to allow it to run in a Closed

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Mode such that the BAS software can lock down the client machine and prevent users without permission from minimizing the application or running other Windows applications that might cover the BAS software interface.

- 3) Communication between the server and Installed Clients must be monitored so that any break in communication between the server and an installed client results in notification at the Server and Installed Client machine
- 4) Installed client machines communicate directly with the BAS server

b. Web Client.

- 1) Software that runs in a browser on the client machine as a Full Trust client application.
- 2) Connected to the BAS software server via Microsoft IIS Server.

c. Windows App.

- 1) Software application downloaded from the BAS server to run on the client machine like an installed application
- 2) Application must be automatically updated whenever new apps are available at the server.
- 3) Connected to the BAS software server via Microsoft IIS Server.

4. Each of the client options shall provide the same functionalities including operation and configuration capabilities.

D. Access Rights and User Privileges

1. Access to any client user session must be password protected.
2. Users shall be able to create local user accounts specific to the application software.
3. Users shall be able to link application user accounts to Active Directory user accounts for consistent management with domain user accounts.
4. Operator-specific password access protection shall be provided to allow the administrator/manager to limit users' workstation control, display and data base manipulation capabilities as deemed appropriate for each user, based upon an assigned user name and password.
5. Operator privileges shall follow the operator to any workstation logged onto.
6. The administrator or manager shall be able to further limit operator privileges based on which console an operator is logged on to.
7. The administrator or manager shall be able to grant discrete levels of access and privileges, per user, for each point, graphic, report, schedule, and BMS workstation application.

E. Activity Logging

1. The operator interface software shall maintain a log of the actions of each individual operator.
2. The software shall provide an application that allows querying based on object name, operator, action, or time range.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. The software shall provide the ability to generate reports showing operator activity based on object name, operator, action, or time range.

F. Graphics Application

1. All graphics shall be available with the same look and functionality whether they are displayed at an installed client console or in a browser.
2. User shall be able to add/delete/modify system graphics for floor plan displays and system schematics for each piece of mechanical equipment (including, air handling units, chilled water systems, hot water boiler systems, and room level terminal units) from standard user interface without the need of any external or specialized tools.
3. The software shall include all necessary tools and procedures for the user to create their own graphics.
4. The software shall provide the user the ability to display real-time point values by animated motion or custom picture control visual representation.
5. The software shall provide animation that depicts movement of mechanical equipment, or air or fluid flow.
6. The software shall provide users the ability to depict various positions in relation to assigned point values or ranges.
7. The software shall provide the ability to add custom gauges and charts to graphic pages.
8. The software must include a library of at least 400 standard control application graphics and symbols for visualizing common mechanical systems, including fans, valves, motors, chillers, AHU systems, standard ductwork diagrams, piping, and laboratory symbols.
9. The Graphics application shall include a set of standard Terminal Equipment controller application-specific background graphic templates. Templates shall provide the automatic display of a selected Terminal Equipment controller's control values and parameters, without the need to create separate and individual graphic files for each controller.
10. The Graphics application shall be capable of automatically assigning the appropriate symbol for an object (point) selected to be displayed on the graphic based on what the object represents (fan, duct sensor, damper, etc.) when the object is placed on a graphic.
11. The Graphics application shall allow a user to manually override the automatically assigned symbol for an object when a different symbol is desired.
12. The user shall have the ability to add custom symbols to the symbol library.
13. The software shall permit the importing of AutoCAD or scanned pictures for use in graphics.
14. Graphics must be automatically associated to any points or system objects that are rendered on the graphic, so that selection of a system object will allow a user to simply navigate to any associated graphic, without the need for manual association.
15. The software must allow users to command points directly off graphics application.
16. Graphic display shall include the ability to depict real-time point values dynamically with text or animation.
17. Navigation through various graphic screens shall be optionally achieved through a hierarchical "tree" structure
18. Graphics viewing shall include dynamic pan zoom capabilities.
19. Graphics viewing shall include the ability to switch between multiple layers with different information on each layer.
20. Graphics shall include a decluttering capability that allows layers to be programmatically

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

hidden and displayed based on zoom level.

21. Graphics shall be capable of displaying the status of points that have been overridden by a field HAND switch, for points that have been designed to provide a field HAND override capability.
22. The software must provide the ability to create dashboard views consisting of gauges and charts that graphically display system and/ or energy performance.

G. System Performance

1. Comply with the following performance requirements:
 - a. Graphic Display: Display graphic with minimum 20 dynamic points with current data within 5 seconds.
 - b. Graphic Refresh: Update graphic with minimum 20 dynamic points with current data within 5 seconds.
 - c. Object Command: Reaction time of less than 5 seconds between operator command of a binary object and device reaction.
 - d. Object Scan: Transmit change of state and change of analog values to control units or workstation within 5 seconds.
 - e. Alarm Response Time: Annunciate alarm at workstation within 2 seconds. Multiple workstations must receive alarms within five seconds of each other.
 - f. Program Execution Frequency: Programmable controllers shall execute DDC PI control loops, and scan and update process values and outputs at least once per second.
 - g. Reporting Accuracy and Stability of Control: Report values and maintain measured variables within tolerances as follows:
 - 1) Water Temperature: Plus or minus 1 deg F.
 - 2) Water Flow: Plus or minus 5 percent of full scale.
 - 3) Water Pressure: Plus or minus 2 percent of full scale.
 - 4) Space Temperature: Plus or minus 1 deg F.
 - 5) Ducted Air Temperature: Plus or minus 1 deg F.
 - 6) Outside Air Temperature: Plus or minus 2 deg F.
 - 7) Dew Point Temperature: Plus or minus 3 deg F.
 - 8) Temperature Differential: Plus or minus 0.25 deg F.
 - 9) Relative Humidity: Plus or minus 2 percent.
 - 10) Airflow (Pressurized Spaces): Plus or minus 3 percent of full scale.
 - 11) Airflow (Measuring Stations): Plus or minus 5 percent of full scale.
 - 12) Airflow (Terminal): Plus or minus 10 percent of full scale.
 - 13) Air Pressure (Space): Plus or minus 0.01-inch wg.
 - 14) Air Pressure (Ducts): Plus or minus 0.1-inch wg.
 - 15) Carbon Monoxide: Plus or minus 5 percent of reading.
 - 16) CarbonDioxide: Plus or minus 50 ppm.
 - 17) Electrical: Plus or minus 5 percent of reading.

H. Reports

1. The software must allow reports shall be executed on demand.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. The software must allow reports shall be executed via pre-defined schedule.
3. As a minimum, the system shall allow the user to easily obtain the following types of reports:
 - a. A general listing of all or selected points in the network
 - b. A status report showing present value and alarm status
 - c. List of all points currently in alarm
 - d. List of all points currently in override status
 - e. List of all disabled points
 - f. System diagnostic reports including, list of Building panels on line and communicating, status of all Building terminal unit device points
 - g. List of alarm strategy definitions
 - h. List of Building Control panels
 - i. Point totalization report
 - j. Point Trend data listings
 - k. Initial Values report
 - l. User activity report
 - m. Event history reports

I. Scheduling

1. The software shall provide a calendar type format for simplification of time and date scheduling and overrides of building operations.
2. The software shall support the definition of BACnet schedules that are defined at the workstation and are downloaded to Building Controller to ensure time equipment scheduling when PC is off-line, such that the operating software is not required to execute time scheduling. The software must provide the following capabilities for BACnet scheduling capabilities as a minimum:
 - a. Fully support all BACnet Schedule, Calendar, and Command objects.
 - b. Daily and Weekly schedules
 - c. Ability to combine multiple points into a logical Command Groups for ease of scheduling (e.g., all Building 1 lights)
 - d. Ability to schedule for a minimum of up to ten (10) years in advance.
3. The software shall support the definition of schedules that are configured and executed to run at the workstation, to support scheduling of workstation software activities and to support field systems that do not include internal scheduling mechanisms. The software must provide the following capabilities for BACnet scheduling capabilities as a minimum:
 - a. Schedule predefined reports
 - b. Schedule Trend collections
 - c. Schedule automated system backups
 - d. Schedule commands to be sent to field panels
 - e. Daily and weekly schedules
 - f. Setting up and executing Holiday schedules
 - g. Ability to combine multiple points into a logical Command Groups for ease of

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

scheduling (e.g., all Building 1 lights)

h. Ability to schedule for a minimum of up to ten (10) years in advance.

4. The software shall provide the ability for users to override regular weekly schedules through menu selection, graphical mouse action or function key.
5. The software shall provide a timeline view, showing the results of any number of combined selected workstation and field panel controller schedules for an overview of facility operation.

J. Trending

1. Provide trending capabilities that allow the user to easily monitor and preserve records of system activity over an extended period of time.
2. Any system point may be trended automatically at time-based intervals or change of value, both of which shall be user-definable.
3. Trend data shall be collected and stored on hard disk for future diagnostics and reporting.
4. Automatic Trend collection may be scheduled at regular intervals through the same scheduling interface as used for scheduling of equipment.
5. System shall support trending in the same device as the monitor point or in an external device.
6. The software must support configuration of panels that have a trending level threshold, above which the data will be automatically uploaded to the BMS server to prevent overwriting the data in the field panel. The trending level will be user defined in % of available space (e.g., automatically upload when the trend buffer is at 75% of allocated space).
7. Trend data reports shall be provided to allow the user to view all trended point data.
8. Trend data reports may be customized to include individual points or predefined groups of selected points.
9. The software shall allow the user to view real-time trend data on trend graphical plot displays.
 - a. A minimum of ten points may be plotted
 - b. A combination of real-time and historical data may be plotted
 - c. Dynamic graphs shall continuously update point values
 - d. At any time the user may redefine sampling times or range scales for any point
 - e. The user may pause the display and take "snapshots" of plot screens to be stored on the workstation disk for future recall and analysis
 - f. Exact point values may be viewed on the Trend plot
 - g. Trend graphs may be printed
 - h. Operator shall be able to command points by selecting them on the trend plot. Operator shall be able to zoom in on a specific time range within a plot.
 - i. The Trend Viewer must allow users to configure separate left and right axis for easier differentiation of point values.
 - j. The Trend Viewer must allow users to display historical data for the same group of points at different times simultaneously for easy comparison of system behavior over time.

K. Event Management

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Event Notification shall be presented to each workstation in a tabular format application, and shall include the following information for each event: name, value, event time and date, event status, priority, acknowledgement information, and alarm count.
2. Only events for which the logged on user has privileges to view shall be displayed on each workstation.
3. The software shall provide the ability to users to limit the list of events displayed at each workstation (e.g. only show fire events at this workstation, no matter who is logged on)
4. Each event shall have the ability to sound an audible notification based on the category of the event.
5. Event List shall have the ability to list and sort the events based on event status, point name, ascending or descending activation time.
6. Directly from the Event List, the user shall have the ability to acknowledge, silence the event sound, print, or erase each event.
7. The interface shall provide the option to inhibit the erasing of active acknowledged events, until they have returned to normal status.
8. The user shall have the ability to navigate to all information related to a selected point in order to command, launch an associated graphic or trended graphical plot, or run a report on a selected point directly from the Event List.
9. Each event shall have a direct link from the Event List to further user-defined point informational data.
10. The user shall have the ability to also associate real-time electronic annotations or notes to each event.
11. Software shall provide the option to configure detailed operating procedures that guide a user through predetermined standard operating procedures for handling critical events. Users shall be able to log completion of each operating step as it is performed.

L. Remote Notification (RENO)

1. Workstations shall be configured to send out messages to numeric pagers, alphanumeric pagers, SMS (Simple Messaging Service, text messaging) Devices, and email accounts based on a point's alarm condition.
2. Email notification must support POP3, IMAP, and SMTP with SSL/TSL
3. Communication with external software must be encrypted.
4. There shall be no limit to the number of points that can be configured for remote notification of alarm conditions and no limit on the number of remote devices which can receive messages from the system.
5. On a per point basis, system shall be configurable to send messages to an individual or group and shall be configurable to send different messages to different remote devices based on alarm message priority level.
6. System must be configurable to send messages to an escalation list so that if the first device does not respond, the message is sent on to the next device after a configurable time has elapsed.
7. Workstation shall have the ability to send manual messages allowing an operator to type in a message to be sent immediately.
8. Workstation shall have a feature to send a heartbeat message to periodically notify users that they have communication with the system.

M. External Data Access

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. The software shall provide the ability to expose configuration properties and real-time values through CSV files, OPC DA, OPC UA, or REST-based Web Services.
2. The software shall provide the ability for external applications to change configuration and real-time values through OPC DA, OPC UA, or REST-based Web Services.
3. The software shall provide the ability for external applications to access historical Trend data through CSV files or REST-based Web Services.
4. External data access must be secured using the level of permissions configured for users and operator workstations.
5. Web service interfaces must allow for exchanging data (object's values, events and trend series) between workstation and external applications such as facility management systems, enterprise applications, mobile applications or other value-added services.
6. Documentation describing web services interfaces must be included to allow external developers to write applications that leverage the data exchange.

N. Licensing

1. Software licensing must be allowed to be bound to a dongle or to physical PC hardware.
2. User licenses from all client types shall be from a common pool of client licenses. Licenses for installed and browser-based clients shall not be in separate pools.
3. Provide the number of client licenses as called for here or in the Sequence of Operations.

O. Data Security

1. The BAS software must allow that all communication paths between clients and the server are encrypted and protected against replay attacks as well as data manipulation.
2. Any runtime data transfer between the system server and Web Server (IIS) must be allowed to be encrypted by Desigo CC.
3. Communication between any Web Server (IIS) and the Web Clients must be allowed to be encrypted.
4. Passwords must be handled with encrypted storage and transmission
5. The software must support the use of public domain algorithms for cryptographic functions, including AES, DiffieHellmann, RSA, and SHA-2. No self-coded algorithms shall be allowed.
6. All symmetrical encryption must use 256 bit AES or stronger.
7. All asymmetrical encryption must use 2048 bit or stronger.
8. The software must support the use of commercial certificates for securing client-server communications.
9. The software must support the use of self-signed certificates to allow local deployments without the overhead of obtaining commercial certificates.
10. When using self-signed certificates, the owner of the Desigo CC system is responsible for maintaining their validity status, and for manually adding them to and removing them from the list of trusted certificates.
11. The BAS software shall be compatible with the following Virus Scanners:
 - a. Kaspersky
 - b. Avira
 - c. McAfee
 - d. Bitdefender

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

e. TrendMicro Office Scan

P. Virtualization

1. The BAS software must be compatible with following Virtualization software packages:

a. VMware®:

- 1) Virtualization platform: VSphere 6.0 or higher
- 2) Fault-tolerant software: ESXi 6.0b managed by VCenter Server Appliance v6.0.0 or higher

b. Stratus®:

- 1) Virtualization platform: KVM for Linux CentOS v7.0 or higher
- 2) Fault-tolerant software: everRun Enterprise 7.2 or higher
- 3) Virtualization platform: Citrix XenServer 6.0.2 or higher
- 4) Fault-tolerant software: everRun MX 6.2 or higher

Q. Subsystem Connectivity

1. The BAS application software must be capable of connecting simultaneously to multiple control systems and data sources.
2. Interface software shall simultaneously communicate with and share data between multiple Ethernet-connected building level networks.
3. The BAS application software must support the following standard protocols:

- a. BACnet IP (standard Revision 1.13)
- b. OPC (OLE for Process Control) OPC DA 2.05, 3.0
- c. Modbus TCP
- d. SNMP (Agent V1 and V2)

4. Any break in system controller communication must result in a notification at the server.

R. BACnet

1. The Operator Workstation Software shall be capable of BACnet IP communications.
2. The Operator Workstation Software shall have demonstrated interoperability during at least one BTL Interoperability Workshop.
3. The Operator Workstation Software shall have demonstrated compliance to BTL B-AWS device classification through BTL listing as specified in ANSI/ASHRAE 135 under revision 1.13 or higher.
4. The BAS software shall meet the BACnet device profile of an Advanced Workstation Server (B-AWS) and Operator Workstation (B-OWS) and shall support the following BACnet BIBBs:

a. Data Sharing

- 1) DS-RP-A Data Sharing-ReadProperty-A

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 2) DS-RP-B Data Sharing-ReadProperty-B
- 3) DS-RPM-A Data Sharing-ReadPropertyMultiple-A
- 4) DS-RPM-B Data Sharing-ReadPropertyMultiple-B
- 5) DS-WP-A Data Sharing-WriteProperty-A
- 6) DS-WP-B Data Sharing-WriteProperty-B
- 7) DS-WPM-A Data Sharing-WritePropertyMultiple-A
- 8) DS-COV-A Data Sharing-ChangeofValue-A
- 9) DS-COVP-A Data Sharing – ChangeofValueProperty-A
- 10) DS-V-A Data Sharing - View - A
- 11) DS-AV-A Data Sharing - Advanced View - A
- 12) DS-M-A Data Sharing - Modify - A
- 13) DS-AM-A Data Sharing - Advanced Modify - A

b. Scheduling

- 1) SCHED-VM-A Scheduling-View and Modify-A
- 2) SCHED-AVM-A Scheduling-Advanced View and Modify-A
- 3) SCHED-WS-A Scheduling-Weekly Schedule-A

c. Alarm and Event Management

- 1) AE-N-A Alarm and Event-Notification-A
- 2) AE-ACK-A Alarm and Event-ACK-A
- 3) AE-LS-A Alarm and Event-LifeSafety - A
- 4) AE-VM-A Alarm and Event Management - View and Modify - A
- 5) AE-AVM-A Alarm and Event Management - Advanced View and Modify - A
- 6) AE-VN-A Alarm and Event Management - View Notifications - A
- 7) AE-AVN-A Alarm and Event Management - Advanced View Notifications - A

d. Trending

- 1) T-V-A Trending-Viewing and Modifying Trends-A
- 2) T-ATR-A Trending-Automated Trend Retrieval-A
- 3) T-AVM-A Trending-Advanced View and Modify -A

e. Network Management

- 1) NM-CE-A Network Management-Connection Establishment-A

f. Device Management

- 1) DM-DDB-A Device Management-Dynamic Device Binding-A
- 2) DM-DDB-B Device Management-Dynamic Device Binding-B
- 3) DM-DOB-A Device Management-Dynamic Object Binding-A
- 4) DM-DOB-B Device Management-Dynamic Object Binding-B
- 5) DM-DCC-A Device Management-DeviceCommunicationControl-A
- 6) DM-TM-A Device Management-Text Message-A

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 7) DM-MTS-A Device Management-Manual Time Synchronization-A
 - 8) DM-ATS-A Device Management-Automatic Time Synchronization-A
 - 9) DM-TS-A Device Management-TimeSynchronization-A
 - 10) DM-UTC-A Device Management-UTCTimeSynchronization-A
 - 11) DM-RD-A Device Management-ReinitializeDevice-A
 - 12) DM-BR-A Device Management-Backup and Restore-A
 - 13) DM-LM-A Device Management-List Manipulation-A
 - 14) DM-LM-B Device Management-List Manipulation-B
 - 15) DM-OCD-A Device Management-Object Creation and Deletion-A
 - 16) DM-ANM-A Device Management-Automatic Network Mapping-A
 - 17) DM-ADM-A Device Management-Automatic Device Mapping-A
5. The BAS Server and Workstations shall support the following Data Link Layers:
- a. BACnet IP Annex J
 - b. BACnet IP Annex J Foreign Device
 - c. ISO 8802-3, Ethernet (Clause 7)
6. The BAS Server and Workstations shall be able to interact with all of the BACnet objects in the controllers. In addition, the software shall be able to support the following objects as they relate to features in the workstation software:
- a. Calendar – Creatable, Deletable
 - b. Command – Creatable, Deletable
 - c. Event Enrollment – Creatable, Deletable
 - d. Notification Class – Creatable, Deletable
 - e. Schedule - Creatable, Deletable
7. The BAS Server and Workstations shall support transmitting and receiving segmented messages.
8. The BAS Server and Workstation shall have the capability to be the BACnet/IP Broadcast Management Device (BBMD) and support foreign devices.

2.5 WEB BASED OPERATOR INTERFACE SOFTWARE

- A. Provide a Web-based graphical interface that allows users to access the BAS data via the Internet, extranet, or Intranet (TCP/IP). The Web-based graphical interface shall use HTML-based pages to send and receive data directly from a network of BAS Field Panels to a Web browser.
- B. The web server shall support browser access via Microsoft Internet Explorer 6.0 (or later), Firefox, or any browser that supports the compatible plug-in.
 1. Cookies are allowed for compatibility
 2. Microsoft Java Applet (JVM) is allowed for compatibility
 3. Adobe Flash Player shall be allowed for compatibility
- C. The web server shall support access via handheld, web enabled devices through apps. The apps

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

shall be available for download from public sites, such as Blackberry App World or Android Market.

- D. If a field panel cannot serve up the graphics, then dedicated PC-based Web servers or separate “Web Appliance” devices may be allowed for this purpose.
- E. The Web server shall allow monitor and control of data in any field panels networked together on the same automation level TCP/IP Ethernet network.
 - 1. The Web server must provide a common alarm display that shows alarms in all field panels on the network.
 - 2. The Web server must be able to provide common graphics that simultaneously display the current value and status for points residing in multiple field panels.
 - 3. The Web server must be able to display daily mode schedules for points from multiple field panels simultaneously.
- F. Access to the Web interface shall be username and password protected. A user’s rights and privileges to database objects within the BAS shall be configurable on a per-user basis. An option shall exist to only allow users “read” access to BAS objects via the Web browser. Operator sessions shall be configurable for “auto-logout” after a designated period of user inactivity.
 - 1. A graphic selector list shall allow or limit the graphic displays that a user account has access to.
 - 2. The embedded Web server shall support an unlimited number of user accounts. A minimum of five concurrent user sessions shall be available for simultaneous operator access to the Web server’s pages.
 - 3. The embedded Web server shall be compatible with and allow coexistence within standard IT security policies and tools (e.g., Firewall protection).
- G. The embedded Web server shall provide the following functionality to users via Web browser, based on their access and privilege rights:
 - 1. Point Navigation – Provide a screen that allows users to see all of the points that are active in the system. The points shall include hardwired, software, schedules, trends, alarms and network setup.
 - a. The point navigation shall display the point name, descriptor, command priority, alarm status, and current value.
 - b. The user shall be able to run and print a pre-configured point log report through a web interface client that shows the point name, descriptor, command priority, alarm status, and current value.
 - c. The interface and report shall allow selection filter such that the operator can select or deselect the types of point that are visible.
 - 2. Alarm Display –displays current BAS alarms to which the user has access will be displayed. Users will be able to acknowledge active alarms, erase resolved alarms, and directly link to the Point Commanding feature.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. The alarm display must provide a filter that displays all alarms whether acknowledged or not.
 - b. The alarm display must provide a filter that displays only alarms that have not yet been acknowledged.
 - c. The alarm display must provide a persistent indication whenever there is one or more unacknowledged alarm in any connected field panel.
3. Point details – users will have access to point detail information including operational status, operational priority, physical address, and alarm limits, for point objects to which they have access rights.
4. Point Commanding – users will be able to override and command points they have access to via the Web browser interface.
5. Scheduling – allows operators, depending on their current user privileges, to override schedules selected by date, and to modify the properties of a selected schedule.
 - a. The scheduler display must be able to represent facility mode schedules in a graphical format.
6. Trend Data Report – allows users to run and print a pre-configured trend data report for historical data reporting, including a representation of the alarm status of the each point for each Trend sample. The report shall allow selection of individual points or wildcard selection of points.
 - a. Trend data shall be exportable to a data file, such as .csv or other comparable.
7. Network navigation - Provide a screen that allows users to navigate to the panels and terminal units via the network architecture.
- H. Graphic Displays – The BAS contractor shall provide a graphical display for each system that is controlled.
 1. Display of system graphics shall be available for viewing over the Web browser. Graphic displays will automatically refresh with the latest change of values. Users shall have the ability to command and override points directly from the graphic display as determined by their user accounts rights. The Graphic Display shall accommodate a minimum of 10 customized graphics.
 2. The Graphic Display shall accommodate the terminal unit graphics related to the Application Specific Controllers tied in to the Field Panels within the system.
- I. The web server shall be able to send SMTP text messages to notify users of alarm status. The owners shall provide a mail server and a connection port. SSL shall not be required.
- J. The operator shall be able to add modify and delete controller database program, including points, schedules, alarms, and trends.
 1. The operator shall be able to edit the custom program in the field panel that executes the sequences of operations, control loops and logic for the systems controlled.
 2. The operator shall be able to add terminal unit controllers that reside on field panel subnetworks.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- K. Internet connections, ISP services, as well as necessary firewalls or proxy servers shall be provided by the Owner as required to support the Web access feature. Coordinate networking, security, and user access to the Web Server interface with the Owner's IT representative.

2.6 ENERGY REPORTING AND DATA ANALYTICS SOFTWARE PLATFORM

A. Acceptable Manufacturers

- 1. Siemens Industry – Advantage Navigator Software

B. Acceptable Installers

- 1. Installer and programmers shall be factory trained representatives of the manufacturer of the software.

C. Provide software to accumulate, log, compile and display energy consumption data and related parameters and measures.

D. Provide an automated reporting software package which will allow utilization of data collected from a sub-metering system and data network. The system should address the following areas:

- 1. Utility bill tracking
- 2. Account tracking
- 3. Savings and analysis
- 4. Weather Data
- 5. Weather Normalization
- 6. Reporting
- 7. Interval data tracking including meters and equipment data
- 8. Automated Energy Star benchmarking and greenhouse gas emissions. Provides a portfolio Comparison and facility ratings trending. Ability to integrate with Energy Star Automated Benchmarking System and generate multi site Energy Star ranking reports as well as individual site trending of monthly Energy Star score.
- 9. Web-based hosted solution
- 10. Customization and Interfaces

E. The software shall integrate to devices provided in other sections of this specification. The contractor shall refer to other sections for the scope of the devices to be integrated into this software, including: [edit to match the project]

- 1. Division 23 Building Automation System
- 2. Division 23 Sequences of operations
- 3. Division 23 Gas sub meters
- 4. Division 23 Water sub meters
- 5. Division 23 Utility meters
- 6. Division 26 Electrical panel boards (if specified with smart meters)
- 7. Division 26 Lighting controls (based on networked to one location and data available via BACnet/IP protocol)
- 8. Division 26 Electric meters

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Coordinate networking, security, and user access to the Web Server interface with the customer's IT representative. Internet connections, ISP services, firewalls or proxy servers shall be provided by the owner as required to support the Web access feature.
- G. Functionality Requirements
 - 1. User Functionality
 - a. The system shall support multiple user roles in which permissions and access to functions can be defined on a customer basis as described in User Setup.
 - b. The system shall support a user licensing system.
 - 2. Reliability
 - a. The system shall have measures in place to ensure reliability. This includes but is not limited to 99.x% uptime, a backup of all databases, and redundant servers.
 - b. The system shall have a staging and quality control environment to ensure system reliability.
 - c. The hosting servers shall be on UPS power supply for a minimum of 100 minutes.
 - d. The hosting facility shall be monitored by personnel 24/7, including the facility, server hardware, and software applications.
 - e. The hosting facility shall demonstrate strict security access.
 - f. The hosting facility shall demonstrate that the servers operate in a well controlled and protected environment including temperature and humidity control, fire detection, water protection and server safe fire extinguishing.
 - 3. Development
 - a. The system shall have an continuous development process with ongoing version releases to support continual system enhancements and the addition of new features.
 - 4. Data Quality and Import / Export
 - a. They system must have measures in place to ensure the reliability and quality of data. This includes but is not limited to Automated Meter Reset Adjustment features.
 - b. The system shall have the ability to normalize data for weather by meeting ASHRAE VBDD (Variable-Based Degree Day) method
 - c. The system shall incorporate a staging environment and have a quality control process to ensure consistency and accuracy of data.
 - d. The system shall be able to support the import of data from external sources. This includes Utility Bill data – which shall be disaggregated and normalized, manual entry of data, and any interval trend data including meters and BAS points.
 - e. The system shall have the ability to receive and monitor data on a 1, 5, 15, 30, and 60-minute resolution.
 - f. The system shall have the ability to import and prorate utility bill data by calendar month.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- g. The system shall have an interface allowing users to manually enter data.
- h. The system shall have the ability to import any interval trend data including but not limited to meters and BAS points.
- i. The system shall provide external data accessibility through a REST (Representational State Transfer) API service.
- j. The system shall allow users to export data from the system.
- k. At the termination of the service, all data shall be owned by the customer

5. General Functionality

- a. Data within the energy management system shall be owned by the customer.
- b. The system shall have supported at least 1000 buildings in order to prove the scalability of the system.

H. Security

- 1. The application and database servers shall operate in a “demilitarized zone” (DMZ), meaning that the application is protected by firewalls from the internet as well as general access by the provider, software maker and the host’s intranet.
- 2. Passwords shall be disabled after 5 login attempts with incorrect password.
- 3. Passwords shall require a minimum of 6 characters
- 4. Data transfers between your PC / browser and Advantage Navigator shall be protected with 256-bit SSL encryption
- 5. The system shall use e-mail validation to reset a forgotten password
- 6. The system shall support the use of data validation certificates
- 7. The system shall support strong authentication via SMS one-time passwords

I. Reporting Requirements

- 1. The system shall provide the following ad-hoc reporting capabilities
 - a. The system shall allow data to be displayed in multiple chart types. At a minimum it shall support the following charts:
 - 1) Line
 - 2) Bar
 - 3) Stepped Area
 - 4) Area
 - 5) Carpet Plot (Ability to show each day on the x axis and each hour of the day on the y axis. Each cell provides an automated color coding that indicates the intensity of energy usage of the data point)
 - 6) Stepped line
 - b. The system shall allow multiple data points to be overlaid on a single chart.
 - c. The system shall allow the user to save any pre-configured ad-hoc reporting view.
 - d. The system shall allow the user to compare data sets between user selectable time frames using multiple meters including a rolling most recent period or a fixed period.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

e. Data Export

- 1) The system shall allow the user to export charts in graphical formats including but not limited to PNG, JPG or PDF.
- 2) The system shall allow the user to export charts in text format including but not limited to CSV.

f. Chart manipulation

- 1) The system shall allow the user to drag and drop data points.
- 2) The system shall allow the user to zoom in and zoom out on charts.
- 3) The system shall allow the user to view data in a tabular format.
- 4) The system shall allow the user to view at least four charts simultaneously.
- 5) The system shall allow multiple X or Y axis in a single chart.
- 6) The system shall allow the user to show/hide the X or Y axis.
- 7) The system shall allow the user to change the scale on the X or Y axis.
- 8) The system shall allow the user to select colors displayed in each chart.
- 9) The system shall allow the user to change the chart type.
- 10) The system shall allow the user to stack bar and area chart types.

2. The system shall provide the following reporting delivery capabilities:

- a. Report access via a web-based interface
- b. E-mailed delivery of standardized reports to the customer via a web-based scheduling interface
- c. Allow users to schedule recurring automated e-mail of standardized reports to an unlimited number of e-mail addresses
- d. Allow users to save report parameters for easy access of favorite reports

3. The system shall include the following report types and KPIs as listed in Report Types.
4. The system shall have Environmental Reporting including but not limited to EPA EGRID factors and manual entry of Emission Factors.
5. The system shall allow the user to export data and charts in HTML, XLS, CSV, PDF and PPT.
6. The system shall provide the ability to automate reporting on data quality issues

J. Technical Requirements

1. Remote Access

- a. The system shall provide secure remote access that is Certified ISO / IEC 27001.

2. Management Dashboard

- a. Google Maps with integrated Geo Pin functionality allowing the user to Toggle KPIs Geo Pin Location based on at least three color coded thresholds definable per individual location
- b. A site ranking system based on energy use index (EUI), energy cost index (ECI), CO2 per square foot, energy consumption versus prior year, cost versus prior year,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

CO2 versus prior year, energy consumption versus budget, energy star score ranking

- c. The dashboard shall provide the ability to trend data over time

3. User Interface

- a. The system shall be hosted in a centrally located data center.
- b. The system shall be accessible via a web browser.
- c. The system shall allow unlimited concurrent users.
- d. The system shall allow administrators to assign different security access by user role as specified in User Setup.
- e. The system shall provide a tree view system supporting multiple tree view structures and orientations.
- f. The system shall support a tree view system at least six levels deep.
- g. The system shall support property inheritance of tree node properties.

4. Language Requirements

- a. The system shall support at least 20 languages.
- b. The system shall support 2 bit (nvar) characters.
- c. The system shall support languages left to right and right to left as necessary.

5. Unit Requirements

- a. The system shall support both Imperial and Metric units.
- b. The system shall allow the user to toggle units for select reports.

6. General Technical Requirements

- a. The system shall allow the software setup and configuration process to be conducted all through a web based interface without any non-web based tools required.
- b. The system shall allow aggregation through property inheritance in tree structure for knowledge meters.
- c. The system shall support properties of a building showing both square feet and geo coordinates.
- d. The system shall support the ability to track consumption and cost budgets versus actual.
- e. The system shall support the ability to track consumption and cost baseline versus actual. This provides the ability to compare energy consumption and cost against a baseline
- f. The system shall provide the ability to display on and off peak usage, day vs. night usage, demand charges, customer charges based on actual rate tariff.
- g. The system shall provide average cost of consumption.

K. User Setup

- 1. The system shall provide capability to set up specific users with corresponding capabilities according to need or security. At minimum provide the following setup

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

types:

a. Super User

- 1) The Super User shall have all rights and access to all functions that are offered by the software application. Only one user per customer may have this role. However, the Super User will be able to Add Super User Substitutes who automatically have the same rights as the actual Super User.

b. Partner User

- 1) Super Users may Add Partners. The partner role enables Super Users to delegate entire branches (e.g. a building pool) of their tree view to a partner (e.g. to a regional manager within the same organization, or to an external facility management service provider). This gives the Partner User full access rights for the node assigned to him or her, including all of the lower-level nodes and meters it contains.
- 2) The Partner User has the same rights as the Super User on the delegated node, but can only display the part of the tree view assigned to him or her. The Partner User has an own user management facility, and is therefore able to Add new users (of type Basic User and Advanced User, see next page) and assign nodes to them (within the given part of the tree view).
- 3) Such Partner Users are invisible to Super Users outside of the partner company. Like the Super User, Partner Users can Add Super User Substitutes but they do not have the authorization to add additional Partners.

c. Advanced User

- 1) Each node in the tree view (site, building, etc.) can be assigned to an Advanced User who has the following rights:
 - a) Reading rights - Example: generate and subscribe to reports, display meter lists
 - b) Writing rights - Example: Add new buildings and meters, or enter metering data
- 2) Deleting rights - Example: delete values, meters or nodes for which the user is the contact person. Note: When a User deletes a meter, the meter and all entered values are automatically moved to the "deleted meters" node (the Super User's "recycle bin"). Therefore, the Super User has the possibility to finally delete meters, or to restore them.

d. Basic User

- 1) Alternatively, each node can be assigned to a Basic User who has the following rights:
 - a) Reading rights - Example: generate and subscribe to reports, display meter lists

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b) Writing rights - Enter and edit meter readings only (no meter exchange)
- c) Deleting rights - Delete individual meter readings only

L. Report Types

1. The software shall support the following report types:

a. Load Profiles (Arrangement of all load levels over time)

- 1) Daily Max kW
- 2) Monthly Max kW
- 3) # of Occ. Of peak load
- 4) Trend of a single KPI
- 5) Daily Avg kW
- 6) Demand
- 7) Monthly Avg kW
- 8) Daily Total kWh
- 9) Gas
- 10) Monthly Total kWh
- 11) Daily Avg kWh
- 12) Monthly Avg kWh
- 13) On Peak
- 14) Temperatures
- 15) Off Peak
- 16) % Breakdown by load
- 17) Chilled Water
- 18) Flow
- 19) Frequency (Any trend data from a BAS System)

b. Operational Analysis

- 1) Daily Max
- 2) Daily Min
- 3) Total usage
- 4) Daily Avg Usage

c. Performance Indicators

- 1) Opportunity Score - Ranked by opportunity to reduce energy use
- 2) Target Energy Use Intensity

d. Consumption

- 1) Daily Max
- 2) Total portfolio energy usage
- 3) Total portfolio emissions usage
- 4) Electricity
- 5) Absolute and pct breakdown of energy usage (electricity)

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 6) Spikes
- 7) Total and Average (electricity)
- 8) Total
- 9) Total portfolio cumulative energy usage
- 10) Daily Min
- 11) Energy Use Intensity
- 12) Emissions Use Intensity
- 13) Demand
- 14) Gas
- 15) Average and r-value correlation (Electricity vs. outside air temp)
- 16) Total usage
- 17) Average energy usage
- 18) Average emissions usage
- 19) Steam
- 20) Gaps and missing data
- 21) Daily Avg Usage
- 22) Fuel
- 23) Temperatures
- 24) Fuel / Oil
- 25) Chilled Water
- 26) Flow
- 27) Target Energy Use Intensity
- 28) Yearly Energy use intensity
- 29) Prior Yr Abs Deviation
- 30) Prior Yr Abs Deviation
- 31) Prior Yr % Deviation

e. Emissions

- 1) Total portfolio emissions usage
- 2) Emissions Use Intensity
- 3) Average emissions usage

f. Chilled Water Reports

- 1) Daily Max tons
- 2) Total usage
- 3) Daily Avg tons
- 4) Daily Total ton-hr
- 5) Daily Avg ton-hr
- 6) On Peak
- 7) Off Peak
- 8) % Breakdown by load

g. Energy Budgeting

- 1) Electricity
- 2) Demand

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 3) Gas
- 4) Temperatures
- 5) Fuel / Oil
- 6) Chilled Water
- 7) Budget
- 8) Deviation absolute
- 9) Deviation % (Ability generate a report with multiple sites and rank by % deviation from a budget)

h. Cost Analysis / Budgeting

- 1) Total portfolio energy cost
- 2) Energy cost Intensity
- 3) Average energy cost
- 4) Electricity
- 5) Demand
- 6) Gas
- 7) Chilled Water
- 8) Budget
- 9) Deviation absolute
- 10) Deviation %

i. Chiller Plant Optimization (if such as system is included in the project)

- 1) Plant Efficiency (kW/Ton)
- 2) Target Savings
- 3) Actual Savings
- 4) Total Operating Hours
- 5) Total Chilled Water usage
- 6) Savings: Actual vs. Predicted

j. Site ranking by customized building attributes

- 1) Energy use index (EUI)
- 2) Energy cost index (ECI)
- 3) Total CO2
- 4) Energy consumption versus prior year
- 5) Cost versus prior year
- 6) Energy consumption versus budget
- 7) Energy cost versus budget
- 8) Energy star score

2.7 WEB BASED CONTROLLER SOFTWARE FOR CONFIGURATION, PROGRAMMING AND OPERATORS

- A. The purpose of this specification is to allow the Owner/Operator to have the same controller programming capabilities as the Controls Contractor Technician without additional software,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

tools, or licenses.

1. The controller programming shall be accessible to any user via a Web Services application over an IP or Internet connection through port 80.
- B. The following types of controllers shall have this feature:
 1. All BACnet BC level controllers
 2. Network Engine Controllers
 3. Controllers on equipment or sequences customized for this job
- C. Manufacturer:
 1. Siemens Launch Pad™ (compatible with PXC controllers with 3.2.5 firmware)
 2. Controllers from other manufacturers shall meet the capabilities of this specification
- D. The controller shall come with the software built-in and delivered with the controller as part of the controller purchase. It shall not require a separate software license to enable the software capability.
 1. The software shall be provided as an integral part of DDC Controllers and shall not be dependent upon any higher level computer or another controller for execution.
- E. The software application shall be accessible from a PC using Web Services, but shall use all of its own services and data files so as to not be susceptible to Microsoft Windows operating systems based viruses.
- F. Access to the controller software shall be username and password protected. User shall be authenticated by the controller.
- G. The embedded Web Services shall provide the following functionality to users, based on their access and privilege rights:
 1. Point Navigation – Provide a screen that allows users to see all of the points that are active in the system. The points shall include hardwired, software, schedules, trends, alarms and network setup.
 - a. The point navigation shall display the point name, descriptor, command priority, alarm status, and current value.
 - b. The user shall be able to run and print a pre-configured point log report through a web interface client that shows the point name, descriptor, command priority, alarm status, and current value.
 - c. The interface and report shall allow selection filter such that the operator can select or deselect the types of point that are visible.
 2. Alarm Display –displays current BAS alarms to which the user has access will be displayed. Users will be able to acknowledge active alarms, erase resolved alarms, and directly link to the Point Commanding feature.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. The alarm display must provide a filter that displays all alarms whether acknowledged or not.
 - b. The alarm display must provide a filter that displays only alarms that have not yet been acknowledged.
 - c. The alarm display must provide a persistent indication whenever there is one or more unacknowledged alarm in any connected field panel.
3. Point details – users will have access to point detail information including operational status, operational priority, physical address, and alarm limits, for point objects to which they have access rights.
4. Point Commanding – users will be able to override and command points they have access to via the Web browser interface.
5. Scheduling – allows operators, depending on their current user privileges, to override schedules selected by date, and to modify the properties of a selected schedule.
 - a. The scheduler display must be able to represent facility mode schedules in a graphical format.
6. Trend Data Report – allows users to run and print a pre-configured trend data report for historical data reporting, including a representation of the alarm status of the each point for each Trend sample. The report shall allow selection of individual points or wildcard selection of points.
 - a. Trend data shall be exportable to a data file, such as .csv or other comparable.
7. Network navigation - Provide a screen that allows users to navigate to the panels and terminal units via the network architecture.
- H. The web server shall be able to send SMTP text messages to notify users of alarm status. The owners shall provide a mail server and a connection port. SSL shall not be required.
- I. The operator shall be able to add modify and delete controller database program, including points, schedules, alarms, and trends.
 1. The operator shall be able to edit the custom program in the field panel that executes the sequences of operations, control loops and logic for the systems controlled.
 2. The operator shall be able to add terminal unit controllers that reside on field panel subnetworks.
- J. Internet connections, ISP services, as well as necessary firewalls or proxy servers shall be provided by the Owner as required to support the Web access feature.
- K. Coordinate with the Owner/Operator's IT representatives to setup and allow access to controllers via IP connections and Web Services through port 80.
 1. It shall be the responsibility of the Owner/IT to setup and maintain security for user access to the private networks.
 2. Coordinate IP addressing scheme.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.8 CONTROL PANEL GRAPHICAL TOUCHSCREEN INTERFACE

- A. Manufacturer: Siemens
 - 1. Basis of design – Siemens Apogee Facility Prime™
- B. Provide a device that can see system graphics and data without connecting to a BAS Server, Web server, network controller or any intermediary device. The device shall communicate directly with the controller to operate the systems that are on that controller and its sub-networked devices.
- C. Provide an iPad and native iPad iOS application to directly communicate with BACnet/IP and/or Siemens APOGEE P2 Ethernet field panels. Software connection through a web browser is not acceptable.
- D. iPad and application shall connect to the DDC panel via:
 - 1. The site's WiFi (802.11 a/b/g/n) network (Site Wi-Fi network shall be provided/managed by the Owner) or
 - 2. Remote cellular connection via the customer's VPN access or
 - 3. For additional cost, a dedicated WiFi network connected to the DDC controller can be requested by the Owner.
- E. The application shall have the following capabilities as a minimum
 - 1. Graphical view of real time environmental conditions and linked HVAC equipment
 - 2. Graphical animation by displaying different image files for changed object status
 - 3. "View only" capability requiring no logon once application has been opened.
 - 4. Application can stay open and active without user interaction or time-out.
 - 5. A reporting function must capture current information shown on the graphical view and save the image as a PDF file and/or attach it to an email.
 - 6. Charts: A Charts tab shall provide key information, such as current or historical values plotted as scatter, bar, or pie charts.
 - 7. After proper access credentials are authenticated between the DDC control panel and the User, a User can command points (e.g. data values and device settings) and equipment.
 - 8. Commands logging: The BAS that is supervising the DDC controller must be able to log the User's activity within the BAS Server, even when commands are made on the iPad Application.
 - 9. Users must be able to navigate the graphics using custom links, from a menu list, or by scanning QR codes.
 - 10. Alarm Indication and Acknowledgment – must allow for display of points in alarm, both unacknowledged and acknowledged. Acknowledgement of alarm conditions from within the application is required.
- F. QR Code Application: The application shall be compatible with a QR Code reading application. QR Code reading shall be able to hyperlink to graphics and data associated with that QR Code.
- G. Editing Tool: An optional Editing Tool must be able to be purchased by the Owner. It shall

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

operate within the application to create and manage graphics. The Tool must include the following:

1. Graphical elements library including gauges, sensors, trends, point blocks, command buttons, embedded documents, and imported images.
 2. Ability to import documents, photos, and images to be used in graphics.
 3. Ability to link elements to graphics by entering point address information or by utilizing browser and auto-discover sequences.
 4. Capability to transfer graphics to other iPads
- H. Contractor shall coordinate with Owner to purchase and load application onto iPad via Owner designated iTunes account per Apple© Terms and Conditions.
- I. Contractor shall spend three days with Owner to assist with initial setup, provide initial graphics/monitoring/control functions, and training on all aspects of the application
- J. Contractor shall carry the cost of the application, an iPad (wi-fi + cellular) and any interface devices required to communicate with the BAS
- K. Cellular data plan shall be provided by Owner as needed

2.9 DIRECT DIGITAL CONTROLLER SOFTWARE

- A. Provide a full capability user license to the owner for the operator to be able to see, modify, create, upload, download and save control programs to the DDC controllers.
- B. The software program shall be provided as an integral part of DDC Controllers and shall not be dependent upon any higher level computer or another controller for execution.
- C. The software application shall be accessible from a PC using the Windows environment, but shall use all of its own services and data files so as to not be susceptible to Microsoft Windows operating systems based viruses.
- D. The software shall be provided with an interactive HELP function to assist operators with syntax, abbreviations, commands and saving programs.
- E. Point naming and communication format:
1. All points, panels, and programs shall be identified by a 30-character name. All points shall also be identified by a 16-character point descriptor. The same names shall be displayed at both Building Controller and the Operator Interface.
 2. All digital points shall have a consistent, user-defined, two-state status indication with 8 characters minimum (e.g., Summer, Enabled, Disabled, Abnormal).
 3. The Building Controller Software shall be capable of BACnet communications. The BACnet Building Controller (B-BC) shall have demonstrated interoperability during at least one BTL Interoperability Workshop, have demonstrated compliance to BTL through BTL listing and shall substantially conform to BACnet Building Controller (B-BC) device profile as specified in ANSI/ASHRAE 135-2004, Annex L.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

F. System Security

1. User access shall be secured using individual security passwords and user names.
2. Passwords shall restrict the user to the objects, applications, and system functions as assigned by the system manager.
3. Building Controllers shall be able to assign a minimum of 50 passwords access and control priorities to each point individually. The logon password (at any Operator Interface or portable operator terminal) shall enable the operator to monitor, adjust and control only the points that the operator is authorized for. All other points shall not be displayed at the Operator Interface or portable terminal. Passwords and priorities for every point shall be fully programmable and adjustable.
4. User Log On/Log Off attempts shall be recorded.
5. The system shall protect itself from unauthorized use by automatically logging off following the last keystroke. The delay time shall be user-definable.
6. Use of workstation resident security as the only means of access control is not an acceptable alternative to resident system security in the DDC controller software.

G. User Defined Control Applications: The applications software shall program DDC routines to meet the sequences of operations.

1. Building Controllers shall have the ability to perform energy management routines including but not limited to time of day scheduling, calendar-based scheduling, holiday scheduling, temporary schedule overrides, start stop time optimization, automatic daylight savings time switch over, night setback control, enthalpy switch over, peak demand limiting, temperature-compensated duty cycling, heating/cooling interlock, supply temperature reset, priority load shedding, and power failure restart.
2. The Building Controllers shall have the ability to perform the following pre tested control algorithms:
 - a. Two position with differential control and time delays
 - b. Floating control
 - c. Proportional control
 - d. Proportional plus integral control
 - e. Proportional, integral, plus derivative control
 - f. Automatic tuning of control loops
 - g. Model-free adaptive control
 - h. Start Stop Time Optimization
3. Controllers shall be able to execute custom, job-specific processes defined by the user, to automatically perform calculations and special control routines.
4. Each controller shall support plain language text comment lines in the operating program to allow for quick troubleshooting, documentation, and historical summaries of program development.

H. Peer-to-peer access to other DDC controllers

1. It shall be possible to use any actual or virtual point data or status, any system calculated data, a result from any process, or any user-defined constant in any controller in the

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

system.

2. Any process shall be able to issue commands to points in any and all other controllers in the system.
3. Processes shall be able to generate operator messages and advisories to other operator I/O devices. A process shall be able to directly send a message to a specified device or cause the execution of an advanced annunciation feature, such as:
 - a. Generate a report
 - b. Annunciate an alarm
 - c. Issue a text message or email

I. Alarm Management

1. Alarm management shall be provided within the controller software to monitor and direct alarm information to operator devices.
2. Each Building Controller shall perform distributed, independent alarm analysis, minimize network traffic and prevent alarms from being lost. At no time shall the Building Controllers ability to report alarms be affected by either operator or activity at a PC workstation, local I/O device or communications with other panels on the network.
3. Conditional alarming shall allow generation of alarms based upon user defined multiple criteria.
4. An Alarm “shelving” feature shall be provided to disable alarms during testing. (Pull the Plug, etc.).
5. Binary Alarms. Each binary alarm object shall be set to alarm based on the operator-specified state. Provide the capability to automatically and manually disable alarming.
6. Analog Alarms. Each analog alarm object shall have both high and low alarm limits. Alarming must be able to be automatically and manually disabled.
7. All alarm shall include the point's user-defined language description and the time and date of occurrence.
8. Alarm reports and messages shall be routed to user-defined list of operator workstations, or other devices based on time and other conditions. An alarm shall be able to start programs, print reports, be logged in the event log, generate custom messages, and display graphics.
9. The user shall be able to add a 200-character alarm message to each alarm point to more fully describe the alarm condition or direct operator response. Each Building Controller shall be capable of storing a library of at least 50 alarm messages. Each message may be assigned to any number of points in the Controller.
10. Operator-selected alarms shall be capable of initiating a trigger to an advanced annunciation, such as text, email, etc.
11. An alarm history log shall report the start of the alarm condition, acknowledgement by a user and return of the alarm to normal condition.

J. Scheduling:

1. Provide a comprehensive menu driven program to automatically start and stop designated multiple objects or events in the system according to a stored time.
2. Schedules shall reside in the building controller and shall not rely on external processing or network.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. It shall be possible to define a group of objects as a custom event (i.e., meeting, athletic activity, etc.). Events can then be scheduled to operate all necessary equipment automatically.
 4. For points assigned to one common load group, it shall be possible to assign variable time delays between each successive start and/or stop within that group.
 5. The operator shall be able to define the following information:
 - a. Time, day
 - b. Commands such as on, off, auto, etc.
 - c. Time delays between successive commands.
 - d. There shall be provisions for manual overriding of each schedule by an authorized operator.
 6. It shall be possible to schedule calendar-based events up to one year in advance based on the following:
 - a. Weekly Schedule. Provide separate schedules for each day of the week. Each of these schedules should include the capability for start, stop, optimal start, optimal stop, and night economizer. When a group of objects are scheduled together as an Event, provide the capability to adjust the start and stop times for each member.
 - b. Exception Schedules. Provide the ability for the operator to designate any day of the year as an exception schedule. Exception schedules may be defined up to a year in advance. Once an exception schedule is executed, it will be discarded and replaced by the standard schedule for that day of the week.
- K. Peak Demand Limiting (PDL):
1. The Peak Demand Limiting (PDL) program shall limit the consumption of electricity to prevent electrical peak demand charges.
 2. PDL shall continuously track the amount of electricity being consumed, by monitoring one or more electrical kilowatt-hour/demand meters. These meters may measure the electrical consumption (kWh), electrical demand (kW), or both.
 3. PDL shall sample the meter data to continuously forecast the demand likely to be used during successive time intervals.
 4. If the PDL forecasted demand indicates that electricity usage is likely to exceed a user preset maximum allowable level, then PDL shall automatically shed electrical loads.
 5. Once the demand peak has passed, loads that have been shed shall be restored and returned to normal control.
- L. Temperature-compensated duty cycling
1. User defined conditions shall be able to initiate a Duty Cycle Control Program.
 2. The Duty Cycle Control Program (DCCP) shall be configured to periodically stop and start loads according to various patterns.
 3. The loads shall be cycled such that there is a net reduction in both the electrical demands and the energy consumed.
- M. Automatic Daylight Savings Time Switchover. The system shall provide automatic time

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

adjustment for switching to/from Daylight Savings Time.

- N. Night setback control. The system shall provide the ability to automatically adjust setpoints for night control.
- O. Enthalpy switchover (economizer). The Building Controller Software (BCS) shall control the position of the air handler relief, return, and outside air dampers. If the outside air dry bulb temperature falls below changeover setpoint the BCS will modulate the dampers to provide 100 percent outside air. The user will be able to quickly change over to an economizer system based on dry bulb temperature and will be able to override the economizer cycle and return to minimum outside air operation at any time.
- P. Control Loop Algorithm
 - 1. Provide a PID (proportional-integral-derivative) closed-loop control algorithm with direct or reverse action and anti-windup. The algorithm shall calculate a time-varying analog value that is used to position an output or stage a series of outputs. The controlled variable, setpoint, and weighting parameters shall be accessible from the operator workstation.
- Q. Adaptive Loop Tuning
 - 1. Building Controllers shall also provide high resolution sampling capability for verification of DDC control loop performance. Documented evidence of tuned control loop performance shall be provided on a monthly, seasonal, quarterly, annual period.
 - 2. For Model-Free Adaptive Control loops, evidence of tuned control loop performance shall be provided via graphical plots or trended data logs. Graphical plots shall minimally include depictions of setpoint, process variable (output), and control variable (e.g., temperature). Other parameters that may influence loop control shall also be included in the plot (e.g., fan on/off, mixed-air temp).
 - 3. For PID control loops, operator-initiated automatic and manual loop tuning algorithms shall be provided for all operator-selected PID control loops. Evidence of tuned control loop performance shall be provided via graphical plots or trended data logs for all loops.
 - a. In automatic mode, the controller shall perform a step response test with a minimum one-second resolution, evaluate the trend data, calculate the new PID gains and input these values into the selected LOOP statement.
 - b. Loop tuning shall be capable of being initiated either locally at the Building Controller, from a network workstation or remotely using dial-in modems. For all loop tuning functions, access shall be limited to authorized personnel through password protection.
- R. Logic programming: Provide a software routine that can build ladder logic to control using many conditional statements.
 - 1. The logic programming syntax shall be able to combine ladder logic with other software features, such as combining status, scheduling, PDL and alarm conditions into one conditional decision.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Logic programming shall be able to reference conditions in any other controller in the system.

S. Staggered Start:

1. This application shall prevent all controlled equipment from simultaneously restarting after a power outage. The order in which equipment (or groups of equipment) is started, along with the time delay between starts, shall be user definable in an application and shall not require written scripts or ladder logic.
2. Upon the resumption of power, each Building Controller shall analyze the status of all controlled equipment, compare it with normal occupancy scheduling and turn equipment on or off as necessary to resume normal operations.

T. Totalization Features:

1. Run-Time Totalization. Building Controllers shall automatically accumulate and store run-time hours for all digital input and output points. A high runtime alarm shall be assigned, if required, by the operator.
2. Consumption totalization. Building Controllers shall automatically sample, calculate and store consumption totals on a daily, weekly or monthly basis for all analog and digital pulse input type points.
3. Event totalization. Building Controllers shall have the ability to count events such as the number of times a pump or fan system is cycled on and off. Event totalization shall be performed on a daily, weekly or monthly basis for all points. The event totalization feature shall be able to store the records associated with events before reset.

U. Data Collection:

1. A variety of historical data collection utilities shall be provided to manually or automatically sample, store, and display system data for all points.
2. Building Controllers shall store point history data for selected analog and digital inputs and outputs:
3. Any point, physical or calculated may be designated for trending. Any point, regardless of physical location in the network, may be collected and stored in each Building Controllers point group.
4. Two methods of collection shall be allowed: either by up to four pre-defined time intervals or upon a pre-defined change of value. Sample intervals of 1 minute to 7 days shall be provided.
5. Each Building Controller shall have a dedicated RAM-based buffer for trend data and shall be capable of storing a minimum of 10,000 data samples.
6. Trend data shall be stored at the Building Controllers and uploaded to the workstation when retrieval is desired. Uploads shall occur based upon either user-defined interval, manual command or when the trend buffers are full. All trend data shall be available for use in third-party personal computer applications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.10 BACNET BUILDING CONTROLLERS

- A. Provide all necessary hardware for a complete operating system as required. The Building Controller shall be able to operate as a standalone panel and shall not be dependent upon any higher level computer or another controller for operation.
- B. Basis of design is Siemens PX Modular and Compact Controllers (PXC).
- C. This controller shall have the BTL listing and meet the BACnet device profile of a Building Controller (B-BC) and shall support the following BACnet BIBBs:
 - 1. Data Sharing
 - a. Data Sharing-Read Property-Initiate, Execute (DS-RP-A,B)
 - b. Data Sharing-Read Property Multiple- Initiate, Execute (DS-RPM-A,B)
 - c. Data Sharing-Write Property- Initiate, Execute (DS-WP-A,B)
 - d. Data Sharing-Write Property Multiple- Execute (DS-WPM-B)
 - e. Data Sharing-COV- Initiate, Execute (DS-COV-A,B)
 - f. Data Sharing-COV-Unsolicited- Initiate, Execute (DS-COVU-A,B)
 - 2. Scheduling
 - a. Scheduling-Internal- Execute (SCHED-I-B)
 - b. Scheduling-External- Execute (SCHED-E-B)
 - 3. Trending
 - a. Trending-Viewing and Modifying Trends - Initiate (T-VMT-A)
 - b. Trending-Viewing and Modifying Trends Internal- Execute (T-VMT-I-B)
 - c. Trending-Viewing and Modifying Trends-External- Execute (T-VMT-E-B)
 - d. Trending-Automated Trend Retrieval- Execute (T-ATR-B)
 - 4. Network Management
 - a. Network Management-Connection Establishment- Initiate (NM-CE-A)
 - 5. Alarming
 - a. Alarm and Event-Notification- Initiate (AE-N-A)
 - b. Alarm and Event-Notification Internal- Execute (AE-N-E-B)
 - c. Alarm and Event-Notification External- Execute (AE-N-E-B)
 - d. Alarm and Event-ACK- Initiate, Execute (AE-ACK-A,B)
 - e. Alarm and Event –Alarm Summary- Execute (AE-ASUM-B)
 - f. Alarm and Event –Enrollment Summary- Execute (AE-ESUM-A,B)
 - g. Alarm and Event –Information- Initiate, Execute (AE-ESUM-A,B)
 - 6. Device Management
 - a. Device Management-Dynamic Device Binding- Initiate, Execute (DM-DDB-A,B)

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Device Management-Dynamic Object Binding- Initiate, Execute (DM-DOB-A,B)
 - c. Device Management-Device Communication Control- Execute (DM-DCC-B)
 - d. Device Management-Private Transfer- Initiate, Execute (DM-PT-A,B)
 - e. Device Management-Text Message- Initiate, Execute (DM-TM-A,B)
 - f. Device Management-Time Synchronization- Execute (DM-TS-B)
 - g. Device Management-Reinitialize Device- Execute (DM-RD-B)
 - h. Device Management-Backup and Restore- Execute (DM-RD-B)
 - i. Device Management-List Manipulation- Execute (DM-RD-B)
 - j. Device Management-Object Creation and Deletion- Execute (DM-OCD-B)
 7. The Building Level Controller shall support the following Data Link Layers:
 - a. BACnet IP Annex J
 - b. BACnet IP Annex J Foreign Device
 - c. MS/TP Master (Claus 9)
 8. The Building Level Controller shall be able to interact with all of the BACnet objects in the controllers. In addition, the software shall be able to support the following objects as they relate to features in the workstation software:
 - a. Calendar – Creatable, Deletable
 - b. Command – Creatable, Deletable
 - c. Event Enrollment – Creatable, Deletable
 - d. Notification Class – Creatable, Deletable
 - e. Schedule - Creatable, Deletable
 9. The Building Level Controller shall support transmitting and receiving segmented messages.
 10. The Building Level Controller shall have the capability to be the BACnet/IP Broadcast Management Device (BBMD) and support foreign devices.
 11. The Building Level Controller shall have the capability to act as a BACnet router between MS/TP subnetworks and BACnet/IP.
- D. This level of controller shall be used for the following types of systems:
1. Chiller plant systems
 2. Heating plant systems
 3. Pumping systems
 4. VAV air handlers
 5. Air handlers over 15,000 cfm
 6. Systems with over 24 input/output points
 7. Rooftop systems
- E. Computing power and memory minimum:
1. A 32-bit, stand-alone, multi-tasking, multi-user, real-time 100MHz digital control microprocessor module.
 2. Inputs shall be 16-bit minimum analog-to-digital resolution

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Outputs shall be 10-bit minimum digital-to-analog resolution
4. Memory module (24 Megabyte, minimum) to accommodate all Primary Control Panel software requirements, including but not limited to, its own operating system and databases (see Controllers Software section), including control processes, energy management applications, alarm management applications, historical/trend data for points specified, maintenance support applications, custom processes, operator I/O, dial-up communications.
5. Real time clock and battery
6. Data collection/ Data Trend module sized for 10,000 data samples.
7. Flash Memory Firmware: Each Building Level Control Panel shall support firmware upgrades without the need to replace hardware.

F. Onboard or Modular hardware and connections:

1. Primary Network communication module, if needed for primary network communications.
2. Secondary Network communication module, if needed for secondary network communications.
3. RJ45 port 10/100Mbaud
4. RS485 ports for subnetworks and point expansion
5. Man to Machine Interface port (MMI)
6. USB Port
7. Wireless Mesh Network Floor Level communication ability
8. Local Controller Interface. A local user interface to the controller shall be provided. The interface shall be hot swappable and may be mounted on any building controller and automatically read and initiate commands of local database points without further set-up or configuration. The Controller Interface shall be provided for interrogating and editing data, commanding point values at user defined priorities, viewing and acknowledging alarms, and viewing point monitoring reports. An optional system security password shall be available to prevent unauthorized use of the local controller interface and display.

G. Input and Output Points Hardware

1. Input/output point modules as required including spare capacity.
2. Input/output point modules shall have removable terminal blocks.
3. Monitoring of the status of all hand-off-auto switches.
4. Monitoring of all industry standard types of analog and digital inputs and outputs, without the addition of equipment to the primary control panel.
5. Local status indication for each digital input and output for constant, up-to-date verification of all point conditions without the need for an operator I/O device. Each primary control panel shall perform diagnostics on all inputs and outputs and a failure of any input or output shall be indicated both locally and at the operator workstation.
6. Graduated intensity LEDs or analog indication of value for each analog output.
7. Optional HOA (hand-off-auto module) with software configurability and LED status indicators.

H. Code compliance

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Approvals and standards: UL916; CE; FCC
 2. Provide UL864-UUKL where called for in the sequences of operations.
- I. Accessories:
1. Appropriate NEMA rated metal enclosure.
 2. Power supplies as required for all associated modules, sensors, actuators, etc.
- J. The operator shall have the ability to manually override automatic or centrally executed commands at the primary control panels via local, point discrete, on-board hand/off/auto operator override switches. If on board switches are not available, provide separate control panels with HOA switches. Mount panel adjacent to primary control panel. Provide hand/off/auto switch for each digital output, including spares.
- K. Each Building Level Control Panel shall continuously perform self-diagnostics on all hardware modules and network communications. The System Level Control Panel shall provide both local and remote annunciation of any detected component failures, low battery conditions or repeated failure to establish communication with any system.
- L. Panel setup, point definitions and sequencing diagrams shall be backed up on EEPROM memory.
- M. Power loss. In the event of the loss of power, there shall be an orderly shutdown of all Building Controllers to prevent the loss of database or operating system software. Non-volatile memory shall be incorporated for all critical controller configuration data and battery backup shall be provided to support the real-time clock and all volatile memory for a minimum of 30 days.
- N. Building Level control panels shall provide at least two serial data communication ports for operation of operator I/O devices such as industry standard printers, operator terminals, modems and portable laptop operator's terminals. Primary control panels shall allow temporary use of portable devices without interrupting the normal communications, operation of permanently connected modems, printers or terminals.
- O. Building Level Controllers shall have the capability to serve as a gateway between Modbus subnetworks and BACnet objects. Provide software, drives and programming.
- P. Isolation shall be provided at all primary control panel terminations, as well as all field point terminations to suppress induced voltage transients consistent with IEEE Standards 587-1980.
- Q. Spare Capacity: Provide enough inputs and outputs to handle the equipment shown to be "future" on drawings and 10% more of each point type. Provide all hardware modules, software modules, processors, power supplies, communication controllers, etc. required to ensure adding a point to the spare point location only requires the addition of the appropriate sensor/actuator and field wiring/tubing.
- R. Environment.
1. Controller hardware shall be suitable for the anticipated ambient conditions.
 2. Controllers used outdoors and/or in wet ambient conditions shall be mounted within

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- waterproof enclosures and shall be rated for operation at 0°C to 49°C (32°F to 120°F).
3. Controllers used in conditioned space shall be mounted in dust-proof enclosures and shall be rated for operation at 0°C to 49°C (32°F to 120°F).
 4. Controller hardware shall be optionally suitable for rooftop environments.
- S. Immunity to power and noise.
1. Controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage.
 2. Operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
 3. Isolation shall be provided at all primary network terminations, as well as all field point terminations to suppress induced voltage transients consistent with:
 - a. RF-Conducted Immunity (RFCI) per ENV 50141 (IEC 1000-4-6) at 3V.
 - b. Electro Static Discharge (ESD) Immunity per EN 61000-4-2 (IEC 1000-4-2) at 8 kV air discharge, 4 kV contact.
 - c. Electrical Fast Transient (EFT) per EN 61000-4-4 (IEC 1000-4-4) at 500V signal, 1 kV power.
 - d. Output Circuit Transients per UL 864 (2,400V, 10A, 1.2 Joule max).
 4. Isolation shall be provided at all Building Controller's AC input terminals to suppress induced voltage transients consistent with:
 - a. IEEE Standard 587 1980
 - b. UL 864 Supply Line Transients
 - c. Voltage Sags, Surge, and Dropout per EN 61000-4-11 (EN 1000-4-11)

2.11 BACNET ADVANCED APPLICATION CONTROLLERS

- A. Provide all necessary hardware for a complete operating system as required. The Advanced Application level control panel shall be able to operate as a standalone panel and shall not be dependent upon any higher level computer or another controller for operation.
- B. Basis of design is Unitary Equipment Controller (PXCxx-UCM).
- C. The Advanced Application Controller Software shall be capable of BACnet communications. The BACnet Advanced Application Controller (B-AAC) shall have demonstrated compliance to BTL through BTL listing and shall substantially conform to BACnet Advanced Application Controller (B-AAC) device profile as specified in ANSI/ASHRAE 135-2004 or ANSI/ASHRAE 135-2008. Supported BIBBS shall include:
 1. Data Sharing
 - a. Data Sharing-Read Property-Initiate, Execute (DS-RP-A,B)
 - b. Data Sharing-Read Property Multiple- Initiate, Execute (DS-RPM-A,B)
 - c. Data Sharing-Write Property- Initiate, Execute (DS-WP-A,B)
 - d. Data Sharing-Write Property Multiple- Execute (DS-WPM-B)

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- e. Data Sharing-COV- Initiate, Execute (DS-COV-A,B)
 - 2. Scheduling
 - a. Scheduling-Internal- Execute (SCHED-I-B)
 - 3. Trending
 - a. Trending-Viewing and Modifying Trends Internal- Execute (T-VMT-I-B)
 - b. Trending-Automated Trend Retrieval- Execute (T-ATR-B)
 - 4. Network Management
 - a. Network Management-Connection Establishment- Initiate (NM-CE-A)
 - 5. Alarming
 - a. Alarm and Event-Notification Internal- Execute (AE-N-I-B)
 - b. Alarm and Event-ACK- Initiate, Execute (AE-ACK-A,B)
 - c. Alarm and Event –Enrollment Summary- Execute (AE-ESUM-B)
 - d. Alarm and Event –Information- Execute (AE-INFO-B)
 - 6. Device Management
 - a. Device Management-Dynamic Device Binding- Initiate, Execute (DM-DDB-A,B)
 - b. Device Management-Dynamic Object Binding- Initiate, Execute (DM-DOB-A,B)
 - c. Device Management-Device Communication Control- Execute (DM-DCC-B)
 - d. Device Management-Time Synchronization- Execute (DM-TS-B)
 - e. Device Management-Reinitialize Device- Execute (DM-RD-B)
 - f. Device Management-Backup and Restore- Execute (DM-BR-B)
 - g. Device Management-List Manipulation- Execute (DM-LM-B)
 - h. Device Management-Object Creation and Deletion- Execute (DM-OCD-B)
 - 7. The Advanced Application Controller shall be able to interact with all of the BACnet objects in the controllers. In addition, the software shall be able to support the following objects as they relate to features in the workstation software:
 - a. Calendar – Creatable, Deletable
 - b. Command – Creatable, Deletable
 - c. Event Enrollment – Creatable, Deletable
 - d. Notification Class – Creatable, Deletable
 - e. Schedule - Creatable, Deletable
 - 8. The Advanced Application Controller shall support transmitting and receiving segmented messages.
- D. Communication:
- 1. BAS Network: The Advanced Application Controller shall support the following Data Link Layers:
 - a. MS/TP Master

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Serial Communication: Temporary use of portable devices shall not interrupt the BAS communication, nor the normal operation of permanently connected printers or terminals.
 - a. Provide at least one EIA-232C serial data communication port for operation of operator I/O devices such as industry standard printers, operator terminals, and portable laptop operator's terminals.
 - b. A USB port shall alternatively be available to support local HMI tools connection.

E. Software

1. The software programs specified in this section shall be provided as an integral part of Advanced Application Controllers and shall not be dependent upon any higher level computer or another controller for execution.
2. Advanced Application Controllers shall have the ability to perform energy management routines including but not limited to
 - a. scheduling, calendar-based scheduling, holiday scheduling, temporary schedule overrides
 - b. automatic daylight savings time switch over
 - c. night setback control
 - d. economizer switch over using enthalpy, dry bulb or a combination
 - e. peak demand limiting,
 - f. temperature-compensated duty cycling
 - g. heating/cooling interlock
 - h. supply temperature reset
 - i. priority load shedding
 - j. power failure restart
3. The software shall have a routine for automatic tuning of control loops
4. System Security in the Field Panel
 - a. User access shall be secured using individual security passwords and user names.
 - b. Passwords shall restrict the user to the objects, applications, and system functions as assigned by the system manager.
 - c. The system shall protect itself from unauthorized use by automatically logging off following the last keystroke. The delay time shall be user-definable.
 - d. Use of workstation resident security as the only means of access control is not an acceptable alternative to resident system security in the field panel.
5. User Defined Control Applications:
 - a. Controllers shall be fully-programmable. Controllers shall execute custom, job-specific sequences to automatically perform calculations and special control routines. Factory installed or pre-configured sequences shall only be allowed if they exactly match the sequence specified herein.
 - b. Programs shall combine control logic, control loop algorithms, and energy management routines
 - c. Each controller shall support plain language text comment lines in the operating

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

program to allow for quick troubleshooting, documentation, and historical summaries of program development.

- d. Controller shall provide a HELP function key, providing enhanced context sensitive on-line help with task oriented information from the user manual.

F. Adaptive Loop Control.

1. Each AAC controller shall come standard with an Adaptive Control Loop Algorithm
 - a. Tuning parameter shall automatically adjust for non-linear applications
2. Model-Free Adaptive (MFA) algorithm
 - a. The algorithm shall not require modeling of the non-linear system in order to maintain control at all points of the non-linear load.
 - b. The controlled variable, setpoint, and weighting parameters shall be user-selectable.
3. Output shall be analog or shall stage a series of outputs.
4. Adaptive Control shall take the place of Proportional, Proportional + Integral, and PID type algorithms for non-linear applications. Adaptive Control routines shall :
 - a. Improve response time
 - b. Improve System efficiency
 - c. Improve Stability
 - d. Result in Consistent outputs
 - e. Reduce cycling and repositioning
 - f. Reduce wear and tear on actuators
5. Adaptive control shall auto-adjust to compensate for
 - a. mode changes
 - b. load changes
 - c. seasonal changes
 - d. Heating and cooling changeover
 - e. Heating or cooling capacity changes on the primary side
 - f. Flow changes on the primary or secondary side
 - g. Airflow changes across coil
 - h. Flow across a heat exchanger
6. Adaptive control shall auto-adjust to compensate for
 - a. Non-linear coils and heat exchangers
 - b. Hot water and chilled water reset routines
 - c. Water flow reset routines
 - d. Duct Static reset routines
7. Auto-Tune PID loops are not acceptable substitutions.
8. If Adaptive Loop Control is not available, then the BAS contractor shall provide re-

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

tuning of the control loops for coils and heat exchangers for each of the following conditions:

- a. Low heating supply water, high heating supply water
- b. Low load on steam coil, high load on steam coil
- c. Chilled water coil, non dehumidification and condensing
- d. Chilled water coil, low airflow, high airflow, economizer
- e. Dual temperature systems tune for heating and cooling modes
- f. Each of 4 seasons

G. This level of controller shall be used for the following types of systems:

1. Systems with custom sequences that meet all of the criteria below:
2. No primary pumping systems
3. Secondary Pumping systems that are remote from Central Plants
4. Air handlers up to 15,000 cfm
5. Systems up to 20 input/output points
6. Room control sequences that cannot be achieved with an application specific controller
7. BAS Network or Architecture or Sequences do not require the system to be on an IP network
8. No systems that require integration to meters, VFDs or other smart equipment
9. Integration to smart thermostats is allowed

H. Input/Outputs

1. Inputs shall be 16-bit minimum digital resolution
2. Outputs shall be 10-bit minimum digital resolution
3. The following I/O port types shall be available on the controller
 - a. Universal Input (software configurable):
 - 1) Digital Input choices:
 - a) Pulse Accumulator
 - b) Contact Closure Sensing
 - c) Dry Contact/Potential Free inputs only
 - d) Digital Input (10 ms settling time)
 - e) Counter inputs up to 20 Hz, minimum pulse duration 20 ms (open or closed)
 - 2) Analog Input Choices:
 - a) 0-10 Vdc
 - b) 4-20 mA
 - c) 1K Ni RTD @ 32°F (Siemens, JCI, DIN Ni 1K)
 - d) 1K Pt RTD (375 or 385 alpha) @ 32°F
 - e) 10K NTC Type 2 or Type 3 Thermistor
 - f) 100K NTC Type 2 Thermistor

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Universal Input or Output (software configurable):
 - 1) All of the above input types
 - 2) Analog Output Types:
 - a) 0 to 10 Vdc @ 1 mA max
- c. Super Universal Input or Output (software configurable):
 - 1) All of the above input types
 - 2) All of the above output types
 - 3) Super digital output type:
 - a) 0 to 24 Vdc, 22 mA max. (for controlling pilot relay)
 - 4) Super Analog Output Choices:
 - a) 0 to 20 mA @ 650 Ω max.
- 4. Provide software configurable I/O ports such that a programmer make a port either an input or an output
- I. Each System Level Control Panel shall, at a minimum, be provided with:
 - 1. Appropriate NEMA rated metal enclosure.
 - 2. A 32-bit, multi-tasking, real-time 100 MHz digital control microprocessor with plug-in, enclosed processors.
 - 3. Each Advanced Application Controller shall have sufficient memory, a minimum of 24 megabyte, to support its own operating system and databases, including control processes, energy management applications, alarm management applications, historical/trend data for points specified, maintenance support applications, custom processes, and operator I/O.
 - 4. Real time clock and battery
 - 5. Data collection/ Data Trend module sized for 10,000 data samples.
 - 6. Power supplies as required for all associated modules, sensors, actuators, etc.
 - 7. Monitoring of all industry standard types of analog and digital inputs and outputs, without the addition of equipment to the primary control panel.
 - 8. Local status indication for each digital input and output for constant, up-to-date verification of all point conditions without the need for an operator I/O device.
 - 9. Each control panel shall perform diagnostics on all inputs and outputs and a failure of any input or output shall be indicated both locally and at the operator workstation.
 - 10. Graduated intensity LEDs or analog indication of value for each analog output.
- J. Power loss. In the event of the loss of power, there shall be an orderly shutdown of all controllers to prevent the loss of database or operating system software. Non-volatile memory shall be incorporated for the operating system software and firmware.
 - 1. Controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Brownout protection and power recovery circuitry protect the controller board from power fluctuations.
 3. Battery backup shall be provided to support the real-time clock for 10 years
 4. The program and database information stored SDRAM memory shall be battery backed for a minimum of 30 days and up to 60 days. This eliminates the need for time consuming program and database re-entry in the event of an extended power failure.
- K. Database Restore: Each AAC controller shall automatically save the latest programmed database. The controller shall be able to automatically restore a lost or corrupt database without involvement from the operator.
- L. Each System Level Control Panel shall continuously perform self-diagnostics on all hardware modules and network communications. The System Level Control Panel shall provide both local and remote annunciation of any detected component failures, low battery conditions or repeated failure to establish communication with any system.
- M. Each Control Panel shall support firmware upgrades without the need to replace hardware.
- N. System Level control panels shall provide at least two RS-232C serial data communication ports for operation of operator I/O devices such as operator terminals, and additional memory. Control panels shall allow temporary use of portable operator interface devices without interrupting the normal communications.
- O. Immunity to noise.
1. Operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
 2. Isolation shall be provided at all primary network terminations, as well as all field point terminations to suppress induced voltage transients consistent with:
 - a. RF-Conducted Immunity (RFCI) per ENV 50141 (IEC 1000-4-6) at 3V.
 - b. Electro Static Discharge (ESD) Immunity per EN 61000-4-2 (IEC 1000-4-2) at 8 kV air discharge, 4 kV contact.
 - c. Electrical Fast Transient (EFT) per EN 61000-4-4 (IEC 1000-4-4) at 500V signal, 1 kV power.
 - d. Output Circuit Transients per UL 864 (2,400V, 10A, 1.2 Joule max).
 3. Isolation shall be provided at all Advanced Application Controller's AC input terminals to suppress induced voltage transients consistent with:
 - a. IEEE Standard 587 1980
 - b. Voltage Sags, Surge, and Dropout per EN 61000-4-11 (EN 1000-4-11)
- P. Agency Compliance
1. UL UL916 PAZX (all models)
 2. UL916 PAZX7 (all models)
 3. FCC Compliance CFR47 Part 15, Subpart B, Class B

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- Q. Spare Capacity: Provide enough inputs and outputs to handle the equipment shown to be “future” on drawings and 10% more of each point type. Provide all hardware modules, software modules, processors, power supplies, communication controllers, etc. required to ensure adding a point to the spare point location only requires the addition of the appropriate sensor/actuator and field wiring/tubing.
- R. Local Operator Interfaces
1. Controllers shall support an optional Operator Interface Module.
 2. Optional local user interface to the controller shall be hot swappable, and may be mounted on any building controller and automatically read and initiate commands of local database points without further set-up or configuration. The Controller Interface shall be provided for interrogating and editing data, commanding point values at user defined priorities, viewing and acknowledging alarms, and viewing point monitoring reports. An optional system security password shall be available to prevent unauthorized use of the local controller interface and display.

2.12 BACNET APPLICATION SPECIFIC CONTROLLERS (DXR)

- A. Each Application Specific Controller shall operate as a stand-alone controller capable of performing its user selectable control routines independently of any other controller in the system. Each Application Specific Controller shall provide standard applications and programmability to provide both reliability and flexibility. Each application specific controller shall be a microprocessor-based, multi-tasking, digital control processor.
- B. Basis of design is the programmable Siemens DXR controller.
- C. Configurable control applications. Each Application Specific Controller model must have a set of pre-loaded, selectable and field-adjustable control applications appropriate for the secondary HVAC equipment that the controller model is intended to control. Specific applications must be configurable to meet the user's control strategy requirements, allowing for additional system flexibility.
- D. Programmability: Application Specific Controllers shall be programmable. Program language shall be graphical.
- E. The Application Specific Controller shall include all point inputs and outputs necessary to perform the specified HVAC control sequences. The controller shall accept input and provide output signals that comply with industry standards. Controllers utilizing proprietary control output signals shall not be acceptable. Controllers shall provide outputs utilized either for two-state, modulating floating, or proportional control, allowing for additional system flexibility.
1. Analog inputs shall be software configurable to accept sensors using 0-10v (such as RH or CO2 sensors), NTC3k, NTC10k, NTC100k, Ni1000, PT1K 385, and resistance sensors of 1000 Ω , 2500 Ω , 10K Ω , and 100k Ω . 24vDC power to drive active sensors shall be an option available from the controller.
 2. Digital input
 3. Analog Outputs shall support 0-10v HVAC control signals.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Digital outputs shall be AC 24V high-side switching triacs, able to switch loads of 250 mA / 6 VA per output.
5. Every installed Application Specific Controller shall be prepared for the addition of occupancy, CO2 and humidity sensors
6. Additional sensors and output modules for occupancy, lighting and shade control within the same space as the HVAC control shall be connected as needed via a sub-network connection on each Application Specific Controller
7. The Application Specific Controller shall be compatible with a Siemens Room Unit which combines a display with CO2, temperature and humidity sensing in 1 wall device.
8. The Application Specific Controller shall be compatible with a Siemens Room Unit which combines a display with temperature sensing and configurable switches for lighting, shade and scene control in 1 wall device.

F. Application Specific Controller communication

1. Communication over floor level network shall be BACnet over MS/TP or BACnet IP over Ethernet.
2. A maximum of 96 controllers may be configured on individual BACnet MS/TP networks.
3. Each controller that uses BACnet IP shall provide at least two Ethernet ports allowing the controllers to be wired in a daisy-chain configuration of up to at least 20 controllers per chain, utilizing standard Ethernet cables of up to 300ft in length between each controller.

G. The Application Specific Controller shall have the BTL listing and meet the BACnet device profile of an Application Specific Controller (B-ASC) as specified in ANSI/ASHRAE 135-2012. The controller shall support the following BACnet BIBBs:

1. Data Sharing

- a. DS-RP-A: Data Sharing – Read Property-A
- b. DS-RP-B: Data Sharing – Read Property-B
- c. DS-RPM-A: Data Sharing – Read Property Multiple-A
- d. DS-RPM-B: Data Sharing – Read Property Multiple-B
- e. DS-WP-A: Data Sharing – Write Property-A
- f. DS-WP-B: Data Sharing – Write Property-B
- g. DS-WPM-A: Data Sharing – Write Property Multiple-A
- h. DS-WPM-B: Data Sharing – Write Property Multiple-B
- i. DS-COV-A: Data Sharing – Change of Value -A
- j. DS-COV-B: Data Sharing – Change of Value -B
- k. DS-COVP-A: Data Sharing – Change of Value Property -A
- l. DS-COVP-B: Data Sharing – Change of Value Property -B

2. Alarm and Event

- a. AE-N-I-B: Alarm and Event – Notification Internal-B
- b. AE-ACK-B: Alarm and Event – ACK-B
- c. AE-ASUM-B: Alarm and Event – Alarm Summary-B

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- d. AE-ESUM-B: Alarm and Event – Enrollment Summary-B
 - e. AE-INFO-B: Alarm and Event – Information-B
 - f. AE-EL-I-B: Alarm and Event – Event Log Internal-B
- 3. Trending
 - a. T-VMT-I-B: Trending – Viewing and Modifying Internal-B
 - b. T-ATR-B: Trending – Automated Trend Retrieval-B
- 4. Device Management
 - a. DM-DDB-A: Device Management – Dynamic Device Binding-A
 - b. DM-DDB-B: Device Management – Dynamic Device Binding-B
 - c. DM-DOB-B: Device Management – Dynamic Object Binding-B
 - d. DM-DCC-B: Device Management – Device Communication Control-B
 - e. DM-TS-B: Device Management – Time Synchronization-B
 - f. DM-UTC-B: Device Management – UTC Time Synchronization-B
 - g. DM-RD-B: Device Management – Reinitialize Device-B
 - h. DM-BR-B: Device Management – Backup and Restore-B
 - i. DM-R-B: Device Management – Restart-B
 - j. DM-LM-B: Device Management – List Manipulation-B
- 5. The Application Specific Controller shall support the following Data Link Layers:
 - a. BACnet MS/TP Master (Clause 9)
 - b. BACnet IP, Foreign Device
- H. The Application Specific Controller shall provide for control of each piece of equipment, including, but not limited to the following:
 - 1. Variable Air volume (VAV)
 - 2. Constant Air volume (CAV)
 - 3. Hot water and electric reheat Coils (RH)
 - 4. Fan Coil Units (FCU)
 - 5. Fan Powered Boxes (FPB)
 - 6. Unit Conditioners
 - 7. Unit Ventilators
 - 8. Baseboard radiator
 - 9. Chilled/heated ceiling panels
 - 10. DX cooling and chilled water coils
- I. Applications for VAV terminals:
 - 1. The following VAV terminal box equipment configurations must be supported with pre-loaded, pre-tested applications that can be selected and configured during commissioning:
 - a. VAV w/cool air only
 - b. VAV w/hot or cool air, automatic switchover

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- c. VAV w/ HW reheat
- 2. All VAV applications must support the following options (where appropriate):
 - a. Demand Control Ventilation using CO2 measurement
 - b. Minimum ventilation control and flow set points configurable for each application operating mode
 - c. Separate minimum and maximum flow set points for heating, cooling and ventilation
 - d. Supply temperature cascade control
 - e. Configuration for Constant Volume control
 - f. Chilled/heated ceiling
 - g. Variable speed fan control (fan-power applications only)
 - h. Multi-speed fan control (fan-power applications only)
 - i. Auxiliary/Base-board/Radiator heating, valve, two position or modulating and electric.
 - j. Analog or 3-point floating control valve/damper actuation, including 6-way heating/cooling valve via standard BACnet Analog Output objects.
 - k. Fault Detection for automatic change to pressure dependent control.
 - l. Built in air balancing support.
 - m. User initiated rapid ventilation to assist in purging the space for a configurable time with a separate flow set point
 - n. Occupancy sensor
- J. Applications for Fan Coil terminals:
 - 1. The following Fan Coil terminal box equipment configurations must be supported with pre-loaded, pre-tested applications that can be selected and configured during commissioning.
 - 2. Heating sources
 - a. 2-pipe HW coil
 - b. 2-pipe HW/CHW coil, automatic switchover
 - c. Electric reheat
 - 3. Cooling sources
 - a. 2-pipe CHW coil
 - b. DX Cooling
 - 4. All Fan Coil applications must support the following options (where appropriate):
 - a. VAV pressure dependant control of a damper (no flow sensor)
 - b. Heating/cooling control with no fan
 - c. Chilled/heated Ceiling
 - d. Single or multi-speed or variable speed fan control
 - e. Auxiliary/Base-board heating, valve modulating or two position and electric
 - f. Analog or 3-point floating control valve actuation, including 6-way heating/cooling

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

valve via standard BACnet Analog Output objects.

g. Occupancy sensor

K. Provide centralized control functions for secondary HVAC control, Lighting, and Shading

1. Functions for coordinating control across a grouping of rooms, a floor area, entire floor, façade, mechanical or electrical supply chains, or different combinations thereof shall be provided.
2. Support commanding of all group members to a common position or state.
3. Support consolidation of common information from group members for calculation or optimization purposes
4. Central functions shall reside in an Application Specific Controller dedicated to the central control functions specified herein.
5. Members of the groups used by the central functions specified herein shall be assigned and be changeable through standard BACnet services.

L. Central functions for Secondary HVAC

1. Utilize the HVAC control status and conditions in a large number of Application Specific Controllers in order to support optimization of primary HVAC plants.
2. Central Supply Air function collects air demand data from rooms (Application Specific Controller flow control loops) to support demand-based run/stop decisions for air handler. Rooms indicate need for primary heating, cooling and ventilation.
3. Central Supply Air function collects data from rooms (Application Specific Controller flow loops) to minimize duct pressure. Application Specific Controllers provide multiple signals to support duct pressure reset, including damper command, damper saturation signal and air flow deviation signal. All are available for collection by Central Air application.
4. Central Supply Air function collects data from rooms (Application Specific Controller control loops) to support dynamically optimizing the primary supply air temperature. Data available from the Application Specific Controller includes cooling demand and demand in the room for reheat.
5. Central Supply Air function collects data from rooms (Application Specific Controller control loops) to support dynamically optimizing the outside air intake. Data available from the Application Specific Controller includes ventilation demand and CO2 levels.

M. Coordination between Application Specific Controllers. In situations where more than one controller is serving a common space, it must be possible through configuration only (not reprogramming) to subordinate one or more Application Specific Controllers to another Application Specific Controller allowing multiple controllers to coordinate HVAC control in a large space.

N. Application Operating Modes - All of the following operating modes shall be supported, with configurable operation of each controlled device during each mode.

1. Comfort, Standby (Pre-comfort), Economy, and Building Protection modes
 - a. Comfort: Space is occupied

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Standby: Space has been or will be unoccupied for a short time
 - c. Economy: Space has been or will be unoccupied for a longer time
 - d. Building Protection: Space has been or will be unoccupied for a more than a day
- 2. Configurable set points and limits for each mode.
 - a. The operating mode can be changed by system schedule or command or by conditions in the space such as by presence detection.
 - b. All controlled devices shall respond to changes in operating mode in a configurable way such as set point resets after a configurable time to optimize energy consumption.
- O. Room Units / HMIs shall provide an intuitive user alert to indicate energy-efficient operation or when there is unnecessary energy consumption, and provide occupants with a one-touch release to return to efficient, comfortable control. Energy efficient operation shall be determined by configurable and programmable algorithms provided by the Application Specific Controller and shall include (but not be limited to) the following conditions:
 - 1. Temperature set point is set outside customer-specified limits
 - 2. Fan Speed is overridden to a higher speed than is required for automated temperature control
- P. The energy efficiency status for each Application Specific Controller and space shall also be available as BACnet object at the BMS for operating and monitoring.
- Q. Scene control. The Application Specific Controller shall provide a set of configurable and field-adjustable presets of HVAC, lighting and shading levels that can be activated by pressing assigned buttons on the Room Unit / HMI.
- R. Application Specific Controller Configuration and Commissioning Tool
 - 1. Provide industry standard, commercially available laptop to host the Application Specific Controller Configuration and Commissioning Tool. The tool shall plug directly into all controllers as described below:
 - 2. Functionality of the Configuration and Commissioning Tool connected to any Application Specific Controller shall include:
 - a. Provide connection capability at either the controller, a related room unit, through a BACnet router or through a Siemens Apogee Field Panel controller to access controller information.
 - 1) When connected via a related room unit to a controller, the tool shall be able to access information of the controller the room unit is connected to and all controllers connected to the same MS/TP or IP network.
 - 2) Connection of the Tool to a controller shall not interrupt nor interfere with normal network operation in any way, prevent alarms from being transmitted or preclude centrally-initiated commands and system modification.
 - 3) Tool access to controller shall be password-controlled. Password protection shall be configurable for each operator based on function, points (designating

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

areas of the facility), and edit/view capability.

- b. Provide device discovery, configuration and setup for addressing and network management of multiple devices from one connection point (location) in parallel.
- c. Select, view, command, change, and enable/disable features and functionality of the control application.
- d. Load pre-designed templates of configuration settings and allow copying of templates to other controllers in order to speed the commissioning process.
- e. Provide status, setup, balancing and control reports to support commissioning and troubleshooting activities.
- f. Backup and restore of application configurations
- g. Air flow balancing.
 - 1) For every air flow sensing channel in the Application Specific Controller control application, the Tool shall offer an interface and menu specifically designed to support the Test, Adjust, and Balance functions. Through the balancing menu, the controller enables the following operations:
 - a) Select the operating point for the test from a list of named operating points, including maximum and minimum cooling, maximum and minimum ventilation and maximum and minimum heating.
 - b) Accept the balancer's flow measurement as a manually entered value.
 - c) Automatically calculate and display the revised flow calibration factor.
 - d) Apply the new calibration factor on command.
 - 2) The Application Specific Controller shall maintain a BACnet object reflecting the TAB state of the controller as: Initial, Balancing, Balanced. The Application Specific Controller records data representing the TAB process, and stores for later retrieval. The controller delivers the data when called for producing reports. Stored data includes:
 - a) Air balancer's air flow measurement.
 - b) Controller's air flow measurement after correction.
 - c) Named test point (max cooling, etc.).
 - d) Initial calibration factor.
 - e) Applied selected calibration factor
- h. The tool should allow configuring, loading and balancing multiple controllers from one connection point (location) in parallel
- i. The Ethernet / IP Application Specific Controller models shall provide web pages for troubleshooting and operation and monitoring which can be accessed via a standard web browser

S. Each Application Specific Controller shall, at a minimum, be provided with:

- 1. Appropriate NEMA rated enclosure
- 2. Power supplies as required for all associated modules, sensors, actuators, etc.
- 3. Each controller measuring air volume shall include a differential pressure transducer

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Approvals and standards: UL916 PAZX; CUL; FCC

- T. Each Application Specific Controller shall continuously perform self-diagnostics on all hardware and secondary network communications. The Application Specific Controller shall provide both local and remote annunciation of any detected component failures or repeated failure to establish communication to the system.
- U. Power Supply. The Application Specific controller shall be powered from a 24 VAC source and shall function normally under an operating range of -15% / +20%.
- V. All controller configuration settings and programs shall be stored in non-volatile memory. The controllers shall be able to return to full normal operation without user intervention after a power failure of unlimited duration.
- W. Environment. The controllers shall function normally under ambient conditions of 23 to 122°F (-5 to 50°C) and 5% to 95% RH (non-condensing). Provide each controller with a suitable cover or enclosure to protect the circuit board assembly.

2.13 CONTROL PANELS

- A. Controllers in mechanical rooms shall be mounted in NEMA 1 enclosures.
- B. Controllers in areas where moisture is a concern shall be mounted in NEMA 12 enclosures.
- C. Controllers installed outdoors shall be mounted in NEMA 4X enclosures. Provide heaters where freezing temperatures are normally experienced.
- D. Mount on walls at an approved location or provide a free standing rack.
- E. Panels shall be constructed of 16 gauge, furniture-quality steel, or extruded-aluminum alloy, totally enclosed, with hinged doors and keyed lock and with ANSI 61 gray polyester-powder painted finish, UL listed. Provide common keying for all panels.
- F. Provide power supplies for control voltage power.
- G. Dedicate 1 power supply to the DDC controller. Other devices shall be on a separate power supply, unless the power for the control device is derived from the controller terminations.
- H. Power supplies for controllers shall be a transformer with a fuse or circuit breaker. Power supplies for other devices can be plain transformers.
- I. All power supplies for 24V low voltage wiring shall be class 2 rated and less than 100VA. If low voltage devices require more amps, then provide multiple power supplies. If a single device requires more amps, then provide a dedicated power supply in a separate enclosure and run a separate, non-class 2 conduit to the device.
- J. Surge transient protection shall be incorporated in design of system to protect electrical components in all DDC Controllers and operator's workstations.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

K. All devices in a panel shall be permanently mounted, including network switches, modems, media converters, etc.

L. Provide a pocket to hold documentation.

2.14 SENSORS

A. General

1. Provide mounting hardware for all devices, including actuator linkages, wells, installation kits for insertion devices, wall boxes and fudge plates, brackets, etc.
2. If a special tool is required to mount a device, provide that tool.

B. Terminal Unit Space Thermostats

1. Each controller performing space temperature control shall be provided with a matching room temperature sensor. The space temperature sensor shall be available in wired and wireless versions.
 - a. Plain Space Temperature Sensors – Wired: Where called for in the sequences or on the drawings, provide sensors with plain covers.
 - b. The sensing element for the space temperature sensor shall be thermistor type providing the following.
 - 1) Element Accuracy: + /- 1.0°F
 - 2) Operating Range: 55 to 95°F
 - 3) Set Point Adjustment Range: 55 to 95°F
 - 4) Calibration Adjustments: None required
 - 5) Installation: Up to 100 ft. from controller
 - 6) Auxiliary Communications Port: as required
 - 7) Local LCD Temperature Display: as required
 - 8) Setpoint Adjustment Dial as required
 - 9) Occupancy Override Switch as required
 - c. Auxiliary Communication Port. Each room temperature sensor shall include a terminal jack integral to the sensor assembly. The terminal jack shall be used to connect a portable operator's terminal to control and monitor all hardware and software points associated with the controller. RS-232 communications port shall allow the operator to query and modify operating parameters of the local room terminal unit from the portable operator's terminal.
2. Digital Display temperature sensor specifications – Wired:
 - a. As called for in the sequences of operations or on the drawings, provide temperature sensors with digital displays.
 - b. The sensing element for the space temperature sensor must be IC-based and provide the following.
 - 1) Digitally communicating with the Application Specific Controller.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 2) Mountable to and fully covering a 2 x 4 electrical junction box without the need for an adapter wall plate.
 - 3) IC Element Accuracy: $\pm 0.9^{\circ}\text{F}$
 - 4) Operating Range: 55 to 95°F
 - 5) Setpoint Adjustment Range: User limiting, selectable range between 55 and 95°F
 - 6) Display of temperature setpoint with numerical temperature values
 - 7) Display of temperature setpoint graphically, with a visual Hotter/Colder setpoint indication
 - 8) Calibration: Single point, field adjustable at the space sensor to $\pm 5^{\circ}\text{F}$
 - 9) Installation: Up to 100 ft. from controller
 - 10) Auxiliary Communications Port: included
 - 11) Local OLED Temperature Display: included
 - 12) Display of Temperature to one decimal place
 - 13) Temperature Setpoint Adjustment included
 - 14) Occupancy Override Function included
- c. Auxiliary Communication Port. Each room temperature sensor shall include a terminal jack integral to the sensor assembly. The terminal jack shall be used to connect a portable operator's terminal to control and monitor all hardware and software points associated with the controller. RS-232 communications port shall allow the operator to query and modify operating parameters of the local room terminal unit from the portable operator's terminal.
3. Provide the following options as they are called for in the sequences or on the drawings:
- a. Setpoint Adjustment. The setpoint adjustment function shall allow for modification of the temperature by the building operators. Setpoint adjustment may be locked out, overridden, or limited as to time or temperature through software by an authorized operator at any central workstation, Building Controller, room sensor two-line display, or via the portable operator's terminal.
 - b. Override Switch. An override button shall initiate override of the night setback mode to normal (day) operation when activated by the occupant and enabled by building operators. The override shall be limited to two (2) hours (adjustable.) The override function may be locked out, overridden, or limited through software by an authorized operator at the operator interface, Building Controller, room sensor two-line display or via the portable operator's terminal.
 - c. Space Combination Temperature and Humidity Sensors. Each controller performing space temperature control shall be provided with a matching room temperature sensor, which also includes the ability to measure humidity for either monitoring or control purposes. The combination temperature and humidity sensors shall have the same appearance as the space temperature sensors. Humidity elements shall measure relative humidity with a $\pm 2\%$ accuracy over the range of 10 to 90% relative humidity. Humidity element shall be an IC (integrated circuit) sensing element. Humidity sensing elements shall be removable and field replaceable if needed.

C. Temperature Sensors

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. All temperature sensors shall meet the following specifications:
 - a. Accuracy: Plus or minus 0.2 percent at calibration point.
 - b. Wire: Twisted, shielded-pair cable.
 - c. Vibration and corrosion resistant
 2. Space temperature sensors shall meet the following specifications:
 - a. 10k ohm type 2 thermisters
 3. Insertion Elements in Ducts shall meet the following specifications:
 - a. Single point 10k ohm thermister
 - b. Use where not affected by temperature stratification
 - c. The sensor shall reach more than 1/3 the distance from the duct wall
 - d. Junction box for wire splices
 4. Averaging Elements in Ducts shall meet the following specifications:
 - a. 72 inches (183 cm) long
 - b. Flexible
 - c. Use where prone to temperature stratification, in front of coils, or where ducts are larger than 9 sq. ft.
 - d. Junction box for wire splices
 5. Insertion Elements for Liquids shall meet the following specifications:
 - a. Platinum RTD with 4-20mA transmitter
 - b. Threaded mounting with matching well
 - c. Brass well with minimum insertion length of 2-1/2 inches for pipes up to 4" diameter
 - d. Brass well with insertion length of 6 inches for pipes up to 10" diameter
 - e. Junction box for wire splices
 6. Outside-Air Sensors Platinum RTD with 4-20mA transmitter:
 - a. Watertight enclosure, shielded from direct sunlight
 - b. Circulation fan
 - c. Watertight conduit fitting
- D. Where called for in the sequences of operations, provide the following feature on space sensors and thermostats:
1. Security Sensors: Stainless-steel cover plate with insulated back and security screws
 2. Space sensors with setpoint adjust: Plain white plastic cover with slide potentiometer to signal a setpoint adjustment to the DDC
 3. Space Sensors with LCD display:
 - a. Operator buttons for adjusting setpoints, setting fans speeds and overriding unit to

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- on/off
 - b. Graphical LCD icons for signaling heating/cooling mode, fans speed, schedule mode, actual temperature and current setpoint
- E. Humidity Sensors shall meet the following specifications:
 - 1. Bulk polymer sensor element
 - 2. Accuracy: 2 percent full range with linear output
 - 3. Room Sensors: With locking cover matching room thermostats, span of 0 to 100 percent relative humidity
 - 4. Duct and Outside-Air Sensors: With element guard and mounting plate, range of 0 to 100 percent relative humidity
- F. Air Static Pressure Transmitter shall meet the following specifications:
 - 1. Non-directional sensor with suitable range for expected input, and temperature compensated.
 - 2. Accuracy: 2 percent of full scale with repeatability of 0.5 percent.
 - 3. Output: 4 to 20 mA.
 - 4. Building Static-Pressure Range: 0 to 0.25 inches wg.
 - 5. Duct Static-Pressure Range: 0 to 5 inches wg.
- G. Pressure Transmitters: Direct acting for gas, liquid, or steam service; range suitable for system; proportional output 4 to 20 mA.
- H. Equipment operation sensors as follows:
 - 1. Status Inputs for Fans: Differential-pressure switch with adjustable range of 0 to 5 inches wg.
 - 2. Status Inputs for Pumps: Differential-pressure switch piped across pump with adjustable pressure-differential range of 8 to 60 psig.
 - 3. Status Inputs for direct drive electric motors: Current-sensing relay with current transformers, adjustable and sized for 175 percent of rated motor current.
 - 4. Status inputs for belt drive electric motors: Current sensing transmitter with linear 4-20mA output
- I. Electronic Valve/Damper Position indication: Visual scale indicating percent of travel and 0 to 10 V dc, feedback signal.
- J. Water-Flow Switches: Pressure-flow switches of bellows-actuated mercury or snap-acting type, with appropriate scale range and differential adjustment, with stainless-steel or bronze paddle. For chilled-water applications, provide vapor proof type.
- K. Air Differential Pressure Switches: Diaphragm type air differential pressure switches with die cast aluminum housing, adjustable setpoint, minimum 5-amp switch rating at 120VAC, SPDT switches, and the switch pressure range shall be suited for the application. Provide Dwyer or equal. These switches shall be utilized for filter status.
- L. Leak detectors: Provide spot leak detectors that can be secured to the floor or secured to a drain

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

pan. The detection shall use a microchip controlled energized probes. The detector shall operate on 24V or less. Provide a way to adjust the height of the leak probes. The SPDT contacts shall be inside a watertight enclosure.

M. Carbon Dioxide Sensors

1. Space or Zone Sensing

- a. One wall module in each zone shall take of each type of sensing called for in the sequences of operations. Separate wall devices in one zone for temperature, humidity and CO2 shall not be allowed.
- b. Provide a plain cover, no display, no setpoint change unless called for in the sequences of operations.
- c. CO2 Sensing specifications:
 - 1) Range: 0-2000ppm
 - 2) Signal: 4-20mA or digital
 - 3) Sensing element type: NDIR
 - 4) Response: < 3 min full scale
 - 5) CO2 Accuracy: Maximum +/- 50ppm + 2% of reading
 - 6) CO2 drift: Maximum +/- 5% of range over 5 years
 - 7) Calibration: Automatic comparison of dual elements
 - 8) Calibration adjustment: Adjustable bias set at the module
 - 9) Power: 24Vac or 24Vdc
- d. Where called for in the sequences of operation or shown on the drawings, provide a display on the face of the thermostat cover. The display shall normally show the current sensor readings. If more than one sensor is used, then rotate the display between the readings.
 - 1) The display shall be an LED, OLED or backlit LCD.
 - 2) The display shall show the value, units and the occupied /unoccupied status
- e. Where called for in the sequences of operations, provide setpoint adjustment. If not called for in the sequence, then provide a plain cover or lock out the adjustment through settings.
- f. Where called for in the sequences of operation, provide an occupancy override button to allow the user to switch the zone from unoccupied to occupied.
- g. Provide power for the sensor. If a special power module is required, then provide one for each sensor.
- h. Provide cables to run from the wall sensor to the zone controller
 - 1) Wall sensors shall have a communication plug to allow an operator to plug in a portable interface and communicate with the zone controller to adjust setpoints and settings.
- i. Installation:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 1) All wall modules shall be mounted on an electrical wall box with wire connection in the box.
- 2) Mount wall modules according to the architectural and engineering plans.
- 3) If mounting locations are not given on the plans, then mount according to the following:
 - a) Sensors with plain covers, no display or adjustments: 60" AFF
 - b) Sensors with display and/or adjustments: 48" AFF
 - c) Insulate between the sensing elements and the interior of the wall or junction box.
 - d) Do not mount where sun can shine on the sensor through a window.
 - e) Do not mount where airflow can be stagnant because of furniture or other obstructions.
 - f) Do not mount above or near heat sources, such as appliances, PCs, AV equipment, copiers or baseboard heat.

2. Duct or Outside Air Intake Sensing

- a. Provide a duct probe sensing module for sensing CO2 levels. Outside air CO2 shall be sensed at an outside air intake duct so that air movement can be maintained over the sensing element.
- b. Electrical connections shall be enclosed in a Nema 1, UL listed enclosure. Connection boxes exposed to weather shall have a Nema 4 watertight junction box for connections
- c. CO2 Sensing specifications:
 - 1) Range: 0-2000ppm
 - 2) Signal: 0-5V, 0-10V, 4-20mA
 - 3) Sensing element type: NDIR
 - 4) Response: < 3 min full scale
 - 5) CO2 Accuracy: Maximum +/- 50ppm + 2% of reading
 - 6) CO2 drift: Maximum +/- 5% of range over 5 years
 - 7) Calibration adjustment: Adjustable bias set at the module
 - 8) Ambient operating ranges: 0 to 100 Deg. F. and 10 to 95% RH noncondensing.
 - 9) Power: 24Vac or 24Vdc
- d. Provide power for the sensor. If a special power module is required, then provide one for each sensor.
- e. Installation
 - 1) Mount sensor in an accessible location for service and replacement.
 - 2) Probe shall be located where there is consistent, low turbulent airflow when the system is on.
 - 3) Do not locate probe where it can be exposed to moisture, such as at the outlet of a cooling coil, outlet of a humidifier, or in an intake plenum that is exposed to weather.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

N. Air Flow Measuring Stations:

1. Provide airflow/temperature measurement devices (ATMD) where specified and/or indicated on the plans.
2. Fan inlet measurement devices shall not be substituted for duct or plenum measurement devices.
3. Each ATMD shall consist of one (1) or more sensor probes and a single, remotely mounted, microprocessor-based transmitter capable of independently processing up to 16 independently wired sensor assemblies.
4. Each sensor assembly shall contain 2 individually wired, hermetically sealed bead-in-glass thermistors.
5. Thermistors shall be mounted in the sensor assembly using a marine-grade, waterproof epoxy. Thermistor leads shall be protected and not exposed to the environment.
6. The airflow rate of each sensor assembly shall be equally weighted and averaged by the transmitter prior to output.
7. The temperature of each sensor assembly shall be velocity weighted and averaged by the transmitter prior to output.
8. Each transmitter shall have a 16-character alpha-numeric display capable of displaying airflow, temperature, system status, configuration settings and diagnostics.
9. Devices using chip-in-glass or diode-case chip thermistors are not acceptable.
10. Devices using less than two (2) thermistors in each sensor assembly are not acceptable.
11. Devices using platinum wire RTDs are not acceptable.
12. Devices having electronic circuitry mounted in or at the sensor probe are not acceptable.
13. Pitot tubes and arrays are not acceptable.
14. Vortex shedding devices are not acceptable.
15. Sensor Probes
16. Each sensor assembly shall independently determine the airflow rate and temperature at each measurement point.
17. Each sensor assembly shall be calibrated at a minimum of 16 airflow rates and 3 temperatures to standards that are traceable to the National Institute of Standards and Technology (NIST).
18. Airflow accuracy shall be + 2% of reading over the entire operating airflow range.
19. Devices whose accuracy is the combined accuracy of the transmitter and sensor probes must demonstrate that the total accuracy meets the performance requirements of this specification throughout the measurement range.
20. Temperature accuracy shall be +0.15°F over the entire operating temperature range of - 20°F to 160°F.
21. The operating humidity range for each sensor probe shall be 0-99% RH (non-condensing).
22. Each sensor probe shall have an integral, U.L. listed, plenum rated cable and terminal plug for connection to the remotely mounted transmitter. All terminal plug interconnecting pins shall be gold plated.
23. Each sensor assembly shall not require matching to the transmitter in the field.
24. A single manufacturer shall provide both the airflow/temperature measuring probe(s) and transmitter for each measurement location.
25. Duct and Plenum Probes
26. Probes shall be constructed of extruded, gold anodized, 6063 aluminum tube. All wires within the aluminum tube shall be Kynar coated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

27. Probe assembly mounting brackets shall be constructed of 304 stainless steel. Probe assemblies shall be mounted using 1 of the following options:
28. Insertion mounted through the side or top of the duct.
29. Internally mounted inside the duct or plenum.
30. Standoff mounted inside the plenum.
31. The number of sensor housings provided for each location shall be as follows:

a. Duct or Plenum Area (sq. ft)	Total # Sensors/Location
<2	4
>2 and <4	6
>4 and <8	8
>8 and <16	12
>16	16

32. The operating airflow range shall be 0 to 5,000 FPM unless otherwise indicated on the plans.
33. Transmitters
34. The transmitter shall have an integral LCD display capable of simultaneously displaying airflow and temperature. The LCD display shall be capable of displaying individual airflow and temperature readings of each independent sensor assembly.
35. The transmitter shall be capable of field configuration and diagnostics using an on-board pushbutton interface and LCD display.
36. The transmitter shall have a power switch and operate on 24 VAC (isolation not required).
37. The transmitter shall use a switching power supply fused and protected from transients and power surges.
38. The transmitter shall use "watch-dog" circuitry to assure reset after power disruption, transients and brown-outs.
39. All interconnecting pins, headers and connections on the main circuit board, option cards and cable receptacles shall be gold plated.
40. The operating temperature range for the transmitter shall be -20°F to 120°F. The transmitter shall be installed at a location that is protected from weather and water.
41. The transmitter shall be capable of communicating with other devices using the following:
42. Linear analog output signals for airflow and temperature: Field selectable, fuse protected and isolated, 0-10 VDC/4-20 mA (4-wire).
43. The ATMD shall be UL listed as an entire assembly.
44. The manufacturer's authorized representative shall review and approve placement and operating airflow rates for each measurement location indicated on the plans.
45. Integral sleeve for outside air measurement where applicable:
 - a. Provide an extruded aluminum (6063T5) sleeve. Sleeve depth shall be 15" for ducted applications and 18" for un-ducted applications. Unducted applications shall include a 3" radius aluminum entry flair. Provide an additional 7" (10" for ducted applications) between the downstream edge of an intake louver and the leading edge of the entry flair for outside air intake applications that are close coupled to intake louvers.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

46. Provide Ebtron Gold Series Model GTx116-P or pre-approved equal.

2.15 ELECTRO-MECHANICAL THERMOSTATS

- A. Fire-Protection Thermostats: UL listed with fixed or adjustable settings to operate at not less than 75 deg F above normal maximum operating temperature, with the following:
 - 1. Reset: Automatic with control circuit arranged to require manual reset at central control panel, with pilot light and reset switch on panel labeled to indicate operation.
- B. Electric Low-Limit Duct Thermostat: Snap-acting, single-pole, single-throw, manual- or automatic-reset switch that trips if temperature sensed across any 12 inches of bulb length is equal to or below set point. Setpoint shall be adjustable.
 - 1. Bulb Length: Minimum 20 feet.
 - 2. Quantity: One thermostat for every 20 sq. ft. of coil surface.
- C. Electric space thermostats: Provide a charged element type stat with snap acting SPDT switch. The switch shall be rated for 16A or 1HP at 120V.
- D. Aquastat: Provide a charged element type stat with snap acting SPDT switch. The switch shall be rated for 16A or 1HP at 120V.

2.16 AUTOMATIC CONTROL VALVES

- A. General:
 - 1. All automatic control valves shall be fully proportioning, unless specified otherwise. The valves shall be quiet in operation and fail-safe in either normally open or normally closed position in the event of control air failure. All valves shall be capable of operating at varying rates of speed to correspond to the exact dictates of the controllers and variable load requirements. The valves shall be capable of operating in sequence with other valves and/or dampers when required by the sequence of operation. All control valves shall be sized by the control vendor and shall be guaranteed to accommodate the flow rates as scheduled. All control valves shall be suitable for the pressure conditions and shall close against the differential pressures involved. Body pressure rating and connection type construction shall conform to fitting and valve schedules. Control valve operators shall be sized to close against a differential pressure equal to the design pump heads plus 10 percent.
 - 2. Cold water, hot water and steam valves, throttling type, and bypass valves shall have equal percentage flow characteristics.
 - 3. Unless otherwise specified, control valves 2 inches and smaller shall have cast iron or bronze bodies with screwed NPT connections.
 - 4. Valves between 2-1/2 inch and 4-inch shall have cast iron bodies with flanged connections.
 - 5. All automatic control valves installed exposed to the elements shall be provided with electric actuators with operating characteristics and accessories as described in herein.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- Coordinate with electrical contractor for power availability and point of connection.
6. All automatic control valves controlled by the BAS shall be furnished by the controls contractor unless noted otherwise in these documents.
 7. All automatic control valves shall be installed by the mechanical trade.
 8. The controls contractor shall provide wiring as follows:
 - a. All line voltage power for electric valve actuators shall be wired by the controls contractor from the nearest available power panel. Coordinate with electrical trade.
 - b. All wiring between the central control system (ATC/BMS) and the valve actuator shall be wired by the controls contractor.
 - c. All wiring between the valve actuator and their associated thermostats, pressure switches, control devices, etc. shall be wired by the controls contractor.
 - d. All wiring shall comply with code requirements. Segregate high and low voltage wiring & circuits and segregate the FAS and controls (BMS) terminals.

B. Characterized Ball Valves

1. All control valves shall be sized by the control vendor. All control valve bodies shall be suitable for the static and dynamic pressures of the system. Control valve operators shall be sized to close against a differential pressure equal to the design pump head plus 10 percent.
2. Body pressure rating and connection type construction shall conform to fitting and valve schedules.
 - a. Design body pressure shall be determined by the adding the static pressure due to the height of the system plus the compression tank charge plus the maximum head of the system pump at cut off. Provide 10% design factor.
3. The valve seat differential pressure rating shall exceed the pump dynamic head design pressure.
4. All automatic control valves controlled by the BAS shall be furnished by the controls contractor unless otherwise noted in these documents.
5. All automatic control valves shall be installed by the mechanical trade.
6. The controls contractor shall provide wiring as follows:
 - a. All line voltage power for electric valve actuators shall be wired by the controls contractor from the nearest available power panel. Coordinate with electrical trade.
 - b. All low voltage wiring between the controller and the valve actuator shall be wired by the controls contractor.
 - c. All wiring between safeties and the valve actuator shall be wired by the controls contractor.
 - d. All wiring shall comply with code requirements. Segregate high and low voltage wiring and circuits and segregate the Fire Alarm (FACS) and BAS controls wiring.

C. Manufacturer

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Siemens 599 series valves bodies, SSD, SAX, SQV Actuators, Series 230, 231, 232, 233, 238, 239, 371, and 373 assemblies
- D. Threaded Valves, line size ½” to 2”
1. Controlled Media Specific Items
 - a. The control valve shall be suitable for chilled water to a minimum of 35°F (2°C) and hot water to a maximum temperature of 250°F (121°C). 3-way 1-1/2 inch and 2 inch valves shall be suitable for chilled water to a minimum of 35°F (2°C) and hot water to a maximum temperature of 230°F (110°C).
 - b. The control valve shall be suitable for up to 50% ethylene or propylene glycol solutions, chilled glycol/water solutions to a minimum of 35°F (2°C) and hot glycol/water solutions to a maximum temperature of 250°F (121°C). 3-way 1-1/2 inch and 2 inch valves shall be suitable for up to 50% ethylene or propylene glycol solutions, chilled glycol/water solutions to a minimum of 35°F (2°C) and hot glycol/water solutions to a maximum temperature of 230°F (110°C).
 2. General Construction Materials/Applicable Standards
 - a. Control valve bodies shall be constructed of forged brass according to ASTM B283 (C37700, CuZn39Pb2 or equivalent), and shall meet requirements of ANSI 250 and 600WOG pressure classes.
 - b. Inlets and outlets shall be clearly marked on the valve bodies.
 - c. Valve ball shall consist of nickel-plated brass, chrome-plated brass or stainless steel.
 - d. End connections shall be NPT internally threaded according to ANSI B1.20.1.
 - e. The control valve flow rate (Cv) shall meet the requirements of ANSI/ISA S75.02.
 - f. The control valve shall have an equal percentage flow characteristic, according to ANSI/ISA S75.11. A single glass filled PTFE V port insert shall provide both the ball seal and shall establish the flow coefficient of the valve. The V port insert shall be retained by the valve body itself, not requiring additional retaining components. Flow coefficient adapters requiring a retainer clip, or installed after final assembly of the valve or as inserts in the ball shall not be allowed.
 - g. 2-way valves and the A-AB path on 3-way valves shall meet the requirements of ANSI Class IV (0.01% of rated Cv) seat leakage, or better, according to ANSI/FCI 70.2, at the specified close-off pressure. Bypass path (B-AB) on 3-way valves shall meet the requirements of ANSI Class III (0.1% of rated Cv) seat leakage, or better, according to ANSI/FCI 70.2.
 - h. Chilled and Hot water valve shall have a blow-out proof stem with two EPDM (peroxide cured) O-rings. External stem retainers will not be allowed.
 - i. Valve stem shall be made of brass or stainless steel.
 - j. Valve shall have the ability to be manually operated in the event of a power failure.
- E. Actuators - Electric
1. The valves shall be provided with an actuator by the same manufacturer, factory installed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. All actuators shall have visual position indication.
3. No external programming device shall be required.
4. Actuator shall be electric motor driving, microprocessor signal controlled.
5. Modulating valves shall be positive positioning, responding to a 0-10VDC, 2-10VDC or 4-20mA signal. Floating modulating signals are acceptable for modulation on terminal units and radiation units. There shall be a visual valve position indicator.
6. Power: All actuators shall be 24VAC power and less than 100VA draw. Power shall be via Class 2 wiring. Actuators requiring more than 100VA shall have a dedicated conduit for power wiring, not mixed with the signal wiring.
7. Fail Safe: Valves actuators shall position the valve in a fail-safe position when the power supply is disrupted or the signal goes to 0. Fail-safe according to the following guidelines unless otherwise stated in the sequence of operations
 - a. Power fail safe shall be via spring loaded mechanical means
 - b. Any AHU hot water exposed to ventilation air shall fail open
 - c. AHU Chilled water coils exposed to ventilation air in possible freezing conditions shall be fail open
 - d. AHU Chilled water coils that are drained in winter months or are in climate zones without freezing conditions shall be fail-in-place
 - e. Terminal unit valves shall fail-in-place
8. Fail in Safe valves on primary equipment such as chilled water systems, hot water systems and condenser water systems shall have a means to manually open the valve when power is not available, such as a hand wheel or a geared crank with a clutch.
9. The actuator shall be designed with a current limiting motor protection. A release button (clutch) or handle on the actuator shall be provided to allow for manual override (except when actuator is spring return type).
10. Actuator shall provide minimum torque required for proper valve close-off. The close-off differential pressure rating of the valve shall exceed the highest possible head pressure available at the pump plus 10%, and still be rated for a Class IV leakage.
11. The actuator shall have the capability of adding auxiliary switches or feedback potentiometer if specified.
12. All automatic control valves installed in locations exposed to the elements shall be provided with weather resistant housings and heaters for climates that reach below freezing.
13. Actuators shall be UL and CSA listed.

F. Hot Water / Chilled Water / Control Valves

1. Single-seated.
2. Fully proportioning with modulating plug or V-port inner valves.
3. Body pressure rating and connection type construction shall conform to fitting and valve schedules. The ANSI rating of the valve shall match the ANSI rating of the piping in which the valve is installed. Minimum ANSI rating shall be ANSI 125.
4. Stainless steel stems and trim.
5. Spring loaded Teflon packing
6. Quiet in operation.
7. Fail-safe in either normally open (hot water) or normally closed (chilled water) position

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- in the event of power failure.
8. Capable of operating in sequence with other valves and/or dampers when required by the sequence of operation.
 9. Capable of operating at varying rates of speed to correspond to the exact dictates of the controller and variable load requirements.

G. Differential Pressure Control Valves:

1. Provide for all water systems where modulating water flow conditions are required to prevent excessive pump pressure build-up. Provide a valve for each closed loop water system. Valve to be globe type. Provide valves 2" and smaller with screwed end bodies and provide valves 2-1/2" and larger with flanged ends.

2.17 PRESSURE INDEPENDENT CONTROL VALVES (PICV)

A. General

1. All control valves shall be sized by the control vendor. All control valve bodies shall be suitable for the static and dynamic pressures of the system. Control valve operators shall be sized to close against a differential pressure equal to the design pump head plus 10 percent.
 - a. Body pressure rating and connection type construction shall conform to fitting and valve schedules. Design body pressure shall be determined by the adding the static pressure due to the height of the system plus the compression tank charge plus the maximum head of the system pump at cut off. Provide 10% design factor.
2. The valve seat differential pressure rating shall exceed the pump dynamic head design pressure.
3. All automatic control valves controlled by the BAS shall be furnished by the controls contractor unless otherwise noted in these documents.
4. All automatic control valves shall be installed by the mechanical trade.
5. The controls contractor shall provide wiring as follows:
 - a. All line voltage power for electric valve actuators shall be wired by the controls contractor from the nearest available power panel. Coordinate with electrical trade.
 - b. All low voltage wiring between the controller and the valve actuator shall be wired by the controls contractor.
 - c. All wiring between safeties and the valve actuator shall be wired by the controls contractor.
 - d. All wiring shall comply with code requirements. Segregate high and low voltage wiring and circuits and segregate the Fire Alarm (FACS) and BAS controls wiring.

B. Manufacturer

1. Siemens 599 series valves bodies, SSD, SAY, SAX, SAV and SQV Actuators, Series 230, 231, 232, 233, 238, 239, 334, 335, 371, 373, 378 and 379 assemblies

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

C. Where to use PICVs

1. Provide PICVs where called for in the specifications, sequences of operations, or on the drawings.
2. If it is not stated elsewhere, PICV valves should be provided to meet the following guidelines:
 - a. Provide in direct return, constant speed pumping systems.
 - b. Provide in direct return, variable flow water systems where with the system at full flow the pressure differential between the supply connection and the return connection is more than double the pressure drop of the circuit or loop at design flow (including piping, fittings, devices, control valve and coil).
 - c. Provide in reverse return, constant speed pumping systems where the circuits and loop pressure drops differ by more than 50%.
 - d. Provide in reverse return, variable speed pumping systems where the differential pressure between the systems will vary more than the pressure drop of the circuit or loop.
 - e. Provide in systems that have direct return headers and reverse return branch lines where with the system at full flow the pressure differential between the supply connection and the return connection is more than double the pressure drop of the branch at design flow (including piping, fittings, devices, control valve and coil).

D. Piping for circuits with PICVs

1. Systems installed with PICVs shall not require balancing valves.
2. Calibrated balancing valves shall not be required in branches or loops where PICV are installed.
3. Automatic flow control valves are strictly prohibited in branches or loops where PICVs are installed.
4. Circuit setters may be required for coils with multiple sections. Follow the piping details.
5. Install pressure ports on either side of the coil for the balancer to test the flow across the coil at different system flows.

E. Sizing Criteria (Pressure Independent):

1. Two-way modulating service:
 - a. Determine the design GPM of the actual coil that is selected be used (may be different than the coil and GPM on the design coil schedule).
 - b. Select the PICV valve with a GPM rating higher than the GPM required.
 - c. If more than one valve fits the GPM rating, then pick the valve that matches or is closest to the line size of the circuit piping.
 - d. If the maximum GPM of the valve exceeds the design GPM required, then adjust the Flow Limiter setting on the valve to the GPM required.
 - e. Traditional flow coefficient and pressure drop sizing is not applicable to PICV valves.

F. Flanged Valves, line size 2 ½” and larger

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Controlled Media Specific Items

- a. The control valve shall be suitable for chilled water to a minimum of 34°F (1°C) and hot water to a maximum temperature of 248°F (120°C).
- b. The control valve shall be suitable for up to 50% ethylene or propylene glycol solutions, chilled glycol/water solutions to a minimum of 34°F (1°C) and hot glycol/water solutions to a maximum temperature of 248°F (120°C).

2. General Construction Materials/Applicable

- a. Control valve bodies shall be constructed of cast iron and shall meet requirements of ANSI 125 or ANSI 250 pressure classes.
- b. Inlets and outlets shall be clearly marked on the valve bodies.
- c. Valves shall be constructed with a single chamber and multiple seats to provide flow limiting, pressure compensation and flow control.
- d. Valves shall contain a mechanical, spring-loaded pressure independent regulator to maintain a consistent differential pressure across the control port of the valve.
- e. Valves shall contain an actuated flow control portion that responds to the modulating signal from the controller. This control valve portion shall have a linear flow characteristic.
- f. Valves shall contain a field adjustable flow limiter. The flow limiter shall be easily adjustable in the field without the use of special tools. The adjustment dial shall be set for and indicate maximum flow. It shall be possible to manually limit the flow to the required value with the flow limiter and then modulate the flow with the control valve and actuator.
 - 1) A table shall be attached to each valve indicating GPM corresponding to each setting on the dial.
 - 2) No mechanical devices besides the valve and actuator shall be permitted to adjust the maximum flow setting. Flow limiting port shall be integrated into the valve body.
 - 3) The valve shall always maintain full nominal stroke regardless of the maximum flow setting of the flow limiter.
 - 4) The flow limiter shall be lockable and tamper resistant when the actuator is installed correctly.
- g. At any given actuator setting the flow accuracy across the entire pressure independent operating range of the automatic differential pressure regulator shall be $\pm 10\%$ or less.
- h. Pressure ports shall be standard in the body of the valve for all flanged valves. Pressure ports shall provide a means for a balancer to test the differential pressure across the valve control port to ensure the PICV is operating within the pressure independent range.
- i. Valves 2-1/2 inch and larger shall be provided with ANSI 125 or ANSI 250 flanged connections.
- j. Valves 2-1/2 inch and larger line size shall meet or exceed ANSI Class IV (0 to 0.01% of nominal maximum) leakage rating at 100 psi close off.
- k. The differential pressure range for effective pressure independent operation shall be

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.6 – 90 psi or 8 – 90 psi for 2-½ and 3 inch flanged valves and 5 – 90 psi or ≤ 10 – 90 psi for 4 to 6 inch flanged valves, depending on the maximum gpm flow range of the valve.

1. Valve materials shall meet or exceed the following:

- 1) Valve body: Cast iron
- 2) Stem, spring: Stainless steel
- 3) Seat: Stainless steel
- 4) Plug: Brass and EPDM
- 5) Seals: EPDM (peroxide cured)

G. Threaded Valves, line size ½” to 2”

1. Controlled Media Specific Items

- a. The control valve shall be suitable for chilled water to a minimum of 35°F (2°C) and hot water to a maximum temperature of 250°F (121°C).
- b. The control valve shall be suitable for up to 50% ethylene or propylene glycol solutions, chilled glycol/water solutions to a minimum of 35°F (2°C) and hot glycol/water solutions to a maximum temperature of 250°F (121°C).

2. General Construction Materials/Applicable Standards

- a. Control valve bodies shall be constructed of forged DZR brass or ductile iron and shall meet requirements of ANSI 250 pressure class.
- b. Inlets and outlets shall be clearly marked on the valve bodies.
- c. Valves shall be constructed with a single chamber and multiple seats to provide flow limiting, pressure compensation and flow control.
- d. Valves shall contain a mechanical, spring-loaded pressure independent regulator to maintain a consistent differential pressure across the control port of the valve.
- e. Valves shall contain an actuated flow control portion that responds to the modulating signal from the controller. This control valve portion shall have a linear flow characteristic.
- f. Valves shall contain a field adjustable flow limiter. The flow limiter shall be easily adjustable in the field without the use of special tools. The adjustment dial shall be set for and indicate maximum flow. It shall be possible to manually limit the flow to the required value with the flow limiter and then modulate the flow with the control valve and actuator.
 - 1) The dial shall show settings in GPM.
 - 2) No mechanical devices besides the valve and actuator shall be permitted to adjust the maximum flow setting. Flow limiting port shall be integrated into the valve body.
 - 3) The valve shall always maintain full nominal stroke regardless of the maximum flow setting of the flow limiter.
 - 4) The flow limiter shall be lockable and tamper resistant when the actuator is installed correctly.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- g. At any given actuator setting the flow accuracy across the entire pressure independent operating range of the automatic differential pressure regulator shall be +/- 5% from 5 to 58psi and $\leq -10\%$ from Δp min. to 5 psi.
- h. Pressure ports shall be an optional accessory that can be added to threaded valves. Pressure ports shall provide a means for a balancer to test the differential pressure across the valve control port to ensure the PICV is operating within the pressure independent range.
- i. Valves 2 inch and smaller shall be provided female NPT piping connections.
- j. Close-off and leakage
 - 1) Normally open valves 1-1/4 inch and smaller line size shall meet or exceed ANSI Class IV (0 to 0.01% of nominal maximum) leakage rating at 200 psi close off.
 - 2) Normally closed valves 1-1/4 inch and smaller line size shall meet or exceed ANSI Class IV (0 to 0.01% of nominal maximum) leakage rating at 45 psi close off.
 - 3) Valves 1-1/2 and 2 inch line sizes shall meet or exceed ANSI Class IV (0 to 0.01% of nominal maximum) leakage rating at 100 psi close off. Differential pressure ranges:
 - 4) The start-up differential pressure of the automatic differential pressure regulator shall be between 2.3 and 5 psi, depending on valve size and flow rate for 1/2 to 2 inch valves.
 - 5) The maximum operating differential pressure of the automatic differential pressure regulator shall be 58 psi for 1/2 to 2 inch valves.
 - 6) In no instance shall the minimum effective pressure differential for effective pressure independent operation exceed 5 psi for valves less than or equal to 2 inch line size.
- k. Valve materials shall meet or exceed the following:
 - 1) Valve body: DZR brass or ductile iron
 - 2) Stem, spring: Stainless steel
 - 3) Seat: brass
 - 4) Plug: Brass and EPDM
 - 5) Seals: EPDM (peroxide cured)

2.18 ELECTRONIC ACTUATOR SPECIFICATION

A. ELECTRONIC VALVE ACTUATORS

- 1. Actuator shall be fully modulating, floating (tri-state), two position, and/or spring return as indicated in the control sequences. Specified fail safe actuators shall require mechanical spring return.
- 2. Modulating valves shall be positive positioning, responding to a 2-10VDC or 4-20mA signal. There shall be a visual valve position indicator.
- 3. The actuator shall have the capability of adding auxiliary switches or feedback potentiometer if specified.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Actuator shall provide minimum torque required for proper valve close-off. The actuator shall be designed with a current limiting motor protection. A release button (clutch) or handle on the actuator shall be provided to allow for manual override (except when actuator is spring return type).
5. Actuators shall be UL listed.

B. ELECTRONIC DAMPER ACTUATORS

1. Actuator shall be direct coupled (over the shaft), enabling it to be mounted directly to the damper shaft without the need for connecting linkage. The actuator-to-shaft clamp shall use a "V" bolt and "V" shaped, toothed cradle to attach to the damper shaft for maximum holding strength. Single bolt or set screw type fasteners are not acceptable.
2. Actuator shall have electronic overload or digital rotation sensing circuitry to prevent damage to the actuator throughout the rotation of the actuator. End switches to deactivate the actuator at the end of rotation or magnetic clutch are not acceptable.
3. For power-failure/safety applications, a mechanical, spring return mechanism shall be used.
4. Actuators with spring return mechanisms shall be capable of either clockwise or counterclockwise spring return operation by simply changing the mounting orientation.
5. Proportional actuators shall accept a 2-10VDC, 4-20mA signal, or be of the 2 point floating type and provide a 2-10VDC actuator position feedback signal.
6. All actuators shall have an external manual gear release (clutch) or manual crank to aid in installation and for allowing manual positioning when the actuator is not powered.
7. All actuators shall have an external direction of rotation switch to aid in installation and to allow proper control response.
8. Actuators shall be provided with a factory-mounted 3-foot electrical cable and conduit fitting to provide easy hook-up to an electrical junction box.
9. Actuators shall be listed under Underwriters Laboratories Standard 873 and Canadian Standards Association. They must be manufactured under ISO 9001.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. The project plans shall be thoroughly examined for control device and equipment locations. Any discrepancies, conflicts, or omissions shall be reported to the architect/engineer for resolution before rough-in work is started.
- B. The contractor shall inspect the site to verify that equipment may be installed as shown. Any discrepancies, conflicts, or omissions shall be reported to the engineer for resolution before rough-in work is started.
- C. The contractor shall examine the drawings and specifications for other parts of the work. If head room or space conditions appear inadequate—or if any discrepancies occur between the plans and the contractor's work and the plans and the work of others—the contractor shall report these discrepancies to the engineer and shall obtain written instructions for any changes necessary to accommodate the contractor's work with the work of others.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 INSTALLATION

- A. Provide all relays, switches and all other auxiliaries, accessories and connections necessary to make a complete operable system in accordance with the sequences specified. All field wiring shall be by this contractor.
- B. Install controls so that adjustments and calibrations can be readily made. Controls are to be installed by the control equipment manufacturer.
- C. Mount surface-mounted control devices on brackets to clear the final finished surface on insulation.
- D. Install equipment level and plumb.
- E. Install control valves horizontally with the power unit up.
- F. Unless otherwise noted, install wall mounted thermostats and humidistat 60" above the floor measured to the center line of the instrument, or as otherwise directed by the Architect.
- G. Install averaging elements in ducts and plenums in horizontal crossing or zigzag pattern.
- H. Install outdoor sensors in perforated tube and sunshield.
- I. Install damper motors on outside of duct in protected areas, not in locations exposed to outdoor temperatures.
- J. Install labels and nameplates on each control panel listing the name of the panel referenced in the graphics and a list of equipment numbers served by that panel.
- K. Furnish hydronic instrument wells, valves, and other accessories to the mechanical contractor for installation.
- L. Furnish automatic dampers to mechanical contractor for installation.

3.3 GRAPHIC DISPLAY GENERATION

- A. All workstation(s) shall be provided with color graphics. All workstation(s) software shall include a graphical viewing and control environment and definition and construction of dynamic color graphic displays.
- B. Provide a main default screen showing the basic layout of the building. Each color graphic screen shall have transfer links to allow the building operator to transfer between system associated screens (both forward and backward), as well as a transfer link back to the main default screen.
- C. Basic CAD floor plans with layers for walls, windows, low pressure ductwork only, supply diffusers and room numbers shall be provided for all CV and VAV terminal units. Floor plans shall show the location of each space temperature sensor with a dashed line to the associated

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

terminal unit. Display in real time the difference between the space temperature and the current setpoint.

1. Display the:
 - a. cooling %,
 - b. heating % (if applicable)
 - c. current CFM of each terminal unit.
2. Provide a transfer link for each terminal unit to allow the operator to access the flow graphic for each individual terminal unit. Use a different color to shade the background area for each part of a floor plan graphic served by a different air handling unit.

D. Thermal floor plan graphics:

1. Show heating and cooling zones throughout the building in a range of colors (minimum 5) that provide a visual display of temperatures relative to their respective setpoints. The colors shall be updated dynamically as zones' comfort conditions change. Locations of space sensors shall also be shown for each zone. Floor plan humidity's shall be represented similarly to zone temperatures. Setpoint adjustment and color band displays shall be provided as a tool for user adjustment.
2. These full screen plans shall be accessible by rolling over the floor on the building elevation rendering. This will provide the viewer a quick and accurate overview of which zones are at setpoint, near setpoint, or need attention.
3. The viewer may then click on any zone to be brought to the terminal unit that is related to that zone. Rolling over any zone will bring up the zone description and temperature in a pop-up flag. Flags are used to keep the zone information legible regardless of how small the zone is depicted on the plan
4. All floor plans shall be vector based to allow for zooming in and out of floor plans without pixelization.
5. If zone lighting controls are tied into the BAS, then produce the same floor viewing and control for lights.
6. If a Web-based graphical interface is specified, then the floor plan graphics shall be accessible through the Web Browser Interfaces.

E. All control set points shall be easily adjustable from the system's color graphic screen by operators with the proper access level. Each controlled point on the BAS operator workstation color graphic screens shall have the set point indicated along with the actual controlled variable reading (preferred set point on top and actual reading on bottom). All points shall indicate the associated engineering unit. All analog outputs points shall indicate engineering units such as "%-open" or "%-closed" as required by the application. All normally-closed or normally-open points shall indicate the normal position (such as "N.C." or "N.O." next to the controlled device).

F. Provide system color graphics for each HVAC system and for each electrical, plumbing and/or piping system that is monitored and/or controlled by the BMS. Provide scaled floor plans indicating equipment location, service, and system data as required.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- G. Provide color graphic floor plan displays and system schematics for each piece of mechanical equipment, including but not limited to air handling units, chilled water systems and hot water systems to optimize system performance analysis and speed alarm recognition.
- H. The operator interface shall allow users to access the various system schematics and floor plans via a graphical penetration scheme, menu selection or text-based commands.
- I. Dynamic temperature values, humidity values, flow values and status indication shall be shown in their actual respective locations and shall automatically update to represent current conditions without operator intervention.
- J. The windowing environment of the PC operator workstation(s) shall allow the user to simultaneously view several graphics at a time to analyze total building operation or to allow the display of a graphic associated with an alarm to be viewed without interrupting work in progress.
 - 1. Graphic generation software shall be provided to allow the user to add, modify or delete system graphic displays via an off the shelf graphics package similar to MicroGraphix Designer.
 - 2. Provide libraries of pre-engineered screens and symbols depicting standard air handling unit components (e.g., fans, cooling coils, filters, dampers, etc.), complete mechanical systems (e.g., constant volume-terminal reheat, VAV, etc.) and electrical symbols.
 - 3. Graphical displays can be created to represent any logical grouping of system points or calculated data based upon building function, mechanical system, building layout or any other logical grouping of points which aids the operator in the analysis of the facility.
- K. Provide an automatically updated, dynamic display of the site-specific BMS architecture indicating the status of primary and secondary controllers, PC workstation(s) and networks.
- L. Provide a separate dynamic display page of each HVAC (AHU, AC, chiller, cooling tower, fuel oil, etc.), electrical, and/or plumbing system connected to the BMS.
- M. Provide a separate dynamic display page of each piece of terminal equipment (VAV box, fan coil unit, etc.) connected to the BMS.
- N. Provide an additional (10) separate dynamic, graphic display pages at each workstation as required by the operating staff to further assist in daily system operations.
- O. Graphics shall incorporate all system integration points communicated via hardware or software gateways and/or interfaces. Origin of information shall be transparent to the operator and shall be controlled, displayed, trended, etc. as if the points were hardwired to the BMS.
- P. Each graphic shall have a “BACK” button and a “HOME” or “MAIN” button located in the same location on all graphics.
- Q. The operator shall be able to clearly distinguish the difference between the following types of points on a graphic either by color, shape, icon or text label:
 - 1. Real-time sensor reading

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Setpoint
 3. Manually set vs. program set Setpoint
 4. Real-time output reading
 5. Manually Overridden or commanded output vs program set output
 6. Status feedback from a piece of equipment vs the output command
- R. When the operator selects a graphic from a menu or a hyperlink, the system shall also make the following adjustments for the operator:
1. Highlight the system name on the system tree
 2. Highlight the controller name on the network tree
 3. Make appear links to additional information associated with the data on the graphic, such as:
 - a. Adjustable modes of operation
 - b. Setpoints
 - c. Alarm statuses
 - d. Trend logs
 4. Make appear links to additional information associated with the system on the graphic, such as:
 - a. Controls as-built schematics and wiring diagrams
 - b. As-built Sequence of Operation
 - c. Mechanical drawings
 - d. Electrical drawings
- S. For control loops that have a 4-point setpoint reset schedule, the operator shall have access to adjust the 4 points in the graphics. Provide a separate graphic with the 4 adjustable data points and a line graph with labels vertices showing the scale of the reset ramp. Display the current calculated output setpoint.
- T. Integration graphics shall be representative of personnel standing in front of equipment. The graphics for equipment specified in the Building Systems Integration paragraph shall be representative of the manufacturers' local display panel and each shall be completely operable from the computer workstation.
- U. Lighting Control System User Interface:
1. Floor plan Graphics: Provide interface for area-level lights status, level, occupancy mode, preset scene, and ability to override all.
 2. Room Graphics: Provide interface for zone-level lights status, level, occupancy mode, preset scene, light level (photocell), light level setpoint, and ability to override all.
 3. Schedule Interface: Time clock schedule commands to the Lighting Control System shall be managed by the BAS System. Provide interface for schedule mode input for each time clock area, with mode feedback.
 4. Alarm Management: BAS System shall manage collection and distribution of alarms from Lighting Control System. Provide interface for any system or device alarm,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

including lamp or ballast failures (as available), panel failures, or network failures.

5. Trend/History Management: BAS System shall collect and manage historical trend logs for Lighting Control System points.

3.4 ELECTRICAL WIRING SCOPE

- A. This contractor shall be responsible for power that is not shown on the electrical drawings, to controls furnished by this contractor. If power circuits are shown on the electrical drawings, this contractor shall continue the power run to the control device. If power circuits are not shown, this contractor shall coordinate with the electrical contractor to provide breakers at distribution panels for power to controls. This contractor is then responsible for power from the distribution panel.
 1. Coordinate panel locations. If enclosures for panels are shown on the electrical drawings, furnish the enclosures according to the electrician's installation schedule.
- B. This contractor shall not be responsible for power to control panels and control devices that are furnished by others, unless it is part of the control interlock wiring.
- C. Refer to Coordination section for what devices this contractor is responsible to mount and which are turned over to others to mount.
- D. This contractor shall be responsible for wiring of any control device that is furnished as part of this section of specification.
- E. Interlock wiring shall be run in separate conduits from BAS associated wiring.
- F. Provide network wiring for equipment that is called to be integrated to the BAS.

3.5 ELECTRICAL WIRING AND CONNECTION INSTALLATION

- A. All low voltage control wiring shall be class 2. Control wiring that is not class 2 shall be run in separate conduits from class 2 wiring.
- B. Floor level network wiring between terminal units can be combined with thermostat and other low voltage wiring in the same conduit. All other network wiring shall be in dedicated conduits.
- C. Install raceways, boxes, and cabinets according to Division 26 Section "Raceways and Boxes."
- D. Install building wire and cable according to Division 26 Section "Conductors and Cables."
- E. Installation shall meet the following requirements:
 1. Conceal cable and conduit, except in mechanical rooms and areas where other conduit and piping are exposed.
 2. Install exposed cable in raceway or conduit.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Install concealed cable using plenum rated cable.
 4. Bundle and harness multiconductor instrument cable in place of single cables where several cables follow a common path.
 5. Fasten flexible conductors, bridging cabinets and doors, along hinge side; protect against abrasion. Tie and support conductors.
 6. Number-code or color-code conductors for future identification and service of control system, except local individual room control cables.
 7. All wiring in lab areas shall be in conduit.
 8. All unsupported risers shall be rigid steel conduit. Supported risers shall be EMT.
- F. Rigid conduit shall be steel, hot dip galvanized, threaded with couplings, $\frac{3}{4}$ inch minimum size, manufactured in accordance with ANSI C-80-1. Electrical metallic tubing (EMT) with compression fittings or intermediate metallic conduit (IMC) may be used as conduit or raceway where permitted by the NEC.
- G. Concealed control conduit and wiring shall be provided in all spaces except in the Mechanical Equipment Rooms and in unfinished spaces. Install in parallel banks with all changes in directions made at 90 degree angles.
- H. Install conduit adjacent to machine to allow service and maintenance.
- I. Connect manual-reset limit controls independent of manual-control switch positions. Automatic duct heater resets may be connected in interlock circuit of power controllers.
- J. Connect hand-off-auto selector switches to override automatic interlock controls when switch is in hand position.
- K. Ground equipment.

3.6 COMMUNICATION WIRING

- A. All cabling shall be installed in a neat and workmanlike manner. Follow manufacturer's installation recommendations for all communication cabling.
- B. Do not install communication wiring in raceway and enclosures containing Class 1 wiring.
- C. Maximum pulling, tension, and bend radius for cable installation, as specified by the cable manufacturer, shall not be exceeded during installation.
- D. Contractor shall verify the integrity of the entire network following the cable installation. Use appropriate test measures for each particular cable.
- E. Cable bundling:
1. RS485 cabling run open air in accessible areas can be bundled with other class 2 low voltage cabling.
 2. RS485 cabling run between terminal units in conduits above ceilings or under floors or in inaccessible areas can be bundled with other class 2 low voltage cabling.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. RS485 cabling run between floors shall be in a communication only conduit.
4. RS485 conduit run long distances between utility rooms or between buildings shall be in a communication only conduit.
5. Ethernet cabling shall be in a communication only conduit.
6. Ethernet and RS485 can be run together.
7. Fiber optics can be run with Ethernet and RS485 cabling as long as the conduit is bent to fiber optic standards and junction boxes are sized for fiber optic use.

F. RS485 Cabling

1. RS485 cabling shall be used for BACnet MS/TP networks.
2. RS485 shall use low capacitance, 20-24 gauge, twisted shielded pair.
3. The shields shall be tied together at each device.
4. The shield shall be grounded at one end only and capped at the other end.
5. Provide end of line (EOL) termination devices at each end of the RS485 network or subnetwork run, to match the impedance of the cable, 100 to 120ohm.

G. Ethernet Cabling

1. Ethernet shall not be run with any Class 1 or low voltage Class 2 wiring.
2. CAT6, unshielded twisted pair (UTP) cable shall be used for BAS Ethernet.
3. Solid wire shall be used for long runs, between mechanical rooms and between floors. Stranded cable can be used for patch cables and between panels in the same mechanical room up to 50 feet away.
4. When the BAS Ethernet connects to an Owner's network switch, document the port number on the BAS As-builts.

H. Fiber-Optic Cabling

1. Maximum pulling tensions as specified by the cable manufacturer shall not be exceeded during installation. Post-installation residual cable tension shall be within cable manufacturer's specifications.
2. All cabling and associated components shall be installed in accordance with manufacturers' instructions. Minimum cable and unjacketed fiber bend radii, as specified by cable manufacturer, shall be maintained.
3. All terminations shall to be made into a patch panel, designed for such use. Free air terminations with patch panels are prohibited.

I. When a cable enters or exits a building, a lightning arrestor must be installed between the lines and ground. The lightning arrestor shall be installed according to the manufacturer's instructions.

J. All runs of communication wiring shall be unspliced length when that length is commercially available.

K. All communication wiring shall be labeled to indicate origination and destination data.

L. Grounding of coaxial cable shall be in accordance with NEC regulations article on "Communications Circuits, Cable, and Protector Grounding."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.7 IDENTIFICATION

- A. Permanent warning labels shall be affixed to all equipment that can be automatically started by the DDC system.
 - 1. Labels shall use white lettering (12-point type or larger) on a red background.
 - 2. Warning labels shall read as follows: C A U T I O N This equipment is operating under automatic control and may start or stop at any time without warning. Switch disconnect to “Off” position before servicing.
- B. Permanent warning labels shall be affixed to all motor starters and all control panels that are connected to multiple power sources utilizing separate disconnects.
 - 1. Labels shall use white lettering (12-point type or larger) on a red background.
 - 2. Warning labels shall read as follows: C A U T I O N This equipment is fed from more than one power source with separate disconnects. Disconnect all power sources before servicing.
- C. Control Equipment and Device labeling:
 - 1. Labels and tags shall match the unique identifiers shown on the as-built drawings.
 - 2. All Enclosures shall be labeled to match the as-built drawing by either control panel name or the names of the DDC controllers inside.
 - 3. All sensors and actuators not in occupied areas shall be tagged.
 - 4. Airflow measurement arrays shall be tagged to show flow rate range for signal output range, duct size, and pitot tube AFMS flow coefficient.
 - 5. Duct static pressure taps shall be tagged at the location of the pressure tap.
 - 6. Each device inside enclosures shall be tagged.
 - 7. Terminal equipment need only have a tag for the unique terminal number, not for each device. Match the unique number on:
 - a. First, the design drawings, or
 - b. Second, the control as-builts, or
 - c. Third, the DDC addressing scheme
 - 8. Tags on the terminal units shall be displayed on the Operator Workstation Graphics.
- D. Tags shall be mechanically printed on permanent adhesivebacked labeling strips, 12 point height minimum.
- E. Manufacturers’ nameplates and UL or CSA labels are to be visible and legible after equipment is installed.
- F. Identification of Wires
 - 1. Tag each wire with a common identifier on each end of the wire, such as in the control panel and at the device termination.
 - 2. Tag each network wire with a common identifier on each end.
 - 3. Tag each 120V power source with the panel and breaker number it is fed by.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

G. Identification of Conduits:

1. Identify the low voltage conduit runs as BAS conduit, power feeds not included.
2. Identify each electric box, junction box, utility box and wiring tray with a blue paint mark or blue permanent adhesive sticker.
3. For conduit runs that run more than 8 ft between junction boxes in 1 room, place a blue identifier at least every 8 feet.
4. Place a blue identifier on each side of where a conduit passed through a wall or other inaccessible path.
5. Identify all BAS communication conduits the same as above.

3.8 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including piping and electrical connections. Report results in writing.

1. Operational Test: After electrical circuitry has been energized, start units to confirm proper unit operation. Remove malfunctioning units, replace with new units, and retest.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment, and retest.
3. Calibration test controllers by disconnecting input sensors and stimulating operation with compatible signal generator.

B. Engage a factory-authorized service representative to perform startup service.

C. Replace damaged or malfunctioning controls and equipment.

1. Start, test, and adjust control systems.
2. Demonstrate compliance with requirements, including calibration and testing, and control sequences.
3. Adjust, calibrate, and fine tune circuits and equipment to achieve sequence of operation specified.

3.9 SYSTEM CHECKOUT AND STARTUP

A. Inspect each termination in the MER control panels and devices to make sure all wires are connected according to the wiring diagrams and all termination are tight.

B. After the controls devices and panels are installed and power is available to the controls, perform a static checkout of all the points, including the following:

1. Inspect the setup and reading on each temperature sensor against a thermometer to verify its accuracy.
2. Inspect the setup and reading on each humidity sensor against a hygrometer to verify its accuracy.
3. Inspect the reading on each CO2 sensor using a calibration kit to verify the sensor range

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- accuracy matches the DDC setup.
 4. Inspect the reading of each status switch to verify the DDC reads the open and close correctly.
 5. Command each relay to open and close to verify its operation.
 6. Command each 2-position damper actuator to open and close to verify operation.
 7. Command each 2-position valve to open and close to verify operation.
 8. Ramp each modulating actuator to 0%, 25%, 50%, 75% and 100% to verify its operation.
 9. Ramp each modulating output signal, such as a VFD speed, to verify its operation.
 10. Test each safety device with a real life simulation, for instance check freezestats with ice water, water detectors with water, etc.
- C. Document that each point was verified and operating correctly. Correct each failed point before proceeding to the dynamic startup.
- D. Verify that each DDC controller communicates on its respective network correctly.
- E. After all of the points are verified, and power is available to the mechanical system, coordinate a startup of each system with the mechanical contractor. Include the following tests:
1. Start systems from DDC.
 2. Verify that each setpoint can be met by the system.
 3. Change setpoints and verify system response.
 4. Change sensor readings to verify system response.
 5. Test safety shutdowns.
 6. Verify time delays.
 7. Verify mode changes.
 8. Adjust filter switches and current switches for proper reactions.
 9. Adjust proportional bands and integration times to stabilize control loops.
- F. Perform all program changes and debugging of the system for a fully operational system.
- G. Verify that all graphics at the operator workstations correspond to the systems as installed. Verify that the points on the screens appear and react properly. Verify that all adjustable setpoints and manual commands operate from the operator workstations.
- H. After the sequence of operation is verified, setup the trends that are listed in the sequence of operations for logging and archiving for the commissioning procedure.
- 3.10 SYSTEM COMMISSIONING, DEMONSTRATION AND TURNOVER
- A. The BAS Contractor shall prepare and submit for approval a complete acceptance test procedure including submittal data relevant to point index, functions, sequence, inter-locks, and associated parameters, and other pertinent information for the operating system. Prior to acceptance of the BAS by the Owner and Engineer, the BAS contractor shall completely test the BAS using the approved test procedure.
- B. After the BAS contractor has completed the tests and certified the BAS is 100% complete, the Engineer shall be requested, in writing, to approve the satisfactory operation of the system, sub-

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

systems and accessories. The BAS contractor shall submit Maintenance and Operating manuals at this time for approval. An acceptance test in the presence of the Engineer and Owner's representative shall be performed. The Owner will then shake down the system for a fixed period of time (30 days).

- C. The BAS contractor shall fix punch list items within 30 days of acceptance.
- D. When the system performance is deemed satisfactory in whole or in part by these observers, the system parts will be accepted for beneficial use and placed under warranty.

3.11 TRAINING

- A. During System commissioning and at such time as acceptable performance of the Building Automation System hardware and software has been established, the BAS contractor shall provide on-site operator instruction to the owner's operating personnel. Operator instruction during normal working hours shall be performed by a competent building automation contractor representative familiar with the Building Automation System's software, hardware and accessories.
- B. At a time mutually agreed upon, during System commissioning as stated above, the BAS contractor shall give 40 hours of onsite training on the operation of all BAS equipment. Describe its intended use with respect to the programmed functions specified. Operator orientation of the automation system shall include, but not be limited to:
 - 1. Explanation of drawings and operator's maintenance manuals.
 - 2. Walk-through of the job to locate all control components.
 - 3. Operator workstation and peripherals.
 - 4. DDC Controller and ASC operation/sequence.
 - 5. Operator control functions including scheduling, alarming, and trending.
 - 6. Explanation of adjustment, calibration and replacement procedures.
- C. Since the Owner may require personnel to have more comprehensive understanding of the hardware and software, additional training must be available from the Contractor. If the Owner requires such training, it will be contracted at a later date. Provide description of available local and factory customer training. Provide costs associated with performing training at an off-site classroom facility and detail what is included in the manufacturer's standard pricing such as transportation, meals, etc.

END OF SECTION 230900

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 232113 - HYDRONIC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes pipe and fitting materials, joining methods, special-duty valves, and specialties for the following:
 - 1. Hot-water heating piping.
 - 2. Chilled-water piping.
 - 3. Condensate-drain piping.

1.3 DEFINITIONS

- A. PTFE: Polytetrafluoroethylene.
- B. RTRF: Reinforced thermosetting resin (fiberglass) fittings.
- C. RTRP: Reinforced thermosetting resin (fiberglass) pipe.

1.4 PERFORMANCE REQUIREMENTS

- A. Hydronic piping components and installation shall be capable of withstanding the following minimum working pressure and temperature:
 - 1. Hot-Water Heating Piping: 150 psig at 200 deg F.
 - 2. Chilled-Water Piping: 150 psig at 200 deg F.
 - 3. Condensate-Drain Piping: 150 deg F.

1.5 SUBMITTALS

- A. Product Data: For each type of the following:
 - 1. Plastic pipe and fittings with solvent cement.
 - 2. RTRP and RTRF with adhesive.
 - 3. Pressure-seal fittings.
 - 4. Valves. Include flow and pressure drop curves based on manufacturer's testing for calibrated-orifice balancing valves and automatic flow-control valves.
 - 5. Air control devices.
 - 6. Chemical treatment.
 - 7. Hydronic specialties.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Shop Drawings: Detail, at 1/4 scale, the piping layout, fabrication of pipe anchors, hangers, supports for multiple pipes, alignment guides, expansion joints and loops, and attachments of the same to the building structure. Detail location of anchors, alignment guides, and expansion joints and loops.
- C. Welding certificates.
- D. Qualification Data: For Installer.
- E. Field quality-control test reports.
- F. Operation and Maintenance Data: For air control devices, hydronic specialties, and special-duty valves to include in emergency, operation, and maintenance manuals.
- G. Water Analysis: Submit a copy of the water analysis to illustrate water quality available at Project site.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Installers of Pressure-Sealed Joints: Installers shall be certified by the pressure-seal joint manufacturer as having been trained and qualified to join piping with pressure-seal pipe couplings and fittings.
 - 2. Fiberglass Pipe and Fitting Installers: Installers of RTRF and RTRP shall be certified by the manufacturer of pipes and fittings as having been trained and qualified to join fiberglass piping with manufacturer-recommended adhesive.
- B. Steel Support Welding: Qualify processes and operators according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- C. Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX.
 - 1. Comply with provisions in ASME B31 Series, "Code for Pressure Piping."
 - 2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.
- D. ASME Compliance: Comply with ASME B31.9, "Building Services Piping," for materials, products, and installation. Safety valves and pressure vessels shall bear the appropriate ASME label. Fabricate and stamp air separators and expansion tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 01.

1.7 EXTRA MATERIALS

- A. Water-Treatment Chemicals: Furnish enough chemicals for initial system startup and for preventive maintenance for one year from date of Substantial Completion.
- B. Differential Pressure Meter: For each type of balancing valve and automatic flow control valve,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

include flowmeter, probes, hoses, flow charts, and carrying case.

PART 2 - - PRODUCTS

2.1 COPPER TUBE AND FITTINGS

- A. Drawn-Temper Copper Tubing: ASTM B 88, Type L.
- B. Annealed-Temper Copper Tubing: ASTM B 88, Type K.
- C. DWV Copper Tubing: ASTM B 306, Type DWV.
- D. Wrought-Copper Unions: ASME B16.22.

2.2 STEEL PIPE AND FITTINGS

- A. Steel Pipe: ASTM A 53/A 53M, black steel with plain ends; type, grade, and wall thickness as indicated in Part 3 "Piping Applications" Article.
- B. Cast-Iron Threaded Fittings: ASME B16.4; Classes 125 and 250 as indicated in Part 3 "Piping Applications" Article.
- C. Malleable-Iron Threaded Fittings: ASME B16.3, Classes 150 and 300 as indicated in Part 3 "Piping Applications" Article.
- D. Malleable-Iron Unions: ASME B16.39; Classes 150, 250, and 300 as indicated in Part 3 "Piping Applications" Article.
- E. Cast-Iron Pipe Flanges and Flanged Fittings: ASME B16.1, Classes 25, 125, and 250; raised ground face, and bolt holes spot faced as indicated in Part 3 "Piping Applications" Article.
- F. Wrought-Steel Fittings: ASTM A 234/A 234M, wall thickness to match adjoining pipe.
- G. Wrought Cast- and Forged-Steel Flanges and Flanged Fittings: ASME B16.5, including bolts, nuts, and gaskets of the following material group, end connections, and facings:
 - 1. Material Group: 1.1.
 - 2. End Connections: Butt welding.
 - 3. Facings: Raised face.
- H. Steel Pipe Nipples: ASTM A 733, made of same materials and wall thicknesses as pipe in which they are installed.

2.3 JOINING MATERIALS

- A. Pipe-Flange Gasket Materials: Suitable for chemical and thermal conditions of piping system contents.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. ASME B16.21, nonmetallic, flat, asbestos free, 1/8-inch maximum thickness unless thickness or specific material is indicated.
 - a. Full-Face Type: For flat-face, Class 125, cast-iron and cast-bronze flanges.
 - b. Narrow-Face Type: For raised-face, Class 250, cast-iron and steel flanges.
 - B. Flange Bolts and Nuts: ASME B18.2.1, carbon steel, unless otherwise indicated.
 - C. Solder Filler Metals: ASTM B 32, lead-free alloys. Include water-flushable flux according to ASTM B 813.
 - D. Brazing Filler Metals: AWS A5.8, BCuP Series, copper-phosphorus alloys for joining copper with copper; or BAg-1, silver alloy for joining copper with bronze or steel.
 - E. Welding Filler Metals: Comply with AWS D10.12/D10.12M for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.
 - F. Gasket Material: Thickness, material, and type suitable for fluid to be handled and working temperatures and pressures.
- 2.4 DIELECTRIC FITTINGS
- A. Description: Combination fitting of copper-alloy and ferrous materials with threaded, solder-joint, plain, or weld-neck end connections that match piping system materials.
 - B. Insulating Material: Suitable for system fluid, pressure, and temperature.
 - C. Dielectric Unions:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Capitol Manufacturing Company.
 - b. Central Plastics Company.
 - c. Hart Industries International, Inc.
 - d. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - e. Zurn Plumbing Products Group; AquaSpec Commercial Products Division.
 2. Factory-fabricated union assembly, for 250-psig minimum working pressure at 180 deg F.
 - D. Dielectric Flanges:
 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Capitol Manufacturing Company.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Central Plastics Company.
 - c. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - 3. Factory-fabricated companion-flange assembly, for 150- or 300-psig minimum working pressure as required to suit system pressures.
- E. Dielectric-Flange Kits:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Advance Products & Systems, Inc.
 - b. Calpico, Inc.
 - c. Central Plastics Company.
 - d. Pipeline Seal and Insulator, Inc.
 - 2. Companion-flange assembly for field assembly. Include flanges, full-face- or ring-type neoprene or phenolic gasket, phenolic or polyethylene bolt sleeves, phenolic washers, and steel backing washers.
 - 3. Separate companion flanges and steel bolts and nuts shall have 150- or 300-psig minimum working pressure where required to suit system pressures.
- F. Dielectric Couplings:
- 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Calpico, Inc.
 - b. Lochinvar Corporation.
 - 2. Galvanized-steel coupling with inert and noncorrosive thermoplastic lining; threaded ends; and 300-psig minimum working pressure at 225 deg F.
- G. Dielectric Nipples:
- 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Perfection Corporation; a subsidiary of American Meter Company.
 - b. Precision Plumbing Products, Inc.
 - c. Sioux Chief Manufacturing Company, Inc.
 - d. Victaulic Company of America.
 - 2. Electroplated steel nipple with inert and noncorrosive, thermoplastic lining; plain, threaded, or grooved ends; and 300-psig minimum working pressure at 225 deg F.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.5 VALVES

- A. Gate, Globe, Check, Ball, and Butterfly Valves: Comply with requirements specified in Division 23 Section "General-Duty Valves for HVAC Piping."
- B. Automatic Temperature-Control Valves, Actuators, and Sensors: Comply with requirements specified in Division 23 Section "Building Automation System."
- C. Automatic Flow-Control Valves:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Flow Design Inc.
 - b. Griswold Controls.
 - 2. Body: Brass or ferrous metal.
 - 3. Piston and Spring Assembly: Stainless steel, tamper proof, self-cleaning, and removable.
 - 4. Combination Assemblies: Include bronze or brass-alloy ball valve.
 - 5. Identification Tag: Marked with zone identification, valve number, and flow rate.
 - 6. Size: Same as pipe in which installed.
 - 7. Performance: Maintain constant flow, plus or minus 5 percent over system pressure fluctuations.
 - 8. Minimum CWP Rating: 175 psig.
 - 9. Maximum Operating Temperature: 250 deg F.

2.6 AIR CONTROL DEVICES

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Amtrol, Inc.
 - 2. Armstrong Pumps, Inc.
 - 3. Bell & Gossett Domestic Pump; a division of ITT Industries.
 - 4. Taco.

2.7 HYDRONIC PIPING SPECIALTIES

- A. Y-Pattern Strainers:
 - 1. Body: ASTM A 126, Class B, cast iron with bolted cover and bottom drain connection.
 - 2. End Connections: Threaded ends for NPS 2 and smaller; flanged ends for NPS 2-1/2 and larger.
 - 3. Strainer Screen: 40-mesh startup strainer, and perforated stainless-steel basket with 50 percent free area.
 - 4. CWP Rating: 125 psig.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 3 - - EXECUTION

3.1 PIPING APPLICATIONS

- A. Hot-water heating piping, aboveground, NPS 2 and smaller, shall be any of the following:
 - 1. Type L, drawn-temper copper tubing, wrought-copper fittings, and soldered joints.
 - 2. Schedule 40 steel pipe; Class 150, malleable-iron fittings; cast-iron flanges and flange fittings; and threaded joints.
- B. Chilled-water piping, aboveground, NPS 2 and smaller, shall be any of the following:
 - 1. Type L, drawn-temper copper tubing, wrought-copper fittings, and soldered joints.
 - 2. Schedule 40 steel pipe; Class 150, malleable-iron fittings; cast-iron flanges and flange fittings; and threaded joints.
- C. Condensate-Drain Piping: Type M, drawn-temper copper tubing, wrought-copper fittings, and soldered joints.

3.2 VALVE APPLICATIONS

- A. Install shutoff-duty valves at each branch connection to supply mains, and at supply connection to each piece of equipment.
- B. Install automatic, balancing valves in the return pipe of each heating or cooling terminal.
- C. Install check valves as required to control flow direction.

3.3 PIPING INSTALLATIONS

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicate piping locations and arrangements if such were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.
- B. Install piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at indicated slopes.
- G. Install piping free of sags and bends.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation.
- J. Select system components with pressure rating equal to or greater than system operating pressure.
- K. Install groups of pipes parallel to each other, spaced to permit applying insulation and servicing of valves.
- L. Install drains, consisting of a tee fitting, NPS 3/4 ball valve, and short NPS 3/4 threaded nipple with cap, at low points in piping system mains and elsewhere as required for system drainage.
- M. Install piping at a uniform grade of 0.2 percent upward in direction of flow.
- N. Reduce pipe sizes using eccentric reducer fitting installed with level side up.
- O. Install branch connections to mains using mechanically formed tee fittings in main pipe, with the branch connected to the bottom of the main pipe. For up-feed risers, connect the branch to the top of the main pipe.
- P. Install valves according to Division 23 Section "General-Duty Valves for HVAC Piping."
- Q. Install unions in piping, NPS 2 and smaller, adjacent to valves, at final connections of equipment, and elsewhere as indicated.
- R. Install flanges in piping, NPS 2-1/2 and larger, at final connections of equipment and elsewhere as indicated.
- S. Install strainers on inlet side of each control valve, pressure-reducing valve, solenoid valve, in-line pump, and elsewhere as indicated. Install NPS 3/4 nipple and ball valve in blowdown connection of strainers NPS 2 and larger. Match size of strainer blowoff connection for strainers smaller than NPS 2.
- T. Identify piping as specified in Division 23 Section "Identification for HVAC Piping and Equipment."
- U. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Division 23 Section "Sleeves and Sleeve Seals for HVAC Piping."
- V. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Division 23 Section "Sleeves and Sleeve Seals for HVAC Piping."
- W. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Division 23 Section "Escutcheons for HVAC Piping."

3.4 HANGERS AND SUPPORTS

- A. Hanger, support, and anchor devices are specified in Division 23 Section "Hangers and Supports for HVAC Piping and Equipment." Comply with the following requirements for maximum

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

spacing of supports.

- B. Seismic restraints are specified in Division 23 Section "Vibration and Seismic Controls for HVAC Piping and Equipment."
- C. Install the following pipe attachments:
 - 1. Adjustable steel clevis hangers for individual horizontal piping less than 20 feet long.
 - 2. Adjustable roller hangers and spring hangers for individual horizontal piping 20 feet or longer.
 - 3. Pipe Roller: MSS SP-58, Type 44 for multiple horizontal piping 20 feet or longer, supported on a trapeze.
 - 4. Spring hangers to support vertical runs.
 - 5. Provide copper-clad hangers and supports for hangers and supports in direct contact with copper pipe.
- D. Install hangers for steel piping with the following maximum spacing and minimum rod sizes:
 - 1. NPS 3/4: Maximum span, 7 feet; minimum rod size, 3/8 inch.
 - 2. NPS 1: Maximum span, 7 feet; minimum rod size, 3/8 inch.
 - 3. NPS 1-1/4: Maximum span, 7 feet; minimum rod size, 3/8 inch.
 - 4. NPS 1-1/2: Maximum span, 9 feet; minimum rod size, 3/8 inch.
 - 5. NPS 2: Maximum span, 10 feet; minimum rod size, 3/8 inch.
 - 6. NPS 2-1/2: Maximum span, 11 feet; minimum rod size, 1/2 inch.
 - 7. NPS 3: Maximum span, 12 feet; minimum rod size, 1/2 inch.
 - 8. NPS 3-1/2: Maximum span, 13 feet; minimum rod size, 1/2 inch.
 - 9. NPS 4: Maximum span, 14 feet; minimum rod size, 5/8 inch.
- E. Install hangers for drawn-temper copper tubing with the following maximum spacing and minimum rod sizes:
 - 1. NPS 3/4: Maximum span, 5 feet; minimum rod size, 3/8 inch.
 - 2. NPS 1: Maximum span, 6 feet; minimum rod size, 3/8 inch.
 - 3. NPS 1-1/4: Maximum span, 7 feet; minimum rod size, 3/8 inch.
 - 4. NPS 1-1/2: Maximum span, 8 feet; minimum rod size, 3/8 inch.
 - 5. NPS 2: Maximum span, 8 feet; minimum rod size, 3/8 inch.
 - 6. NPS 2-1/2: Maximum span, 9 feet; minimum rod size, 1/2 inch.
 - 7. NPS 3: Maximum span, 10 feet; minimum rod size, 1/2 inch.
- F. Support vertical runs at roof, at each floor, and at 10-foot intervals between floors.

3.5 PIPE JOINT CONSTRUCTION

- A. Join pipe and fittings according to the following requirements and Division 23 Sections specifying piping systems.
- B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- D. Soldered Joints: Apply ASTM B 813, water-flushable flux, unless otherwise indicated, to tube end. Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B 32.
- E. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- F. Welded Joints: Construct joints according to AWS D10.12/D10.12M, using qualified processes and welding operators according to Part 1 "Quality Assurance" Article.
- G. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.

3.6 TERMINAL EQUIPMENT CONNECTIONS

- A. Sizes for supply and return piping connections shall be the same as or larger than equipment connections.
- B. Install control valves in accessible locations close to connected equipment.
- C. Install bypass piping with globe valve around control valve. If parallel control valves are installed, only one bypass is required.
- D. Install ports for pressure gages and thermometers at coil inlet and outlet connections according to Division 23 Section "Meters and Gages for HVAC Piping."

3.7 FIELD QUALITY CONTROL

- A. Prepare hydronic piping according to ASME B31.9 and as follows:
 - 1. Leave joints, including welds, uninsulated and exposed for examination during test.
 - 2. Provide temporary restraints for expansion joints that cannot sustain reactions due to test pressure. If temporary restraints are impractical, isolate expansion joints from testing.
 - 3. Flush hydronic piping systems with clean water; then remove and clean or replace strainer screens.
 - 4. Isolate equipment from piping. If a valve is used to isolate equipment, its closure shall be capable of sealing against test pressure without damage to valve. Install blinds in flanged joints to isolate equipment.
 - 5. Install safety valve, set at a pressure no more than one-third higher than test pressure, to protect against damage by expanding liquid or other source of overpressure during test.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

B. Perform the following tests on hydronic piping:

1. Use ambient temperature water as a testing medium unless there is risk of damage due to freezing. Another liquid that is safe for workers and compatible with piping may be used.
2. While filling system, use vents installed at high points of system to release air. Use drains installed at low points for complete draining of test liquid.
3. Isolate expansion tanks and determine that hydronic system is full of water.
4. Subject piping system to hydrostatic test pressure that is not less than 100 psi.. Test pressure shall not exceed maximum pressure for any vessel, pump, valve, or other component in system under test. Verify that stress due to pressure at bottom of vertical runs does not exceed 90 percent of specified minimum yield strength or 1.7 times "SE" value in Appendix A in ASME B31.9, "Building Services Piping."
5. After hydrostatic test pressure has been applied for at least 15 minutes, examine piping, joints, and connections for leakage. Eliminate leaks by tightening, repairing, or replacing components, and repeat hydrostatic test until there are no leaks.
6. Once all leaks have been repaired repeat the test in the presence of the designer.
7. Prepare written report of testing.

C. Perform the following before operating the system:

1. Open manual valves fully.
2. Inspect pumps for proper rotation.
3. Set temperature controls so all coils are calling for full flow.
4. Inspect and set operating temperatures of hydronic equipment, such as boilers, chillers, cooling towers, to specified values.

END OF SECTION 232113

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Single-wall rectangular ducts and fittings.
- 2. Single-wall round ducts and fittings.
- 3. Sheet metal materials.
- 4. Sealants and gaskets.
- 5. Hangers and supports.

- B. Related Sections:

- 1. Division 23 Section "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing requirements for metal ducts.
- 2. Division 23 Section "Air Duct Accessories" for dampers, sound-control devices, duct-mounting access doors and panels, turning vanes, and flexible ducts.

1.3 PERFORMANCE REQUIREMENTS

- A. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

1.4 SUBMITTALS

- A. Product Data: For each type of the following products:

- 1. Liners and adhesives.
- 2. Sealants and gaskets.

- B. Shop Drawings:

- 1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
- 2. Factory- and shop-fabricated ducts and fittings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Duct layout indicating sizes, configuration, liner material, and static-pressure classes.
 4. Elevation of top of ducts.
 5. Dimensions of main duct runs from building grid lines.
 6. Fittings.
 7. Reinforcement and spacing.
 8. Seam and joint construction.
 9. Penetrations through fire-rated and other partitions.
 10. Equipment installation based on equipment being used on Project.
 11. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.
 12. Hangers and supports, including methods for duct and building attachment and vibration isolation.
- C. Coordination Drawings: Plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
1. Duct installation in congested spaces, indicating coordination with general construction, building components, and other building services. Indicate proposed changes to duct layout.
 2. Suspended ceiling components.
 3. Structural members to which duct will be attached.
 4. Size and location of initial access modules for acoustical tile.
 5. Penetrations of smoke barriers and fire-rated construction.
 6. Items penetrating finished ceiling including the following:
 - a. Lighting fixtures.
 - b. Air outlets and inlets.
 - c. Speakers.
 - d. Sprinklers.
 - e. Access panels.
 - f. Perimeter moldings.
- D. Welding certificates.
- E. Field quality-control reports.

PART 2 - PRODUCTS

2.1 SINGLE-WALL RECTANGULAR DUCTS AND FITTINGS

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on indicated static-pressure class unless otherwise indicated.
- B. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 1-4, "Transverse (Girth) Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

- C. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 1-5, "Longitudinal Seams - Rectangular Ducts," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 2, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.2 SINGLE-WALL ROUND DUCTS AND FITTINGS

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 3, "Round, Oval, and Flexible Duct," based on indicated static-pressure class unless otherwise indicated.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Eastern Sheet Metal
 - b. Lindab Inc.
 - c. McGill AirFlow LLC.
 - d. SEMCO Incorporated.
 - e. Sheet Metal Connectors, Inc.
 - f. Spiral Manufacturing Co., Inc.
 - g. Hamlin Sheet Metal
- B. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Transverse Joints - Round Duct," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 1. Transverse Joints in Ducts Larger Than 60 Inches in Diameter: Flanged.
- C. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Seams - Round Duct and Fittings," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 1. Fabricate round ducts larger than 90 inches in diameter with butt-welded longitudinal seams.
 - 2. Fabricate flat-oval ducts larger than 72 inches in width (major dimension) with butt-welded longitudinal seams.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Tees and Laterals: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "90 Degree Tees and Laterals," and Figure 3-5, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 SHEET METAL MATERIALS

- A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
 - 1. Galvanized Coating Designation: G90.
 - 2. Finishes for Surfaces Exposed to View: Mill phosphatized.
- C. Reinforcement Shapes and Plates: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
 - 1. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.
- D. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

2.4 SEALANT AND GASKETS

- A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets shall be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested according to UL 723; certified by an NRTL.
- B. Two-Part Tape Sealing System:
 - 1. Tape: Woven cotton fiber impregnated with mineral gypsum and modified acrylic/silicone activator to react exothermically with tape to form hard, durable, airtight seal.
 - 2. Tape Width: 4 inches.
 - 3. Sealant: Modified styrene acrylic.
 - 4. Water resistant.
 - 5. Mold and mildew resistant.
 - 6. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
 - 7. Service: Indoor and outdoor.
 - 8. Service Temperature: Minus 40 to plus 200 deg F.
 - 9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum.
 - 10. For indoor applications, use sealant that has a VOC content of 250 g/L or less when

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

calculated according to 40 CFR 59, Subpart D (EPA Method 24).

C. Water-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Solids Content: Minimum 65 percent.
3. Shore A Hardness: Minimum 20.
4. Water resistant.
5. Mold and mildew resistant.
6. VOC: Maximum 75 g/L (less water).
7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
8. Service: Indoor or outdoor.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

D. Solvent-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Base: Synthetic rubber resin.
3. Solvent: Toluene and heptane.
4. Solids Content: Minimum 60 percent.
5. Shore A Hardness: Minimum 60.
6. Water resistant.
7. Mold and mildew resistant.
8. For indoor applications, use sealant that has a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
9. VOC: Maximum 395 g/L.
10. Maximum Static-Pressure Class: 10-inch wg, positive or negative.
11. Service: Indoor or outdoor.
12. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

E. Flanged Joint Sealant: Comply with ASTM C 920.

1. General: Single-component, acid-curing, silicone, elastomeric.
2. Type: S.
3. Grade: NS.
4. Class: 25.
5. Use: O.
6. For indoor applications, use sealant that has a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

F. Flange Gaskets: Butyl rubber, neoprene, or EPDM polymer with polyisobutylene plasticizer.

G. Round Duct Joint O-Ring Seals:

1. Seal shall provide maximum leakage class of 3 cfm/100 sq. ft. at 1-inch wg and shall be rated for 10-inch wg static-pressure class, positive or negative.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. EPDM O-ring to seal in concave bead in coupling or fitting spigot.
3. Double-lipped, EPDM O-ring seal, mechanically fastened to factory-fabricated couplings and fitting spigots.

2.5 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Cadmium-plated steel rods and nuts.
- B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods with threads painted with zinc-chromate primer after installation.
- C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 4-1, "Rectangular Duct Hangers Minimum Size," and Table 4-2, "Minimum Hanger Sizes for Round Duct."
- D. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A 603.
- E. Steel Cables for Stainless-Steel Ducts: Stainless steel complying with ASTM A 492.
- F. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- G. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- H. Trapeze and Riser Supports:
 1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
 2. Supports for Stainless-Steel Ducts: Stainless-steel shapes and plates.
 3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.

PART 3 - EXECUTION

3.1 DUCT INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and Coordination Drawings.
- B. Install ducts according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" unless otherwise indicated.
- C. Install round ducts in maximum practical lengths.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Install ducts with fewest possible joints.
- E. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.
- F. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.
- G. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.
- H. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.
- I. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.
- J. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.
- K. Where ducts pass through fire-rated interior partitions and exterior walls, install fire dampers. Comply with requirements in Division 23 Section "Air Duct Accessories" for fire and smoke dampers.
- L. Protect duct interiors from moisture, construction debris and dust, and other foreign materials. Comply with SMACNA's "Duct Cleanliness for New Construction Guidelines."

3.2 DUCT SEALING

- A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- B. Seal ducts to the following seal classes according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible":
 - 1. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 2. Outdoor, Supply-Air Ducts: Seal Class A.
 - 3. Outdoor, Exhaust Ducts: Seal Class C.
 - 4. Outdoor, Return-Air Ducts: Seal Class C.
 - 5. Unconditioned Space, Supply-Air Ducts in Pressure Classes 2-Inch wg and Lower: Seal Class B.
 - 6. Unconditioned Space, Supply-Air Ducts in Pressure Classes Higher Than 2-Inch wg: Seal Class A.
 - 7. Unconditioned Space, Exhaust Ducts: Seal Class C.
 - 8. Unconditioned Space, Return-Air Ducts: Seal Class B.
 - 9. Conditioned Space, Supply-Air Ducts in Pressure Classes 2-Inch wg and Lower: Seal Class C.
 - 10. Conditioned Space, Supply-Air Ducts in Pressure Classes Higher Than 2-Inch wg: Seal

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Class B.

11. Conditioned Space, Exhaust Ducts: Seal Class B.
12. Conditioned Space, Return-Air Ducts: Seal Class C.

3.3 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 4, "Hangers and Supports."
- B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 1. Where practical, install concrete inserts before placing concrete.
 2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
 3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes or for slabs more than 4 inches thick.
 4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes or for slabs less than 4 inches thick.
- C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 4-1, "Rectangular Duct Hangers Minimum Size," and Table 4-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.
- D. Hangers Exposed to View: Threaded rod and angle or channel supports.
- E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 feet.
- F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.4 CONNECTIONS

- A. Make connections to equipment with flexible connectors complying with Division 23 Section "Air Duct Accessories."
- B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.5 PAINTING

- A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. Paint materials and application requirements are specified in Division 09 painting Sections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.6 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Leakage Tests:
 - 1. Comply with SMACNA's "HVAC Air Duct Leakage Test Manual." Submit a test report for each test.
 - 2. Test the following systems:
 - a. Supply Ducts with a Pressure Class of 2-Inch wg or Higher: Test representative duct sections totaling no less than 100 percent of total installed duct area for each designated pressure class.
 - b. Return Ducts with a Pressure Class of 2-Inch wg or Higher: Test representative duct sections totaling no less than 100 percent of total installed duct area for each designated pressure class.
 - c. Exhaust Ducts with a Pressure Class of 2-Inch wg or Higher: Test representative duct sections totaling no less than 100 percent of total installed duct area for each designated pressure class.
 - d. Outdoor Air Ducts with a Pressure Class of 2-Inch wg or Higher: Test representative duct sections totaling no less than 100 percent of total installed duct area for each designated pressure class.
 - 3. Disassemble, reassemble, and seal segments of systems to accommodate leakage testing and for compliance with test requirements.
 - 4. Test for leaks before applying external insulation.
 - 5. Conduct tests at static pressures equal to maximum design pressure of system or section being tested. If static-pressure classes are not indicated, test system at maximum system design pressure. Do not pressurize systems above maximum design operating pressure.
 - 6. Give seven days' advance notice for testing.
- C. Duct System Cleanliness Tests:
 - 1. Visually inspect duct system to ensure that no visible contaminants are present.
 - 2. Test sections of metal duct system, chosen randomly by Owner, for cleanliness according to "Vacuum Test" in NADCA ACR, "Assessment, Cleaning and Restoration of HVAC Systems."
 - a. Acceptable Cleanliness Level: Net weight of debris collected on the filter media shall not exceed 0.75 mg/100 sq. cm.
- D. Duct system will be considered defective if it does not pass tests and inspections.
- E. Prepare test and inspection reports.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.7 DUCT CLEANING

- A. Clean existing duct systems before testing, adjusting, and balancing.
- B. Use service openings for entry and inspection.
 - 1. Create new openings and install access panels appropriate for duct static-pressure class if required for cleaning access. Provide insulated panels for insulated or lined duct. Patch insulation and liner as recommended by duct liner manufacturer. Comply with Division 23 Section "Air Duct Accessories" for access panels and doors.
 - 2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
 - 3. Remove and reinstall ceiling to gain access during the cleaning process.
- C. Particulate Collection and Odor Control:
 - 1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
 - 2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.
- D. Clean the following components by removing surface contaminants and deposits:
 - 1. Air outlets and inlets (registers, grilles, and diffusers).
 - 2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.
 - 3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
 - 4. Coils and related components.
 - 5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
 - 6. Supply-air ducts, dampers, actuators, and turning vanes.
 - 7. Dedicated exhaust and ventilation components and makeup air systems.

3.8 START UP

- A. Air Balance: Comply with requirements in Division 23 Section "Testing, Adjusting, and Balancing for HVAC."

3.9 DUCT SCHEDULE

- A. Supply Ducts:
 - 1. Ducts Connected to Fan Coil Units, Heat Pumps, and Terminal Units (downstream):
 - a. Pressure Class: Positive 1-inch wg.
 - b. Minimum SMACNA Seal Class: B.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 12.
 - 2. Ducts Connected to Constant-Volume Air-Handling Units:
 - a. Pressure Class: Positive 2-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 6.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.
 - 3. Ducts Connected to Variable-Air-Volume Air-Handling Units:
 - a. Pressure Class: Positive 2-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 6.
 - d. SMACNA Leakage Class for Round and Flat Oval: 3.
- B. Return Ducts:
 - 1. Ducts Connected to Fan Coil Units:
 - a. Pressure Class: Positive or negative 1-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - 2. Ducts Connected to Air-Handling Units:
 - a. Pressure Class: Positive or negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.
- C. Exhaust Ducts:
 - 1. Ducts Connected to Fans Exhausting (ASHRAE 62.1, Class 1 and 2) Air:
 - a. Pressure Class: Negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: B if negative pressure, and A if positive pressure.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.
 - 2. Ducts Connected to Air-Handling Units:
 - a. Pressure Class: Positive or negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: A if negative pressure, and A if positive pressure.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

D. Outdoor-Air (Not Filtered, Heated, or Cooled) Ducts:

1. Ducts Connected to Air-Handling Units:
 - a. Pressure Class: Positive or negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.
2. Ducts Connected to Equipment Not Listed Above:
 - a. Pressure Class: Positive or negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: A.
 - c. SMACNA Leakage Class for Rectangular: 12.
 - d. SMACNA Leakage Class for Round and Flat Oval: 6.

E. Intermediate Reinforcement:

1. Galvanized-Steel Ducts: Galvanized steel.

F. Elbow Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Elbows."
 - a. Velocity 1000 fpm or Lower:
 - 1) Radius Type RE 1 with minimum 0.5 radius-to-diameter ratio.
 - 2) Mitered Type RE 4 without vanes.
 - b. Velocity 1000 to 1500 fpm:
 - 1) Radius Type RE 1 with minimum 1.0 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 0.5 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
 - c. Velocity 1500 fpm or Higher:
 - 1) Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
2. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Elbows."
 - a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
3. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-3, "Round Duct Elbows."
- a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.
 - 1) Velocity 1000 fpm or Lower: 0.5 radius-to-diameter ratio and three segments for 90-degree elbow.
 - 2) Velocity 1000 to 1500 fpm: 1.0 radius-to-diameter ratio and four segments for 90-degree elbow.
 - 3) Velocity 1500 fpm or Higher: 1.5 radius-to-diameter ratio and five segments for 90-degree elbow.
 - 4) Radius-to Diameter Ratio: 1.5.
 - b. Round Elbows, 12 Inches and Smaller in Diameter: Stamped or pleated.
 - c. Round Elbows, 14 Inches and Larger in Diameter: Standing seam.

G. Branch Configuration:

- 1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-6, "Branch Connections."
 - a. Rectangular Main to Rectangular Branch: 45-degree entry.
 - b. Rectangular Main to Round Branch: Spin in.
- 2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "90 Degree Tees and Laterals," and Figure 3-5, "Conical Tees." Saddle taps are permitted in existing duct.
 - a. Velocity 1000 fpm or Lower: 90-degree tap.
 - b. Velocity 1000 to 1500 fpm: Conical tap.
 - c. Velocity 1500 fpm or Higher: 45-degree lateral.

END OF SECTION 233113

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Backdraft dampers.
 - 2. Manual volume dampers.
 - 3. Control dampers.
 - 4. Flange connectors.
 - 5. Turning vanes.
 - 6. Remote damper operators.
 - 7. Duct-mounted access doors.
 - 8. Flexible connectors.
 - 9. Flexible ducts.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For duct accessories. Include plans, elevations, sections, details and attachments to other work.
 - 1. Detail duct accessories fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:
 - a. Special fittings.
 - b. Manual volume damper installations.
 - c. Control damper installations.
 - d. Wiring Diagrams: For power, signal, and control wiring.
- C. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which ceiling-mounted access panels and access doors required for access to duct accessories are shown and coordinated with each other, using input from Installers of the items involved.
- D. Source quality-control reports.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Operation and Maintenance Data: For air duct accessories to include in operation and maintenance manuals.

1.4 QUALITY ASSURANCE

- A. Comply with AMCA 500-D testing for damper rating.

PART 2 - - PRODUCTS

2.1 MATERIALS

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
 - 1. Galvanized Coating Designation: G90.
 - 2. Exposed-Surface Finish: Mill phosphatized.
- C. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

2.2 BACKDRAFT AND PRESSURE RELIEF DAMPERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Air Balance Inc.; a division of Mestek, Inc.
 - 2. American Warming and Ventilating; a division of Mestek, Inc.
 - 3. Cesco Products; a division of Mestek, Inc.
 - 4. Duro Dyne Inc.
 - 5. Greenheck Fan Corporation.
 - 6. Lloyd Industries, Inc.
 - 7. Nailor Industries Inc.
 - 8. NCA Manufacturing, Inc.
 - 9. Pottorff; a division of PCI Industries, Inc.
 - 10. Ruskin Company.
 - 11. SEMCO Incorporated.
 - 12. Vent Products Company, Inc.
- B. Description: Gravity balanced.
- C. Maximum Air Velocity: 2000 fpm.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Maximum System Pressure: 2-inch wg.
- E. Frame: 0.052-inch- thick, galvanized sheet steel, with welded corners and mounting flange.
- F. Blades: Multiple single-piece blades, center-pivoted, maximum 6-inch width, 0.050-inch- thick aluminum sheet with sealed edges.
- G. Blade Action: Parallel.
- H. Blade Seals: Neoprene, mechanically locked.
- I. Blade Axles:
 - 1. Material: Stainless steel.
 - 2. Diameter: 0.20 inch.
- J. Tie Bars and Brackets: Galvanized steel.
- K. Return Spring: Adjustable tension.
- L. Bearings: Steel ball.
- M. Accessories:
 - 1. Adjustment device to permit setting for varying differential static pressure.
 - 2. Counterweights and spring-assist kits for vertical airflow installations.
 - 3. Electric actuators.
 - 4. Chain pulls.
 - 5. Front of rear screens.
 - 6. 90-degree stops.
- N. Sleeve: Minimum 20-gage thickness.

2.3 MANUAL VOLUME DAMPERS

- A. Standard, Steel, Manual Volume Dampers:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Air Balance Inc.; a division of Mestek, Inc.
 - b. American Warming and Ventilating; a division of Mestek, Inc.
 - c. Flexmaster U.S.A., Inc.
 - d. McGill AirFlow LLC.
 - e. METALAIRE, Inc.
 - f. Nailor Industries Inc.
 - g. Pottorff; a division of PCI Industries, Inc.
 - h. Ruskin Company.
 - i. Trox USA Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- j. Vent Products Company, Inc.
2. Standard leakage rating, with linkage outside airstream.
3. Suitable for horizontal or vertical applications.
4. Frames:
 - a. Hat-shaped, galvanized-steel channels, 0.064-inch minimum thickness.
 - b. Mitered and welded corners.
 - c. Flanges for attaching to walls and flangeless frames for installing in ducts.
5. Blades:
 - a. Multiple or single blade.
 - b. Parallel- or opposed-blade design.
 - c. Stiffen damper blades for stability.
 - d. Galvanized-steel, 0.064 inch thick.
6. Blade Axles: Stainless steel.
7. Bearings:
 - a. Stainless-steel sleeve.
 - b. Dampers in ducts with pressure classes of 3-inch wg or less shall have axles full length of damper blades and bearings at both ends of operating shaft.
8. Tie Bars and Brackets: Galvanized steel.

B. Jackshaft:

1. Size: 1-inch diameter.
2. Material: Galvanized-steel pipe rotating within pipe-bearing assembly mounted on supports at each mullion and at each end of multiple-damper assemblies.
3. Length and Number of Mountings: As required to connect linkage of each damper in multiple-damper assembly.

C. Damper Hardware:

1. Zinc-plated, die-cast core with dial and handle made of 3/32-inch- thick zinc-plated steel, and a 3/4-inch hexagon locking nut.
2. Include center hole to suit damper operating-rod size.
3. Include elevated platform for insulated duct mounting.

2.4 CONTROL DAMPERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. American Warming and Ventilating; a division of Mestek, Inc.
2. Arrow United Industries; a division of Mestek, Inc.
3. Cesco Products; a division of Mestek, Inc.
4. Duro Dyne Inc.
5. Flexmaster U.S.A., Inc.
6. Greenheck Fan Corporation.
7. Lloyd Industries, Inc.
8. M&I Air Systems Engineering; Division of M&I Heat Transfer Products Ltd.
9. McGill AirFlow LLC.
10. METALAIRE, Inc.
11. Metal Form Manufacturing, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

12. Nailor Industries Inc.
 13. NCA Manufacturing, Inc.
 14. Ruskin Company.
 15. Vent Products Company, Inc.
- B. Low-leakage rating and bearing AMCA's Certified Ratings Seal for both air performance and air leakage.
- C. Frames:
1. Hat shaped.
 2. Galvanized-steel channels, 0.064 inch thick.
 3. Mitered and welded corners.
- D. Blades:
1. Multiple blade with maximum blade width of 8 inches.
 2. Parallel- and opposed-blade design.
 3. Galvanized steel.
 4. 0.064 inch thick.
 5. Blade Edging: Closed-cell neoprene edging.
 6. Blade Edging: Inflatable seal blade edging, or replaceable rubber seals.
- E. Blade Axles: 1/2-inch- diameter; stainless steel; blade-linkage hardware of zinc-plated steel and brass; ends sealed against blade bearings.
1. Operating Temperature Range: From minus 40 to plus 200 deg F.
- F. Bearings:
1. Stainless-steel sleeve.
 2. Dampers in ducts with pressure classes of 3-inch wg or less shall have axles full length of damper blades and bearings at both ends of operating shaft.
 3. Thrust bearings at each end of every blade.
- 2.5 FLANGE CONNECTORS
- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. Ductmate Industries, Inc.
 2. Nexus PDQ; Division of Shilco Holdings Inc.
 3. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
- B. Description: Add-on or roll-formed, factory-fabricated, slide-on transverse flange connectors, gaskets, and components.
- C. Material: Galvanized steel.
- D. Gage and Shape: Match connecting ductwork.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.6 TURNING VANES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Ductmate Industries, Inc.
 - 2. Duro Dyne Inc.
 - 3. METALAIRE, Inc.
 - 4. SEMCO Incorporated.
 - 5. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
- B. Turning Vanes for Metal Ducts: Curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
 - 1. Acoustic Turning Vanes: Fabricate airfoil-shaped aluminum extrusions with perforated faces and fibrous-glass fill.
- C. Manufactured Turning Vanes for Nonmetal Ducts: Fabricate curved blades of resin-bonded fiberglass with acrylic polymer coating; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
- D. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 2-3, "Vanes and Vane Runners," and 2-4, "Vane Support in Elbows."
- E. Vane Construction: Single wall for ducts up to 48 inches wide and double wall for larger dimensions.

2.7 REMOTE DAMPER OPERATORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Pottorff; a division of PCI Industries, Inc.
 - 2. Ventfabrics, Inc.
 - 3. Young Regulator Company.
- B. Description: Cable system designed for remote manual damper adjustment.
- C. Tubing: Brass.
- D. Cable: Stainless steel.
- E. Wall-Box Mounting: Recessed, 3/4 inches deep.
- F. Wall-Box Cover-Plate Material: Stainless steel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.8 DUCT-MOUNTED ACCESS DOORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. American Warming and Ventilating; a division of Mestek, Inc.
 - 2. Cesco Products; a division of Mestek, Inc.
 - 3. Ductmate Industries, Inc.
 - 4. Flexmaster U.S.A., Inc.
 - 5. Greenheck Fan Corporation.
 - 6. McGill AirFlow LLC.
 - 7. Nailor Industries Inc.
 - 8. Pottorff; a division of PCI Industries, Inc.
 - 9. Ventfabrics, Inc.
 - 10. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
- B. Duct-Mounted Access Doors: Fabricate access panels according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 2-10, "Duct Access Doors and Panels," and 2-11, "Access Panels - Round Duct."
 - 1. Door:
 - a. Double wall, rectangular.
 - b. Galvanized sheet metal with insulation fill and thickness as indicated for duct pressure class.
 - c. Vision panel.
 - d. Hinges and Latches: 1-by-1-inch butt or piano hinge and cam latches.
 - e. Fabricate doors airtight and suitable for duct pressure class.
 - 2. Frame: Galvanized sheet steel, with bend-over tabs and foam gaskets.
 - 3. Number of Hinges and Locks:
 - a. Access Doors Less Than 12 Inches Square: No hinges and two sash locks.
 - b. Access Doors up to 18 Inches Square: Two hinges and two sash locks.
 - c. Access Doors up to 24 by 48 Inches: Three hinges and two compression latches with outside and inside handles.
 - d. Access Doors Larger Than 24 by 48 Inches: Four hinges and two compression latches with outside and inside handles.

2.9 FLEXIBLE CONNECTORS

- A. Manufacturers: Subject to compliance with requirements available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Ductmate Industries, Inc.
 - 2. Duro Dyne Inc.
 - 3. Ventfabrics, Inc.
 - 4. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
- B. Materials: Flame-retardant or noncombustible fabrics.
- C. Coatings and Adhesives: Comply with UL 181, Class 1.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Metal-Edged Connectors: Factory fabricated with a fabric strip 3-1/2 inches wide attached to 2 strips of 2-3/4-inch- wide, 0.028-inch- thick, galvanized sheet steel or 0.032-inch- thick aluminum sheets. Provide metal compatible with connected ducts.
- E. Indoor System, Flexible Connector Fabric: Glass fabric double coated with neoprene.
 - 1. Minimum Weight: 26 oz./sq. yd..
 - 2. Tensile Strength: 480 lbf/inch in the warp and 360 lbf/inch in the filling.
 - 3. Service Temperature: Minus 40 to plus 200 deg F.
- F. Thrust Limits: Combination coil spring and elastomeric insert with spring and insert in compression, and with a load stop. Include rod and angle-iron brackets for attaching to fan discharge and duct.
 - 1. Frame: Steel, fabricated for connection to threaded rods and to allow for a maximum of 30 degrees of angular rod misalignment without binding or reducing isolation efficiency.
 - 2. Outdoor Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
 - 3. Minimum Additional Travel: 50 percent of the required deflection at rated load.
 - 4. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
 - 5. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
 - 6. Elastomeric Element: Molded, oil-resistant rubber or neoprene.
 - 7. Coil Spring: Factory set and field adjustable for a maximum of 1/4-inch movement at start and stop.

2.10 FLEXIBLE DUCTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Flexmaster U.S.A., Inc.
 - 2. McGill AirFlow LLC.
 - 3. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
- B. Insulated, Flexible Duct: UL 181, Class 1, 2-ply vinyl film supported by helically wound, spring-steel wire; fibrous-glass insulation; polyethylene vapor-barrier film.
 - 1. Pressure Rating: 10-inch wg positive and 1.0-inch wg negative.
 - 2. Maximum Air Velocity: 4000 fpm.
 - 3. Temperature Range: Minus 10 to plus 160 deg F.
- C. Flexible Duct Connectors:
 - 1. Clamps: Stainless-steel band with cadmium-plated hex screw to tighten band with a worm-gear action in sizes 3 through 18 inches, to suit duct size.

2.11 DUCT ACCESSORY HARDWARE

- A. Instrument Test Holes: Cast iron or cast aluminum to suit duct material, including screw cap and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

gasket. Size to allow insertion of pitot tube and other testing instruments and of length to suit duct-insulation thickness.

- B. Adhesives: High strength, quick setting, neoprene based, waterproof, and resistant to gasoline and grease.

PART 3 - - EXECUTION

3.1 INSTALLATION

- A. Install duct accessories according to applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116, "Fibrous Glass Duct Construction Standards," for fibrous-glass ducts.
- B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless-steel accessories in stainless-steel ducts, and aluminum accessories in aluminum ducts.
- C. Install backdraft dampers at inlet of exhaust fans or exhaust ducts as close as possible to exhaust fan unless otherwise indicated.
- D. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Where dampers are installed in ducts having duct liner, install dampers with hat channels of same depth as liner, and terminate liner with nosing at hat channel.
 - 1. Coordinate subparagraphs below with Division 23 Section "Metal Ducts." Install steel volume dampers in steel ducts.
- E. Set dampers to fully open position before testing, adjusting, and balancing.
- F. Install test holes at fan inlets and outlets and elsewhere as indicated.
- G. Install duct access doors on sides of ducts to allow for inspecting, adjusting, and maintaining accessories and equipment at the following locations:
 - 1. On both sides of duct coils.
 - 2. Downstream from manual volume dampers, control dampers and equipment.
 - 3. Adjacent to and close enough to fire or smoke dampers, to reset or reinstall fusible links. Access doors for access to fire or smoke dampers having fusible links shall be pressure relief access doors and shall be outward operation for access doors installed upstream from dampers and inward operation for access doors installed downstream from dampers.
 - 4. At each change in direction and at maximum 50-foot spacing.
 - 5. Upstream of turning vanes.
 - 6. Elsewhere as indicated.
- H. Install access doors with swing against duct static pressure.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- I. Access Door Sizes:
 - 1. One-Hand or Inspection Access: 8 by 5 inches.
 - 2. Two-Hand Access: 12 by 6 inches.
 - 3. Head and Hand Access: 18 by 10 inches.
 - 4. Head and Shoulders Access: 21 by 14 inches.
 - 5. Body Access: 25 by 14 inches.
 - 6. Body plus Ladder Access: 25 by 17 inches.
- J. Label access doors according to Division 23 Section "Identification for HVAC Piping and Equipment" to indicate the purpose of access door.
- K. Install flexible connectors to connect ducts to equipment.
- L. Connect terminal units to supply ducts with maximum 12-inch lengths of flexible duct. Do not use flexible ducts to change directions.
- M. Connect diffusers to low-pressure ducts with maximum 60-inch lengths of flexible duct clamped or strapped in place.
- N. Connect flexible ducts to metal ducts with draw bands.
- O. Install duct test holes where required for testing and balancing purposes.
- P. Install thrust limits at centerline of thrust, symmetrical on both sides of equipment. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4-inch movement during start and stop of fans.

3.2 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Operate dampers to verify full range of movement.
 - 2. Inspect locations of access doors and verify that purpose of access door can be performed.
 - 3. Inspect turning vanes for proper and secure installation.
 - 4. Operate remote damper operators to verify full range of movement of operator and damper.

END OF SECTION 233300

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 233423 - HVAC POWER VENTILATORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:

- 1. Ceiling-mounting ventilators.
- 2. In-line centrifugal fans.

1.3 PERFORMANCE REQUIREMENTS

- A. Project Altitude: Base fan-performance ratings on actual Project site elevations.
- B. Operating Limits: Classify according to AMCA 99.

1.4 SUBMITTALS

- A. Product Data: Include rated capacities, furnished specialties, and accessories for each type of product indicated and include the following:
 - 1. Certified fan performance curves with system operating conditions indicated.
 - 2. Certified fan sound-power ratings.
 - 3. Motor ratings and electrical characteristics, plus motor and electrical accessories.
 - 4. Material thickness and finishes, including color charts.
 - 5. Dampers, including housings, linkages, and operators.
 - 6. Roof curbs.
 - 7. Fan speed controllers.
- B. Shop Drawings: Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 1. Wiring Diagrams: Power, signal, and control wiring.
 - 2. Design Calculations: Calculate requirements for selecting vibration isolators and seismic restraints and for designing vibration isolation bases.
 - 3. Vibration Isolation Base Details: Detail fabrication, including anchorages and attachments to structure and to supported equipment. Include auxiliary motor slides and rails, and base

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

weights.

- C. Coordination Drawings: Reflected ceiling plans and other details, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:
 - 1. Ceiling suspension assembly members.
 - 2. Size and location of initial access modules for acoustical tile.
 - 3. Ceiling-mounted items including light fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.
- D. Field quality-control test reports.
- E. Operation and Maintenance Data: For power ventilators to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. AMCA Compliance: Products shall comply with performance requirements and shall be licensed to use the AMCA-Certified Ratings Seal.
- C. NEMA Compliance: Motors and electrical accessories shall comply with NEMA standards.
- D. UL Standard: Power ventilators shall comply with UL 705.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver fans as factory-assembled unit, to the extent allowable by shipping limitations, with protective crating and covering.
- B. Disassemble and reassemble units, as required for moving to final location, according to manufacturer's written instructions.
- C. Lift and support units with manufacturer's designated lifting or supporting points.

1.7 COORDINATION

- A. Coordinate size and location of structural-steel support members.
- B. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Coordinate installation of roof curbs, equipment supports, and roof penetrations. These items are specified in Division 07 Section "Roof Accessories."

PART 2 - PRODUCTS

2.1 CEILING-MOUNTING VENTILATORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- B. Basis-of-Design Product: Subject to compliance with requirements, provide Greenheck SP as scheduled or a comparable product by one of the following:
 - 1. Breidert Air Products.
 - 2. JencoFan; Div. of Breidert Air Products.
 - 3. Loren Cook Company.
 - 4. NuTone Inc.
 - 5. Penn Ventilation.
- C. Description: Centrifugal fans designed for installing in ceiling or wall or for concealed in-line applications.
- D. Housing: Steel, lined with acoustical insulation.
- E. Fan Wheel: Centrifugal wheels directly mounted on motor shaft. Fan shrouds, motor, and fan wheel shall be removable for service.
- F. Grille: Painted aluminum, louvered grille with flange on intake and thumbscrew attachment to fan housing.
- G. Electrical Requirements: Junction box for electrical connection on housing and receptacle for motor plug-in.
- H. Accessories:
 - 1. Motion Sensor: Motion detector with adjustable shutoff timer.
 - 2. Manufacturer's standard wall cap, and transition fittings.
- I. Capacities and Characteristics: As indicated on Schedules.

2.2 IN-LINE CENTRIFUGAL FANS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- B. Basis-of-Design Product: Subject to compliance with requirements, provide Greenheck CSP or a

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

comparable product by one of the following:

- 1.
2. Breidert Air Products.
3. JencoFan; Div. of Breidert Air Products.
4. Loren Cook Company.
5. Penn Ventilation.

- C. Description: In-line, direct-driven centrifugal fans consisting of housing, wheel, outlet guide vanes, fan shaft, bearings, motor and disconnect switch, drive assembly, mounting brackets, and accessories.
- D. Housing: Split, spun aluminum with aluminum straightening vanes, inlet and outlet flanges, and support bracket adaptable to floor, side wall, or ceiling mounting.
- E. Direct-Driven Units: Motor mounted in airstream, factory wired to disconnect switch located on outside of fan housing.
- F. Fan Wheels: Aluminum, airfoil blades welded to aluminum hub.
- G. Capacities and Characteristics: As indicated on Schedules.

2.3 MOTORS

- A. Comply with requirements in Division 23 Section "Common Motor Requirements for HVAC Equipment."
- B. Enclosure Type: Totally enclosed, fan cooled.

2.4 SOURCE QUALITY CONTROL

- A. Sound-Power Level Ratings: Comply with AMCA 301, "Methods for Calculating Fan Sound Ratings from Laboratory Test Data." Factory test fans according to AMCA 300, "Reverberant Room Method for Sound Testing of Fans." Label fans with the AMCA-Certified Ratings Seal.
- B. Fan Performance Ratings: Establish flow rate, pressure, power, air density, speed of rotation, and efficiency by factory tests and ratings according to AMCA 210, "Laboratory Methods of Testing Fans for Rating."

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install power ventilators level and plumb.
- B. Ceiling Units: Suspend units from structure; use steel wire or metal straps.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Support suspended units from structure using threaded steel rods and vibration isolation indicated below. Vibration- and seismic-control devices are specified in Division 23 Section "Vibration and Seismic Controls for HVAC Piping and Equipment."
 - 1. Suspended Units, 4" total static pressure and under: Hanger spring neoprene, with static deflection as indicated below.
 - a. 500 FRPM and up: 0.75 inches
 - b. 375-499 FRPM: 1.5 inches
 - c. 300-374 FRPM: 2.5 inches
 - d. 175-299 FRPM: 3.5 inches
- D. Install units with clearances for service and maintenance.
- E. Label units according to requirements specified in Division 23 Section "Identification for HVAC Piping and Equipment."

3.2 CONNECTIONS

- A. Duct installation and connection requirements are specified in other Division 23 Sections. Drawings indicate general arrangement of ducts and duct accessories. Make final duct connections with flexible connectors. Flexible connectors are specified in Division 23 Section "Air Duct Accessories."
- B. Install ducts adjacent to power ventilators to allow service and maintenance.
- C. Ground equipment according to Division 26 Section "Grounding and Bonding for Electrical Systems."
- D. Connect wiring according to Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."

3.3 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
 - 1. Verify that shipping, blocking, and bracing are removed.
 - 2. Verify that unit is secure on mountings and supporting devices and that connections to ducts and electrical components are complete. Verify that proper thermal-overload protection is installed in motors, starters, and disconnect switches.
 - 3. Verify that cleaning and adjusting are complete.
 - 4. Disconnect fan drive from motor, verify proper motor rotation direction, and verify fan wheel free rotation and smooth bearing operation.
 - 5. Verify lubrication for bearings and other moving parts.
 - 6. Remove and replace malfunctioning units and retest as specified above.
- B. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

equipment.

- C. The total fan assembly after installation shall be checked for balance. Fans are to be statically and dynamically balanced to American National Standard Institute (ANSI) balancing tolerance of Grade G6.3 or as per AMCA Standard 204-96 - Balance Quality & Vibration Level for Fans.

3.4 ADJUSTING

- A. Adjust damper linkages for proper damper operation.
- B. Adjust belt tension.
- C. Refer to Division 23 Section "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing procedures.
- D. Replace fan and motor pulleys as required to achieve design airflow.
- E. Lubricate bearings.

END OF SECTION 233423

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 233600 - AIR TERMINAL UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Shutoff, single-duct air terminal units.
- B. Terminal units utilized in laboratory containment exhaust applications or wet applications shall be stainless steel or have a baked phenolic coating.

1.3 SUBMITTALS

- A. Product Data: For each type of the following products, including rated capacities, furnished specialties, sound-power ratings, and accessories.
 - 1. Air terminal units.
 - 2. Sealants and gaskets.
- B. Shop Drawings: For air terminal units. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 2. Wiring Diagrams: For power, signal, and control wiring.
 - 3. Hangers and supports, including methods for duct and building attachment and vibration isolation.
- C. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from Installers of the items involved:
 - 1. Ceiling suspension assembly members.
 - 2. Method of attaching hangers to building structure.
 - 3. Size and location of initial access modules for acoustic tile.
 - 4. Ceiling-mounted items including lighting fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.
- D. Field quality-control reports.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Operation and Maintenance Data: For air terminal units to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:
 - 1. Instructions for resetting minimum and maximum air volumes.
 - 2. Instructions for adjusting software set points.

1.4 QUALITY ASSURANCE

- A. Product Options: Drawings indicate size, profiles, and dimensional requirements of air terminal units and are based on the specific system indicated. Refer to Division 01 Section "Product Requirements."
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.
- C. NFPA Compliance: Install air terminal units according to NFPA 90A, "Standard for the Installation of Air Conditioning and Ventilating Systems."
- D. Units shall be certified under ARI Standard 880-94.
- E. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1-2004, Section 7 - "Systems and Equipment" and Section 7 - "Construction and System Start-Up."

1.5 COORDINATION

- A. Coordinate layout and installation of air terminal units and suspension system with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, fire-suppression system, and partition assemblies.

PART 2 - - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 SHUTOFF, SINGLE-DUCT AIR TERMINAL UNITS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Nailor D30RW or comparable product by one of the following:
 - 1. Krueger.
 - 2. METALAIRE, Inc.
 - 3. Titus.
 - 4. Price.
- B. Configuration: Volume-damper assembly inside unit casing with control components inside a protective metal shroud.
- C. Casing: minimum 22-gauge, double wall.
 - 1. Casing Lining: Adhesive attached, 1-inch- thick, polyurethane foam insulation complying with UL 181 erosion requirements, and having a maximum flame-spread index of 25 and a maximum smoke-developed index of 50, for both insulation and adhesive, when tested according to ASTM E 84.
 - 2. Air Inlet: Round stub connection or S-slip and drive connections for duct attachment.
 - 3. Air Outlet: S-slip and drive connections.
 - 4. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket.
 - 5. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1-2007.
- D. Regulator Assembly: System-air-powered bellows section incorporating polypropylene bellows for volume regulation and thermostatic control. Bellows shall operate at temperatures from 0 to 140 deg F, shall be impervious to moisture and fungus, shall be suitable for 10-inch wg static pressure, and shall be factory tested for leaks.
- E. Volume Damper: Galvanized steel with peripheral gasket and self-lubricating bearings.
 - 1. Maximum Damper Leakage: ARI 880 rated, 2 percent of nominal airflow at 3-inch wg inlet static pressure.
 - 2. Damper Position: Normally open.
- F. Hydronic Coils: Copper tube, with mechanically bonded aluminum fins spaced no closer than 0.1 inch, and rated for a minimum working pressure of 200 psig and a maximum entering-water temperature of 220 deg F. Include manual air vent and drain valve.
- G. Direct Digital Controls: Single-package unitary controller and actuator specified in Division 23 Section "Building Automation System."

2.3 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Cadmium-plated steel rods and nuts.
- B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

with threads painted with zinc-chromate primer after installation.

- C. Steel Cables: Galvanized steel complying with ASTM A 603.
- D. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- E. Air Terminal Unit Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- F. Trapeze and Riser Supports: Steel shapes and plates for units with steel casings; aluminum for units with aluminum casings.

2.4 SOURCE QUALITY CONTROL

- A. Factory Tests: Test assembled air terminal units according to ARI 880.
 - 1. Label each air terminal unit with plan number, nominal airflow, maximum and minimum factory-set airflows, coil type and ARI certification seal.

PART 3 - - EXECUTION

3.1 INSTALLATION

- A. Install air terminal units level and plumb. Maintain sufficient clearance for normal service and maintenance. Mount no more than 24 inches above the ceiling.

3.2 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 4, "Hangers and Supports."
- B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 - 1. Where practical, install concrete inserts before placing concrete.
 - 2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
 - 3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes and for slabs more than 4 inches thick.
 - 4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes and for slabs less than 4 inches thick.
- C. Hangers Exposed to View: Threaded rod and angle or channel supports.
- D. Install upper attachments to structures. Select and size upper attachments with pull-out, tension,

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

and shear capacities appropriate for supported loads and building materials where used.

3.3 CONNECTIONS

- A. Piping installation requirements are specified in other Division 23 Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to air terminal units to allow service and maintenance.
- C. Hot-Water Piping: In addition to requirements in Division 23 Section "Hydronic Piping," connect heating coils to supply with shutoff valve, strainer, control valve, and union or flange; and to return with balancing valve and union or flange.
- D. Connect ducts to air terminal units according to Division 23 Section "Metal Ducts."
- E. Ground units with electric heating coils according to Division 26 Section "Grounding and Bonding for Electrical Systems."
- F. Connect wiring according to Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."
- G. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.
- H. Make connections to air terminal units with flexible connectors complying with requirements in Division 23 Section "Air Duct Accessories."

3.4 IDENTIFICATION

- A. Label each air terminal unit with plan number, nominal airflow, and maximum and minimum factory-set airflows. Comply with requirements in Division 23 Section "Identification for HVAC Piping and Equipment" for equipment labels and warning signs and labels.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust field-assembled components and equipment installation, including connections and to assist in field testing. Report results in writing.
- C. Perform the following field tests and inspections and prepare test reports:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. After installing air terminal units and after electrical circuitry has been energized, test for compliance with requirements.
 2. Leak Test: After installation, fill water coils and test for leaks. Repair leaks and retest until no leaks exist.
 3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- D. Remove and replace malfunctioning units and retest as specified above.
- E. Air terminal unit will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.

3.6 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service.
1. Complete installation and startup checks according to manufacturer's written instructions.
 2. Verify that inlet duct connections are as recommended by air terminal unit manufacturer to achieve proper performance.
 3. Verify that controls and control enclosure are accessible.
 4. Verify that control connections are complete.
 5. Verify that nameplate and identification tag are visible.
 6. Verify that controls respond to inputs as specified.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain air terminal units.

END OF SECTION 233600

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 233713 - DIFFUSERS, REGISTERS, AND GRILLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes ceiling- and wall-mounted diffusers, registers, and grilles.
- B. Related Sections include the following:
 - 1. Division 08 Section "Louvers and Vents" for fixed and adjustable louvers and wall vents, whether or not they are connected to ducts.
 - 2. Division 23 Section "Air Duct Accessories" for fire and smoke dampers and volume-control dampers not integral to diffusers, registers, and grilles.

1.3 SUBMITTALS

- A. Product Data: For each product indicated, include the following:
 - 1. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
 - 2. Diffuser, Register, and Grille Schedule: Indicate Drawing designation, room location, quantity, model number, size, and accessories furnished.
- B. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:
 - 1. Ceiling suspension assembly members.
 - 2. Method of attaching hangers to building structure.
 - 3. Size and location of initial access modules for acoustical tile.
 - 4. Ceiling-mounted items including lighting fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.
 - 5. Duct access panels.
- C. Samples for Initial Selection: For diffusers, registers, and grilles with factory-applied color finishes.
- D. Samples for Verification: For diffusers, registers, and grilles, in manufacturer's standard sizes to verify color selected.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, products specified.
 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 GRILLES AND REGISTERS

- A. Adjustable Bar Grille (Type D):
1. Manufacturers:
 - a. Carnes.
 - b. Krueger.
 - c. METALAIRE, Inc.; Metal Industries Inc.
 - d. Price
 - e. Titus.
 - f. Tuttle and Bailey
 2. Material: Steel.
 3. Finish: Baked enamel, white.
 4. Face Blade Arrangement: Fixed horizontal spaced 3/4 inch apart.
 5. Rear Blade Arrangement: Adjustable vertical spaced 3/4 inch apart.
 6. Mounting: Countersunk screw.
 7. Damper Type: Adjustable opposed-blade assembly.
- B. Fixed Face Grille (Type F, H):
1. Manufacturers:
 - a. Carnes.
 - b. Krueger.
 - c. Price
 - d. Titus.
 - e. Tuttle and Bailey
 2. Material: Aluminum.
 3. Finish: Baked enamel, white.
 4. Face Arrangement: 1/2-by-1/2-by-1/2-inch grid core.
 5. Frame: 1 inch wide.
 6. Mounting: Countersunk screw.
 7. Damper Type: Adjustable opposed-blade assembly.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.3 LINEAR SLOT OUTLETS

A. Linear Bar Grille or Diffuser:

1. Manufacturers:
 - a. Carnes.
 - b. Krueger.
 - c. METALAIR, Inc.; Metal Industries Inc.
 - d. Price
 - e. Titus.
 - f. Tuttle and Bailey
2. Material: Steel.
3. Finish: Baked enamel, white.
4. Narrow Core Spacing Arrangement: 1/8-inch- thick blades spaced 1/4 inch apart, 15-degree deflection.
5. Two-Way Deflection Vanes: Extruded construction fixed louvers with removable core.
6. Frame: 1 inch wide.
7. Mounting: Concealed bracket.
8. Damper Type: Adjustable opposed-blade assembly.
9. Accessories: Plaster frame.

B. Linear Slot Diffuser:

1. Manufacturers:
 - a. Carnes.
 - b. Krueger.
 - c. METALAIR, Inc.; Metal Industries Inc.
 - d. Price
 - e. Titus.
 - f. Tuttle and Bailey
2. Material - Shell: Steel.
3. Material - Pattern Controller and Tees: Aluminum.
4. Finish - Face and Shell: Baked enamel, black.
5. Finish - Pattern Controller: Baked enamel, black.
6. Finish - Tees: Baked enamel, white.
7. Slot Width: See air device schedule on drawings.
8. Number of Slots: See air device schedule on drawings.
9. Length: 48 inches.
10. Accessories: Plaster frame, insulated inlet plenum.

2.4 CEILING DIFFUSER OUTLETS

A. Rectangular and Square Ceiling Diffusers:

1. Manufacturers:
 - a. Carnes.
 - b. Krueger.
 - c. METALAIR, Inc.; Metal Industries Inc.
 - d. Price
 - e. Titus.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- f. Tuttle and Bailey
 - 2. Material: Steel.
 - 3. Finish: Baked enamel, white.
 - 4. Face Size: See air device schedule on drawings.
 - 5. Face Style: Three cone.
 - 6. Mounting: As required by ceiling type.
 - 7. Pattern: Adjustable.
 - 8. Dampers: Radial opposed blade.
 - 9. Accessories:
 - a. Equaling grid.
 - b. Plaster ring.
- B. Louver Face Diffuser (Type A):
 - 1. Manufacturers:
 - a. Carnes.
 - b. METALAIRE, Inc.; Metal Industries Inc.
 - c. Price
 - d. Titus.
 - e. Tuttle and Bailey
 - 2. Material: Steel.
 - 3. Finish: Baked enamel, white.
 - 4. Face Size: See air device schedule on drawings.
 - 5. Mounting: As required by ceiling type.
 - 6. Pattern: See air device schedule on drawings.
 - 7. Dampers: Radial opposed blade.
 - 8. Accessories:
 - a. Square to round neck adaptor.
 - b. Adjustable pattern vanes.
 - c. Throw reducing vanes.
 - d. Equaling grid.
 - e. Plaster ring.
- C. Type K: Aluminum supply grilles shall be TITUS direct spiral duct-mounted supply grilles model S301F, single deflection or equal by manufacturers listed, for the sizes and mounting types as shown on the plans and outlet schedule. The deflection blades shall be available parallel to the long or short dimension of the grille.
 - 1. Air supply grilles shall be constructed with radius end caps and foam gaskets for a tight seal to the duct diameter. All supply grilles shall be constructed with a 1 3/8-inch wide border.
 - 2. Blades shall be constructed of heavy duty extruded aluminum and shall be spaced 3/4-inch apart. Blades shall extend completely through the side frame on each side to ensure stability throughout the complete cfm operating range of the grille. Blades shall be individually adjustable without loosening or rattling and shall be securely held in place with tension wire.
 - 3. Air scoop damper/extractor (ASD) shall be constructed of heavy duty aluminum. The ASD must be operable from the face with a screwdriver.
 - 4. The grille finish shall be #26 white. The finish shall be an anodic acrylic paint, baked at 315°F for 30 minutes. The pencil hardness must be HB to H. The paint must pass a 100-

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

hour ATM B117 Corrosive Environments Salt Spray Test without creepage, blistering or deterioration of film. The paint must pass a 250-hour ASTM D870 Water Immersion Test. The paint must also pass the ASTM D2794 Reverse Impact Cracking Test with a 50-inch pound force applied. The manufacturer shall provide published performance data for the grille. The grille shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.

- D. Type L: Turbofuser panel mounted nozzle diffusers shall be TITUS model. TBF (steel) or equal by manufacturers listed for the sizes and mounting types as shown on the plans and outlet schedule. Diffuser shall be of heavy-duty construction with one, two, three or four nozzles. The TBF model will be constructed of 22-gauge steel nozzles with miscellaneous aluminum components.

1. Each nozzle shall have concentric deep deflection individually adjustable rings, heavy duty pivot bars will maintain numerous deflection settings for rated airflows up to 30° in any direction.
2. The finish shall be #26 white. The finish shall be an anodic acrylic paint, baked at 315°F for 30 minutes. The pencil hardness must be HB to H. The paint must pass a 100-hour ATM B117 Corrosive Environments Salt Spray Test without creepage, blistering or deterioration of film. The paint must pass a 250-hour ASTM D870 Water Immersion Test. The paint must also pass the ASTM D2794 Reverse Impact Cracking Test with a 50-inch pound force applied. The manufacturer shall provide published performance data for the grille. The grille shall be tested in accordance with ANSI/ASHRAE Standard 70-1991.

2.5 SOURCE QUALITY CONTROL

- A. Verification of Performance: Rate diffusers, registers, and grilles according to ASHRAE 70, "Method of Testing for Rating the Performance of Air Outlets and Inlets."

PART 3 - - EXECUTION

3.1 EXAMINATION

- A. Examine areas where diffusers, registers, and grilles are to be installed for compliance with requirements for installation tolerances and other conditions affecting performance of equipment.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install diffusers, registers, and grilles level and plumb.
- B. Ceiling-Mounted Outlets and Inlets: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated, as much as practicable. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.

- C. Air devices shall be selected to provide draft-free air distribution over entire area served and sound rating shall not exceed Noise Criteria (NC) 35.
- D. Install diffusers, registers, and grilles with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.
- E. All devices shall have plaster frames when installed in plaster or drywall construction. Margins shall be as indicated or directed to suit field conditions.
- F. Provide an opposed blade volume damper for all diffusers and registers.
- G. Align exposed butt edges of linear diffusers using slots and keys or with other concealed means.

3.3 ADJUSTING

- A. After installation, adjust diffusers, registers, and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 237313.13 - INDOOR, BASIC AIR-HANDLING UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes factory-assembled, indoor air-handling units with limited features, including the following components and accessories:
 - 1. Casings.
 - 2. Fans, drives, and motors.
 - 3. Coils.
 - 4. Air filtration.
 - 5. Dampers.

1.3 ACTION SUBMITTALS

- A. Product Data: For each air-handling unit.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
 - 3. Include unit dimensions and weight.
 - 4. Include cabinet material, metal thickness, finishes, insulation, and accessories.
 - 5. Fans:
 - a. Include certified fan-performance curves with system operating conditions indicated.
 - b. Include certified fan-sound power ratings.
 - c. Include fan construction and accessories.
 - d. Include motor ratings, electrical characteristics, and motor accessories.
 - 6. Include certified coil-performance ratings with system operating conditions indicated.
 - 7. Include filters with performance characteristics.
 - 8. Include dampers, including housings, linkages, and operators.
- B. Shop Drawings: For each type and configuration of indoor, basic, air-handling unit.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Detail fabrication and assembly of indoor, basic air-handling units, as well as procedures and diagrams.
4. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Floor plans and other details, or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.
- B. Source quality-control reports.
- C. Startup service reports.
- D. Field quality-control reports.
- E. Sample Warranty: For manufacturer's warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For air-handling units to include in emergency, operation, and maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Filters: One set for each air-handling unit.
 2. Gaskets: One set for each access door.
 3. Fan Belts: One set for each air-handling unit fan.

1.7 WARRANTY

- A. Warranty: Manufacturer agrees to repair or replace components of indoor, basic, air-handling units that fail in materials or workmanship within specified warranty period.
 1. Warranty Period: Manufacturer's standard, but not less than one year from date of Owner Occupancy.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."
- C. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."
- D. Structural Performance: Casing panels shall be self-supporting and capable of withstanding positive/negative 4-inch wg (996 Pa) of internal static pressure, without exceeding a midpoint deflection of 0.005 inches/inch (0.005 mm/mm) of panel span.

2.2 CAPACITIES AND CHARACTERISTICS (See schedule on Drawing M7.01)

2.3 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Carrier Corporation
 - 2. Daikin Applied
 - 3. ENVIRO-TEC; by Johnson Controls, Inc.
 - 4. Trane
 - 5. YORK; a Johnson Controls Company

2.4 UNIT CASINGS

- A. General Fabrication Requirements for Casings:
 - 1. Forming: Form walls, roofs, and floors with at least two breaks at each joint.
 - 2. Joints: Sheet metal screws or pop rivets.
 - 3. Sealing: Seal all joints with water-resistant sealant. Hermetically seal at each corner and around entire perimeter.
- B. Double-Wall Construction:
 - 1. Outside Casing Wall: Galvanized steel, minimum 18 gauge (1.3 mm) thick, with manufacturer's standard finish.
 - 2. Inside Casing Wall: G90 (Z275) galvanized steel, solid, minimum 18 gauge (1.3 mm) thick.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Casing Insulation:
 - a. Materials: Glass-fiber blanket or board insulation, Type I or Type II ASTM C1071 or injected polyurethane foam insulation.
 - b. Casing Panel R-Value: Minimum 4.2.
 - c. Insulation Thickness: 1 inch (25 mm).
 - d. Thermal Break: Provide continuity of insulation with no through-casing metal in casing walls, floors, or roofs of air-handling unit.
- C. Airstream Surfaces: Surfaces in contact with airstream shall comply with requirements in ASHRAE 62.1.
- D. Static-Pressure Classifications:
 1. For Unit Sections Upstream of Fans: Minus 2-inch wg (500 Pa).
 2. For Unit Sections Downstream and Including Fans: 2-inch wg (500 Pa).
- E. Panels and Doors:
 1. Panels:
 - a. Fabrication: Formed and reinforced with same materials and insulation thickness as casing.
 - b. Fasteners: Two or more camlock type for panel lift-out operation. Arrangement shall allow panels to be opened against airflow.
 - c. Gasket: Neoprene, applied around entire perimeters of panel frames.
 - d. Size: Large enough to allow unobstructed access for inspection and maintenance of air-handling unit's internal components.
- F. Condensate Drain Pans:
 1. Location: Each type of cooling coil.
 2. Construction:
 - a. Single-wall, stainless-steel or noncorrosive polymer sheet.
 3. Drain Connection:
 - a. Located at lowest point of pan and sized to prevent overflow. Terminate with threaded nipple on one end of pan.
 - b. Minimum Connection Size: NPS 1 (DN 25).
 4. Slope: Minimum 0.125 in./ft. (10 mm/mm) slope, to comply with ASHRAE 62.1, in at least two planes to collect condensate from cooling coils (including coil piping connections, coil headers, and return bends) and from humidifiers, and to direct water toward drain connection.
 5. Length: Extend drain pan downstream from leaving face for distance to comply with ASHRAE 62.1.
 6. Width: Entire width of water producing device.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

7. Depth: A minimum of 2 inches (50 mm) deep.

2.5 FAN, DRIVE, AND MOTOR SECTION

- A. Fan and Drive Assemblies: Statically and dynamically balanced and designed for continuous operation at maximum-rated fan speed and motor horsepower.
- B. Fans: Centrifugal, rated according to AMCA 210; galvanized steel; mounted on solid-steel shaft.
 1. Shafts: With field-adjustable alignment.
 - a. Turned, ground, and polished hot-rolled steel with keyway.
 2. Shaft Bearings:
 - a. Heavy-duty, self-aligning, pillow-block type with an L-50 rated life of minimum 100,000 hours according to ABMA 9.
 3. Housings: Formed- and reinforced-steel panels to form curved scroll housings with shaped cutoff and spun-metal inlet bell.
 - a. Bracing: Steel angle or channel supports for mounting and supporting fan scroll, wheel, motor, and accessories.
 4. Forward-Curved, Centrifugal Fan Wheels: Inlet flange, backplate, and shallow blades with inlet and tip curved forward in direction of airflow and mechanically fastened to flange and backplate; steel hub swaged to backplate and fastened to shaft with setscrews.
 5. Mounting: For internal vibration isolation. Factory-mount fans with manufacturer's standard vibration isolation mounting devices having a minimum static deflection of 1 inch (25 mm).
 6. Shaft Lubrication Lines: Extended to a location outside the casing.
 7. Flexible Connector: Factory fabricated with a fabric strip minimum 3-1/2 inches (89 mm) wide, attached to two strips of minimum 2-3/4-inch- (70-mm-) wide by 0.028-inch- (0.7-mm-) thick, galvanized-steel sheet.
 - a. Flexible Connector Fabric: Glass fabric, double coated with neoprene. Fabrics, coatings, and adhesives shall comply with UL 181, Class 1.
- C. Drive, Direct: Factory-mounted, direct drive.
- D. Motors:
 1. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230513 "Common Motor Requirements for HVAC Equipment."
 2. Electronically Commutated Motors (ECM) - Three Phase
 - a. All motors are brushless DC (BLDC) electronically commutated motors (ECM) factory programmed and run tested in assembled units. The motor controller is

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

mounted in a control box with a built in integrated user interface and LED tachometer. If adjustments are needed, motor parameters can be adjusted through momentary contact switches accessible without factory service personnel on the motor control board. Motors will soft ramp between speeds to lessen the acoustics due to sudden speed changes. Motors can be operated at three speeds or at variable speed with factory supplied or field supplied controllers. The motor will choose the highest speed if there are simultaneous or conflicting speed requests. All motors have integral overload protection with a maximum ambient operating temperature of 130.0 F and use permanently sealed ball bearings. Motors can operate at plus or minus 10 percent of rated voltage on all speed settings. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.

3. Efficiency: Premium efficient as defined in NEMA MG 1.
4. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in electrical Sections.

E. Variable-Frequency Motor Controller: Comply with Section 262923 "Variable-Frequency Motor Controllers."

2.6 COIL SECTION

A. General Requirements for Coil Section:

1. Comply with AHRI 410.
2. Fabricate coil section to allow removal and replacement of coil for maintenance and to allow in-place access for service and maintenance of coil(s).
3. Coils shall not act as structural component of unit.

B. Preheat Coils:

1. Hot-Water Coils:
 - a. Heating coils are one row hot water. All water coils are 12 fins per inch and have 3/8" tubes with 0.012" wall thickness. All water coils use highly efficient Trane Delta Flo, Type H aluminum fins, mechanically bonded to seamless copper tubes. All coils are specifically designed and circuited for water use. All coils are factory tested with 450.00 psi air under water. Maximum standard operating conditions are 300.00 psi at 200.0 F. Sweat type connections are standard. Coil performance data is in accordance with the current edition of AHRI Standard 410. In "Steam Coils" Subparagraph below, coordinate type with manufacturers.

C. Cooling Coils:

1. Cooling coils are four, row chilled water. All water coils are 12 fins per inch and have 3/8" tubes with 0.012" wall thickness. All water coils use highly efficient Trane Delta Flo, Type H aluminum fins, mechanically bonded to seamless copper tubes. All coils are specifically designed and circuited for water use. All coils are factory tested with 450.00

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

psi air under water. Maximum standard operating conditions are 300.00 psi at 200.0 F. Sweat type connections are standard. Coil performance data is in accordance with the current edition of AHRI Standard 410.

2.7 AIR FILTRATION SECTION

A. Panel Filters:

1. Description: Flat, non-pleated factory-fabricated, self-supported disposable air filters with holding frames.
2. Filter Unit Class: UL 900.
3. Media: Interlaced glass, synthetic, or cotton fibers coated with nonflammable adhesive and antimicrobial coating.
4. Filter-Media Frame: High wet-strength beverage board with perforated metal retainer, or metal grid, on outlet side.

B. Side-Access Filter Mounting Frames:

1. Particulate Air Filter Frames: Match inner casing and outer casing material, and insulation thickness. Galvanized steel track.
 - a. Sealing: Incorporate positive-sealing device to ensure seal between gasketed material on channels to seal top and bottom of filter cartridge frames to prevent bypass of unfiltered air.

2.8 DAMPERS

A. Dampers: Comply with requirements in Section 230923.

B. Damper Operators: Comply with requirements in Section 230923.

C. Electronic Damper Operators:

1. Direct-coupled type designed for minimum 60,000 full-stroke cycles at rated torque.
2. Electronic damper position indicator shall have visual scale indicating percent of travel and 2- to 10-V dc, feedback signal.
3. Operator Motors:
 - a. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 230513 "Common Motor Requirements for HVAC Equipment."
 - b. Size to operate with sufficient reserve power to provide smooth modulating action or two-position action.
 - c. Permanent Split-Capacitor or Shaded-Pole Type: Gear trains completely oil immersed and sealed. Equip spring-return motors with integral spiral-spring mechanism in housings designed for easy removal for service or adjustment of limit switches, auxiliary switches, or feedback potentiometer.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.9 SOURCE QUALITY CONTROL

- A. AHRI 430 Certification: Air-handling units and their components shall be factory tested according to AHRI 430 and shall be listed and labeled by AHRI.
- B. AMCA 300 and AMCA 301, or AHRI 260 Certification: Air-handling unit fan sound ratings shall comply with AMCA 300, "Methods for Calculating Fan Sound Ratings from Laboratory Test Data" and AMCA 301, "Methods for Calculating Fan Sound Ratings from Laboratory Test Data," or with AHRI 260, "Sound Rating of Ducted Air Moving and Conditioning Equipment."
- C. Water Coils: Factory tested to 300 psig (2070 kPa) according to AHRI 410 and ASHRAE 33.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine casing insulation materials and filter media before air-handling unit installation. Replace with new insulation materials and filter media that are wet, moisture damaged, or mold damaged.
- C. Examine roughing-in for hydronic, and condensate drainage piping systems and electrical services to verify actual locations of connections before installation.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Suspended Units: Suspend units from structural-steel support frame using threaded steel rods and spring hangers. Coordinate sizes and locations of structural-steel support members with actual equipment provided. Comply with requirements for vibration isolation devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."
- B. Arrange installation of units to provide access space around air-handling units for service and maintenance.
- C. Do not operate fan system until filters (temporary or permanent) are in place. Replace temporary filters used during construction and testing with new, clean filters.
- D. Connect duct to air-handling units with flexible connections. Comply with requirements in Section 233300 "Air Duct Accessories."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.3 PIPING CONNECTIONS

- A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Where installing piping adjacent to air-handling unit, allow for service and maintenance.
- C. Connect piping to air-handling units mounted on vibration isolators with flexible connectors.
- D. Connect condensate drain pans using ASTM B88, Type M (ASTM B88M, Type C) copper tubing. Extend to nearest equipment or floor drain. Construct deep trap at connection to drain pan and install cleanouts at changes in direction.
- E. Hot- and Chilled-Water Piping: Comply with applicable requirements in Section 232113 "Hydronic Piping" and Section 232116 "Hydronic Piping Specialties." Install shutoff valve and union or flange at each coil supply connection. Install balancing valve and union or flange at each coil return connection.

3.4 ELECTRICAL CONNECTIONS

- A. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."
- C. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.
- D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.
 - 1. Nameplate shall be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
 - 2. Nameplate shall be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch (13 mm) high.

3.5 CONTROL CONNECTIONS

- A. Install control and electrical power wiring to field-mounted control devices.
- B. Connect control wiring according to Section 260523 "Control-Voltage Electrical Power Cables."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.6 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service.
 - 1. Complete installation and startup checks according to manufacturer's written instructions.
 - 2. Verify that shipping, blocking, and bracing are removed.
 - 3. Verify that unit is secure on mountings and supporting devices and that connections to piping, ducts, and electrical systems are complete. Verify that proper thermal-overload protection is installed in motors, controllers, and switches.
 - 4. Verify proper motor rotation direction, free fan wheel rotation, and smooth bearing operations. Reconnect fan drive system, align belts, and install belt guards.
 - 5. Verify that bearings, pulleys, belts, and other moving parts are lubricated with factory-recommended lubricants.
 - 6. Verify that outdoor- and return-air mixing dampers open and close and maintain minimum outdoor-air setting.
 - 7. Comb coil fins for parallel orientation.
 - 8. Verify that proper thermal-overload protection is installed for electric coils.
 - 9. Install new, clean filters.
 - 10. Verify that manual and automatic volume control and fire and smoke dampers in connected duct systems are in fully open position.
- B. Starting procedures for air-handling units include the following:
 - 1. Energize motor; verify proper operation of motor, drive system, and fan wheel. Adjust fan to indicated rpm.
 - 2. Measure and record motor electrical values for voltage and amperage.
 - 3. Manually operate dampers from fully closed to fully open position and record fan performance.

3.7 ADJUSTING

- A. Adjust damper linkages for proper damper operation.
- B. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for air-handling system testing, adjusting, and balancing.
- C. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.8 CLEANING

- A. After completing system installation and testing, adjusting, and balancing of air-handling unit and air-distribution systems, and after completing startup service, clean air-handling units internally to remove foreign material and construction dirt and dust. Clean fan wheels, cabinets, dampers, coils, and filter housings, and install new, clean filters.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.9 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- C. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- D. Perform the following tests and inspections with the assistance of a factory-authorized service representative:
 - 1. Leak Test: After installation, fill water and steam coils with water, and test coils and connections for leaks.
 - 2. Fan Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
- E. Air-handling unit and components will be considered defective if unit or components do not pass tests and inspections.
- F. Prepare test and inspection reports.

3.10 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain air-handling units.

END OF SECTION 237313.13

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Building wires and cables rated 600 V and less.
 - 2. Connectors, splices, and terminations rated 600 V and less.
 - 3. Sleeves and sleeve seals for cables.

1.3 DEFINITIONS

- A. NRTL: Nationally Recognized Testing Laboratory.
- B. VFC: Variable-frequency controller.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, an NRTL acceptable to authorities having jurisdiction, and marked for intended use.
- B. Comply with NFPA 70.

1.6 COORDINATION

- A. Set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. 600-Volt Building Wire Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. General Cable Corporation.
 - 2. Southwire Company.
 - 3. Encore.
 - 4. Okanite
 - 5. Tyco
- B. Special Systems Wire Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Belden Cable
 - 2. Tyco Thermal Controls (fire alarm cable)
- C. Copper Conductors: Comply with NEMA WC 70.
- D. Conductor Insulation: Comply with NEMA WC 70 for Types THHN-THWN
- E. Conductor sizes: Minimum conductor size shall be #12 for feeder and branch circuits. Maximum conductor size shall be 500 kcmil. per 2008 SCO Electrical Guidelines and Policies.

2.2 CONNECTORS AND SPLICES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. AFC Cable Systems, Inc.
 - 2. Hubbell Power Systems, Inc.
 - 3. O-Z/Gedney; EGS Electrical Group LLC.
 - 4. 3M; Electrical Products Division.
 - 5. Tyco Electronics Corp.
 - 6. IlSCO
 - 7. Thomas-Betts
 - 8. Ideal
- B. Description: Factory-fabricated connectors and splices of size, ampacity rating, material, type, and class for application and service indicated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.3 CONDUCTOR AND CABLE LUBRICANT

A. Manufacturers:

1. American Polywater Corporation
2. Ideal Industries
3. 3M Company

B. The cable pulling lubricant GEL shall be compatible with all cable jackets. The lubricant GEL shall be UL or CSA listed and water soluble, non-toxic and environmentally safe.

2.4 SLEEVE SEALS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Advance Products & Systems, Inc.
2. Calpico, Inc.
3. Metraflex Co.
4. Pipeline Seal and Insulator, Inc.

B. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and cable.

1. Sealing Elements: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
2. Pressure Plates: Stainless steel. Include two for each sealing element.
3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements. Include one for each sealing element.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.2 CONDUCTOR INSULATION AND WIRING METHODS

- A. Exposed Feeders: Type THHN-THWN, single conductors in raceway.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspace: Type THHN-THWN, single conductors in raceway.
- C. Feeders Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-THWN, single conductors in raceway.
- D. Feeders Installed below Raised Flooring: Type THHN-THWN, single conductors in raceway.
- E. Exposed Branch Circuits, Including in Crawlspace: Type THHN-THWN, single conductors in raceway.
- F. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-THWN, single conductors in raceway.
- G. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-THWN, single conductors in raceway.
- H. Branch Circuits Installed below Raised Flooring: Type THHN-THWN, single conductors in raceway.
- I. Cord Drops and Portable Appliance Connections: Type SOJ, hard service cord with stainless-steel, wire-mesh, strain relief device at terminations to suit application.
- J. Class 1 Control Circuits: Type THHN-THWN, in raceway.
- K. Class 2 Control Circuits: Type THHN-THWN, in raceway.
- L. Fire Alarm Signaling and Notification Circuits: Refer to specifications for fire alarm system.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

- A. Unless specifically noted on the drawings, all wiring shall be installed in a raceway.
- B. Surface mount devices only where specifically shown on the plans. Obtain written permission from the Engineer for all other surface mounting locations that are not specifically shown on the plans.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Identify and color-code conductors according to Division 26 Section "Identification for Electrical Systems."
- G. Where the conductor length from the panel to the first outlet on a 277 volt circuit exceeds 125 feet, the branch circuit conductors from the panel to the first outlet shall not be smaller than #10 AWG.
- H. Where the conductor length from the panel to the first outlet on a 120 volt circuit exceeds 50 feet, the branch circuit conductors from the panel to the first outlet shall not be smaller than #10 AWG.
- I. Install no more than 3 phase wires in any feeder or branch circuit conduit.
- J. Install a dedicated neutral conductor for each single phase 277-volt or 120-volt circuit.

3.4 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.
- B. Make splices and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
- C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches of slack.
- D. Joints in solid conductors shall be spliced using Ideal "wrenuts", 3M Company "Scotchlock" in junction boxes, outlet boxes and lighting fixtures.
 - 1. "Sta-kon" or other permanent type crimp connectors shall not be used for branch circuit connections.
- E. Joints in stranded conductors shall be spliced by approved mechanical connectors and electrical vinyl tape.
 - 1. Solderless mechanical connectors for splices and taps, provided with U/L-approved insulating covers, may be used instead of mechanical connectors plus tape.
- F. Conductors, in all cases, shall be continuous from outlet to outlet and no splicing shall be made except within outlet or junction boxes, troughs and gutters.

3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Coordinate sleeve selection and application with selection and application of firestopping.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Concrete Slabs and Walls: Install sleeves for penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of slabs and walls.
- C. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
- D. Rectangular Sleeve Minimum Metal Thickness:
 - 1. For sleeve rectangle perimeter less than 50 inches and no side greater than 16 inches, thickness shall be 0.052 inch.
 - 2. For sleeve rectangle perimeter equal to, or greater than, 50 inches and 1 or more sides equal to, or greater than, 16 inches, thickness shall be 0.138 inch.
- E. Fire-Rated Assemblies: Install sleeves for penetrations of fire-rated floor and wall assemblies unless openings compatible with firestop system used are fabricated during construction of floor or wall.
- F. Cut sleeves to length for mounting flush with both wall surfaces.
- G. Extend sleeves installed in floors 2 inches above finished floor level.
- H. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and cable unless sleeve seal is to be installed unless seismic criteria require different clearance.
- I. Seal space outside of sleeves with grout for penetrations of concrete and masonry and with approved joint compound for gypsum board assemblies.
- J. Interior Penetrations of Non-Fire-Rated Walls and Floors: Seal annular space between sleeve and conduit, using joint sealant appropriate for size, depth, and location of joint.
- K. Fire-Rated-Assembly Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at cable penetrations. Install sleeves and seal with firestop.
- L. Roof-Penetration Sleeves: Seal penetration of individual cables with flexible boot-type flashing units applied in coordination with roofing work.
- M. Aboveground Exterior-Wall Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Size sleeves to allow for 1-inch annular clear space between conduit and sleeve for installing mechanical sleeve seals.
- N. Underground Exterior-Wall Penetrations: Install cast-iron "wall pipes" for sleeves. Size sleeves to allow for 1-inch annular clear space between conduit and sleeve for installing mechanical sleeve seals.

3.6 SLEEVE-SEAL INSTALLATION

- A. Install to seal underground exterior-wall penetrations.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Use type and number of sealing elements recommended by manufacturer for cable material and size. Position cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.7 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly.

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.

- B. Tests and Inspections:

1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors for compliance with requirements.
2. Prior to energizing feeders, sub-feeders and service conductor, cables shall be tested for electrical continuity and short circuits. A copy of these tests shall be sent to the engineer of record and the owner.
3. All current carrying phase conductors and neutrals shall be tested as installed, and before connections are made, for insulation resistance and accidental grounds. This shall be done with a DC megger. The procedures listed below shall be followed:

- a. Three-phase conductor installations:

- 1) For each phase conductor, ground all other conductors, shields and metal conduit as applicable.
- 2) Apply test voltage between tested conductor and ground for sixty seconds. Repeat this procedure for other phase conductors.
- 3) Minimum readings shall be one million (1,000,000) or more ohms for #6 AWG wire and smaller, 250,000 ohms or more for #4 AWG wire or larger, between conductors and between conductor and ground.

- b. Single-phase conductor installations:

- 1) Ground the neutral conductor, neutral shield and metal conduit as applicable.
- 2) Apply test voltage between phase conductor and ground for sixty seconds.
- 3) Minimum readings shall be one million (1,000,000) or more ohms for #6 AWG wire and smaller, 250,000 ohms or more for #4 AWG wire or larger, between the phase conductor and ground.

- c. After all fixtures, devices and equipment are installed and all connections completed to each panel, the contractor shall disconnect the neutral feeder conductor from the neutral bar and take a megger reading between the neutral bar and the grounded enclosure.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 1) Whenever this reading is less than 250,000 ohms, the contractor shall disconnect the branch circuit neutral wires from this neutral bar. The contractor shall then test each one separately to the panel and until the low readings are found.
 - 2) The contractor shall correct troubles, reconnect and retest until at least 250,000 ohms from the neutral bar to the grounded panel can be achieved with only the neutral feeder disconnected.
- d. At final inspection, the contractor shall furnish a megger and show the engineers that the panels comply with the above requirements.
 - 1) The contractor shall also furnish a hook-on type ammeter and voltmeter to take current and voltage readings as directed by the representatives.
4. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
- C. Test Reports: Prepare a written report to record the following and complete the form at the end of this section:
 1. Test procedures used.
 2. Test results that comply with requirements.
 3. Test results that do not comply with requirements and corrective action taken to achieve compliance with requirements.
- D. Remove and replace malfunctioning units and retest as specified above.


Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

Figure1: Example conductor-megger setup.

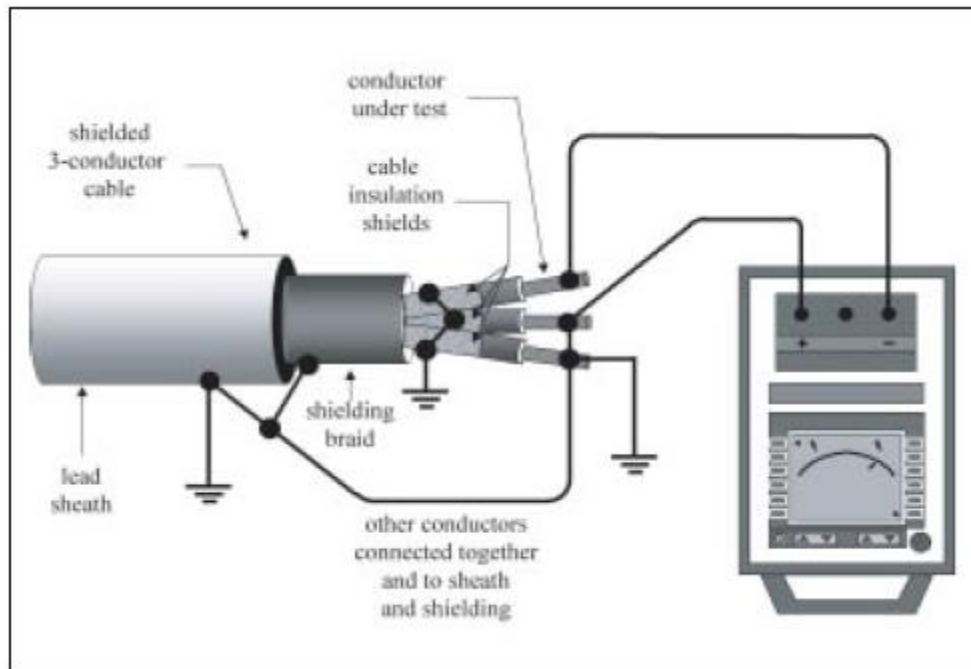

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

REPORT OF CABLE MEGGER TESTING

TESTING COMPANY: _____

DATE OF TEST: _____

CLIENT/LOCATION: _____

MANUFACTURER AND TYPE OF CABLE: _____

VOLTAGE RATING OF CABLES: _____

TEST EQUIPMENT MFG./MODEL: _____

TEST VOLTAGE (IN VDC): _____

TEST RESULTS (IN MEGA-OHMS):

PANEL/CABLES TESTED	CABLES A-G	CABLES B-G	CABLES C-G	PANEL NEUTRAL TO ENCLOSURE

WEATHER CONDITIONS:

COMMENTS:

TESTER'S SIGNATURE: _____

CONTRACTOR'S LICENSE #: _____

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

END OF SECTION 260519

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes methods and materials for grounding systems.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Other Informational Submittals: Plans showing dimensioned as-built locations of grounding features specified in Part 3 "Field Quality Control" Article, including the following:
 - 1. Test wells.
 - 2. Ground rods.
 - 3. Grounding arrangements and connections for separately derived systems.
 - 4. Grounding points for chilled water piping, domestic water piping, fire protection piping and natural gas piping.
- C. Qualification Data: For Exothermic-welding personnel.
- D. Field quality-control test reports. Submit written test reports to include the following:
 - 1. Test procedures used.
 - 2. Test results that comply with requirements.
 - 3. Results of failed tests and corrective action taken to achieve test results that comply with requirements.
- E. Operation and Maintenance Data: For grounding to include the following in emergency, operation, and maintenance manuals:
 - 1. Instructions for periodic testing and inspection of grounding features at test wells based on NETA MTS.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Tests shall be to determine if ground resistance or impedance values remain within specified maximums, and instructions shall recommend corrective action if they do not.
- b. Include recommended testing intervals.

1.4 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. Comply with UL 467 for grounding and bonding materials and equipment.
- C. Personnel performing Exothermic-welding must be certified by the manufacturer whose equipment will be utilized on this project and must provide a certificate indicating the manufacturer who provided the training and the date of the training.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Grounding Conductors, Cables, Connectors, and Rods:
 - a. Apache Grounding/Erico Inc.
 - b. Boggs, Inc.
 - c. Chance/Hubbell.
 - d. Copperweld Corp.
 - e. Dossert Corp.
 - f. Encore
 - g. Erico Inc.; Electrical Products Group.
 - h. Framatome Connectors/Burndy Electrical.
 - i. Galvan Industries, Inc.
 - j. Harger Lightning Protection, Inc.
 - k. Hastings Fiber Glass Products, Inc.
 - l. Heary Brothers Lightning Protection Co.
 - m. Ideal Industries, Inc.
 - n. ILSCO.
 - o. Kearney/Cooper Power Systems.
 - p. Korns: C. C. Korns Co.; Division of Robroy Industries.
 - q. Lightning Master Corp.
 - r. Lyncole XIT Grounding.
 - s. O-Z/Gedney Co.; a business of the EGS Electrical Group.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- t. Racco, Inc.; Division of Hubbell.
- u. Robbins Lightning, Inc.
- v. Salisbury: W. H. Salisbury & Co.
- w. Southwire Company
- x. Superior Grounding Systems, Inc.
- y. Thomas & Betts, Electrical.

2.2 CONDUCTORS

A. Bare Copper Conductors:

- 1. Solid Conductors: ASTM B 3.
- 2. Stranded Conductors: ASTM B 8.
- 3. Tinned Conductors: ASTM B 33.
- 4. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch in diameter.
- 5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
- 6. Bonding Jumper: Copper tape, braided conductors, terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.
- 7. Tinned Bonding Jumper: Tinned-copper tape, braided conductors, terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.

B. Grounding Bus: Rectangular bars of annealed copper, 1/4 by 8 inches 24-inches length, unless otherwise indicated; with insulators.

2.3 CONNECTORS

A. Listed and labeled by a nationally recognized testing laboratory acceptable to authorities having jurisdiction for applications in which used, and for specific types, sizes, and combinations of conductors and other items connected.

B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, bolted pressure-type, with at least two bolts.

- 1. Pipe Connectors: Clamp type, sized for pipe.

C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

- 1. Provide correct mold for type and size of conductor and termination type.

2.4 GROUNDING ELECTRODES

A. Ground Rods: Copper-clad, 3/4 inch in diameter and 10-feet long and shall be copper-clad steel construction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Inspection Wells: Provide inspection well for each grounding electrode installed as detailed on the drawings.

PART 3 - EXECUTION

3.1 APPLICATIONS

- A. Conductors: Install solid conductor for No. 10 AWG and smaller, and stranded conductors for No. 8 AWG and larger, unless otherwise indicated.
- B. Underground Grounding Conductors: Install a continuous bare copper conductor, No. 2/0 AWG minimum unless show otherwise on the drawings.
 1. Bury at least 24 inches below grade.
 2. Duct-Bank Grounding Conductor: Bury 12 inches above duct bank when indicated as part of duct-bank installation.
- C. Grounding Bus: Install in electrical and telephone equipment rooms, in rooms housing service equipment, and elsewhere as indicated.
 1. Install bus on insulated spacers 1 inch, minimum, from wall 6 inches above finished floor, unless otherwise indicated.
 2. Provide a main ground bus for the service as shown on the drawings: ¾-inch minimum thick x 24-inch minimum length. Increase size if necessary to accommodate the required exothermic terminations.
 3. Where indicated on both sides of doorways, route bus up to top of door frame, across top of doorway, down to specified height above floor, and connect to horizontal bus.
- D. Conductor Terminations and Connections:
 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 2. Underground Connections: Exothermic-welded connectors except and as otherwise indicated.
 3. Connections to Ground Rods at Test Wells: Exothermic weld.
 4. Connections to Structural Steel: Exothermic-welded connectors.
 5. Connections to ground bus: Exothermic-welded

3.2 GROUNDING UNDERGROUND DISTRIBUTION SYSTEM COMPONENTS

- A. Comply with IEEE C2 grounding requirements.
- B. Grounding Manholes and Handholes: Install a driven ground rod through manhole or handhole floor, close to wall, and set rod depth so 4 inches will extend above finished floor. If necessary, install ground rod before manhole is placed and provide No. 1/0 AWG bare, tinned-copper conductor from ground rod into manhole through a waterproof sleeve in manhole wall. Protect

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

ground rods passing through concrete floor with a double wrapping of pressure-sensitive insulating tape or heat-shrunk insulating sleeve from 2 inches above to 6 inches below concrete. Seal floor opening with waterproof, nonshrink grout.

- C. Grounding Connections to Manhole Components: Bond exposed-metal parts such as inserts, cable racks, pulling irons, ladders, and cable shields within each manhole or handhole, to ground rod or grounding conductor. Make connections with No. 4 AWG minimum, stranded, hard-drawn copper bonding conductor. Train conductors level or plumb around corners and fasten to manhole walls. Connect to cable armor and cable shields as recommended by manufacturer of splicing and termination kits.

3.3 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits raceways and cables.
- B. Signal and Communication Equipment: For telephone, alarm, voice and data, and other communication equipment, provide No. 4 AWG minimum insulated grounding conductor in raceway from grounding electrode system ground bus to each service location, terminal cabinet, wiring closet, and central equipment location.
 - 1. Service and Central Equipment Locations and Wiring Closets: Terminate grounding conductor on a 1/4-by-2-by-12-inch grounding bus.
 - 2. Terminal Cabinets: Terminate grounding conductor on cabinet grounding terminal.
- C. **Metal Poles Supporting Outdoor Lighting Fixtures:** Install grounding electrode and a separate insulated equipment grounding conductor in addition to grounding conductor installed with branch-circuit conductors.

3.4 INSTALLATION

- A. Grounding electrode conductors #4 AWG and larger shall be installed in a raceway system.
- B. Wherever grounding electrode conductors are connected/bonded to wall mounted grounding busses, all conductors shall be identified with black phenolic identification labels having 1/4" high white letters indicating the equipment where the grounding electrode conductor originates from. Labels shall be wire-tied to the grounding electrode conductors at the point where the conductor is connected/bonded to the bus. The following areas apply:
 - 1. Main Electric room grounding bus.
 - 2. Satellite electric rooms grounding busses.
 - 3. Emergency electric rooms grounding busses.
 - 4. Telecommunications rooms grounding busses.
- C. Grounding Conductors: Route along shortest and straightest paths possible, unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Ground Rods: Drive rods until tops are 2 inches below finished floor or final grade, unless otherwise indicated.
1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating, if any.
 2. Provide test/inspection wells for each ground rod installed. Refer to drawings for details.
 3. For each electrical service on the project install at three rods spaced at least 20-ft. from each other and located at least the same distance from other grounding electrodes, and connect to the service grounding electrode conductor and to the main ground bar. Refer to drawings for details.
 4. Use exothermic welded connections for conductor connections to ground rods except at Test Wells where bolted connection shall be utilized.
- E. Test Wells: Ground rod driven through drilled hole in bottom of Test/Inspection well as indicated on the drawings and shall be at least 12 inches deep, with cover.
1. Test Wells: Install test wells as indicated. Set top of test well flush with finished grade, surface or floor.
- F. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance, except where routed through short lengths of conduit.
1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
 2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install so vibration is not transmitted to rigidly mounted equipment.
 3. Use exothermic-welded connectors for outdoor locations, but if a disconnect-type connection is required, use a bolted clamp.
 4. Bond cable trays and/or cable ladder sections at all section joints, tees, radius, waterfalls and 4-way intersections.
- G. Grounding and Bonding for Piping:
1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes, using a bolted clamp connector or by bolting a lug-type connector to a pipe flange, using one of the lug bolts of the flange. Connect within 5'-0" of where pipe enters building. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
 2. Water Meter Piping: Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with a bolted connector.
 3. Chilled Water, Hot Water and Steam Piping: Where chilled water piping and/or hot water piping and/or steam piping enter the building install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to metal

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

pipes, using a bolted clamp connector or by bolting a lug-type connector to a pipe flange, using one of the lug bolts of the flange. Connect within 5'-0" of where pipe enters building. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.

4. Gas Piping: Where gas is utilized for connected electrical equipment within the building having the potential of energizing the gas piping due to a failure of insulation of the connected electrical equipment the gas piping shall be bonded to the grounding system. The bonding shall occur between the gas shutoff valve and where the gas piping enters the building or in the case of underground piping entering the building below grade the gas piping shall be bonded within 5-ft of where it enters the building.

- H. Bonding Interior Metal Ducts: Bond metal air ducts to equipment grounding conductors of associated fans, blowers, electric heaters, and air cleaners. Install tinned bonding jumper to bond across flexible duct connections to achieve continuity.

3.5 "UFER" GROUNDING SYSTEM

- A. Provide one 20-ft. long, 2/0 AWG size copper grounding conductor and exothermically connect to the steel column nearest the main electrical room and exothermically connect to the horizontal foundation re-bar located nearest the bottom of the foundation footing as detailed on the drawings. The grounding conductor shall be bonded as shown on the drawing details ("Supplemental Ground Electrode Detail").
- B. Each perimeter steel column shall be exothermically welded to the horizontal re-bar located nearest the bottom of the foundation footing.

3.6 CONNECTIONS

- A. General: Make connections so galvanic action or electrolysis possibility is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact will be galvanically compatible.
 1. Use electroplated or hot-tin-coated materials to ensure high conductivity and to make contact points closer to order of galvanic series.
 2. Make connections with clean, bare metal at points of contact.
 3. Make aluminum-to-steel connections with stainless-steel separators and mechanical clamps.
 4. Make aluminum-to-galvanized steel connections with tin-plated copper jumpers and mechanical clamps.
 5. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.
- B. Exothermic-Welded Connections: Comply with manufacturer's written instructions. Welds that are puffed up or that show convex surfaces indicating improper cleaning are not acceptable.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Equipment Grounding Conductor Terminations: For No. 8 AWG and larger, use pressure-type grounding lugs. No. 10 AWG and smaller grounding conductors may be terminated with winged pressure-type connectors.
- D. Non-contact Metal Raceway Terminations: If metallic raceways terminate at metal housings without mechanical and electrical connection to housing, terminate each conduit with a grounding bushing. Connect grounding bushings with a bare grounding conductor to grounding bus or terminal in housing. Bond electrically non-continuous conduits at entrances and exits with grounding bushings and bare grounding conductors, unless otherwise indicated.
- E. Connections at Test Wells: Use bolted connections between conductors and ground rods.
- F. Tighten screws and bolts for grounding and bonding connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A.
- G. Compression-Type Connections: Use hydraulic compression tools to provide correct circumferential pressure for compression connectors. Use tools and dies recommended by connector manufacturer. Provide embossing die code or other standard method to make a visible indication that a connector has been adequately compressed on grounding conductor.
- H. Moisture Protection: If insulated grounding conductors are connected to ground rods or grounding buses, insulate entire area of connection and seal against moisture penetration of insulation and cable.

3.7 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections and prepare test reports:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal and at individual ground rods. Make tests at ground rods before any conductors are connected.
 - a. Measure ground resistance not less than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
 - b. Perform tests by fall-of-potential method according to IEEE 81.
 - 3. Prepare dimensioned drawings locating each test well, ground rod and ground rod assembly, and other grounding electrodes. Identify each by letter in alphabetical order, and key to the record of tests and observations. Include the number of rods driven and their depth at each location, and include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Report measured ground resistances that exceed the following values:
1. Power and Lighting Equipment or System with Capacity 500 kVA and Less: 10 ohms.
 2. Power and Lighting Equipment or System with Capacity 500 to 1000 kVA: 5 ohms.
 3. Power and Lighting Equipment or System with Capacity More Than 1000 kVA: 3 ohms.
 4. Power Distribution Units or Panelboards Serving Electronic Equipment: 3 ohm(s).
 5. Substations and Pad-Mounted Equipment: 5 ohms.
 6. Manhole Grounds: 10 ohms.
- C. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

3.8 GRADING AND PLANTING

- A. Restore surface features, including vegetation, at areas disturbed by Work of this Section. Reestablish original grades, unless otherwise indicated. If sod has been removed, replace it as soon as possible after backfilling is completed. Restore areas disturbed by trenching, storing of dirt, cable laying, and other activities to their original condition. Include application of topsoil, fertilizer, lime, seed, sod, sprig, and mulch. Maintain restored surfaces. Restore disturbed paving as indicated.

END OF SECTION 260526

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Hangers and supports for electrical equipment and systems.
 - 2. Construction requirements for concrete bases.
- B. Related Sections include the following:
 - 1. Division 26 Section "Vibration and Seismic Controls For Electrical Systems" for products and installation requirements necessary for compliance with seismic criteria.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. IMC: Intermediate metal conduit.
- C. RMC: Rigid metal conduit.

1.4 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design supports for multiple raceways, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.
- B. Design supports for multiple raceways capable of supporting combined weight of supported systems and its contents.
- C. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed for this Project, with a minimum structural safety factor of five times the applied force.

1.5 SUBMITTALS

- A. Product Data: For the following:
 - 1. Steel slotted support systems.
 - 2. Nonmetallic slotted support systems.
- B. Shop Drawings: Signed and sealed by a qualified professional engineer. Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze hangers. Include Product Data for components.
 - 2. Steel slotted channel systems. Include Product Data for components.
 - 3. Nonmetallic slotted channel systems. Include Product Data for components.
 - 4. Equipment supports.
- C. Welding certificates.

1.6 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- B. Comply with NFPA 70.

1.7 COORDINATION

- A. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.
- B. Coordinate installation of roof curbs, equipment supports, and roof penetrations.
- C. Sequence, coordinate, and integrate installing electrical materials and equipment for efficient flow of the Work. Coordinate installing large equipment requiring positioning before closing in the building.
- D. Coordinate electrical service connections to components furnished by utility companies.
 - 1. Coordinate installation and connection of exterior underground and overhead utilities and services, including provision for electricity-metering components.
 - 2. Comply with requirements of authorities having jurisdiction and of utility company providing electrical power and other services.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Coordinate location of access panels and doors for electrical items that are concealed by finished surfaces.
- F. Coordinate installation locations of electrical switchboards, panelboards, disconnect switches, circuit breaker enclosures, control enclosures, motor control centers, raceways, lighting fixtures, junction and pull boxes with all mechanical, plumbing and fire protection trades prior to installation of equipment and systems.
 - 1. Provide dimensioned layout drawing(s) of the proposed locations of all switchboards, panelboards, disconnect switches, circuit breaker enclosures, control enclosures, motor control centers, raceways, lighting fixtures, junction/pull boxes larger than 6" x 6" x 4" and conduit routing of all conduits over 2" diameter. The scaled drawing(s) shall indicate actual dimensions of proposed equipment, front elevations, and access door swings. Minimum scale factor shall be 1/8" = 1'-0".
 - 2. Coordinate the installation drawings with all other trades to assure proper and conflict free installation of electrical systems and components.
 - 3. Submit drawings to the Engineer for review prior to commencing the installation of any electrical equipment.
 - 4. Provide code required access and clearances to all equipment and sufficient access for maintenance.
- G. Provide dimensioned layout drawing(s) of main electrical room, generator room, and electrical closet prior to commencing work in that room. The scaled drawing(s) shall indicate actual dimensions of proposed equipment, front elevations, and access door swings. Minimum scale factor shall be 1/4" = 1'-0".
 - 1. Coordinate the installation drawings with all other trades to assure proper and conflict free installation of electrical systems and components.
 - 2. Submit drawings to the Engineer for review prior to commencing the installation of any electrical equipment.
- H. All individual motor starters for mechanical equipment (fans, pumps, etc.) shall be furnished and installed under Division 23 unless indicated as part of a motor control center.
- I. Under Division 26, power wiring shall be provided up to a termination point consisting of a junction box, trough, starter or disconnect switch. Under Division 26 line side terminations shall be provided. Wiring from the termination point to the mechanical equipment, including final connections, shall be provided under Division 22 or 23.

PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allied Tube & Conduit.
 - b. Cooper B-Line, Inc.; a division of Cooper Industries.
 - c. ERICO International Corporation.
 - d. GS Metals Corp.
 - e. Thomas & Betts Corporation.
 - f. Unistrut; Tyco International, Ltd.
 - g. Wesanco, Inc.
 2. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
 3. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
 4. Channel Dimensions: Selected for applicable load criteria.
- B. Raceway and Cable Supports: As described in NECA 1 and NECA 101.
- C. Conduit and Cable Support Devices: Steel and malleable-iron hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for non-armored electrical conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be malleable iron.
- E. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
- F. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
1. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel, for use in hardened Portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
 - a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Hilti Inc.
 - 2) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
 - 3) MKT Fastening, LLC.
 - 4) Simpson Strong-Tie Co., Inc.; Masterset Fastening Systems Unit.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel, for use in hardened portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.
 - a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Cooper B-Line, Inc.; a division of Cooper Industries.
 - 2) Empire Tool and Manufacturing Co., Inc.
 - 3) Hilti Inc.
 - 4) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
 - 5) MKT Fastening, LLC.
3. Concrete Inserts: Steel or malleable-iron, slotted support system units similar to MSS Type 18; complying with MFMA-4 or MSS SP-58.
4. Clamps for Attachment to Steel Structural Elements: MSS SP-58, type suitable for attached structural element.
5. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
6. Toggle Bolts: All-steel springhead type.
7. Hanger Rods: Threaded steel.

2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

- A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.
- B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, IMC, and RMC as scheduled in NECA 1, where its Table 1 lists maximum spacings less than stated in NFPA 70. Minimum rod size shall be 1/4 inch in diameter.
- C. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 1. Secure raceways to these supports with two-bolt conduit clamps.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.
- B. Raceway Support Methods: In addition to methods described in NECA 1, EMT, IMC, and RMC may be supported by openings through structure members, as permitted in NFPA 70.
- C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.
- D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Wood: Fasten with lag screws or through bolts.
 - 2. To New Concrete: Bolt to concrete inserts.
 - 3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - 4. To Existing Concrete: Expansion anchor fasteners.
 - 5. To Steel: Beam clamps (MSS Type 19, 21, 23, 25, or 27) complying with MSS SP-69.
 - 6. To Light Steel: Sheet metal screws.
 - 7. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that meet seismic-restraint strength and anchorage requirements.
 - 8. Conduits installed in the interior or exterior building walls shall be spaced off the wall surface a minimum of ¼-inch using “clamp-backs” or strut.
- E. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

- A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
- B. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 CONCRETE BASES

- A. Construct concrete bases of dimensions indicated but not less than 4 inches larger in both directions than supported unit, and so anchors will be a minimum of 10 bolt diameters from edge of the base.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Use **3000-psi**, 28-day compressive-strength concrete.
- C. Anchor equipment to concrete base.
 - 1. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 2. Install anchor bolts to elevations required for proper attachment to supported equipment.
 - 3. Install anchor bolts according to anchor-bolt manufacturer's written instructions.

3.5 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 260529

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260533 - RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes raceways, fittings, boxes, enclosures, and cabinets for electrical wiring.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. EPDM: Ethylene-propylene-diene terpolymer rubber.
- C. FMC: Flexible metal conduit.
- D. IMC: Intermediate metal conduit.
- E. LFMC: Liquidtight flexible metal conduit.
- F. LFNC: Liquidtight flexible nonmetallic conduit.
- G. RNC: Rigid nonmetallic conduit.

1.4 SUBMITTALS

- A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.
- B. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Custom enclosures and cabinets.
 - 2. For handholes and boxes for underground wiring, including the following:
 - a. Duct entry provisions, including locations and duct sizes.
 - b. Frame and cover design.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- c. Grounding details.
 - d. Dimensioned locations of cable rack inserts, and pulling-in and lifting irons.
 - e. Joint details.
 - C. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:
 - 1. Structural members in the paths of conduit groups with common supports.
 - 2. HVAC and plumbing items and architectural features in the paths of conduit groups with common supports.
 - D. Manufacturer Seismic Qualification Certification: Submit certification that enclosures and cabinets and their mounting provisions, including those for internal components, will withstand seismic forces defined in Division 26 Section "Vibration and Seismic Controls for Electrical Systems." Include the following:
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - a. The term "withstand" means "the cabinet or enclosure will remain in place without separation of any parts when subjected to the seismic forces specified and the unit will retain its enclosure characteristics, including its interior accessibility, after the seismic event."
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
 - E. Qualification Data: For professional engineer and testing agency.
 - F. Source quality-control test reports.
- 1.5 QUALITY ASSURANCE
- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
 - B. Comply with NFPA 70.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 METAL CONDUIT AND TUBING

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. AFC Cable Systems, Inc.
 - 2. Allied Tube & Conduit; a Tyco International Ltd. Co.
 - 3. Anamet Electrical, Inc.; Anaconda Metal Hose.
 - 4. Electri-Flex Co.
 - 5. Manhattan/CDT/Cole-Flex.
 - 6. Maverick Tube Corporation.
 - 7. O-Z Gedney; a unit of General Signal.
 - 8. Wheatland Tube Company.
- B. Rigid Steel Conduit: ANSI C80.1.
- C. EMT: ANSI C80.3.
- D. FMC: Zinc-coated steel.
- E. LFMC: Flexible steel conduit with PVC jacket.
- F. Fittings for Conduit (Including all Types and Flexible and Liquidtight), EMT, and Cable: NEMA FB 1; listed for type and size raceway with which used, and for application and environment in which installed.
 - 1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 886.
 - 2. Fittings for EMT: Steel compression type.
- G. Joint Compound for Rigid Steel Conduit: Listed for use in cable connector assemblies, and compounded for use to lubricate and protect threaded raceway joints from corrosion and enhance their conductivity.

2.2 NONMETALLIC CONDUIT

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. AFC Cable Systems, Inc.
 - 2. Anamet Electrical, Inc.; Anaconda Metal Hose.
 - 3. Arnco Corporation.
 - 4. CANTEX Inc.
 - 5. CertainTeed Corp.; Pipe & Plastics Group.
 - 6. Condux International, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

7. ElecSYS, Inc.
8. Electri-Flex Co.
9. Lamson & Sessions; Carlon Electrical Products.
10. Manhattan/CDT/Cole-Flex.
11. RACO; a Hubbell Company.
12. Thomas & Betts Corporation.

B. RNC: NEMA TC 2, Type EPC-40-PVC, unless otherwise indicated.

C. Fittings for RNC: NEMA TC 3; match to conduit type and material.

2.3 OPTICAL FIBER/COMMUNICATIONS CABLE RACEWAY AND FITTINGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Arncor Corporation.
2. Endot Industries Inc.
3. IPEX Inc.
4. Lamson & Sessions; Carlon Electrical Products.

B. Description: Comply with UL 2024; flexible type, approved for plenum installation.

2.4 BOXES, ENCLOSURES, AND CABINETS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cooper Crouse-Hinds; Div. of Cooper Industries, Inc.
2. EGS/Appleton Electric.
3. Erickson Electrical Equipment Company.
4. Hoffman.
5. Hubbell Incorporated; Killark Electric Manufacturing Co. Division.
6. O-Z/Gedney; a unit of General Signal.
7. RACO; a Hubbell Company.
8. Scott Fetzer Co.; Adalet Division.
9. Spring City Electrical Manufacturing Company.
10. Thomas & Betts Corporation.
11. Walker Systems, Inc.; Wiremold Company (The).
12. Woodhead, Daniel Company; Woodhead Industries, Inc. Subsidiary.
13. Highline Products.
14. FSR for Audio/Visual system applications.

B. Sheet Metal Outlet and Device Boxes: NEMA OS 1.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Cast-Metal Outlet and Device Boxes: NEMA FB 1, ferrous alloy or aluminum, Type FD, with gasketed cover.
- D. Wall outlet boxes.
 - 1. For surface or recessed mounted receptacle, data and/or telephone boxes provide 4" square by 2 1/8" deep box unless noted otherwise on the plans.
 - a. Surface mounted cast boxes for mechanical and electrical rooms.
 - b. Recessed boxes in finished spaces.
- E. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- F. Cast-Metal Access, Pull, and Junction Boxes: NEMA FB 1 cast aluminum with gasketed cover.
- G. Hinged-Cover Enclosures: NEMA 250, Type 1, with continuous-hinge cover with flush latch, unless otherwise indicated.
 - 1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
 - 2. Nonmetallic Enclosures: Plastic.
- H. Cabinets:
 - 1. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
 - 2. Hinged door in front cover with flush latch and concealed hinge.
 - 3. Key latch to match panelboards.
 - 4. Metal barriers to separate wiring of different systems and voltage.
 - 5. Accessory feet where required for freestanding equipment.

2.5 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

- A. Description: Comply with SCTE 77.
 - 1. Color of Frame and Cover: Green.
 - 2. Configuration: Units shall be designed for flush burial and have open bottom, unless otherwise indicated.
 - 3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure.
 - 4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
 - 5. Cover Legend: Molded lettering, "ELECTRIC." or "TELEPHONE."
 - 6. Conduit Entrance Provisions: Conduit-terminating fittings shall mate with entering ducts for secure, fixed installation in enclosure wall.
 - 7. Handholes 12 inches wide by 24 inches long and larger shall have inserts for cable racks and pulling-in irons installed before concrete is poured.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel or fiberglass or a combination of the two.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Armorcast Products Company.
 - b. Carson Industries LLC.
 - c. CDR Systems Corporation.
 - d. NewBasis.

2.6 SLEEVES FOR RACEWAYS

- A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.
- B. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch thickness as indicated and of length to suit application.
- C. Coordinate sleeve selection and application with selection and application of firestopping.

2.7 SLEEVE SEALS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Advance Products & Systems, Inc.
 - 2. Calpico, Inc.
 - 3. Metraflex Co.
 - 4. Pipeline Seal and Insulator, Inc.
- B. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and cable.
 - 1. Sealing Elements: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
 - 2. Pressure Plates: Stainless steel. Include two for each sealing element.
 - 3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.8 SOURCE QUALITY CONTROL FOR UNDERGROUND ENCLOSURES

- A. Handhole and Pull-Box Prototype Test: Test prototypes of handholes and boxes for compliance with SCTE 77. Strength tests shall be for specified tier ratings of products supplied.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Tests of materials shall be performed by a independent testing agency.
2. Strength tests of complete boxes and covers shall be by either an independent testing agency or manufacturer. A qualified registered professional engineer shall certify tests by manufacturer.
3. Testing machine pressure gages shall have current calibration certification complying with ISO 9000 and ISO 10012, and traceable to NIST standards.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

A. Outdoors: Apply raceway products as specified below, unless otherwise indicated:

1. Exposed Conduit: Rigid steel conduit.
2. Concealed Conduit, Aboveground: Rigid steel conduit or IMC.
3. Underground Conduit: RNC, Type EPC-40-PVC, direct buried.
4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
5. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R.
6. Application of Handholes and Boxes for Underground Wiring:
 - a. Handholes and Pull Boxes in Driveway, Parking Lot, and Off-Roadway Locations, Subject to Occasional, Nondeliberate Loading by Heavy Vehicles: Polymer concrete, SCTE 77, Tier 15 structural load rating.
 - b. Handholes and Pull Boxes in Sidewalk and Similar Applications with a Safety Factor for Nondeliberate Loading by Vehicles: Polymer-concrete units SCTE 77, Tier 8 structural load rating.
 - c. Handholes and Pull Boxes Subject to Light-Duty Pedestrian Traffic Only: Fiberglass-reinforced polyester resin, structurally tested according to SCTE 77 with 3000-lbf vertical loading.

B. Comply with the following indoor applications, unless otherwise indicated:

1. Exposed, Not Subject to Physical Damage: EMT.
2. Exposed and Subject to Severe Physical Damage: Rigid steel conduit. Includes raceways in the following locations:
 - a. Loading dock areas from the floor to a distance of 10-ft above the floor.
 - b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units from the floor to a distance of 10-ft. above the floor.
 - c. Mechanical and electrical rooms from the floor to a distance of 10-ft. above the floor.
3. Concealed in Ceilings and Interior Walls and Partitions: EMT.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
5. Damp or Wet Locations: Rigid steel conduit or IMC.
6. Raceways for Optical Fiber or Communications Cable in Spaces Used for Environmental Air: EMT.
7. Raceways for Optical Fiber or Communications Cable Risers in Vertical Shafts: EMT.
8. Raceways for Concealed General Purpose Distribution of Optical Fiber or Communications Cable: EMT.
9. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4, stainless steel in damp or wet locations.

C. Minimum Raceway Size: 3/4-inch trade size.

D. Raceway Fittings: Compatible with raceways and suitable for use and location.

1. Rigid Steel Conduit:
 - a. Use threaded rigid steel conduit fittings, unless otherwise indicated.
2. EMT terminations and couplings:
 - a. Steel-plated hexagonal compression connectors.
 - b. Pot metal, setscrew or indented type fittings are prohibited.

3.2 INSTALLATION

- A. Comply with NECA 1 for installation requirements applicable to products specified in Part 2 except where requirements on Drawings or in this Article are stricter.
- B. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- C. Complete raceway installation before starting conductor installation.
- D. Support raceways as specified in Division 26 Section "Hangers and Supports for Electrical Systems."
- E. Arrange stub-ups so curved portions of bends are not visible above the finished slab.
- F. Install no more than the equivalent of three 90-degree bends in any conduit run except for communications conduits, for which fewer bends are allowed.
- G. Conceal conduit and EMT within finished walls, ceilings, and floors, unless otherwise indicated.
- H. Install raceways above ceilings tight to the floor structure above.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Group feeder and branch circuit raceways together using common trapeze supports wherever feasible.
- I. Embedded raceways within concrete slabs shall not be permitted due to the potential practice of 'blind' drilling floor and elevated slabs for the purpose of installing fastening devices.
 1. Raceways shall be routed under slab on grade or suspended to the bottom of the elevated slab supporting structure.
- J. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- K. Raceway Terminations at all conduit ends entering junction boxes, panel enclosures, switchboards and control enclosures:
 1. Use insulating bushings to protect conductors, including conductors smaller than No. 4 AWG.
- L. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire.
- M. Raceways for Optical Fiber and Communications Cable: Install metallic, rigid and flexible raceways as follows:
 1. 3/4-Inch Trade Size and Smaller: Install raceways in maximum lengths of 50 feet.
 2. 1-Inch Trade Size and Larger: Install raceways in maximum lengths of 75 feet.
 3. Install with a maximum of two 90-degree bends or equivalent for each length of raceway unless Drawings show stricter requirements.
 - a. Separate lengths with pull or junction boxes or terminations at distribution frames or cabinets where necessary to comply with these requirements.
- N. Install raceway sealing fittings at suitable, approved, and accessible locations and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings at the following points:
 1. Seal raceways where they pass from warm to cold locations to prevent condensation from forming on the inside or exterior surfaces of the raceways:
 - a. Boundaries of refrigerated spaces.
 - b. From exterior non-conditioned spaces to conditioned spaces.
 2. Where otherwise required by NFPA 70.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- O. Expansion-Joint Fittings for RNC: Install in each run of aboveground conduit that is located where environmental temperature change may exceed 30 deg F, and that has straight-run length that exceeds 25 feet.
1. Install expansion-joint fittings for each of the following locations, and provide type and quantity of fittings that accommodate temperature change listed for location:
 - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F temperature change.
 - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F temperature change.
 - c. Indoor Spaces: Connected with the Outdoors without Physical Separation: 125 deg F temperature change.
 - d. Attics: 135 deg F temperature change.
 2. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F of temperature change.
 3. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at the time of installation.
- P. Flexible Conduit Connections: Use maximum of 72 inches of flexible conduit for recessed and semi-recessed lighting fixtures, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
1. Use LFMC in damp or wet locations subject to severe physical damage.
 2. Use LFMC in damp or wet locations not subject to severe physical damage.
- Q. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall.
- R. Junction and pull box minimum size:
1. Recessed locations.
 - a. 4" square x 2 1/8" deep.
 - b. Single gang plaster/mud ring.
 2. Accessible locations.
 - a. 4" square x 2 1/8" deep.
 - b. For pull boxes, larger sizes may be required to meet the NEC requirements for number of conduits and orientation of conduits to the pull box.
- S. Device box minimum size:
1. Single receptacle or single wall switch.
 - a. 4" square x 2 1/8" deep with single gang plaster/mud ring.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Multiple receptacles or wall switches (two devices or switches).
 - a. 4" square x 2 1/8" deep with double device plaster/mud ring.
3. Multiple receptacles or wall switches (more than two devices or switches).
 - a. Gangable boxes x 2 1/8" deep with appropriately sized plaster/mud ring.
- T. Set metal floor boxes level and flush with finished floor surface.
- U. For floor boxes installed in slab-on grade concrete provide concrete 'pour-pans' made specifically for the floor boxes being installed.
 1. Install under the floor box.
- V. For floor boxes installed in fire rated elevated concrete slabs provide UL fire rated assembly and/or product to the bottom of the floor box where the floor penetration occurs to maintain the fire rating of the floor per the structural design.
- W. All enclosures containing electrical devices shall be UL or third party labeled as an assembly and shall display the appropriate label on the enclosure. This shall include HVAC control enclosures whether manufactured for a specific purpose or fabricated in the field from UL or third party listed materials and/or electrical devices. The electrical devices shall include, but are not be limited to, the following:
 1. Control relays
 2. Control transformers
 3. Fuses
 4. Disconnect switches
 5. Motor starting equipment
 6. Contactors
 7. Terminal/barrier strips

3.3 INSTALLATION OF UNDERGROUND CONDUIT

A. Direct-Buried Conduit:

1. Excavate trench bottom to provide firm and uniform support for conduit.
2. Install backfill.
3. After installing conduit, backfill and compact. Start at tie-in point, and work toward end of conduit run, leaving conduit at end of run free to move with expansion and contraction as temperature changes during this process. Firmly hand tamp backfill around conduit to provide maximum supporting strength. After placing controlled backfill to within 12 inches of finished grade, make final conduit connection at end of run and complete backfilling with normal compaction.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Install manufactured duct elbows for stub-ups at poles and equipment and at building entrances through the floor, unless otherwise indicated. Encase elbows for stub-up ducts throughout the length of the elbow.
5. Install manufactured rigid steel conduit elbows for stub-ups at poles and equipment and at building entrances through the floor.
 - a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches of concrete.
 - b. For stub-ups at equipment mounted on outdoor concrete bases, extend steel conduit horizontally a minimum of 60 inches from edge of equipment pad or foundation. Install insulated grounding bushings on terminations at equipment.

3.4 INSTALLATION OF UNDERGROUND HANDHOLES AND BOXES

- A. Install handholes and boxes level and plumb and with orientation and depth coordinated with connecting conduits to minimize bends and deflections required for proper entrances.
- B. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1/2-inch sieve to No. 4 sieve and compacted to same density as adjacent undisturbed earth.
- C. Elevation: In paved areas, set so cover surface will be flush with finished grade. Set covers of other enclosures 1 inch above finished grade.
- D. Install handholes and boxes with bottom below the frost line, below grade.
- E. Install removable hardware, including pulling eyes, cable stanchions, cable arms, and insulators, as required for installation and support of cables and conductors and as indicated. Select arm lengths to be long enough to provide spare space for future cables, but short enough to preserve adequate working clearances in the enclosure.
- F. Field-cut openings for conduits according to enclosure manufacturer's written instructions. Cut wall of enclosure with a tool designed for material to be cut. Size holes for terminating fittings to be used, and seal around penetrations after fittings are installed.

3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Coordinate sleeve selection and application.
- B. Concrete Slabs and Walls: Install sleeves for penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of slabs and walls.
- C. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
- D. Rectangular Sleeve Minimum Metal Thickness:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. For sleeve cross-section rectangle perimeter less than 50 inches and no side greater than 16 inches, thickness shall be 0.052 inch.
 2. For sleeve cross-section rectangle perimeter equal to, or greater than, 50 inches and 1 or more sides equal to, or greater than, 16 inches, thickness shall be 0.138 inch.
- E. Fire-Rated Assemblies: Install sleeves for penetrations of fire-rated floor and wall assemblies unless openings compatible with firestop system used are fabricated during construction of floor or wall.
- F. Cut sleeves to length for mounting flush with both surfaces of walls.
- G. Extend sleeves installed in floors 2 inches above finished floor level.
- H. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and raceway unless sleeve seal is to be installed or unless seismic criteria require different clearance.
- I. Seal space outside of sleeves with grout for penetrations of concrete and masonry and with approved joint compound for gypsum board assemblies.
- J. Interior Penetrations of Non-Fire-Rated Walls and Floors: Seal annular space between sleeve and raceway, using joint sealant appropriate for size, depth, and location of joint.
- K. Fire-Rated-Assembly Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at raceway penetrations. Install sleeves and seal with firestop materials.
- L. Roof-Penetration Sleeves: Seal penetration of individual raceways with flexible, boot-type flashing units applied in coordination with roofing work.
- M. Aboveground, Exterior-Wall Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
- N. Underground, Exterior-Wall Penetrations: Install cast-iron "wall pipes" for sleeves. Size sleeves to allow for 1-inch annular clear space between raceway and sleeve for installing mechanical sleeve seals.
- 3.6 SLEEVE-SEAL INSTALLATION
- A. Install to seal underground, exterior wall penetrations.
- B. Use type and number of sealing elements recommended by manufacturer for raceway material and size. Position raceway in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.7 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly.

3.8 PROTECTION

- A. Provide final protection and maintain conditions that ensure coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.

END OF SECTION 260533

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260548 - VIBRATION AND SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Related Sections include the following:
 - 1. Division 26 Section "Hangers and Supports for Electrical Systems" for commonly used electrical supports and installation requirements.

1.3 DEFINITIONS

- A. The IBC: International Building Code.
- B. ICC-ES: ICC-Evaluation Service.

1.4 PERFORMANCE REQUIREMENTS

- A. Seismic-Restraint Loading:
 - 1. Site Class as Defined in the IBC: C.
 - 2. Assigned Seismic Use Group or Building Category as Defined in the IBC: II.
 - a. Component Importance Factor: **1.0**
 - b. Component Response Modification Factor: **1.5**
 - c. Component Amplification Factor: **1.0**
 - 3. Design Spectral Response Acceleration at Short Periods (0.2 Second):
 - 4. Design Spectral Response Acceleration at 1.0-Second Period:

1.5 SUBMITTALS

- A. Product Data: For the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
 2. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of seismic-restraint component used.
 - a. Tabulate types and sizes of seismic restraints, complete with report numbers and rated strength in tension and shear as evaluated by an evaluation service member of ICC-ES.
 - b. Annotate to indicate application of each product submitted and compliance with requirements.
 3. Restrained-Isolation Devices: Include ratings for horizontal, vertical, and combined loads.
- B. Delegated-Design Submittal: For seismic-restraint details indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
1. Design Calculations: Calculate static and dynamic loading due to equipment weight and operation, seismic forces required to select vibration isolators and seismic restraints.
 - a. Coordinate design calculations with wind-load calculations required for equipment mounted outdoors. Comply with requirements in other Division 26 Sections for equipment mounted outdoors.
 2. Indicate materials and dimensions and identify hardware, including attachment and anchorage devices.
 3. Field-fabricated supports.
 4. Seismic-Restraint Details:
 - a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads.
 - b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to the restrained items and to the structure. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events. Indicate association with vibration isolation devices.
 - c. Preapproval and Evaluation Documentation: By an evaluation service member of ICC-ES, showing maximum ratings of restraint items and the basis for approval (tests or calculations).
- C. Coordination Drawings: Show coordination of seismic bracing for electrical components with other systems and equipment in the vicinity, including other supports and seismic restraints.
- D. Welding certificates.
- E. Qualification Data: For professional engineer and testing agency.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Field quality-control test reports.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated, that is a nationally recognized testing laboratory (NRTL) as defined by OSHA in 29 CFR 1910.7, and that is acceptable to authorities having jurisdiction.
- B. Comply with seismic-restraint requirements in the IBC unless requirements in this Section are more stringent.
- C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- D. Seismic-restraint devices shall have horizontal and vertical load testing and analysis and shall bear anchorage pre-approval by ICC-ES, or pre-approval by another agency acceptable to authorities having jurisdiction, showing maximum seismic-restraint ratings. Ratings based on independent testing are preferred to ratings based on calculations. If pre-approved ratings are not available, submittals based on independent testing are preferred. Calculations (including combining shear and tensile loads) to support seismic-restraint designs must be signed and sealed by a qualified professional engineer.
- E. Comply with NFPA 70.
- F. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing seismic engineering services, including the design of seismic restraints, that are similar to those indicated for this Project.

1.7 PROJECT CONDITIONS

- A. Project Seismic Design Category as Defined in NCSBC.
 - 1. Seismic design category shall be determined from information. Contained in the bid documents.
 - 2. Seismic Design Category: C
 - 3. Seismic Use Group: II

1.8 COORDINATION

- A. Coordinate layout and installation of seismic bracing with building structural system and Engineerural features, and with mechanical, fire-protection, electrical, and other building features in the vicinity.
- B. Coordinate concrete bases with building structural system.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 SEISMIC-RESTRAINT DEVICES

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Amber/Booth Company, Inc.
 - 2. California Dynamics Corporation.
 - 3. Cooper B-Line, Inc.; a division of Cooper Industries.
 - 4. Hilti Inc.
 - 5. Loos & Co.; Seismic Earthquake Division.
 - 6. Mason Industries.
 - 7. TOLCO Incorporated; a brand of NIBCO INC.
 - 8. Unistrut; Tyco International, Ltd.
- B. General Requirements for Restraint Components: Rated strengths, features, and application requirements shall be as defined in reports by an evaluation service member of ICC-ES.
 - 1. Structural Safety Factor: Allowable strength in tension, shear, and pullout force of components shall be at least four times the maximum seismic forces to which they will be subjected.
- C. Channel Support System: MFMA-3, shop- or field-fabricated support assembly made of slotted steel channels with accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; and rated in tension, compression, and torsion forces.
- D. Restraint Cables: ASTM A 492 stainless-steel cables with end connections made of steel assemblies with thimbles, brackets, swivels, and bolts designed for restraining cable service; and with a minimum of two clamping bolts for cable engagement.
- E. Hanger Rod Stiffener: Steel tube or steel slotted-support-system sleeve with internally bolted connections to hanger rod. Do not weld stiffeners to rods.
- F. Bushings for Floor-Mounted Equipment Anchor: Neoprene bushings designed for rigid equipment mountings, and matched to type and size of anchors and studs.
- G. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings, and matched to type and size of attachment devices.
- H. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.
- I. Mechanical Anchor: Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchors with strength

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

required for anchor and as tested according to ASTM E 488. Minimum length of eight times diameter.

- J. Adhesive Anchor: Drilled-in and capsule anchor system containing polyvinyl or urethane methacrylate-based resin and accelerator, or injected polymer or hybrid mortar adhesive. Provide anchor bolts and hardware with zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.

2.2 FACTORY FINISHES

- A. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.
 - 1. Powder coating on springs and housings.
 - 2. All hardware shall be galvanized. Hot-dip galvanize metal components for exterior use.
 - 3. Baked enamel or powder coat for metal components on isolators for interior use.
 - 4. Color-code or otherwise mark vibration isolation and seismic-control devices to indicate capacity range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and equipment to receive seismic-control devices for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

- A. Multiple Raceways or Cables: Secure raceways and cables to trapeze member with clamps approved for application by an evaluation service member of ICC-ES.
- B. Hanger Rod Stiffeners: Install hanger rod stiffeners where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.
- C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static and seismic loads within specified loading limits.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.3 SEISMIC-RESTRAINT DEVICE INSTALLATION

A. Equipment and Hanger Restraints:

1. Install restrained isolators on electrical equipment.
2. Install resilient, bolt-isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.
3. Install seismic-restraint devices using methods approved by an evaluation service member of ICC-ES providing required submittals for component.

B. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.

C. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.

D. Drilled-in Anchors:

1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
3. Wedge Anchors: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors shall be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
4. Adhesive Anchors: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
5. Set anchors to manufacturer's recommended torque, using a torque wrench.
6. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

3.4 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

- #### **A. Install flexible connections in runs of raceways, cables, wireways, cable trays, and busways where they cross seismic joints, where adjacent sections or branches are supported by different structural elements, and where they terminate with connection to equipment that is anchored to a different structural element from the one supporting them as they approach equipment.**

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.5 FIELD QUALITY CONTROL

- A. Inspection Agency: Engage a qualified testing agency to perform inspections and prepare final report.
- B. Perform inspections.
- C. Inspections:
 - 1. Schedule inspection with Owner, through Engineer, with at least seven days' advance notice.
 - 2. Inspect all seismic restraints for electrical equipment
- D. Prepare inspection reports.
 - 1. The final written, signed and sealed report shall be prepared by a professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing seismic engineering services, including the design of seismic restraints, that are similar to those indicated for this Project. The engineer shall visit the site and inspect all seismic restraints as described within the section of the specifications prior to issuing the report.

3.6 ELECTRICAL SEISMIC-RESTRAINT DEVICE SCHEDULE

- A. Life safety systems:
 - 1. Fire alarm system.
 - 2. Emergency egress lighting system.

END OF SECTION 260548

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Identification for raceway.
 - 2. Identification for conductors and communication and control cable.
 - 3. Underground-line warning tape.
 - 4. Warning labels and signs.
 - 5. Instruction signs.
 - 6. Equipment identification labels.
 - 7. Miscellaneous identification products.
 - 8. Labeling for Fault Current Levels.

1.3 SUBMITTALS

- A. Product Data: For each electrical identification product indicated.
- B. Identification Schedule: An index of nomenclature of electrical equipment and system components used in identification signs and labels.
- C. Samples: For each type of label and sign to illustrate size, colors, lettering style, mounting provisions, and graphic features of identification products.

1.4 QUALITY ASSURANCE

- A. Comply with ANSI A13.1 and ANSI C2.
- B. Comply with NFPA 70.
- C. Comply with 29 CFR 1910.145.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 COORDINATION

- A. Coordinate identification names, abbreviations, colors, and other features with requirements in the Contract Documents, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual, and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.
- B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- C. Coordinate installation of identifying devices with location of access panels and doors.
- D. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 RACEWAY IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.
- B. Color for Printed Legend:
 - 1. See Section 2.6 of this specification for color codes for use on this project.
- C. Phenolic Tags: Color coded phenolic tags with wire attachment to conduit or outlet.

2.2 CONDUCTOR AND COMMUNICATION- AND CONTROL-CABLE IDENTIFICATION MATERIALS

- A. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.

2.3 UNDERGROUND-LINE WARNING TAPE

- A. Description: Permanent, bright-colored, continuous-printed, polyethylene tape.
 - 1. Not less than 6 inches wide by 4 mils thick.
 - 2. Compounded for permanent direct-burial service.
 - 3. Embedded continuous metallic strip or core installed to allow detection from above grade without disturbing surface.
 - 4. Printed legend shall indicate type of underground line.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 WARNING LABELS AND SIGNS

- A. Comply with NFPA 70, 70E and 29 CFR 1910.145.
- B. Self-Adhesive Warning Labels: Factory printed, multicolor, pressure-sensitive adhesive labels, configured for display on front cover, door, or other access to equipment, unless otherwise indicated.
 - 1. Custom warning labels indicating the available Fault Current level shall meet National Electrical Code (NFPA 70) 110.24, NFPA 70E and applicable OSHA requirements.
- C. Baked-Enamel Warning Signs: Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application. Screw mount with four (4) self-tapping stainless steel screws. Nominal size, 7 by 10 inches.
- D. Warning label and sign shall include, but are not limited to, the following legends:
 - 1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
 - 2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES."

2.5 INSTRUCTION SIGNS

- A. Engraved, laminated acrylic or melamine plastic, minimum 1/16 inch thick for signs up to 20 sq. in. and 1/8 inch thick for larger sizes.
 - 1. Engraved legend with black letters on white face.
 - 2. Punched or drilled for mechanical fasteners.
 - 3. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.

2.6 EQUIPMENT IDENTIFICATION LABELS

- A. Engraved, Laminated Acrylic or Melamine Label: Punched or drilled for screw mounting using a minimum of two (2) self-tapping stainless steel screws. Minimum letter height shall be 1/2 inch.
- B. Nameplate material colors shall be:
 - 1. Blue surface with white core for 120/208 volt equipment.
 - 2. Black surface with white core for 277/480 volt equipment.
 - 3. Bright red surface with white core for all equipment related to fire alarm system.
 - 4. Dark red (burgundy) surface with white core for all equipment related to security.
 - 5. Green surface with white core for all equipment related to "emergency" systems.
 - 6. Orange surface with white core for all equipment related to telephone systems.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

7. Brown surface with white core for all equipment related to data systems.
8. White surface with black core for all equipment related to paging systems.
9. Purple surface with white core for all equipment related to TV systems.

2.7 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Cable Ties: Fungus-inert, self-extinguishing, 1-piece, self-locking, Type 6/6 nylon cable ties.
 1. Minimum Width: 3/16 inch.
 2. Tensile Strength: 50 lb, minimum.
 3. Temperature Range: Minus 40 to plus 185 deg F.
 4. Color: Black, except where used for color-coding.
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws; provide measures to prevent hazard from sharp end of screws.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Accessible Raceways, 600 V or Less, for Service, Feeder, and Branch Circuits More Than 30 A and all empty (spare) conduit runs and conduits with conductors or cables for future use shall be identified and shall indicate where they terminate: Identify with color coded (see Section 2.6) snap-around label.
- B. Accessible Raceways and Cables of Auxiliary Systems: Identify the following systems with color-coded, snap-around, color-coding bands:
 1. See Section 2.6 for color codes.
- C. Power-Circuit Conductor Identification: For primary and secondary conductors No. 1/0 AWG and larger in vaults, pull and junction boxes, manholes, and handholes use color-coding conductor tape. Identify source and circuit number of each set of conductors. For single conductor cables, identify phase in addition to the above.
- D. Branch-Circuit Conductor Identification: Where there are conductors for more than three branch circuits in same junction or pull box, use color-coding conductor tape. Identify each ungrounded conductor according to source and circuit number.
- E. Cable Labels: Each branch circuit and each feeder shall be tagged in each panelboard gutter and in all pull or junction boxes, wire trough, etc. Tags in panelboard gutters shall indicate circuit. Tags in junction boxes and pull boxes shall indicate the circuit or feeder numbers and its point of origin. Tags for branch circuits shall be printed cloth or vinyl plastic with self-stick pressure adhesive.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Conductors to Be Extended in the Future: Attach write-on tags to conductors and list source and circuit number.
- G. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, signal, sound, intercommunications, voice, and data connections.
 - 1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
 - 2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
 - 3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and Operation and Maintenance Manual.
- H. Locations of Underground Lines: Identify with underground-line warning tape for power, lighting, communication, and control wiring and optical fiber cable. Limit use of underground-line warning tape to direct-buried cables.
- I. Available Fault Current Warning labels:
 - 1. Where shown on this project, whether new or existing equipment, the following equipment shall be provided with warning labels indicating the available fault current level:
 - a. Switchboards
 - b. Pad mounted transformers
 - c. Dry type transformers
 - d. Distribution panels
 - e. Panelboards
 - 2. Available Fault Current level warning labels shall be:
 - a. Provided by the contractor and shall include the information as shown on the drawings. The contractor shall install the labels.
- J. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Comply with 29 CFR 1910.145 and apply baked-enamel warning signs. Identify system voltage with black letters on an orange background. Apply to exterior of door, cover, or other access.
 - 1. Equipment with Multiple Power or Control Sources: Apply to door or cover of equipment including, but not limited to, the following:
 - a. Power transfer switches.
 - b. Controls with external control power connections.
 - 2. Equipment Requiring Workspace Clearance According to NFPA 70: Unless otherwise indicated, apply to door or cover of equipment but not on flush panelboards and similar equipment in finished spaces.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

K. Instruction Signs:

1. Operating Instructions: Install instruction signs to facilitate proper operation and maintenance of electrical systems and items to which they connect. Install instruction signs with approved legend where instructions are needed for system or equipment operation.
2. Emergency Operating Instructions: Install instruction signs with white legend on a red background with minimum 1/2-inch- high letters for emergency instructions at equipment used for power transfer.

L. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.

1. Labeling Instructions:

- a. Indoor Equipment: Engraved, laminated acrylic or melamine label. Unless otherwise indicated, provide a single line of text with 1/2-inch- high letters on 1-1/2-inch- high label; where 2 lines of text are required, use labels 2 inches high.
- b. Outdoor Equipment: Engraved, laminated acrylic or melamine label.
- c. Elevated Components: Increase sizes of labels and letters to those appropriate for viewing from the floor or finished surface level.

2. Equipment to Be Labeled (All may not apply to this project):

- a. Panelboards, electrical cabinets, and enclosures.
- b. Access doors and panels for concealed electrical items.
- c. Electrical switchboards.
- d. Transformers.
- e. Emergency system boxes and enclosures.
- f. Disconnect switches.
- g. Enclosed circuit breakers.
- h. Motor starters.
- i. Push-button stations.
- j. Power transfer equipment.
- k. Contactors.
- l. Remote-controlled switches, dimmer modules, and control devices.
- m. Battery inverter units.
- n. Battery racks.
- o. Power-generating units.
- p. Voice and data cable terminal equipment.
- q. Master clock and program equipment.
- r. Intercommunication and call system master and staff stations.
- s. Television/audio components, racks, and controls.
- t. Fire-alarm control panel and annunciators.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- u. Security and intrusion-detection control stations, control panels, terminal cabinets, and racks.
- v. Monitoring and control equipment.
- w. Uninterruptible power supply equipment.
- x. Terminals, racks, and patch panels for voice and data communication and for signal and control functions.
- y. Dimmers.
- z. Inverters.
- aa. Frequency converters.

3.2 INSTALLATION

- A. Verify identity of each item before installing identification products.
- B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.
- C. Apply identification devices to surfaces that require finish after completing finish work.
- D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.
- E. Attach nonadhesive signs and plastic labels with screws and auxiliary hardware appropriate to the location and substrate.
- F. System Identification Color Banding for Raceways and Cables: Each color band shall completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
- G. Color-Coding for Phase and Voltage Level Identification, 600 V and Less: Use the colors listed below for ungrounded service, feeder, and branch-circuit conductors.
 - 1. Color shall be factory applied or, for sizes larger than No. 10 AWG if authorities having jurisdiction permit, field applied.
 - 2. Colors for 208/120-V Circuits:
 - a. Phase A: Black.
 - b. Phase B: Red.
 - c. Phase C: Blue.
 - d. Neutral: White
 - e. Ground: Green
 - 3. Colors for 480/277-V Circuits:
 - a. Phase A: Brown.
 - b. Phase B: Orange.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- c. Phase C: Yellow.
 - d. Neutral: Neutral Gray
 - e. Ground: Green
- 4. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.
- H. Aluminum Wraparound Marker Labels and Metal Tags: Secure tight to surface of conductor or cable at a location with high visibility and accessibility.
- I. Underground-Line Warning Tape: During backfilling of trenches install continuous underground-line warning tape directly above line at 6 to 8 inches below finished grade. Use multiple tapes where width of multiple lines installed in a common trench exceeds 16 inches overall.
- J. Raceway Boxes: All outlet boxes, junction boxes and pull boxes shall have their covers and exterior visible surfaces painted with colors to match the surface color scheme outlined in section 2.6. This includes covers on boxes above lift-out and other type accessible ceilings. For emergency circuits, paint one half of box green and other half blue or black depending on voltage.
 - 1. The Contractor shall blank-off the center portion of the cover plate with 2” wide tape prior to painting. After painting with the tape removed, the circuit labeling shall be indicated on the non-painted surface of the cover plate using permanent black marker.
- K. Empty Conduit: All empty conduit runs and conduit with conductors for future use shall be identified for use and shall indicate where they terminate. Identification shall be by tags with string or wire attached to conduit or outlet.

END OF SECTION 260553

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following lighting control devices:
 - 1. Time switches.
 - 2. Outdoor photoelectric switches and indoor photoelectric sensors.
 - 3. Indoor photoelectric sensors.
 - 4. Lighting contactors.
- B. Related Sections include the following:
 - 1. Division 26 Section "Wiring Devices" for wall-box dimmers and manual light switches.

1.3 DEFINITIONS

- A. LED: Light-emitting diode.
- B. PIR: Passive infrared.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show installation details for occupancy and light-level sensors.
 - 1. Provide scaled plan layouts of all occupancy sensor locations based upon the manufacturer's suggested layout for their equipment in full compliance with these specifications.
 - a. Show sensor type being supplied for each sensor location and the area of coverage for each sensor.
 - 2. Interconnection diagrams showing field-installed wiring.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Field quality-control test reports.
- D. Operation and Maintenance Data: For each type of product to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

1.6 COORDINATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression system, and partition assemblies.

PART 2 - PRODUCTS

2.1 TIME SWITCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Intermatic, Inc.
 - 2. Leviton Mfg. Company Inc.
 - 3. Lithonia Lighting; Acuity Lighting Group, Inc.
 - 4. Paragon Electric Co.; Invensys Climate Controls.
 - 5. Square D; Schneider Electric.
 - 6. TORK.
 - 7. Touch-Plate, Inc.
 - 8. Watt Stopper (The).
 - 9. Bodine
 - 10. Sensor Switch
 - 11. Crestron
- B. Electronic Time Switches: Electronic, solid-state programmable units with alphanumeric display; complying with UL 917.
 - 1. Contact Configuration: SPST.
 - 2. Contact Rating: 20-A ballast load, 120/240-V ac.
 - 3. Program: 2 on-off set points on a 24-hour schedule, allowing different set points for each day of the week and an annual holiday schedule that overrides the weekly operation on holidays.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Battery Backup: For schedules and time clock.

2.2 OUTDOOR PHOTOELECTRIC SWITCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Intermatic, Inc.
 2. Lithonia Lighting; Acuity Lighting Group, Inc.
 3. Paragon Electric Co.; Invensys Climate Controls.
 4. Square D; Schneider Electric.
 5. TORK.
 6. Touch-Plate, Inc.
 7. Watt Stopper (The).
 8. Sensor Switch.
 9. Crestron.
- B. Description: Solid state, with DPST dry contacts rated for 1800-VA tungsten or 1000-VA inductive, to operate connected relay, contactor coils, or microprocessor input; complying with UL 773A.
 1. Light-Level Monitoring Range: 1.5 to 10 fc, with an adjustment for turn-on and turn-off levels within that range, and a directional lens in front of photocell to prevent fixed light sources from causing turn-off.
 2. Time Delay: 15-second minimum, to prevent false operation.
 3. Surge Protection: Metal-oxide varistor, complying with IEEE C62.41.1, IEEE C62.41.2, and IEEE 62.45 for Category A1 locations.
 4. Mounting: Twist lock complying with IEEE C136.10, with base-and-stem mounting or stem-and-swivel mounting accessories as required to direct sensor to the north sky exposure.
 5. Contact voltage rating: Suitable for the circuit being controlled.

2.3 INDOOR PHOTOELECTRIC SENSORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Intermatic, Inc.
 2. Lithonia Lighting; Acuity Lighting Group, Inc.
 3. Lutron Electronics Co., Inc.
 4. Paragon Electric Co.; Invensys Climate Controls.
 5. Square D; Schneider Electric.
 6. TORK.
 7. Touch-Plate, Inc.
 8. Watt Stopper (The).
 9. Sensor Switch.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

10. Crestron.

- B. Ceiling-Mounted Photoelectric Sensor: Solid-state, light-level sensor unit, with communications with dimmers or lighting drivers, to detect changes in lighting levels that are perceived by the eye and adjust lighting fixture dimming level to maintain a target (setpoint) lighting level. Arrange photoelectric sensors to provide closed-loop or semi-open-loop daylighting control of lighting fixture rows near exterior windows.

2.4 INDOOR OCCUPANCY SENSORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Hubbell Lighting.
 2. Leviton Mfg. Company Inc.
 3. Lithonia Lighting; Acuity Lighting Group, Inc.
 4. TORK.
 5. Watt Stopper (The).
 6. Sensor Switch.
 7. Crestron.
- B. General Description: Wall- or ceiling-mounting, solid-state units with a separate relay unit.
1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
 2. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A. Sensor shall be powered from the relay unit.
 3. Relay Unit: Dry contacts rated for 20-A ballast load at 120- and 277-V ac, for 13-A tungsten at 120-V ac, and for 1 hp at 120-V ac. Power supply to sensor shall be 24-V dc, 150-mA, Class 2 power source as defined by NFPA 70.
 4. Mounting:
 - a. Sensor: Suitable for mounting in any position on a standard outlet box.
 - b. Relay: Externally mounted through a 1/2-inch knockout in a standard electrical enclosure.
 - c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
 5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
 6. Bypass Switch: Override the on function in case of sensor failure.
 7. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; keep lighting off when selected lighting level is present.
- C. PIR Type: Ceiling mounting; detect occupancy by sensing a combination of heat and movement in area of coverage.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Detector Sensitivity: Detect occurrences of 6-inch- minimum movement of any portion of a human body that presents a target of not less than 36 sq. in..
 2. Detection Coverage (Room): Detect occupancy anywhere in a circular area of 1000 sq. ft. when mounted on a 96-inch- high ceiling.
 3. Detection Coverage (Corridor): Detect occupancy within 90 feet when mounted on a 10-foot- high ceiling.
- D. Ultrasonic Type: Ceiling mounting; detect occupancy by sensing a change in pattern of reflected ultrasonic energy in area of coverage.
1. Detector Sensitivity: Detect a person of average size and weight moving not less than 12 inches in either a horizontal or a vertical manner at an approximate speed of 12 inches/s.
 2. Detection Coverage (Small Room): Detect occupancy anywhere within a circular area of 600 sq. ft. when mounted on a 96-inch- high ceiling.
 3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96-inch- high ceiling.
 4. Detection Coverage (Large Room): Detect occupancy anywhere within a circular area of 2000 sq. ft. when mounted on a 96-inch- high ceiling.
 5. Detection Coverage (Corridor): Detect occupancy anywhere within 90 feet when mounted on a 10-foot- high ceiling in a corridor not wider than 14 feet.
- E. Dual-Technology Type: Ceiling mounting; detect occupancy by using a combination of PIR and ultrasonic detection methods in area of coverage. Particular technology or combination of technologies that controls on-off functions shall be selectable in the field by operating controls on unit.
1. Sensitivity Adjustment: Separate for each sensing technology.
 2. Detector Sensitivity: Detect occurrences of 6-inch- minimum movement of any portion of a human body that presents a target of not less than 36 sq. in., and detect a person of average size and weight moving not less than 12 inches in either a horizontal or a vertical manner at an approximate speed of 12 inches/s.
 3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96-inch- high ceiling.

2.5 WALL OCCUPANCY SENSORS

A. Wall-Switch Sensors:

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 6111 for 120 V, 6117 for 277 V.
 - b. Hubbell; WS1277.
 - c. Leviton; ODS 10-ID.
 - d. Pass & Seymour; WS3000.
 - e. Watt Stopper (The); WS-200.
 - f. Lutron;

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- g. Lithonia;
 - 2. Description: Passive-infrared type, 120/277 V, adjustable time delay up to 30 minutes, 180-degree field of view, with a minimum coverage area of 900 sq. ft..
- B. Wall-Switch Sensors:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Hubbell; AT120 for 120 V, AT277 for 277 V.
 - b. Leviton; ODS 15-ID.
 - c. Lutron;
 - d. Lithonia;
 - 2. Description: Adaptive-technology type, 120/277 V, adjustable time delay up to 20 minutes, 180-degree field of view, with a minimum coverage area of 900 sq. ft..
- C. Long-Range Wall-Switch Sensors:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Hubbell; ATP1600WRP.
 - b. Leviton; ODWWV-IRW.
 - c. Pass & Seymour; WA1001.
 - d. Watt Stopper (The); CX-100.
 - e. Lutron;
 - f. Lithonia;
 - 2. Description: Passive-infrared type, 120/277 V, adjustable time delay up to 30 minutes, 110-degree field of view, with a minimum coverage area of 1200 sq. ft..
- D. Long-Range Wall-Switch Sensors:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Hubbell; ATD1600WRP.
 - b. Leviton; ODW12-MRW.
 - c. Watt Stopper (The); DT-200.
 - d. Lutron;
 - e. Lithonia;
 - 2. Description: Dual technology, with both passive-infrared- and ultrasonic-type sensing, 120/277 V, adjustable time delay up to 30 minutes, 110-degree field of view, and a minimum coverage area of 1200 sq. ft..
- E. Wide-Range Wall-Switch Sensors:
 - 1. Products: Subject to compliance with requirements, provide one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Hubbell; ATP120HBRP.
 - b. Leviton; ODWHB-IRW.
 - c. Pass & Seymour; HS1001.
 - d. Watt Stopper (The); CX-100-3.
 - e. Lutron;
 - f. Lithonia;
2. Description: Passive-infrared type, 120/277 V, adjustable time delay up to 30 minutes, 150-degree field of view, with a minimum coverage area of 1200 sq. ft..

2.6 LIGHTING CONTACTORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. ASCO Power Technologies, LP; a division of Emerson Electric Co.
 2. Eaton Electrical Inc.; Cutler-Hammer Products.
 3. GE Industrial Systems; Total Lighting Control.
 4. Hubbell Lighting.
 5. Lithonia Lighting; Acuity Lighting Group, Inc.
 6. Square D; Schneider Electric.
- B. Description: Electrically operated and electrically held, combination type with fusible switch, complying with NEMA ICS 2 and UL 508.
 1. Current Rating for Switching: Listing or rating consistent with type of load served, including tungsten filament, inductive, and high-inrush ballast (ballast with 15 percent or less total harmonic distortion of normal load current).
 2. Fault Current Withstand Rating: Equal to or exceeding the available fault current at the point of installation.
 3. Enclosure: Comply with NEMA 250.
 4. Provide with control and pilot devices as indicated on Drawings, matching the NEMA type specified for the enclosure.

2.7 EMERGENCY INVERTER FOR LIGHTING

2.8 CONDUCTORS AND CABLES

- A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."
- B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 18 AWG. Comply with requirements in Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 14 AWG. Comply with requirements in Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."

PART 3 - EXECUTION

3.1 SENSOR INSTALLATION

- A. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

3.2 CONTACTOR INSTALLATION

- A. Mount electrically held lighting contactors with elastomeric isolator pads, to eliminate structure-borne vibration, unless contactors are installed in an enclosure with factory-installed vibration isolators.

3.3 WIRING INSTALLATION

- A. Wiring Method: Comply with Division 26 Section "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size shall be 1/2 inch.
- B. Wiring within Enclosures: Comply with NECA 1. Separate power-limited and nonpower-limited conductors according to conductor manufacturer's written instructions.
- C. Size conductors according to lighting control device manufacturer's written instructions, unless otherwise indicated.
- D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.
- E. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A.
- F. Complete wiring systems shall be color coded according to the manufacturer's recommendations and conductors must be tagged or identified at terminals.

3.4 IDENTIFICATION

- A. Identify components and power and control wiring according to Division 26 Section "Identification for Electrical Systems."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Identify controlled circuits in lighting contactors.
 2. Identify circuits or luminaries controlled by photoelectric and occupancy sensors at each sensor.
- B. Label time switches and contactors with a unique designation.

3.5 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
1. After installing time switches and sensors, and after electrical circuitry has been energized, adjust and test for compliance with requirements.
 2. Operational Test: Verify operation of each lighting control device, and adjust time delays.
- B. Lighting control devices that fail tests and inspections are defective work.
- C. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance or replaced or additional work with specified requirements.

3.6 ADJUSTING

- A. Occupancy Adjustments: When requested within 90 days of date of Substantial Completion, provide on-site assistance in adjusting sensors to suit occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain lighting control devices. Refer to Division 01 Section "Demonstration and Training."

END OF SECTION 260923

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Receptacles, receptacles with integral GFCI, and associated device plates.
 - 2. Snap switches and wall-box dimmers.
 - 3. Communications outlets.

1.3 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. GFCI: Ground-fault circuit interrupter.
- C. Pigtail: Short lead used to connect a device to a branch-circuit conductor.
- D. RFI: Radio-frequency interference.
- E. UTP: Unshielded twisted pair.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: List of legends and description of materials and process used for premarking wall plates.
- C. Samples: One for each type of device and wall plate specified, in each color specified.
- D. Field quality-control test reports.
- E. Operation and Maintenance Data: For wiring devices to include in all manufacturers' packing label warnings and instruction manuals that include labeling conditions.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain each type of wiring device and associated wall plate through one source from a single manufacturer. Insofar as they are available, obtain all wiring devices and associated wall plates from a single manufacturer and one source.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- C. Comply with NFPA 70.

1.6 COORDINATION

- A. Receptacles for Owner-Furnished Equipment: Match plug configurations.
 - 1. Cord and Plug Sets: Match equipment requirements.

1.7 EXTRA MATERIALS

- A. Furnish extra materials described in subparagraphs below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Service/Power Poles: One for every 10, but no fewer than one.
 - 2. Floor Service Outlet Assemblies: One for every 10, but no fewer than one.
 - 3. Poke-Through, Fire-Rated Closure Plugs: One for every five floor service outlets installed, but no fewer than two.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers' Names: Shortened versions (shown in parentheses) of the following manufacturers' names are used in other Part 2 articles:
 - 1. Cooper Wiring Devices; a division of Cooper Industries, Inc. (Cooper).
 - 2. Hubbell Incorporated; Wiring Device-Kellems (Hubbell).
 - 3. Leviton Mfg. Company Inc. (Leviton).
 - 4. Pass & Seymour/Legrand; Wiring Devices & Accessories (Pass & Seymour).

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 STRAIGHT BLADE RECEPTACLES

- A. Convenience Receptacles, Heavy-Duty, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 configuration 5-20R, and UL 498.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 5351 (single), 5352 (duplex).
 - b. Hubbell; HBL5351 (single), CR5352 (duplex).
 - c. Leviton; 5891 (single), 5352 (duplex).
 - d. Pass & Seymour; 5381 (single), 5352 (duplex).
 - 2. Receptacles shall have side wired terminals with brass screws and hex ground screw.
- B. Tamper-Resistant Convenience Receptacles, Heavy-Duty, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 configuration 5-20R, and UL 498.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; TR8300.
 - b. Hubbell; HBL8300SG.
 - c. Leviton; 8300-SGG.
 - d. Pass & Seymour; 63H.

2.3 GFCI RECEPTACLES

- A. General Description: Straight blade, non-feed through type. Comply with NEMA WD 1, NEMA WD 6, UL 498, and UL 943, Class A, and include indicator light that is lighted when device is tripped.
- B. Duplex GFCI Convenience Receptacles, Heavy-Duty, 125 V, 20 A:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; GF20.
 - b. Pass & Seymour; 2084.
 - c. Leviton; W7899
 - d. Hubbell; GFR5362

2.4 WALL-BOX DIMMERS

- A. Dimmer Switches: Modular, full-wave, solid-state units with integral, quiet on-off switches, with audible frequency and EMI/RFI suppression filters.
- B. Control: Continuously adjustable slider; with single-pole or three-way switching. Comply with UL 1472.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Fluorescent Lamp Dimmer Switches: Modular; compatible with dimmer ballasts; trim potentiometer to adjust low-end dimming; dimmer-ballast combination capable of consistent dimming with low end not greater than 20 percent of full brightness.

2.5 COMMUNICATIONS OUTLETS

A. Data/Communications Outlet:

- 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 3560-6.
 - b. Leviton; 40649.
- 2. Description: Single RJ-45 jack for terminating 100-ohm, balanced, four-pair UTP; TIA/EIA-568-B.1; complying with Category 5e. Comply with UL 1863.

B. Combination TV and Data Outlet:

- 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 3562.
 - b. Leviton; 40595.
- 2. Description: Single RJ-45 jack for 100-ohm, balanced, four-pair UTP; TIA/EIA-568-B.1; complying with Category 5e; and one Type F coaxial cable connector.

2.6 WALL PLATES

A. Single and combination types to match corresponding wiring devices.

- 1. Plate-Securing Screws: Metal with head color to match plate finish.
- 2. Material for Finished Spaces: Smooth, high-impact thermoplastic.
- 3. Material for Unfinished Spaces: Smooth, high-impact thermoplastic.
- 4. Material for Damp Locations: Thermoplastic with spring-loaded lift cover, and listed and labeled for use in "wet locations."

B. Wet-Location, Weatherproof Cover Plates: NEMA 250, complying with type 3R weather-resistant, die-cast aluminum or thermoplastic with lockable cover.

2.7 MULTIOUTLET ASSEMBLIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1. Hubbell Incorporated; Wiring Device-Kellems.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Wiremold Company (The).
- B. Components of Assemblies: Products from a single manufacturer designed for use as a complete, matching assembly of raceways and receptacles.
- C. Raceway Material: Metal, with manufacturer's standard finish.
- D. Wire: No. 12 AWG.

2.8 FINISHES

- A. Color: Wiring device catalog numbers in Section Text do not designate device color.
 1. Wiring Devices Connected to Normal Power System: As selected by Architect, unless otherwise indicated or required by NFPA 70 or device listing.
 2. Wiring Devices Connected to Emergency Power System: Red.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with NECA 1, including the mounting heights listed in that standard, unless otherwise noted.
- B. Coordination with Other Trades:
 1. Take steps to insure that devices and their boxes are protected. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of the boxes.
 2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
 3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
 4. Install wiring devices after all wall preparation, including painting, is complete.
- C. Conductors:
 1. Do not strip insulation from conductors until just before they are spliced or terminated on devices.
 2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
 3. The length of free conductors at outlets for devices shall meet provisions of NFPA 70, Article 300, without pigtails.
 4. Existing Conductors:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Cut back and pigtail, or replace all damaged conductors.
- b. Straighten conductors that remain and remove corrosion and foreign matter.
- c. Pigtail existing conductors is permitted provided the outlet box is large enough.

D. Device Installation:

1. Replace all devices that have been in temporary use during construction or that show signs that they were installed before building finishing operations were complete.
2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
4. Connect devices to branch circuits using pigtails that are not less than 6 inches in length.
5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, 2/3 to 3/4 of the way around terminal screw.
6. Use a torque screwdriver when a torque is recommended or required by the manufacturer.
7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
8. Tighten unused terminal screws on the device.
9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device mounting screws in yokes, allowing metal-to-metal contact.

E. Receptacle Orientation:

1. Install ground pin of vertically mounted receptacles up, and on horizontally mounted receptacles to the right.

F. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.

G. Dimmers:

1. Install dimmers within terms of their listing.
2. Verify that dimmers used for fan speed control are listed for that application.
3. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' device listing conditions in the written instructions.

H. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.

I. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

3.2 IDENTIFICATION

A. Comply with Division 26 Section "Identification for Electrical Systems."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Wall switches and Receptacles: Identify panelboard and circuit number from which served.
 - a. Label all cover plates using adhesive film label with clear protective overlay.
 - 1) Labels shall include the power source panelboard name and circuit number.
Example: "Panel 1NL2-24"
 - 2) Labels shall be placed below the toggle on wall switches and below the lower duplex receptacle on receptacles.
 - b. For wall switches and/or receptacles connected to generator circuits provide engraved stainless steel cover plate with the text "EMERGENCY" using 1/4" high red filled letters.
 - 1) Engraved text shall be located above toggle on wall switches and above the upper receptacle for receptacles.
 - c. Durable wire markers or tags inside outlet boxes.

3.3 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.
 1. Test Instruments: Use instruments that comply with UL 1436.
 2. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated LED indicators of measurement.
- B. Tests for Convenience Receptacles:
 1. Line Voltage: Acceptable range is 105 to 132 V.
 2. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is not acceptable.
 3. Ground Impedance: Values of up to 2 ohms are acceptable.
 4. GFCI Trip: Test for tripping values specified in UL 1436 and UL 943.
 5. Using the test plug, verify that the device and its outlet box are securely mounted.
 6. The tests shall be diagnostic, indicating damaged conductors, high resistance at the circuit breaker, poor connections, inadequate fault current path, defective devices, or similar problems. Correct circuit conditions, remove malfunctioning units and replace with new ones, and retest as specified above.

END OF SECTION 262726

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 262813 - FUSES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Cartridge fuses rated 600-V ac and less for use in control circuits, enclosed switches, and enclosed controllers.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material, dimensions, descriptions of individual components, and finishes for spare-fuse cabinets. Include the following for each fuse type indicated:

- 1. Ambient Temperature Adjustment Information: If ratings of fuses have been adjusted to accommodate ambient temperatures, provide list of fuses with adjusted ratings.
 - a. For each fuse having adjusted ratings, include location of fuse, original fuse rating, local ambient temperature, and adjusted fuse rating.
 - b. Provide manufacturer's technical data on which ambient temperature adjustment calculations are based.
 - 2. Dimensions and manufacturer's technical data on features, performance, electrical characteristics, and ratings.
 - 3. Current-limitation curves for fuses with current-limiting characteristics.
 - 4. Time-current coordination curves (average melt) and current-limitation curves (instantaneous peak let-through current) for each type and rating of fuse.
 - 5. Coordination charts and tables and related data.
 - 6. Fuse sizes for elevator feeders and elevator disconnect switches.

- B. Operation and Maintenance Data: For fuses to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:

- 1. Ambient temperature adjustment information.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Current-limitation curves for fuses with current-limiting characteristics.
3. Time-current coordination curves (average melt) and current-limitation curves (instantaneous peak let-through current) for each type and rating of fuse.
4. Coordination charts and tables and related data.

1.4 QUALITY ASSURANCE

- A. Source Limitations: Obtain fuses, for use within a specific product or circuit, from single source from single manufacturer.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Comply with NEMA FU 1 for cartridge fuses.
- D. Comply with NFPA 70.

1.5 PROJECT CONDITIONS

- A. Where ambient temperature to which fuses are directly exposed is less than 40 deg F or more than 100 deg F, apply manufacturer's ambient temperature adjustment factors to fuse ratings.

1.6 COORDINATION

- A. Coordinate fuse ratings with utilization equipment nameplate limitations of maximum fuse size and with system short-circuit current levels.

1.7 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Cooper Bussmann, Inc.
2. Edison Fuse, Inc.
3. Ferraz Shawmut, Inc.
4. Littelfuse, Inc.

2.2 CARTRIDGE FUSES

- A. Characteristics: NEMA FU 1, nonrenewable cartridge fuses with voltage ratings consistent with circuit voltages.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fuses before installation. Reject fuses that are moisture damaged or physically damaged.
- B. Examine holders to receive fuses for compliance with installation tolerances and other conditions affecting performance, such as rejection features.
- C. Examine utilization equipment nameplates and installation instructions. Install fuses of sizes and with characteristics appropriate for each piece of equipment.
- D. Evaluate ambient temperatures to determine if fuse rating adjustment factors must be applied to fuse ratings.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 600 VOLT AND LESS FUSE APPLICATIONS

- A. Cartridge Fuses:
 1. Motor Branch Circuits: Class RK1, time delay.
 2. Other Branch Circuits: Class RK1, time delay.
 3. Control Circuits: Class CC, fast acting.

3.3 INSTALLATION

- A. Install fuses in fusible devices. Arrange fuses so rating information is readable without removing fuse.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 IDENTIFICATION

- A. Install labels complying with requirements for identification specified in Division 26 Section "Identification for Electrical Systems" and indicating fuse replacement information on inside door of each fused switch and adjacent to each fuse block, socket, and holder.

END OF SECTION 262813

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 26 2923 - VARIABLE-FREQUENCY MOTOR CONTROLLERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes separately enclosed, pre-assembled, combination VFCs, rated 600 V and less, for speed control of three-phase, squirrel-cage induction motors.

1.3 DEFINITIONS

- A. BAS: Building automation system.
- B. CE: Conformance Europeene (European Compliance).
- C. CPT: Control power transformer.
- D. EMI: Electromagnetic interference.
- E. IGBT: Insulated-gate bipolar transistor.
- F. LAN: Local area network.
- G. LED: Light-emitting diode.
- H. MCP: Motor-circuit protector.
- I. NC: Normally closed.
- J. NO: Normally open.
- K. OCPD: Overcurrent protective device.
- L. PCC: Point of common coupling.
- M. PID: Control action, proportional plus integral plus derivative.
- N. PWM: Pulse-width modulated.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- O. RFI: Radio-frequency interference.
- P. TDD: Total demand (harmonic current) distortion.
- Q. THD(V): Total harmonic distortion (voltage).
- R. VFC: Variable-frequency motor controller.
- S. VFD: Variable-frequency drive. Used interchangeably with VFC.

1.4 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: VFCs shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

1.5 ACTION SUBMITTALS

- A. Product Data: For each type and rating of VFC indicated. Include features, performance, electrical ratings, operating characteristics, shipping and operating weights, and furnished specialties and accessories.
- B. Shop Drawings: For each VFC indicated. Include dimensioned plans, elevations, and sections; and conduit entry locations and sizes, mounting arrangements, and details, including required clearances and service space around equipment.
 - 1. Show tabulations of installed devices, equipment features, and ratings. Include the following:
 - a. Each installed unit's type and details.
 - b. Factory-installed devices.
 - c. Enclosure types and details.
 - d. Nameplate legends.
 - e. Short-circuit current (withstand) rating of enclosed unit.
 - f. Features, characteristics, ratings, and factory settings of each VFC and installed devices.
 - g. Specified modifications.
 - 2. Schematic and Connection Wiring Diagrams: For power, signal, and control wiring.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.6 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Floor plans, drawn to scale, showing dimensioned layout, required working clearances, and required area above and around VFCs. Show VFC layout and relationships between electrical components and adjacent structural and mechanical elements. Show support locations, type of support, and weight on each support. Indicate field measurements.
- B. Seismic Qualification Certificates: For VFCs, accessories, and components, from manufacturer.
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which the certification is based, and their installation requirements.
- C. Product Certificates: For each VFC, from manufacturer.
- D. Harmonic Analysis Study and Report: Comply with IEEE 399 and NETA Acceptance Testing Specification; identify the effects of nonlinear loads and their associated harmonic contributions on the voltages and currents throughout the electrical system. Analyze possible operating scenarios, including recommendations for VFC input filtering to limit TDD and THD(V) at each VFC to specified levels at the point of common coupling as defined by IEEE-519-1992.
- E. Source quality-control reports.
- F. Field quality-control reports.
- G. Load-Current and List of Settings of Adjustable Overload Relays: Compile after motors have been installed and arrange to demonstrate that switch settings for motor-running overload protection suit actual motors to be protected.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For VFCs to include in emergency, operation, and maintenance manuals. Include the following:
 - 1. Manufacturer's written instructions for testing and adjusting thermal-magnetic circuit breaker and MCP trip settings.
 - 2. Manufacturer's written instructions for setting field-adjustable overload relays.
 - 3. Manufacturer's written instructions for testing, adjusting, and reprogramming microprocessor control modules.
 - 4. Manufacturer's written instructions for setting field-adjustable timers, controls, and status and alarm points.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Power Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.
 - 2. Control Power Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than two of each size and type.
 - 3. Indicating Lights: Two of each type and color installed.
 - 4. Auxiliary Contacts: Furnish two spare(s) for each size and type of magnetic controller installed.
 - 5. Power Contacts: Furnish three spares for each size and type of magnetic contactor installed.

1.9 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.
- C. IEEE Compliance: Fabricate and test VFC according to IEEE 344 to withstand seismic forces defined in Section 26 0548 "Vibration and Seismic Controls for Electrical Systems."

1.10 DELIVERY, STORAGE, AND HANDLING

- A. If stored in space that is not permanently enclosed and environmentally controlled, remove loose packing and flammable materials from inside controllers and install temporary electric heating, with at least 250 W per controller.

1.11 PROJECT CONDITIONS

- A. Environmental Limitations: Rate equipment for continuous operation, capable of driving full load without derating, under the following conditions unless otherwise indicated:
 - 1. Ambient Storage Temperature: Not less than minus 4 deg F and not exceeding 140 deg F
 - 2. Humidity: Less than 95 percent (noncondensing).
 - 3. Altitude: Not exceeding 3300 feet.
- B. Interruption of Existing Electrical Systems: Do not interrupt electrical systems in facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electrical service according to requirements indicated:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Notify Owner no fewer than 14 days in advance of proposed interruption of electrical systems.
 2. Indicate method of providing temporary electrical service.
 3. Do not proceed with interruption of electrical systems without Owner's written permission.
 4. Comply with NFPA 70E.
- C. Product Selection for Restricted Space: Drawings indicate maximum dimensions for VFCs, including clearances between VFCs, and adjacent surfaces and other items.

1.12 COORDINATION

- A. Coordinate features of motors, load characteristics, installed units, and accessory devices to be compatible with the following:
1. Torque, speed, and horsepower requirements of the load.
 2. Ratings and characteristics of supply circuit and required control sequence.
 3. Ambient and environmental conditions of installation location.
- B. Coordinate sizes and locations of concrete bases with actual equipment provided. Cast anchor-bolt inserts into bases.
- C. Coordinate sizes and locations of roof curbs, equipment supports, and roof penetrations with actual equipment provided.

1.13 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace VFCs that fail in materials or workmanship within specified warranty period.
1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURED UNITS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. ABB.
 2. Danfoss Inc.; Danfoss Drives Div.
 3. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
 4. Siemens Energy & Automation, Inc.
 5. Square D; a brand of Schneider Electric.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. General Requirements for VFCs: Comply with NEMA ICS 7, NEMA ICS 61800-2, and UL 508C.
- C. Application: Constant torque and/or variable torque units shall be supplied for the specific equipment usage. This may include one or both types of VFCs. The manufacturer shall be consulted for each specific VFC application to determine the recommended type of VFC to be used.
- D. VFC Description: Variable-frequency power converter (rectifier, dc bus, and IGBT, PWM inverter) factory packaged in an enclosure, with integral disconnecting means and overcurrent and overload protection; listed and labeled by an NRTL as a complete unit; arranged to provide self-protection, protection, and variable-speed control of one or more three-phase induction motors by adjusting output voltage and frequency.
 - 1. Units suitable for operation of inverter-duty motors as defined by NEMA MG 1, Section IV, Part 31, “Definite-Purpose Inverter-Fed Polyphase Motors.”
 - 2. Listed and labeled for integrated short-circuit current (withstand) rating by an NRTL acceptable to authorities having jurisdiction.
- E. Design and Rating: Match load type, such as fans, blowers, and pumps; and type of connection used between motor and load such as direct or through a power-transmission connection.
 - 1. Variable Frequency Controllers shall be of 6-pulse or 12-pulse design with sufficient harmonic distortion mitigation to limit TDD and THD (V) to 2.5% at the defined PCC or per IEEE 519 if more stringent.
- F. Output Rating: Three-phase; 10 to 60 Hz, with voltage proportional to frequency throughout voltage range.
- G. Unit Operating Requirements:
 - 1. Input AC Voltage Tolerance: Plus 10 and minus 10 percent of VFC input voltage rating.
 - 2. Input AC Voltage Unbalance: Not exceeding 3 percent.
 - 3. Input Frequency Tolerance: Plus or minus 3 percent of VFC frequency rating.
 - 4. Minimum Efficiency: 96 percent at 60 Hz, full load.
 - 5. Minimum Displacement Primary-Side Power Factor: 96 percent under any load or speed condition.
 - 6. Minimum Short-Circuit Current (Withstand) Rating: 65 kA.
 - 7. Ambient Temperature Rating: Not less than 14 deg F and not exceeding 104 deg F.
 - 8. Ambient Storage Temperature Rating: Not less than minus 4 deg F and not exceeding 140 deg F
 - 9. Humidity Rating: Less than 95 percent (noncondensing).
 - 10. Altitude Rating: Not exceeding 3300 feet.
 - 11. Vibration Withstand: Comply with IEC 60068-2-6.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

12. Overload Capability: 1.5 times the base load current for 60 seconds; minimum of 1.8 times the base load current for three seconds.
 13. Starting Torque: Minimum 100 percent of rated torque from 3 to 60 Hz.
 14. Speed Regulation: Plus or minus 5 percent.
 15. Output Carrier Frequency: Selectable; 0.5 to 15 kHz.
 16. Stop Modes: Programmable; includes fast, free-wheel, and dc injection braking.
- H. Inverter Logic: Microprocessor based, 32 bit, isolated from all power circuits.
- I. Isolated Control Interface: Allows VFCs to follow remote-control signal over a minimum 40:1 speed range.
1. Signal: Electrical.
- J. Internal Adjustability Capabilities:
1. Minimum Speed: 5 to 25 percent of maximum rpm.
 2. Maximum Speed: 80 to 100 percent of maximum rpm.
 3. Acceleration: 0.1 to 999.9 seconds.
 4. Deceleration: 0.1 to 999.9 seconds.
 5. Current Limit: 30 to minimum of 150 percent of maximum rating.
- K. Self-Protection and Reliability Features:
1. Input transient protection by means of surge suppressors to provide three-phase protection against damage from supply voltage surges 10 percent or more above nominal line voltage.
 2. Loss of Input Signal Protection: Selectable response strategy, including speed default to a percent of the most recent speed, a preset speed, or stop; with alarm.
 3. Under- and overvoltage trips.
 4. Inverter overcurrent trips.
 5. VFC and Motor Overload/Overtemperature Protection: Microprocessor-based thermal protection system for monitoring VFCs and motor thermal characteristics, and for providing VFC overtemperature and motor overload alarm and trip; settings selectable via the keypad; NRTL approved.
 6. Critical frequency rejection, with three (minimum) selectable, adjustable deadbands.
 7. Instantaneous line-to-line and line-to-ground overcurrent trips.
 8. Loss-of-phase protection.
 9. Reverse-phase protection.
 10. Short-circuit protection.
 11. Motor overtemperature fault.
 12. Interlocking of motor disconnect switches to prevent VFC damage.
- L. Automatic Reset/Restart: Attempt three restarts after drive fault or on return of power after an interruption and before shutting down for manual reset or fault correction; adjustable delay time between restart attempts.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- M. Power-Interruption Protection: To prevent motor from re-energizing after a power interruption until motor has stopped, unless "Bidirectional Autospeed Search" feature is available and engaged.
- N. Bidirectional Autospeed Search: Capable of starting VFC into rotating loads spinning in either direction and returning motor to set speed in proper direction, without causing damage to drive, motor, or load.
- O. Torque Boost: Automatically varies starting and continuous torque to at least 1.5 times the minimum torque to ensure high-starting torque and increased torque at slow speeds.
- P. Motor Temperature Compensation at Slow Speeds: Adjustable current fall-back based on output frequency for temperature protection of self-cooled, fan-ventilated motors at slow speeds.
- Q. Integral Input Disconnecting Means and OCPD: NEMA AB 1, instantaneous-trip circuit breaker; NEMA AB 1, molded-case switch, with power fuse block and current-limiting fuses; NEMA AB 1, thermal-magnetic circuit breaker; NEMA KS 1, nonfusible switch, with power fuse block and current-limiting fuses; or NEMA KS 1, fusible switch with pad-lockable, door-mounted handle mechanism.
 - 1. Disconnect Rating: Not less than 115 percent of NFPA 70 motor full-load current rating or VFC input current rating, whichever is larger.
 - 2. Auxiliary Contacts: NO/NC, arranged to activate before switch blades open.
 - 3. Lockable in the OFF position.
 - 4. Auxiliary contacts "a" and "b" arranged to activate with circuit-breaker handle.
 - 5. Form 'C' NC and NO alarm contact that operates only when circuit breaker has tripped.

2.2 CONTROLS AND INDICATION

- A. Status Lights: Door-mounted LED indicators displaying the following conditions:
 - 1. Power on.
 - 2. Run.
 - 3. Overvoltage.
 - 4. Line fault.
 - 5. Overcurrent.
 - 6. External fault.
- B. Panel-Mounted Operator Station: Manufacturer's standard front-accessible, sealed keypad and plain-English language digital display; allows complete programming, program copying, operating, monitoring, and diagnostic capability.
 - 1. Keypad: In addition to required programming and control keys, include keys for HAND, OFF, and AUTO modes.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Security Access: Provide electronic security access to controls through identification and password with at least three levels of access: View only; view and operate; and view, operate, and service.
 - a. Control Authority: Supports at least four conditions: Off, local manual control at VFC, local automatic control at VFC, and automatic control through a remote source.
- C. Historical Logging Information and Displays:
 1. Real-time clock with current time and date.
 2. Running log of total power versus time.
 3. Total run time.
 4. Fault log, maintaining last four faults with time and date stamp for each.
- D. Indicating Devices: Digital display and additional readout devices as required, mounted flush in VFC door and connected to display VFC parameters including, but not limited to:
 1. Output frequency (Hz).
 2. Motor speed (rpm).
 3. Motor status (running, stop, fault).
 4. Motor current (amperes).
 5. Motor torque (percent).
 6. Fault or alarming status (code).
 7. PID feedback signal (percent).
 8. DC-link voltage (V dc).
 9. Set point frequency (Hz).
 10. Motor output voltage (V ac).
- E. Control Signal Interfaces:
 1. Electric Input Signal Interface:
 - a. A minimum of two programmable analog inputs: 0- to 10-V dc and 4- to 20-mA dc.
 - b. A minimum of six multifunction programmable digital inputs.
 2. Remote Signal Inputs: Capability to accept any of the following speed-setting input signals from the BAS or other control systems:
 - a. 0- to 10-V dc.
 - b. 4- to 20-mA dc.
 - c. Potentiometer using up/down digital inputs.
 - d. Fixed frequencies using digital inputs.
 3. Output Signal Interface: A minimum of two programmable analog output signal(s) (0- to 10-V dc and 4- to 20-mA dc, which can be configured for any of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Output frequency (Hz).
 - b. Output current (load).
 - c. DC-link voltage (V dc).
 - d. Motor torque (percent).
 - e. Motor speed (rpm).
 - f. Set point frequency (Hz).
4. Remote Indication Interface: A minimum of two programmable dry-circuit relay outputs (120-V ac, 1 A) for remote indication of the following:
 - a. Motor running.
 - b. Set point speed reached.
 - c. Fault and warning indication (overtemperature or overcurrent).
 - d. PID high- or low-speed limits reached.
- F. PID Control Interface: Provides closed-loop set point, differential feedback control in response to dual feedback signals. Allows for closed-loop control of fans and pumps for pressure, flow, or temperature regulation.
 1. Number of Loops: Two.
- G. BAS Interface: Factory-installed hardware and software to enable the BAS to monitor, control, and display VFC status and alarms and energy usage. Data available to the BAS must include all commands (on, off, speed) and status control setpoints, zone process variables and controller alarms. Allows VFC to be used with an external system within a multidrop LAN configuration; settings retained within VFC's nonvolatile memory.
 1. Network Communications Ports: Ethernet and RS-422/485.
 2. Embedded BAS Protocols for Network Communications: ASHRAE 135 BACnet, Echelon LonWorks, Johnson Metasys N2 and Modbus/Memobus protocols accessible via the communications ports.

2.3 LINE CONDITIONING AND FILTERING

- A. Input Line Conditioning: Based on the harmonic analysis study and report, provide input filtering, as required, to limit TDD and THD(V) to 2.5% at the defined PCC or per IEEE 519 if more stringent.
 1. In addition to limits defined above, limit worst case THD(V) on source panelboards feeding multiple VFCs to 5% or per IEEE 519 if more stringent.
- B. EMI/RFI Filtering: CE marked; certify compliance with IEC 61800-3 for Category C2.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 BYPASS SYSTEMS

- A. Bypass Operation: Safely transfers motor between power converter output and bypass circuit, manually, automatically, or both. Selector switches set modes and indicator lights indicate mode selected. Unit is capable of stable operation (starting, stopping, and running) with motor completely disconnected from power converter.
- B. Bypass Mode: Manual operation only; requires local operator selection at VFC. Transfer between power converter and bypass contactor and retransfer shall only be allowed with the motor at zero speed.
- C. Bypass Controller: Three-contactor-style bypass allows motor operation via the power converter or the bypass controller; with input isolating switch and barrier arranged to isolate the power converter input and output and permit safe testing and troubleshooting of the power converter, both energized and de-energized, while motor is operating in bypass mode.
 - 1. Bypass Contactor: Load-break, IEC-rated contactor.
 - 2. Input and Output Isolating Contactors: Non-load-break, IEC-rated contactors.
 - 3. Isolating Switch: Provide manual bypass consisting of a door interlocked main fused disconnect padlockable in the off position.
- D. Bypass Contactor Configuration: Full-voltage (across-the-line) type.
 - 1. Provide four position AUTO/OFF/LINE/TEST selector switch: Which allows normal automatic VFC operation of the motor in “AUTO” position; de-energizing of the motor in “OFF” position; bypass, full-voltage (across-the-line), starting and operation of motor in the “LINE” position; and bypass operation of the motor while allowing testing and adjusting of VFC in the “TEST” position.
 - 2. Contactor Coils: Pressure-encapsulated type with coil transient suppressors.
 - a. Operating Voltage: Depending on contactor IEC size and line-voltage rating, manufacturer's standard matching control power or line voltage.
 - b. Power Contacts: Totally enclosed, double break, and silver-cadmium oxide; assembled to allow inspection and replacement without disturbing line or load wiring.
 - 3. Overload Relays: NEMA ICS 2.
 - a. Solid-State Overload Relays:
 - 1) Switch or dial selectable for motor-running overload protection.
 - 2) Sensors in each phase.
 - 3) Class 10/20 selectable tripping characteristic selected to protect motor against voltage and current unbalance and single phasing.
 - 4) Class II ground-fault protection, with start and run delays to prevent nuisance trip on starting.
 - 5) Analog communication module.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- b. Form 'C' NC and NO isolated overload alarm contact.
- c. External overload reset push button.

2.5 OPTIONAL FEATURES

- A. Multiple-Motor Capability: VFC suitable for variable-speed service to multiple motors. Overload protection shuts down VFC and motors served by it, and generates fault indications, when overload protection activates.
 - 1. Configure to allow two or more motors to operate simultaneously at the same speed; separate overload relay for each controlled motor.
- B. Damper control circuit with end of travel feedback capability.
- C. Motor Preheat Function: Preheats motor when idle to prevent moisture accumulation in the motor.
- D. Firefighter's Override (Smoke Purge) Input: On a remote contact closure from the firefighter's control station or the smoke-control fan controller, whichever is applicable on this project, this password-protected input:
 - 1. Overrides all other local and external inputs (analog/digital, serial communication, and all keypad commands).
 - 2. Forces VFC to operate motor, without any other run or speed command, at a field-adjustable, preset speed.
 - 3. Forces VFC to transfer to Bypass Mode and operate motor at full speed.
 - 4. Causes display of Override Mode on the VFC display.
 - 5. Reset VFC to normal operation on removal of override signal automatically.
- E. Communication Port: RS-232 port, USB 2.0 port, or equivalent connection capable of connecting a printer and a notebook computer.

2.6 ENCLOSURES

- A. Variable frequency drives shall be located indoors, unless approved by the University.
- B. VFC Enclosures: NEMA 250, to comply with environmental conditions at installed location.
 - 1. Dry and Clean Indoor Locations: Type 1.
 - 2. Outdoor Locations: Type 4X (only allowed with written approval from University).
 - 3. Kitchen and/or Wash-Down Areas: Type 4X, stainless steel.
 - 4. Other Wet or Damp Indoor Locations: Type 4X.
 - 5. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: Type 12.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Plenum Rating: UL 1995; NRTL certification label on enclosure, clearly identifying VFC as "Plenum Rated."

2.7 ACCESSORIES

- A. General Requirements for Control-Circuit and Pilot Devices: NEMA ICS 5; factory installed in VFC enclosure cover unless otherwise indicated.
 - 1. Push Buttons, Pilot Lights, and Selector Switches: Heavy-duty, oiltight type.
 - a. Push Buttons: Recessed or shielded types.
 - b. Pilot Lights: LED types; push to test.
 - c. Selector Switches: Rotary type.
 - d. Stop and Lockout Push-Button Station: Momentary-break, push-button station with a factory-applied hasp arranged so padlock can be used to lock push button in depressed position with control circuit open.
- B. Reversible NC/NO bypass contactor auxiliary contact(s).
- C. Control Relays: Auxiliary and adjustable solid-state time-delay relays.
- D. Phase-Failure, Phase-Reversal, and Undervoltage and Overvoltage Relays: Solid-state sensing circuit with isolated output contacts for hard-wired connections. Provide adjustable undervoltage, overvoltage, and time-delay settings.
 - 1. Current Transformers: Continuous current rating, basic impulse insulating level (BIL) rating, burden, and accuracy class suitable for connected circuitry. Comply with IEEE C57.13.
- E. Supplemental Digital Meters:
 - 1. Elapsed-time meter.
 - 2. Kilowatt meter.
 - 3. Kilowatt-hour meter.
- F. Breather and drain assemblies, to maintain interior pressure and release condensation in NEMA Type 4 and 4X enclosures installed outdoors or in unconditioned interior spaces subject to humidity and temperature swings.
- G. Space heaters, with NC auxiliary contacts, to mitigate condensation in NEMA Type 4 and 4X enclosures installed outdoors or in unconditioned interior spaces subject to humidity and temperature swings.
- H. Cooling Fan and Exhaust System: For NEMA 250, Type 1, 4 and 4X; UL 508 component recognized: Supply fan, with stainless steel intake and exhaust grills and filters; 120-V ac; obtained from integral CPT.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- I. Sun shields installed on fronts, sides, and tops of enclosures installed outdoors and subject to direct and extended sun exposure.
- J. Spare control-wiring terminal blocks; wired.

2.8 MOTORS

- A. Motors to be used with Variable Frequency Controllers shall be inverter duty motors.
- B. Cabling from VFCs to motors shall be enclosed in appropriate raceway system; exposed cabling is unacceptable.
- C. Motors to be used with Variable Frequency Controllers shall be equipped with shaft grounding rings bonded to the building grounding system to dissipate any voltages on shafts and extend the life of the motors.

2.9 SOURCE QUALITY CONTROL

- A. Testing: Test and inspect VFCs according to requirements in NEMA ICS 61800-2.
 - 1. Test each VFC while connected to its specified motor.
 - 2. Verification of Performance: Rate VFCs according to operation of functions and features specified.
- B. VFCs will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, surfaces, and substrates to receive VFCs, with Installer present, for compliance with requirements for installation tolerances, and other conditions affecting performance.
- B. Examine VFC before installation. Reject VFCs that are wet, moisture damaged, or mold damaged.
- C. Examine roughing-in for conduit systems to verify actual locations of conduit connections before VFC installation.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 HARMONIC ANALYSIS STUDY

- A. Prepare a harmonic analysis study and report complying with IEEE 519 and NETA Acceptance Testing Specification.

3.3 INSTALLATION

- A. Coordinate layout and installation of VFCs with other construction including conduit, piping, equipment, and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.
- B. Wall-Mounting Controllers: Install VFCs on walls with tops at uniform height and with disconnect operating handles not higher than 79 inches above finished floor unless otherwise indicated, and by bolting units to wall or mounting on lightweight structural-steel channels bolted to wall. For controllers not on walls, provide freestanding racks complying with Section 26 0529 "Hangers and Supports for Electrical Systems."
- C. Floor-Mounting Controllers: Install VFCs on 4-inch nominal thickness concrete base.
 - 1. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of concrete base.
 - 2. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
 - 3. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 4. Install anchor bolts to elevations required for proper attachment to supported equipment.
- D. Roof-Mounting Controllers: Install VFC on roofs with tops at uniform height and with disconnect operating handles not higher than 79 inches above finished roof surface unless otherwise indicated, and by bolting units to curbs or mounting on freestanding, lightweight, structural-steel channels bolted to curbs. Seal roof penetrations after raceways are installed.
 - 1. Structural-steel channels are specified in Section 26 0529 "Hangers and Supports for Electrical Systems."
- E. Seismic Bracing: Comply with requirements specified in Section 26 0548 "Vibration and Seismic Controls for Electrical Systems."
- F. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.
- G. Install fuses in each fusible-switch VFC.
- H. Install fuses in control circuits if not factory installed.
- I. Install, connect, and fuse thermal-protector monitoring relays furnished with motor-driven equipment.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- J. Comply with NECA 1.

3.4 IDENTIFICATION

- A. Identify VFCs, components, and control wiring. Comply with requirements for identification specified in Section 26 0553 "Identification for Electrical Systems."
 - 1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
 - 2. Label each VFC with engraved nameplate.
 - 3. Label each enclosure-mounted control and pilot device.
- B. Operating Instructions: Frame printed operating instructions for VFCs, including control sequences and emergency procedures. Fabricate frame of finished metal, and cover instructions with clear acrylic plastic. Mount on front of VFC units.

3.5 CONTROL WIRING INSTALLATION

- A. Install wiring between VFCs and remote devices and facility's central-control system.
- B. Bundle, train, and support wiring in enclosures.
- C. Connect selector switches and other automatic control devices where applicable.
 - 1. Connect selector switches to bypass only those manual- and automatic control devices that have no safety functions when switches are in manual-control position.
 - 2. Connect selector switches with control circuit in both manual and automatic positions for safety-type control devices such as low- and high-pressure cutouts, high-temperature cutouts, and motor overload protectors.

3.6 FIELD QUALITY CONTROL

- A. Control System Integrator: Engage a control system integrator to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Perform tests and inspections.
 - 1. Control System Integrator: Engage a control system integrator to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
- C. Acceptance Testing Preparation:
 - 1. Test insulation resistance for each VFC element, bus, component, connecting supply, feeder, and control circuit.
 - 2. Test continuity of each circuit.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

D. Tests and Inspections:

1. Inspect VFC, wiring, components, connections, and equipment installation.
2. Test and adjust controllers, components, and equipment.
3. Test insulation resistance for each VFC element, component, connecting motor supply, feeder, and control circuits.
4. Test continuity of each circuit.
5. Verify that voltages at VFC locations are within 10 percent of motor nameplate rated voltages. If outside this range for any motor, notify Construction Manager and the Engineer of Record before starting the motor(s).
6. Test each motor for proper phase rotation.
7. Perform each electrical test and visual and mechanical inspection stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
8. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
9. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.

E. VFCs will be considered defective if they do not pass tests and inspections.

F. Prepare test and inspection reports, including a certified report that identifies the VFC. Include notation of deficiencies detected, remedial action taken, and observations made after remedial action.

3.7 STARTUP SERVICE

A. Engage a Control Systems Integrator to perform control integration of all data communications to/from the BAS and all other startup services. Control Systems Integrator shall be responsible for proper interfacing of VFCs to the BAS and verification of proper setting of all protective features and elements of the system.

1. Complete installation and startup checks according to manufacturer's written instructions.

3.8 ADJUSTING

A. Program microprocessors for required operational sequences, status indications, alarms, event recording, and display features. Clear events memory after final acceptance testing and prior to Substantial Completion.

B. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and overload-relay pickup and trip ranges.

C. Adjust the trip settings of MCPs and thermal-magnetic circuit breakers with adjustable, instantaneous trip elements. Initially adjust to six times the motor nameplate full-load amperes

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

and attempt to start motors several times, allowing for motor cool-down between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficient motors if required). Where these maximum settings do not allow starting of a motor, notify the Construction manager and the Engineer of Record before increasing settings.

- D. Set field-adjustable pressure switches.

3.9 PROTECTION

- A. Temporary Heating: Apply temporary heat to maintain temperature according to manufacturer's written instructions until controllers are ready to be energized and placed into service.
- B. Replace VFCs whose interiors have been exposed to water or other liquids prior to Substantial Completion.

3.10 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, reprogram, and maintain VFCs.

END OF SECTION 262923

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 265100 - INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Interior lighting fixtures, LED array boards and electronic drivers.
 - 2. Emergency lighting units.
 - 3. Exit signs.
 - 4. Lighting fixture supports.
- B. Related Sections include the following:
 - 1. Division 26 Section "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.
 - 2. Division 26 Section "Wiring Devices" for manual wall-box dimmers for incandescent lamps.

1.3 DEFINITIONS

- A. CRI: Color-rendering index.
- B. CU: Coefficient of utilization.
- C. HID: High-intensity discharge.
- D. LED: Light Emitting Diode.
- E. Luminaire: Complete lighting fixture, including driver housing if provided.
- F. RCR: Room cavity ratio.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.4 SUBMITTALS

- A. Product Data: Partial submittals are not acceptable. Submittals that are incomplete shall be cause for rejection for the entire submittal. For each type of lighting fixture, arranged in order of fixture designation. Include data on features, accessories, finishes, and the following:
1. Physical description of lighting fixture including dimensions.
 2. Emergency lighting units.
 3. Lamp data shall include the following:
 - a. Average rated life @ 3 hours per start.
 - b. Color temperature in Kelvin.
 - c. Color Rendering Index.
 - d. Approximate Lumens initial @25°C.
 - e. Nominal Wattage.
 - f. Operating ambient temperature range.
 4. Driver data for each different type used on the project. The submittal must include the following information:
 - a. Input power ratings (watts) for the driver and fixture (where multiple drivers are required) as submitted.
 5. Energy-efficiency data.
 6. Life, output, and energy-efficiency data for lamps.
 7. Photometric data, in IESNA format, based on laboratory tests of each lighting fixture type, outfitted with LEDs, drivers, and accessories identical to those indicated for the lighting fixture as applied in this Project.
- B. Shop Drawings: Show details of nonstandard or custom lighting fixtures. Indicate dimensions, weights, methods of field assembly, components, features, and accessories.
1. Wiring Diagrams: Power and control wiring.
- C. The lighting design was based on the lighting fixture type and manufacturers as specified. Only those fixtures specified are approved for installation. If the Contractor elects to substitute an alternative fixture they shall submit in detail complete catalog information on the proposed substitution as well as the specified fixture and provide lighting calculations of areas affected by the proposed substitutions. The proposed substitution shall be in all details completely equal to or better than the specified fixture. If requested by the Engineer, the Contractor shall provide, at no cost, a sample of each proposed substitution and each specified fixture for evaluation. In all cases, all requests for substitutions shall be completed not less than ten (10) days prior to bid date. Request received less than ten (10) days prior to bid will not be evaluated and will be returned "NOT ACCEPTABLE".
- D. Coordination Drawings: Reflected ceiling plan(s) and other details, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Lighting fixtures.
 2. Suspended ceiling components.
 3. Structural members to which suspension systems for lighting fixtures will be attached.
 4. Other items in finished ceiling including the following:
 - a. Air outlets and inlets.
 - b. Speakers.
 - c. Sprinklers.
 - d. Smoke and fire detectors.
 - e. Occupancy sensors.
 - f. Photo electric sensors for daylighting control.
 - g. Location of proposed access doors for non-accessible electrical equipment located above non-accessible ceilings.
 - 1) Junction boxes.
 - 2) Lighting fixtures equipped with junction boxes that are non-accessible through the bottom of the fixture.
 5. Perimeter moldings.
- E. Product Certificates: For each type of driver for bi-level and dimmer-controlled fixtures, signed by product manufacturer.
- F. Qualification Data: For agencies providing photometric data for lighting fixtures.
- G. Field quality-control test reports.
- H. Operation and Maintenance Data: For lighting equipment and fixtures to include in emergency, operation, and maintenance manuals.
- I. Warranties: Special warranties specified in this Section.

1.5 QUALITY ASSURANCE

- A. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by manufacturers' laboratories that are accredited under the National Volunteer Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by an independent agency, with the experience and capability to conduct the testing indicated, that is an NRTL as defined by OSHA in 29 CFR 1910.7.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- D. Comply with NFPA 70.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.6 COORDINATION

- A. Coordinate layout and installation of lighting fixtures and suspension system with other construction that penetrates ceilings or is supported by them, including HVAC equipment, fire-suppression system, and partition assemblies.

1.7 WARRANTY

- A. Special Warranty for Drivers and LED Array Boards: Manufacturer's standard form in which drivers and LED array board manufacturer agrees to repair or replace drivers or LED array boards that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period for Drivers and LED Array Boards: Ten (10) years from date of Final Acceptance of the Work.

1.8 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. LED Array Boards: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
 - 2. Plastic Diffusers and Lenses: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
 - 3. Drivers: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
 - 4. Globes and Guards: 1 for every 20 of each type and rating installed. Furnish at least one of each type.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
- B. On the Lighting Fixture Schedule located on the drawings or where titles within this specification section that introduce lists, the following requirements apply to product selection:
 - 1. Basis-of-Design Product: The design for each lighting fixture is based on the product named. Subject to compliance with requirements, provide either the named product or a comparable product by one of the other manufacturers specified on the Lighting Fixture Schedule or as listed herein for LED array boards and electronic drivers.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.2 LIGHTING FIXTURES AND COMPONENTS, GENERAL REQUIREMENTS

- A. A UL listing shall be provided for each fixture type, and the appropriate label or labels shall be affixed to each fixture in a position concealing it from normal view. UL labels shall not be installed on reflectors. Fixtures shall be listed according to their exposure in respective environments, e.g. wet location, damp location, shower light, etc.
- B. Recessed Fixtures: Comply with NEMA LE 4 for ceiling compatibility for recessed fixtures.
- C. Metal Parts: Free of burrs and sharp corners and edges.
- D. Sheet Metal Components: Steel, unless otherwise indicated. Form and support to prevent warping and sagging.
- E. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit replacement of LED array boards or electronic drivers. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during maintenance and when secured in operating position.
- F. Reflecting surfaces shall have minimum reflectance as follows, unless otherwise indicated:
 - 1. White Surfaces: 85 percent.
 - 2. Specular Surfaces: 83 percent.
 - 3. Diffusing Specular Surfaces: 75 percent.
 - 4. Laminated Silver Metallized Film: 90 percent.
- G. Plastic Diffusers, Covers, and Globes:
 - 1. Acrylic Lighting Diffusers: 100 percent virgin acrylic plastic. High resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
 - a. Lens Thickness: At least 0.125 inch minimum unless different thickness is indicated.
 - b. UV stabilized.
 - 2. Glass: Annealed crystal glass, unless otherwise indicated.
- H. Electromagnetic-Interference Filters: Factory installed to suppress conducted electromagnetic-interference as required by MIL-STD-461E. Fabricate lighting fixtures with one filter on each electronic driver indicated to require a filter.

2.3 LIGHTING FIXTURES

- A. See lighting fixture schedule drawing for lighting fixture specifications.
- B. Miscellaneous

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. All fixtures shall be completely wired at the factory.
2. All fixtures shall be listed on the LED Lighting Facts website (www.lightingfacts.com), the Energy Star website (www.energystar.gov), or the Design Light Consortium website (www.designlights.org).
3. Light fixtures shall meet NEMA Standard 410-2011 for flicker.
4. Each recessed and semi-recessed fixture shall be finished with a mounting frame or ring compatible with the ceiling in which they are to be installed. The frames and rings shall be one (1) piece or constructed with electrically welded butt joints, and of sufficient size and strength to sustain the weight of the fixture.
5. It shall be the responsibility of the Contractor to make certain that all recessed fixtures have trims and mounting components compatible with the ceiling in which they are to be installed. Shop drawings shall clearly indicate the compatibility of the fixture to the ceiling.
6. The contractor shall use factory accessories for mounting and supporting the lighting fixtures in the ceilings.
 - a. Conduit sections installed and wired horizontally across ceiling grids and used for supporting lighting fixtures will not be accepted.
7. All materials, accessories, and other related fixture parts herein mentioned shall conform to the requirements of the drawings, specifications, and the agencies heretofore mentioned. They shall be new and free from defects which in any manner may impair their character, appearance, strength, durability and function, and shall be of prime quality intended for their respective purpose, and effectively protected from any damage or injury from the time of fabrication to the time of delivery and until final acceptance of the work. The above items shall meet with the approval of the Architect and Engineer who reserves the right of rejection prior to or after installation if found to be not in strict accordance with the true intent of the Contract.
8. All sheet metal work shall be free from tool marks and dents, and shall have accurate angles bent as sharp as compatible with the gauges of the required metal. All intersections and joints shall be formed true of adequate strength and structural rigidity to prevent any distortion after assembly. All sheet metal shall be void of light leaks. All edges shall be finished so there are no sharp edges exposed. All miters shall be in accurate alignment with abutting intersection members. Piecing of plates in individual runs on single plans, and the use of spliced pieces of filler materials to cover defective workmanship, will not be tolerated. Sheet metal work shall be properly fabricated in order that planes will not deform, that is, become concave or convex, due to normal expected ambient and operating conditions.
9. All lighting fixtures shall include a disconnecting means either internal or external to each luminaire to disconnect simultaneously from the supply source all conductors of the electronic driver, including the grounded conductor if any. The line side terminals of the disconnecting means shall be guarded. The disconnecting means shall be readily accessible and mounted either directly on the external housing or on the interior of the housing, so that no fixture parts, ceiling tiles or other building components are required be removed to access and operate the disconnect. The disconnect switch shall be in full compliance with the NEC 410.130 (G).

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 ELECTRONIC LED DRIVERS

A. Characteristics:

1. Inrush Current: Meet NEMA 410-2011 standard for maximum inrush current.
2. Power Factor: 90% (minimum).
3. Total Harmonic Distortion: 10% (maximum).
4. Integral Surge Suppression: 2.5V (minimum).

2.5 EXIT SIGNS

A. Description: Comply with UL 924; for sign colors, visibility, luminance, and lettering size, comply with authorities having jurisdiction and with fixture specified.

1. Emergency Exit Sign: It shall be completely self-contained. Fixture must be third-party listed as emergency lighting equipment, and meet or exceed the following standards; NEC, N.C. Building Code, North Carolina Energy Code, NFPA-101, and NEMA Standards. LED: The use of LED is required due to their reliable performance, low power consumption, and limited maintenance requirements. Maximum LED failure rate shall be 25% within a seven (7) year period; otherwise, if exceeded, manufacturer shall replace the complete unit at no charge to the owner.

B. Internally Lighted Signs:

1. Lamps for AC Operation: LEDs, 70,000 hours minimum rated lamp life.

2.6 LIGHTING FIXTURE SUPPORT COMPONENTS

- A. Comply with Division 26 Section "Hangers and Supports for Electrical Systems" for channel- and angle-iron supports and nonmetallic channel and angle supports.
- B. Single-Stem Hangers: 1/2-inch steel tubing with swivel ball fittings and ceiling canopy. Finish same as fixture.
- C. Twin-Stem Hangers: Two, 1/2-inch steel tubes with single canopy designed to mount a single fixture. Finish same as fixture.
- D. Wires: ASTM A 641/A 641M, Class 3, soft temper, zinc-coated steel, 12 gage.
- E. Wires for Humid Spaces: ASTM A 580/A 580M, Composition 302 or 304, annealed stainless steel, 12 gage.
- F. Rod Hangers: 3/16-inch minimum diameter, cadmium-plated, threaded steel rod.
- G. Hook Hangers: Integrated assembly matched to fixture and line voltage and equipped with threaded attachment, cord, and locking-type plug.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- H. Aircraft Cable Support: Use cable, anchorages, and intermediate supports recommended by fixture manufacturer.

2.7 REQUIREMENTS FOR INDIVIDUAL LIGHTING FIXTURES

- A. See Lighting Fixture Schedule.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Lighting fixtures: Set level, plumb, and square with ceilings and walls. Install lamps in each fixture. Lamp and socket orientations for similar fixtures shall be identical within each individual space.
- B. Support for Lighting Fixtures in or on Grid-Type Suspended Ceilings: Do not use grid as a support element.
 - 1. Where a recessed or downlight fixture replaces a section or a part of a ceiling tile, the fixture is to be supported:
 - a. At the two (2) opposite ends to the steel frame of the building with the same type of wire as used to support the lay-in ceiling track. Attach one end of the wire to one corner of the luminaire and the other end to the building's structural system.
 - b. The lay-in luminaire shall then be screwed to the main runners of the lay-in ceiling track at all four (4) corners using sheet metal screws.
 - c. For fire rated suspended ceiling, luminaire shall be supported to the Building Structure as per the Ceiling Design Criteria.
 - 2. Light leaks between ceiling trims of recessed lighting equipment and the ceiling will not be tolerated. Locate not more than 6 inches from fixture corners.
 - 3. Support Clips: Fasten to lighting fixtures and to ceiling grid members at or near each fixture corner with clips that are UL listed for the application.
 - 4. Fixtures of Sizes Less Than Ceiling Grid: Install as indicated on reflected ceiling plans or center in acoustical panel, and support fixtures independently with at least two 3/4-inch metal channels spanning and secured to ceiling tees with listed clips installed per manufacturer's instructions.
 - 5. Install at least two independent support rods or wires from structure to a tab on lighting fixture. Wire or rod shall have breaking strength of the weight of fixture at a safety factor of 3.
- C. Suspended Lighting Fixture Support:
 - 1. Pendants and Rods: Where longer than 48 inches, brace to limit swinging. Pendant rods shall be all-thread, minimum of 3/8" diameter Galvanized carbon steel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Stem-Mounted, Single-Unit Fixtures:
 - a. Common and office areas with non-industrial type fixtures:
 - 1) Suspend with single pendant or aircraft cable as indicated on the drawings.
 - 2) Provide swivel plate/connection at top of stem for stem hangers.
 - b. Mechanical, Electrical Storage, Misc. rooms with industrial type fixtures:
 - 1) Suspend with twin-stem hangers or provide steel strut attached along the length of the fixture and a single stem attached to the strut.
 - 2) Provide swivel plate/connection at top of stem for stem hangers.
3. Continuous Rows: Use tubing or stem for wiring at one point and tubing or rod for suspension for each unit length of fixture chassis, including one at each end.
4. The Contractor shall furnish and install all necessary channels, support wires or rods, etc. to provide a structurally sound system.
- D. Provide adjustments to lighting fixtures that are designed to be modified in the field for light intensity aiming purposes.
 1. This shall be directed in the field by the engineer. The contractor shall notify the engineer in writing fourteen (14) days in advance to arrange a date and time for the adjustments.
 2. Lighting fixtures installed exterior to the building and/or in interior areas with exterior glass shall be adjusted after sunset.
- E. Connect wiring according to Division 26 Section "Low-Voltage Electrical Power Conductors and Cables."
- F. Yokes, brackets and supplementary supporting members needed to mounting lighting fixtures to two (2) inch carrier channels or other suitable ceiling members shall be furnished and installed by the Contractor.

3.2 ACCESS DOORS

- A. Provide access doors for all electrical equipment that requires accessibility where installed concealed in non-accessible walls or ceilings.
 1. Minimum size door shall be 8" x 8".
 2. Suitable for installation in wall or ceiling type as specified on the architectural drawings.
 3. Where equipment is located more than 16" from the access door the door size must be increase to a minimum of 24" x 24".
 4. Coordinate all access door locations with the architect and Owner prior to installing any equipment in non-accessible walls and/or ceilings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.3 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A.

3.4 FIELD QUALITY CONTROL

- A. Inspect each installed fixture for damage. Replace damaged fixtures and components.
- B. Verify normal operation of each fixture after installation.
- C. Prepare a written report of tests, inspections, observations, and verifications indicating and interpreting results. If adjustments are made to lighting system, retest to demonstrate compliance with standards.
- D. Corroded Fixtures: During warranty period, replace fixtures that show any signs of corrosion.
- E. Reflectors, reflector cones and visible trim of all lighting fixtures shall not be installed until completion of plastering, ceiling tile work, painting and general cleanup. They shall be carefully handled to avoid scratching or fingerprinting and shall be, at the time of acceptance by the Owner, completely clean. All Alzak parabolic cones shall be guaranteed against discoloration for a minimum of two (2) years, and, in the event of premature discoloration, shall be replaced by the manufacturer, including both materials and the cost of labor.
- F. Upon completion of the installation, all lighting fixtures shall be cleaned to the satisfaction of the Engineer.
- G. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation.

END OF SECTION 265100

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 265600 - EXTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Exterior luminaires with lamps and ballasts.
 - 2. Luminaire-mounted photoelectric relays.
 - 3. Poles and accessories.
 - 4. Luminaire lowering devices.
- B. Related Sections include the following:
 - 1. Division 26 Section "Interior Lighting" for exterior luminaires normally mounted on exterior surfaces of buildings.

1.3 DEFINITIONS

- A. CRI: Color-rendering index.
- B. HID: High-intensity discharge.
- C. Luminaire: Complete lighting fixture, including ballast housing if provided.
- D. Pole: Luminaire support structure, including tower used for large area illumination.
- E. Standard: Same definition as "Pole" above.

1.4 STRUCTURAL ANALYSIS CRITERIA FOR POLE SELECTION

- A. Dead Load: Weight of luminaire and its horizontal and vertical supports, lowering devices, and supporting structure, applied as stated in AASHTO LTS-4.
- B. Live Load: Single load of 500 lbf, distributed as stated in AASHTO LTS-4.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Ice Load: Load of 3 lbf/sq. ft., applied as stated in AASHTO LTS-4.
- D. Wind Load: Pressure of wind on pole and luminaire, calculated and applied as stated in AASHTO LTS-4.
 - 1. Wind speed for calculating wind load for poles exceeding 50 feet in height is **[110 mph]** **[70 mph]** <Insert value from AASHTO LTS-4 for this Project>.
 - 2. Wind speed for calculating wind load for poles 50 feet or less in height is **[110 mph]** **[70 mph]** <Insert value from AASHTO LTS-4 for this Project>.

1.5 SUBMITTALS

- A. Product Data: For each luminaire, pole, and support component, arranged in order of lighting unit designation. Include data on features, accessories, finishes, and the following:
 - 1. Physical description of luminaire, including materials, dimensions, effective projected area, and verification of indicated parameters.
 - 2. Details of attaching luminaires and accessories.
 - 3. Details of installation and construction.
 - 4. Luminaire materials.
 - 5. Photometric data based on laboratory tests of each luminaire type, complete with indicated lamps, ballasts, and accessories.
 - a. For indicated luminaires, photometric data shall be certified by a qualified independent testing agency. Photometric data for remaining luminaires shall be certified by manufacturer.
 - b. Photometric data shall be certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
 - 6. Photoelectric relays.
 - 7. Ballasts, including energy-efficiency data.
 - 8. Lamps, including life, output, and energy-efficiency data.
 - 9. Materials, dimensions, and finishes of poles.
 - 10. Means of attaching luminaires to supports, and indication that attachment is suitable for components involved.
 - 11. Anchor bolts for poles.
 - 12. Manufactured pole foundations.
- B. Shop Drawings:
 - 1. Anchor-bolt templates keyed to specific poles and certified by manufacturer.
 - 2. Design calculations, certified by a qualified professional engineer, indicating strength of screw foundations and soil conditions on which they are based.
 - 3. Wiring Diagrams: Power[**and control**] wiring.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Samples for Verification: For products designated for sample submission in Exterior Lighting Device Schedule. Each sample shall include lamps and ballasts.
- D. Pole and Support Component Certificates: Signed by manufacturers of poles, certifying that products are designed for indicated load requirements in AASHTO LTS-4 and that load imposed by luminaire has been included in design.
- E. Qualification Data: For agencies providing photometric data for lighting fixtures.
- F. Field quality-control test reports.
- G. Operation and Maintenance Data: For **[luminaires][and poles] [luminaire lowering devices]** to include in emergency, operation, and maintenance manuals.
- H. Warranty: Special warranty specified in this Section.

1.6 QUALITY ASSURANCE

- A. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by manufacturers' laboratories that are accredited under the National Volunteer Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by an independent agency, with the experience and capability to conduct the testing indicated, that is an NRTL as defined by OSHA in 29 CFR 1910.7.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- D. Comply with IEEE C2, "National Electrical Safety Code."
- E. Comply with NFPA 70.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Package aluminum poles for shipping according to ASTM B 660.
- B. Store poles on decay-resistant-treated skids at least 12 inches above grade and vegetation. Support poles to prevent distortion and arrange to provide free air circulation.
- C. Handle wood poles so they will not be damaged. Do not use pointed tools that can indent pole surface more than 1/4 inch deep. Do not apply tools to section of pole to be installed below ground line.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Retain factory-applied pole wrappings on fiberglass and laminated wood poles until right before pole installation. Handle poles with web fabric straps.
- E. Retain factory-applied pole wrappings on metal poles until right before pole installation. For poles with nonmetallic finishes, handle with web fabric straps.

1.8 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace products that fail in materials or workmanship; that corrode; or that fade, stain, perforate, erode, or chalk due to effects of weather or solar radiation within specified warranty period. Manufacturer may exclude lightning damage, hail damage, vandalism, abuse, or unauthorized repairs or alterations from special warranty coverage.
 - 1. Warranty Period for Luminaires: **[Five]** <Insert number> years from date of Final Acceptance of the Work.
 - 2. Warranty Period for Metal Corrosion: **[Five]** <Insert number> years from date of Final Acceptance of the Work.
 - 3. Warranty Period for Color Retention: **[Five]** <Insert number> years from date of Final Acceptance of the Work.
 - 4. Warranty Period for Lamps: Replace lamps and fuses that fail within **[12]** <Insert number> months from date of Substantial Completion; furnish replacement lamps and fuses that fail within the second **[12]** <Insert number> months from date of Final Acceptance of the Work.
 - 5. Warranty Period for Poles: Repair or replace lighting poles and standards that fail in finish, materials, and workmanship within manufacturer's standard warranty period, but not less than **[three]** <Insert number> years from date of Final Acceptance of the Work.

1.9 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Lamps: **[10 for every 100]** <Insert quantity> of each type and rating installed. Furnish at least one of each type.
 - 2. Glass and Plastic Lenses, Covers, and Other Optical Parts: **[10 for every 100]** <Insert quantity> of each type and rating installed. Furnish at least one of each type.
 - 3. Ballasts: **[10 for every 100]** <Insert quantity> of each type and rating installed. Furnish at least one of each type.
 - 4. Globes and Guards: **[10 for every 20]** <Insert quantity> of each type and rating installed. Furnish at least one of each type.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:
- B. In Exterior Lighting Device Schedule where titles below are column or row headings that introduce lists, the following requirements apply to product selection:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.
 - 3. Basis of Design Product: The design of each item of exterior luminaire and its support is based on the product named. Subject to compliance with requirements, provide either the named product or a comparable product by one of the other manufacturers specified.

2.2 LUMINAIRES, GENERAL REQUIREMENTS

- A. Luminaires shall comply with UL 1598 and be listed and labeled for installation in wet locations by an NRTL acceptable to authorities having jurisdiction.
- B. Comply with IESNA RP-8 for parameters of lateral light distribution patterns indicated for luminaires.
- C. Metal Parts: Free of burrs and sharp corners and edges.
- D. Sheet Metal Components: Corrosion-resistant aluminum, unless otherwise indicated. Form and support to prevent warping and sagging.
- E. Housings: Rigidly formed, weather- and light-tight enclosures that will not warp, sag, or deform in use. Provide filter/breather for enclosed luminaires.
- F. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position. Doors shall be removable for cleaning or replacing lenses. Designed to disconnect ballast when door opens.
- G. Exposed Hardware Material: Stainless steel.
- H. Plastic Parts: High resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- I. Light Shields: Metal baffles, factory installed and field adjustable, arranged to block light distribution to indicated portion of normally illuminated area or field.
- J. Reflecting surfaces shall have minimum reflectance as follows, unless otherwise indicated:
 - 1. White Surfaces: 85 percent.
 - 2. Specular Surfaces: 83 percent.
 - 3. Diffusing Specular Surfaces: 75 percent.
- K. Lenses and Refractors Gaskets: Use heat- and aging-resistant resilient gaskets to seal and cushion lenses and refractors in luminaire doors.
- L. Luminaire Finish: Manufacturer's standard paint applied to factory-assembled and -tested luminaire before shipping. Where indicated, match finish process and color of pole or support materials.
- M. Factory-Applied Finish for Steel luminaires: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
 - 1. Surface Preparation: Clean surfaces to comply with SSPC-SP 1, "Solvent Cleaning," to remove dirt, oil, grease, and other contaminants that could impair paint bond. Grind welds and polish surfaces to a smooth, even finish. Remove mill scale and rust, if present, from uncoated steel, complying with SSPC-SP 5/NACE No. 1, "White Metal Blast Cleaning," or SSPC-SP 8, "Pickling."
 - 2. Exterior Surfaces: Manufacturer's standard finish consisting of one or more coats of primer and two finish coats of high-gloss, high-build polyurethane enamel.
 - a. Color: As selected from manufacturer's standard catalog of colors.
 - b. Color: Match Architect's sample of [**manufacturer's standard**] [**custom**] color.
 - c. Color: As selected by Architect from manufacturer's full range.
- N. Factory-Applied Finish for Aluminum luminaires: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
 - 1. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.
 - 2. Natural Satin Finish: Provide fine, directional, medium satin polish (AA-M32); buff complying with AA-M20; and seal aluminum surfaces with clear, hard-coat wax.
 - 3. Class I, Clear Anodic Finish: AA-M32C22A41 (Mechanical Finish: medium satin; Chemical Finish: etched, medium matte; Anodic Coating: Architectural Class I, clear coating 0.018 mm or thicker) complying with AAMA 611.
 - 4. Class I, Color Anodic Finish: AA-M32C22A42/A44 (Mechanical Finish: medium satin; Chemical Finish: etched, medium matte; Anodic Coating: Architectural Class I, integrally colored or electrolytically deposited color coating 0.018 mm or thicker) complying with AAMA 611.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Color: **[Light bronze] [Medium bronze] [Dark bronze] [Black]**.

2.3 LUMINAIRE-MOUNTED PHOTOELECTRIC RELAYS

- A. Comply with UL 773 or UL 773A.
- B. Contact Relays: Factory mounted, single throw, designed to fail in the on position, and factory set to turn light unit on at 1.5 to 3 fc and off at 4.5 to 10 fc with 15-second minimum time delay. **[Relay shall have directional lens in front of photocell to prevent artificial light sources from causing false turnoff.]**
1. Relay with locking-type receptacle shall comply with NEMA C136.10.
 2. Adjustable window slide for adjusting on-off set points.

2.4 FLUORESCENT BALLASTS AND LAMPS

- A. Low-Temperature Ballast Capability: Rated by its manufacturer for reliable starting and operation of indicated lamp(s) at temperatures **[0 deg F] [minus 20 deg F]** and higher.
- B. Ballast Characteristics:
1. Power Factor: 90 percent, minimum.
 2. Sound Rating: **[A] [A, except B for T12/HO ballasts]**.
 3. Total Harmonic Distortion Rating: Less than **[10] [20]** percent.
 4. Electromagnetic Ballasts: Comply with ANSI C82.1, energy-saving, high power factor, Class P, automatic-reset thermal protection.
 5. Case Temperature for Compact Lamp Ballasts: 65 deg C, maximum.
 6. Transient-Voltage Protection: Comply with IEEE C62.41 Category A or better.
- C. Low-Temperature Lamp Capability: Rated for reliable starting and operation with ballast provided at temperatures **[0 deg F] [minus 20 deg F]** and higher.
- D. Fluorescent Lamps: Low-mercury type. Comply with the EPA's toxicity characteristic leaching procedure test; shall yield less than 0.2 mg of mercury per liter when tested according to NEMA LL 1.

2.5 BALLASTS FOR HID LAMPS

- A. Comply with ANSI C82.4 and UL 1029 and capable of open-circuit operation without reduction of average lamp life. Include the following features, unless otherwise indicated:
1. Ballast Circuit: Constant-wattage autotransformer or regulating high-power-factor type.
 2. Minimum Starting Temperature: Minus 22 deg F.
 3. Normal Ambient Operating Temperature: 104 deg F.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Ballast Fuses: One in each ungrounded power supply conductor. Voltage and current ratings as recommended by ballast manufacturer.
- B. Auxiliary, Instant-On, Quartz System: Factory-installed feature automatically switches quartz lamp on when fixture is initially energized and when momentary power outages occur. System automatically turns quartz lamp off when HID lamp reaches approximately 60 percent of light output.
- C. High-Pressure Sodium Ballasts: Electromagnetic type with solid-state igniter/starter and capable of open-circuit operation without reduction of average lamp life. Igniter/starter shall have an average life in pulsing mode of 10,000 hours at an igniter/starter-case temperature of 90 deg C.
 1. Instant-Restrike Device: Integral with ballast, or solid-state potted module, factory installed within fixture and compatible with lamps, ballasts, and mogul sockets up to 150 W.
 - a. Restrike Range: 105- to 130-V ac.
 - b. Maximum Voltage: 250-V peak or 150-V ac RMS.
 2. Minimum Starting Temperature: Minus 40 deg F.

2.6 HID LAMPS

- A. High-Pressure Sodium Lamps: ANSI C78.42, CRI 21 (minimum), color temperature [1900] <Insert value> K, and average rated life of 24,000 hours, minimum.
 1. Dual-Arc Tube Lamp: Arranged so only one of two arc tubes is lighted at one time and, when power is restored after an outage, the cooler arc tube, with lower internal pressure, lights instantly, providing an immediate 8 to 15 percent of normal light output.
- B. Metal-Halide Lamps: ANSI C78.1372, with a minimum CRI [65] <Insert value>, and color temperature [4000] <Insert value> K.
- C. Pulse-Start, Metal-Halide Lamps: Minimum CRI 65, and color temperature [4000] <Insert value> K.
- D. Ceramic, Pulse-Start, Metal-Halide Lamps: Minimum CRI [80] <Insert value>, and color temperature [4000] <Insert value> K.

2.7 POLES AND SUPPORT COMPONENTS, GENERAL REQUIREMENTS

- A. Structural Characteristics: Comply with AASHTO LTS-4.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Wind-Load Strength of Poles: Adequate at indicated heights above grade without failure, permanent deflection, or whipping in steady winds of speed indicated in Part 1 "Structural Analysis Criteria for Pole Selection" Article, with a gust factor of 1.3.
 2. Strength Analysis: For each pole, multiply the actual equivalent projected area of luminaires and brackets by a factor of **[1.1]** **<Insert number>** to obtain the equivalent projected area to be used in pole selection strength analysis.
- B. Luminaire Attachment Provisions: Comply with luminaire manufacturers' mounting requirements. Use stainless-steel fasteners and mounting bolts, unless otherwise indicated.
- C. Mountings, Fasteners, and Appurtenances: Corrosion-resistant items compatible with support components.
1. Materials: Shall not cause galvanic action at contact points.
 2. Anchor Bolts, Leveling Nuts, Bolt Caps, and Washers: Hot-dip galvanized after fabrication, unless stainless-steel items are indicated.
 3. Anchor-Bolt Template: Plywood or steel.
- D. Concrete Pole Foundations: Cast in place, with anchor bolts to match pole-base flange. Concrete, reinforcement, and formwork are specified in Division 03 Section "Cast-in-Place Concrete."
- E. Power-Installed Screw Foundations: Factory fabricated by pole manufacturer, with structural steel complying with ASTM A 36/A 36M and hot-dip galvanized according to ASTM A 123/A 123M; and with top-plate and mounting bolts to match pole base flange and strength required to support pole, luminaire, and accessories.
- F. Breakaway Supports: Frangible breakaway supports, tested by an independent testing agency acceptable to authorities having jurisdiction, according to AASHTO LTS-4.

2.8 STEEL POLES

- A. Poles: Comply with ASTM A 500, Grade B, carbon steel with a minimum yield of 46,000 psig; 1-piece construction up to 40 feet in height with access handhole in pole wall.
1. Shape: **[Round, tapered]** **[Round, straight]** **[Square, tapered]** **[Square, straight]**.
 2. Mounting Provisions: Butt flange for bolted mounting on foundation or breakaway support.
- B. Steel Mast Arms: **[Single-arm]** **[Truss]** **[Davit]** type, continuously welded to pole attachment plate. Material and finish same as pole.
- C. Brackets for Luminaires: Detachable, cantilever, without underbrace.
1. Adapter fitting welded to pole and bracket, then bolted together with **[stainless]** **[galvanized]**-steel bolts.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Cross Section: Tapered oval, with straight tubular end section to accommodate luminaire.
 3. Match pole material and finish.
- D. Pole-Top Tenons: Fabricated to support luminaire or luminaires and brackets indicated, and securely fastened to pole top.
- E. Steps: Fixed steel, with nonslip treads, positioned for 15-inch vertical spacing, alternating on opposite sides of pole; first step at elevation 10 feet above finished grade.
- F. Intermediate Handhole and Cable Support: Weathertight, 3-by-5-inch handhole located at midpoint of pole with cover for access to internal welded attachment lug for electric cable support grip.
- G. Grounding and Bonding Lugs: Welded 1/2-inch threaded lug, complying with requirements in Division 26 Section "Grounding and Bonding for Electrical Systems," listed for attaching grounding and bonding conductors of type and size listed in that Section, and accessible through handhole.
- H. Cable Support Grip: Wire-mesh type with rotating attachment eye, sized for diameter of cable and rated for a minimum load equal to weight of supported cable times a 5.0 safety factor.
- I. Platform for Lamp and Ballast Servicing: Factory fabricated of steel with finish matching that of pole.
- J. Prime-Coat Finish: Manufacturer's standard prime-coat finish ready for field painting.
- K. Galvanized Finish: After fabrication, hot-dip galvanize complying with ASTM A 123/A 123M.
- L. Factory-Painted Finish: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
1. Surface Preparation: Clean surfaces to comply with SSPC-SP 1, "Solvent Cleaning," to remove dirt, oil, grease, and other contaminants that could impair paint bond. Grind welds and polish surfaces to a smooth, even finish. Remove mill scale and rust, if present, from uncoated steel, complying with SSPC-SP 5/NACE No. 1, "White Metal Blast Cleaning," or SSPC-SP 8, "Pickling."
 2. Interior Surfaces of Pole: One coat of bituminous paint, or otherwise treat for equal corrosion protection.
 3. Exterior Surfaces: Manufacturer's standard finish consisting of one or more coats of primer and two finish coats of high-gloss, high-build polyurethane enamel.
 - a. Color: **[As indicated by manufacturer's designations] [Match Architect's sample] [As selected by Architect from manufacturer's full range].**

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.9 ALUMINUM POLES

- A. Poles: Seamless, extruded structural tube complying with ASTM B 429, Alloy 6063-T6 with access handhole in pole wall.
- B. Poles: ASTM B 209, 5052-H34 marine sheet alloy with access handhole in pole wall.
 - 1. Shape: **[Round, tapered]** **[Round, straight]** **[Square, tapered]** **[Square, straight]**.
 - 2. Mounting Provisions: Butt flange for bolted mounting on foundation or breakaway support.
- C. Pole-Top Tenons: Fabricated to support luminaire or luminaires and brackets indicated, and securely fastened to pole top.
- D. Grounding and Bonding Lugs: Welded 1/2-inch threaded lug, complying with requirements in Division 26 Section "Grounding and Bonding for Electrical Systems," listed for attaching grounding and bonding conductors of type and size listed in that Section, and accessible through handhole.
- E. Brackets for Luminaires: Detachable, with pole and adapter fittings of cast aluminum. Adapter fitting welded to pole and bracket, then bolted together with stainless-steel bolts.
 - 1. Tapered oval cross section, with straight tubular end section to accommodate luminaire.
 - 2. Finish: Same as **[pole]** **[luminaire]**.
- F. Prime-Coat Finish: Manufacturer's standard prime-coat finish ready for field painting.
- G. Aluminum Finish: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
 - 1. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.
 - 2. Natural Satin Finish: Provide fine, directional, medium satin polish (AA-M32); buff complying with AA-M20; and seal aluminum surfaces with clear, hard-coat wax.
 - 3. Class I, Clear Anodic Finish: AA-M32C22A41 (Mechanical Finish: medium satin; Chemical Finish: etched, medium matte; Anodic Coating: Architectural Class I, clear coating 0.018 mm or thicker) complying with AAMA 611.
 - 4. Class I, Color Anodic Finish: AA-M32C22A42/A44 (Mechanical Finish: medium satin; Chemical Finish: etched, medium matte; Anodic Coating: Architectural Class I, integrally colored or electrolytically deposited color coating 0.018 mm or thicker) complying with AAMA 611.
 - 5. **<Insert finish.>**
 - a. Color: **[Light bronze]** **[Medium bronze]** **[Dark bronze]** **[Black]** **[As selected by Architect from manufacturer's full range]**.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.10 FIBERGLASS POLES

- A. Poles: Comply with ANSI C136.20, with access handhole in pole wall.
 - 1. Mounting: Embedded.
 - 2. Mounting Provisions: Butt flange for bolted mounting on foundation or breakaway support.
- B. Resin Color: [**Dark bronze**] <Insert color>; provide uniform coloration throughout entire wall thickness.
- C. Surface Finish: Pigmented polyurethane, with a minimum dry film thickness of 1.5 mils.

2.11 DECORATIVE POLES

- A. Pole Material:
 - 1. Cast ductile iron.
 - 2. Cast gray iron, according to ASTM A 48/A 48M, Class 30.
 - 3. Cast aluminum.
 - 4. Cast concrete.
 - 5. Spun concrete.
 - 6. Steel tube, covered with closed-cell polyurethane foam, with a polyethylene exterior.
 - 7. <Insert material.>
- B. Mounting Provisions:
 - 1. Bolted to concrete foundation.
 - 2. Embedded.
- C. Fixture Brackets:
 - 1. Cast ductile iron.
 - 2. Cast gray iron.
 - 3. Cast aluminum.
- D. Pole Finish: <Insert finish.>

2.12 LAMINATED WOOD POLES

- A. Species and Grades for Structural Glulam Timber: Engineer and fabricate structural laminated wood poles, complying with AITC 190.1. Use [**southern pine**] [**Douglas fir**] [**Alaska cedar**] [**any species listed in AITC 117 - MANUFACTURING**] to withstand indicated structural loads without exceeding allowable design working stresses according to AITC 117 - DESIGN.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Features: Include **[wood bracket]** **[wood crossarm]** **[pole-top adapter]** **<Insert other items>** for mounting luminaire(s), **[metal pole cap]**, and concealed raceway path connected to access handhole.
- C. Mounting Provisions: **[Embedded]** **<Insert description of other mounting, unless detailed on Drawings>**.
- D. Appearance Grade: Architectural appearance grade complying with AITC 110.
- E. Preservative Treatment: Pressure treat lumber before gluing according to AWPAC28 for waterborne preservatives. After dressing and end-cutting each member to final size and shape, apply a field-treatment preservative to comply with AWPAC4 to surfaces cut to a depth of more than 1/16 inch.
- F. Adhesive: Wet-use type complying with ASTM D 2559.
- G. End Sealer: Manufacturer's standard, transparent, colorless wood sealer that is effective in retarding the transmission of moisture at cross-grain cuts and is compatible with indicated finish.
- H. Penetrating Sealer: Manufacturer's standard, transparent, penetrating wood sealer that is compatible with indicated finish.
- I. Finish: **[Natural, unstained wood]** **[Semitransparent stain applied after erection]** **[Semitransparent stain applied at factory]**, color as selected by Architect.

2.13 WOOD POLES

- A. Poles: **[Douglas fir]** **[Southern yellow pine]**, **[machine trimmed by turning]**, complying with ANSI O5.1 and with AWPAC4 for wood species used; and bored, roofed, and galled before treatment.
 - 1. Mounting Provisions: Embedded.
- B. Preservative Treatment: Pressure treat poles with **[creosote]** **[pentachlorophenol]** **[ammoniacal copper arsenate]** according to AWPAC1 and AWPAC4.
- C. Luminaire Brackets: Comply with ANSI C136.13.

2.14 PRESTRESSED CONCRETE POLES

- A. Poles: Manufactured **[by centrifugal spin-casting process]** **[of cast concrete]**.
 - 1. Shape: **[Round, tapered]** **[Round, straight]** **[Square, tapered]** **[Square, straight]**.
 - 2. Mounting Provisions: **[Steel butt flange for bolted mounting to foundation or breakaway support]** **[Embedded]**.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Finishing: Capped at top and plugged at bottom. Seal each steel reinforcing strand with epoxy adhesive.
 4. Grounding: Continuous copper ground wire cast into pole. Terminate at top of pole[**and attach to 24-inch lightning rod**].
- B. Cure with wet steam and age for a minimum of 15 days before installation.
- C. Fabricate poles with a hard, nonporous surface that is resistant to water, frost, and road and soil chemicals and that has a maximum water-absorption rate of 3 percent.
- D. Cast aluminum nameplate into pole wall at approximately 5 feet above ground line, listing name of manufacturer, Project identifier, overall height, and approximate weight.
- E. Pole Brackets: Comply with ANSI C136.13.
- F. Finish Color: Provided by color material complying with ASTM C 979, uniformly impregnated throughout the pole concrete. Color material shall provide a uniform, stable, permanent **<Insert other adjectives>** color and be as follows:
1. Inert, and carbon free.
 2. Unaffected by environmental conditions and contaminants including, but not limited to, UV solar radiation, salts, and alkalis.
- G. Finish Texture: **[Standard form] [Polished exposed aggregate] [Etched exposed aggregate]**.
1. Exposed aggregate shall be of **<Insert aggregate type selected from manufacturers' lists>** type.

2.15 POLE ACCESSORIES

- A. Duplex Receptacle: 120 V, 20 A in a weatherproof assembly complying with Division 26 Section "Wiring Devices" for ground-fault circuit-interrupter type.
1. **[Surface mounted] [Recessed], [12 inches] <Insert other mounting height>** above finished grade.
 2. Nonmetallic polycarbonate plastic or reinforced fiberglass cover, **<Insert color to match pole,>** that when mounted results in NEMA 250, Type **[3R] [4X]** enclosure.
 3. With cord opening.
 4. With lockable hasp and latch that complies with OSHA lockout and tag-out requirements.
- B. Minimum 1800-W transformer, protected by replaceable fuses, mounted behind access cover.
- C. Base Covers: Manufacturers' standard metal units, arranged to cover pole's mounting bolts and nuts. Finish same as pole.
- D. Transformer Type Base: Same material and color as pole. Coordinate dimensions to suit pole's base flange and accept **[ballast(s)] [indicated accessories]**.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

E. Decorative accessories, supplied by decorative pole manufacturer, include the following:

1. Banner Arms: **<Insert material.>**
2. Flag Holders: **<Insert material.>**
3. Ladder Rests: **<Insert material.>**

2.16 LOWERING SYSTEM FOR LUMINAIRES

- A. Arrange system to lower luminaire[**assembly**] to a servicing position within 36 inches of finished grade in winds up to 30 mph and to provide for manual plug connection to electrical power in the lowered position for testing.
- B. Coordinate with luminaire and pole manufacturers for assembly details, wind-load and vibration analysis, and compatibility of materials for electrolysis-free attachment and connection for luminaire mounting assembly, lowering device, lowering cable, and portable winch.
- C. Structural and Mechanical Design: Use a minimum safety factor of 5.0 for static and dynamic loads of load-bearing components, including cable.
- D. Luminaire Mounting and Disconnect Arrangement: Multiple [**ring**] [**carriage**]-mounted luminaires, arranged for lowering and raising as a group.
 1. Electrical cable for normal operating power to luminaires manually disconnects inside pole base, using weatherproof multipin connector, and shall be arranged to move within the pole during lowering and raising of luminaire assembly.
 2. Electrical cable for normal operating power to luminaires automatically disconnects at a weatherproof multipin connector within the pole-top lowering head at the beginning of the lowering cycle and reconnects when luminaire or luminaire assembly is raised to the operating position.
- E. Lowering Device: Weatherproof, cast-aluminum housing and multiple mechanical latches. Moving parts of latching assembly shall be located in the portion of the unit that is lowered to the servicing position. Positive latching in the operating position shall be indicated to the operator at the base of the pole by a clear visual signal, or by other means acceptable to Owner or authorities having jurisdiction.
- F. Lowering Cable: [**Zinc-electroplated-**] [**Stainless-**] [**Zinc-electroplated- or stainless-**]steel aircraft cable.
- G. Portable Winch: [**Manual**] [**120 V electric**] type. [**One**] **<Insert number>** required.
 1. Winch Power Connection: Cord and plug.
 2. Winch Raise-Lower Control: Remote-control station with [**15 feet**] **<Insert length>** of cable.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- H. Winch Transformer: Portable, totally enclosed, encapsulated, single-phase, dry type. Primary rated at lighting-circuit voltage; secondary rated at 120 V. Permanent, primary and secondary, twist-locking plug connectors on pigtails shall match pole-base power outlet and winch plug.

2.17 REQUIREMENTS FOR INDIVIDUAL EXTERIOR LIGHTING DEVICES

- A. See Lighting Fixture Schedule.

PART 3 - EXECUTION

3.1 LUMINAIRE INSTALLATION

- A. Install lamps in each luminaire.
- B. Fasten luminaire to indicated structural supports.
 - 1. Use fastening methods and materials selected to resist seismic forces defined for the application and approved by manufacturer.
- C. Adjust luminaires that require field adjustment or aiming. **[Include adjustment of photoelectric device to prevent false operation of relay by artificial light sources.]**

3.2 POLE INSTALLATION

- A. Align pole foundations and poles for optimum directional alignment of luminaires and their mounting provisions on the pole.
- B. Clearances: Maintain the following minimum horizontal distances of poles from surface and underground features, unless otherwise indicated on Drawings:
 - 1. Fire Hydrants and Storm Drainage Piping: **[60 inches] <Insert dimension>**.
 - 2. Water, Gas, Electric, Communication, and Sewer Lines: **[10 feet] <Insert dimension>**.
 - 3. Trees: **[15 feet] <Insert dimension>**.
 - 4. **<Insert features and clearance dimensions.>**
- C. Concrete Pole Foundations: Set anchor bolts according to anchor-bolt templates furnished by pole manufacturer.
 - 1. Forms for Cylindrical Columns, Pedestals, and Supports:
 - a. Metal, glass-fiber-reinforced plastic, paper, or fiber tubes that will produce surfaces with gradual or abrupt irregularities not exceeding specified formwork surface class. Provide units with sufficient wall thickness to resist plastic concrete loads without detrimental deformation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Form-Release Agent:
 - a. Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces.
3. Rubbed Finish:
 - a. Apply the following to exposed above grade smooth-formed finished concrete:
 - 1) Smooth-Rubbed Finish: Not later than one day after form removal, moisten concrete surfaces and rub with carborundum brick or another abrasive until producing a uniform color and texture. Do not apply cement grout other than that created by the rubbing process.
 - 2) Grout-Cleaned Finish: Wet concrete surfaces and apply grout of a consistency of thick paint to coat surfaces and fill small holes. Mix one part portland cement to one and one-half parts fine sand with a 1:1 mixture of bonding admixture and water. Add white portland cement in amounts determined by trial patches so color of dry grout will match adjacent surfaces. Scrub grout into voids and remove excess grout. When grout whitens, rub surface with clean burlap and keep surface damp by fog spray for at least 36 hours.
 - 3) Cork-Floated Finish: Wet concrete surfaces and apply a stiff grout. Mix one part portland cement and one part fine sand with a 1:1 mixture of bonding agent and water. Add white portland cement in amounts determined by trial patches so color of dry grout will match adjacent surfaces. Compress grout into voids by grinding surface. In a swirling motion, finish surface with a cork float.
4. Repairing Formed Surfaces:
 - a. Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 - b. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch (13 mm) in any dimension in solid concrete but not less than 1 inch (25 mm) in depth. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
 - c. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 - d. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Foundation-Mounted Poles: Mount pole with leveling nuts, and tighten top nuts to torque level recommended by pole manufacturer.
 - 1. Use anchor bolts and nuts selected to resist seismic forces defined for the application and approved by manufacturer.
 - 2. Grout void between pole base and foundation. Use nonshrink or expanding concrete grout firmly packed to fill space.
 - 3. Install base covers, unless otherwise indicated.
 - 4. Use a short piece of 1/2-inch- diameter pipe to make a drain hole through grout. Arrange to drain condensation from interior of pole.
- E. Embedded Poles with Tamped Earth Backfill: Set poles to depth below finished grade indicated on Drawings, but not less than one-sixth of pole height.
 - 1. Dig holes large enough to permit use of tampers in the full depth of hole.
 - 2. Backfill in 6-inch layers and thoroughly tamp each layer so compaction of backfill is equal to or greater than that of undisturbed earth.
- F. Embedded Poles with Concrete Backfill: Set poles in augered holes to depth below finished grade indicated on Drawings, but not less than one-sixth of pole height.
 - 1. Make holes 6 inches in diameter larger than pole diameter.
 - 2. Fill augered hole around pole with air-entrained concrete having a minimum compressive strength of 3000 psi at 28 days, and finish in a dome above finished grade.
 - 3. Use a short piece of 1/2-inch- diameter pipe to make a drain hole through concrete dome. Arrange to drain condensation from interior of pole.
 - 4. Cure concrete a minimum of 72 hours before performing work on pole.
- G. Poles and Pole Foundations Set in Concrete Paved Areas: Install poles with minimum of 6-inch- wide, unpaved gap between the pole or pole foundation and the edge of adjacent concrete slab. Fill unpaved ring with [pea gravel] <Insert material> to a level 1 inch below top of concrete slab.
- H. Raise and set poles using web fabric slings (not chain or cable).

3.3 BOLLARD LUMINAIRE INSTALLATION

- A. Align units for optimum directional alignment of light distribution.
- B. Install on concrete base with top [4 inches] <Insert height> above finished grade or surface at bollard location. Cast conduit into base, and shape base to match shape of bollard base. Finish by troweling and rubbing smooth. Concrete materials, installation, and finishing are specified in Division 03 Section "Cast-in-Place Concrete."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.4 INSTALLATION OF INDIVIDUAL GROUND-MOUNTING LUMINAIRES

- A. Install on concrete base with top [4 inches] <Insert height> above finished grade or surface at luminaire location. Cast conduit into base, and finish by troweling and rubbing smooth. Concrete materials, installation, and finishing are specified in Division 03 Section "Cast-in-Place Concrete."

3.5 CORROSION PREVENTION

- A. Aluminum: Do not use in contact with earth or concrete. When in direct contact with a dissimilar metal, protect aluminum by insulating fittings or treatment.
- B. Steel Conduits: Comply with Division 26 Section "Raceway and Boxes for Electrical Systems." In concrete foundations, wrap conduit with 0.010-inch- thick, pipe-wrapping plastic tape applied with a 50 percent overlap.

3.6 GROUNDING

- A. Ground metal poles and support structures according to Division 26 Section "Grounding and Bonding for Electrical Systems."
 - 1. Install grounding electrode for each pole, unless otherwise indicated.
 - 2. Install grounding conductor pigtail in the base for connecting luminaire to grounding system.
- B. Ground nonmetallic poles and support structures according to Division 26 Section "Grounding and Bonding for Electrical Systems."
 - 1. Install grounding electrode for each pole.
 - 2. Install grounding conductor and conductor protector.
 - 3. Ground metallic components of pole accessories and foundations.

3.7 FIELD QUALITY CONTROL

- A. Inspect each installed fixture for damage. Replace damaged fixtures and components.
- B. Illumination Observations: Verify normal operation of lighting units after installing luminaires and energizing circuits with normal power source.
 - 1. Verify operation of photoelectric controls.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.8 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain luminaire lowering devices. Refer to Division 01 Section "Demonstration and Training."

END OF SECTION 265600

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270500 - COMMON WORK RESULTS FOR COMMUNICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Communications equipment coordination and installation.
 - 2. Common communications installation requirements.

1.3 COORDINATION

- A. Coordinate arrangement, mounting, and support of communications equipment:
 - 1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
 - 2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
 - 3. To allow right of way for piping and conduit installed at required slope.
 - 4. So connecting pathways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.
- B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.
- C. Coordinate location of access panels and doors for communications items that are behind finished surfaces or otherwise concealed.
- D. Coordinate sleeve selection and application with selection and application of firestopping.

PART 2 - EXECUTION

2.1 COMMON REQUIREMENTS FOR COMMUNICATIONS INSTALLATION

- A. Comply with NECA 1.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.
- C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.
- D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both communications equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.
- E. Right of Way: Give to piping systems installed at a required slope.

2.2 FIRESTOPPING

- A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for communications installations to restore original fire-resistance rating of assembly.

2.3 GUARANTEE:

- A. All wiring, etc., shall be in strict accordance with the local Electrical Code requirements. The Contractor shall guarantee all equipment and wiring free from inherent mechanical and electrical defects for a period of one (1) year from date of installation. The final connection between the equipment and wiring system shall be made under the direct supervision of a qualified technical representative of the manufacturer.

END OF SECTION 270500

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270526 - GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Grounding conductors.
 - 2. Grounding connectors.
 - 3. Grounding busbars.
 - 4. Grounding labeling.

1.3 DEFINITIONS

- A. BCT: Bonding conductor for telecommunications.
- B. TGB: Telecommunications grounding busbar.
- C. TMGB: Telecommunications main grounding busbar.
- D. Service Provider: The operator of a service that provides telecommunications transmission delivered over access provider facilities.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For communications equipment room signal reference grid. Include plans, elevations, sections, details, and attachments to other work.

1.5 INFORMATIONAL SUBMITTALS

- A. As-Built Data: Plans showing as-built locations of grounding and bonding infrastructure, including the following:
 - 1. Ground rods.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Ground and roof rings.
3. BCT, TMGB, TGBs, and routing of their bonding conductors.

B. Qualification Data: For installation supervisor, and field inspector.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Installation Supervision: Installation shall be under the direct supervision of ITS Technician who shall be present at all times when Work of this Section is performed at Project site.
2. Field Inspector: Currently registered by BICSI as a designer RCDD to perform the on-site inspection.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.
- C. Comply with TIA-607-C.

2.2 CONDUCTORS

- A. Comply with UL 486A-486B.
- B. Insulated Conductors: Stranded copper wire, green or green with yellow stripe insulation, insulated for 600 V, and complying with UL 83.
 1. Ground wire for custom-length equipment ground jumpers shall be No. 6 AWG, 19-strand, UL-listed, Type THHN wire.
 2. Cable Tray Equipment Grounding Wire: No. 6 AWG.
- C. Cable Tray Grounding Jumper:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Not smaller than No. 6 AWG and not longer than 12 inches (300 mm). If jumper is a wire, it shall have a crimped grounding lug with two holes and long barrel for two crimps. If jumper is a flexible braid, it shall have a one-hole ferrule. Attach with grounding screw or connector provided by cable tray manufacturer.

D. Bare Copper Conductors:

1. Solid Conductors: ASTM B3.
2. Stranded Conductors: ASTM B8.
3. Tinned Conductors: ASTM B33.
4. Bonding Cable: 28 kcmils (14.2 sq. mm), 14 strands of No. 17 AWG conductor, and 1/4 inch (6.3 mm) in diameter.
5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
6. Bonding Jumper: Tinned-copper tape, braided conductors terminated with two-hole copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.

2.3 CONNECTORS

- A. Irreversible connectors listed for the purpose. Listed by an NRTL as complying with NFPA 70 for specific types, sizes, and combinations of conductors and other items connected. Comply with UL 486A-486B.
- B. Compression Wire Connectors: Crimp-and-compress connectors that bond to the conductor when the connector is compressed around the conductor. Comply with UL 467.
 1. Electroplated tinned copper, C and H shaped.
- C. Signal Reference Grid Connectors: Combination of compression wire connectors, access floor grounding clamps, bronze U-bolt grounding clamps, and copper split-bolt connectors, designed for the purpose.
- D. Busbar Connectors: Cast silicon bronze, solderless compression-type, mechanical connector; with a long barrel and two holes spaced on 5/8- or 1-inch (15.8- or 25.4-mm) centers for a two-bolt connection to the busbar.
- E. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.4 GROUNDING BUSBARS

- A. TMGB: Predrilled, wall-mounted, rectangular bars of hard-drawn solid copper, 1/4 by 4 inches (6.3 by 100 mm) in cross section, length as indicated on Drawings. The busbar shall be NRTL listed for use as TMGB and shall comply with TIA-607-C.
 1. Predrilling shall be with holes for use with lugs specified in this Section.
 2. Mounting Hardware: Stand-off brackets that provide a 4-inch (100-mm) clearance to access the rear of the busbar. Brackets and bolts shall be stainless steel.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Stand-off insulators for mounting shall be Lexan or PVC. Comply with UL 891 for use in 600-V switchboards, impulse tested at 5000 V.
- B. TGB: Predrilled rectangular bars of hard-drawn solid copper, 1/4 by 2 inches (6.3 by 50 mm) in cross section, length as indicated on Drawings. The busbar shall be for wall mounting, shall be NRTL listed as complying with UL 467, and shall comply with TIA-607-C.
 1. Predrilling shall be with holes for use with lugs specified in this Section.
 2. Mounting Hardware: Stand-off brackets that provide at least a 2-inch (50-mm) clearance to access the rear of the busbar. Brackets and bolts shall be stainless steel.
 3. Stand-off insulators for mounting shall be Lexan or PVC. Comply with UL 891 for use in 600-V switchboards, impulse tested at 5000 V.

2.5 IDENTIFICATION

- A. Comply with requirements for identification products in Section 270553 "Identification for Communications Systems."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine the ac grounding electrode system and equipment grounding for compliance with requirements for maximum ground-resistance level and other conditions affecting performance of grounding and bonding of the electrical system.
- B. Inspect the test results of the ac grounding system measured at the point of BCT connection.
- C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.
- D. Proceed with connection of the BCT only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Bonding shall include the ac utility power service entrance, the communications cable entrance, and the grounding electrode system. The bonding of these elements shall form a loop so that each element is connected to at least two others.
- B. Comply with NECA 1.
- C. Comply with TIA-607-C.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.3 APPLICATION

- A. Conductors: Install solid conductor for No. 8 AWG and smaller and stranded conductors for No. 6 AWG and larger unless otherwise indicated.
 - 1. The bonding conductors between the TGB and structural steel of steel-frame buildings shall not be smaller than No. 6 AWG.
 - 2. The bonding conductors between the TMGB and structural steel of steel-frame buildings shall not be smaller than No. 6 AWG.
- B. Conductor Terminations and Connections:
 - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 - 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
 - 3. Connections to Ground Rods at Test Wells: Bolted connectors.
 - 4. Connections to Structural Steel: Welded connectors.
- C. Conductor Support:
 - 1. Secure grounding and bonding conductors at intervals of not less than 36 inches (900 mm).
- D. Grounding and Bonding Conductors:
 - 1. Install in the straightest and shortest route between the origination and termination point, and no longer than required. The bend radius shall not be smaller than eight times the diameter of the conductor. No one bend may exceed 90 degrees.
 - 2. Install without splices.
 - 3. Support at not more than 36-inch (900-mm) intervals.
 - 4. Install grounding and bonding conductors in 3/4-inch (21-mm) PVC conduit until conduit enters a telecommunications room. The grounding and bonding conductor pathway through a plenum shall be in EMT. Conductors shall not be installed in EMT unless otherwise indicated.
 - a. If a grounding and bonding conductor is installed in ferrous metallic conduit, bond the conductor to the conduit using a grounding bushing that complies with requirements in Section 270528 "Pathways for Communications Systems," and bond both ends of the conduit to a TGB.

3.4 GROUNDING ELECTRODE SYSTEM

- A. The BCT between the TMGB and the ac service equipment ground shall not be smaller than No. 1/0 AWG.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.5 GROUNDING BUSBARS

- A. Indicate locations of grounding busbars on Drawings. Install busbars horizontally, on insulated spacers **2 inches (50 mm)** minimum from wall, **12 inches (300 mm)** above finished floor unless otherwise indicated.
- B. Where indicated on both sides of doorways, route bus up to top of door frame, across top of doorway, and down; connect to horizontal bus.

3.6 CONNECTIONS

- A. Bond metallic equipment in a telecommunications equipment room to the grounding busbar in that room, using equipment grounding conductors not smaller than No. 6 AWG.
- B. Stacking of conductors under a single bolt is not permitted when connecting to busbars.
- C. Assemble the wire connector to the conductor, complying with manufacturer's written instructions and as follows:
 - 1. Use crimping tool and the die specific to the connector.
 - 2. Pretwist the conductor.
 - 3. Apply an antioxidant compound to all bolted and compression connections.
- D. Primary Protector: Bond to the TMGB with insulated bonding conductor.
- E. Interconnections: Interconnect all TGBs with the TMGB with the telecommunications backbone conductor. If more than one TMGB is installed, interconnect TMGBs using the grounding equalizer conductor. The telecommunications backbone conductor and grounding equalizer conductor size shall not be less than **2 kcmils/linear foot (1 sq. mm/linear meter)** of conductor length, up to a maximum size of No. 3/0 AWG unless otherwise indicated.
- F. Telecommunications Enclosures and Equipment Racks: Bond metallic components of enclosures to the telecommunications bonding and grounding system. Install vertically mounted rack grounding busbar unless the enclosure and rack are manufactured with the busbar. Bond the equipment grounding busbar to the TGB No. 2 AWG bonding conductors.
- G. Structural Steel: Where the structural steel of a steel frame building is readily accessible within the room or space, bond each TGB and TMGB to the vertical steel of the building frame.
- H. Electrical Power Panelboards: Where an electrical panelboard for telecommunications equipment is located in the same room or space, bond each TGB to the ground bar of the panelboard.
- I. Rack- and Cabinet-Mounted Equipment: Bond powered equipment chassis to the cabinet or rack grounding bar. Power connection shall comply with NFPA 70; the equipment grounding conductor in the power cord of cord- and plug-connected equipment shall be considered as a supplement to bonding requirements in this Section.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.7 IDENTIFICATION

- A. Labels shall be preprinted or computer-printed type.
 - 1. Label TMGB(s) with "fs-TMGB," where "fs" is the telecommunications space identifier for the space containing the TMGB.
 - 2. Label TGB(s) with "fs-TGB," where "fs" is the telecommunications space identifier for the space containing the TGB.
 - 3. Label the BCT and each telecommunications backbone conductor at its attachment point: "WARNING! TELECOMMUNICATIONS BONDING CONDUCTOR. DO NOT REMOVE OR DISCONNECT!"

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
 - 2. Test the bonding connections of the system using an ac earth ground-resistance tester, taking two-point bonding measurements in each telecommunications equipment room containing a TMGB and a TGB and using the process recommended by BICSI TDMM. Conduct tests with the facility in operation.
 - a. Measure the resistance between the busbar and the nearest available grounding electrode. The maximum acceptable value of this bonding resistance is 100 milliohms.
 - 3. Test for ground loop currents using a digital clamp-on ammeter, with a full-scale of not more than 10 A, displaying current in increments of 0.01 A at an accuracy of plus/minus 2.0 percent.
 - a. With the grounding infrastructure completed and the communications system electronics operating, measure the current in every conductor connected to the TMGB and in each TGB. Maximum acceptable ac current level is 1 A.
- C. Excessive Ground Resistance: If resistance to ground at the BCT exceeds 5 ohms, notify Architect promptly and include recommendations to reduce ground resistance.
- D. Grounding system will be considered defective if it does not pass tests and inspections.
- E. Prepare test and inspection reports.

END OF SECTION 270526

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270528 - PATHWAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Metal conduits and fittings.
 - 2. Nonmetallic conduits and fittings.
 - 3. Optical-fiber-cable pathways and fittings.
 - 4. Nonmetallic wireways and auxiliary gutters.
 - 5. Metallic surface pathways.
 - 6. Nonmetallic surface pathways.
 - 7. Hooks.
 - 8. Boxes, enclosures, and cabinets.

1.3 DEFINITIONS

- A. ARC: Aluminum rigid conduit.
- B. GRC: Galvanized rigid conduit.
- C. IMC: Intermediate metal conduit.
- D. RTRC: Reinforced thermosetting resin conduit.

1.4 ACTION SUBMITTALS

- A. Product data for the following:
 - 1. Surface pathways
 - 2. Wireways and fittings.
 - 3. Boxes, enclosures, and cabinets.
- B. Shop Drawings: For custom enclosures and cabinets. Include plans, elevations, sections, and attachment details.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Samples: For surface pathways and tele-power poles and for each color and texture specified, 12 inches (300 mm) long.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Pathway routing plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of items involved:
 - 1. Structural members in paths of pathway groups with common supports.
 - 2. HVAC and plumbing items and architectural features in paths of conduit groups with common supports.
 - 3. Underground ducts, piping, and structures in location of underground enclosures and handholes.
- B. Qualification Data: For professional engineer.
- C. Seismic Qualification Data: Provide seismic bracing for all pathway racks, enclosures, cabinets, equipment racks, and their mounting provisions, including those for internal components, from manufacturer.
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which certification is based and their installation requirements.
 - 4. Detailed description of conduit support devices and interconnections on which certification is based and their installation requirements.
- D. Source quality-control reports.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

- A. Description: Metal raceway of circular cross section with manufacturer-fabricated fittings.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. AFC Cable Systems, Inc.
 - 2. Allied Tube & Conduit; a Tyco International Ltd. Co.
 - 3. Anamet Electrical, Inc.; Anaconda Metal Hose.
 - 4. Electri-Flex Co.
 - 5. Manhattan/CDT/Cole-Flex.
 - 6. Maverick Tube Corporation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

7. O-Z Gedney; a unit of General Signal.
8. Wheatland Tube Company.

C. General Requirements for Metal Conduits and Fittings:

1. Listed and labeled as defined in NFPA 70, by a nationally recognized testing laboratory, and marked for intended location and application.
2. Comply with TIA-569-D.

D. GRC: Comply with ANSI C80.1 and UL 6.

E. ARC: Comply with ANSI C80.5 and UL 6A.

F. IMC: Comply with ANSI C80.6 and UL 1242.

G. PVC-Coated Steel Conduit: PVC-coated IMC.

1. Comply with NEMA RN 1.
2. Coating Thickness: 0.040 inch (1 mm), minimum.

H. EMT: Comply with ANSI C80.3 and UL 797.

I. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.

1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 1203 and NFPA 70.
 2. Fittings for EMT:
 - a. Material: Steel.
 - b. Type: Compression.
 3. Expansion Fittings: PVC or steel to match conduit type, complying with UL-467, rated for environmental conditions where installed, and including flexible external bonding jumper.
 4. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch (1 mm), with overlapping sleeves protecting threaded joints.
- J. Joint Compound for IMC, GRC, or ARC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

2.2 NONMETALLIC CONDUITS AND FITTINGS

A. Description: Nonmetallic raceway of circular section with manufacturer-fabricated fittings.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. AFC Cable Systems, Inc.
2. Anamet Electrical, Inc.; Anaconda Metal Hose.
3. Arnco Corporation.
4. CANTEX Inc.
5. CertainTeed Corp.; Pipe & Plastics Group.
6. Condux International, Inc.
7. ElecSYS, Inc.
8. Electri-Flex Co.
9. Lamson & Sessions; Carlon Electrical Products.
10. Manhattan/CDT/Cole-Flex.
11. RACO; a Hubbell Company.
12. Thomas & Betts Corporation.

C. General Requirements for Nonmetallic Conduits and Fittings:

1. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
 2. Comply with TIA-569-D.
- D. RNC: Type EPC-40-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.
- E. Rigid HDPE: Comply with UL 651A.
- F. Continuous HDPE: Comply with UL 651A.
- G. RTRC: Comply with UL 2515A and NEMA TC 14.
- H. Fittings: Comply with NEMA TC 3; match to conduit or tubing type and material.
- I. Solvents and Adhesives: As recommended by conduit manufacturer.

2.3 OPTICAL-FIBER-CABLE PATHWAYS AND FITTINGS

- A. Description: Comply with UL 2024; flexible-type pathway with a circular cross section, approved for plenum installation unless otherwise indicated.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Arnco Corporation.
 2. Endot Industries Inc.
 3. IPEX Inc.
 4. Lamson & Sessions; Carlon Electrical Products.
- C. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- D. Comply with TIA-569-D.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 SURFACE METAL PATHWAYS

- A. Description: Galvanized steel with snap-on covers, complying with UL 5.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Monosystems, Inc.
 - 2. Panduit.
 - 3. Niedax Inc.
 - 4. Wiremold / Legrand.
- C. Finish: Manufacturer's standard enamel finish in color selected by Architect.
- D. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- E. Comply with TIA-569-D.

2.5 SURFACE NONMETALLIC PATHWAYS:

- A. Description: Two- or three-piece construction, complying with UL 5A, and manufactured of rigid PVC.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Monosystems, Inc.
 - 2. Panduit.
 - 3. Wiremold / Legrand.
- C. Finish: Texture and color selected by Architect from manufacturer's standard colors.
- D. Product shall comply with UL 94 V-0 requirements for self-extinguishing characteristics.
- E. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- F. Comply with TIA-569-D.

2.6 HOOKS

- A. Description: Prefabricated sheet metal cable supports for telecommunications cable.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Monosystems, Inc.
 - 2. Panduit.
 - 3. Wiremold / Legrand.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 4. Erico.
- C. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- D. Comply with TIA-569-D.
- E. Galvanized steel.
- F. J shape.

2.7 BOXES, ENCLOSURES, AND CABINETS

- A. Description: Enclosures for communications.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Cooper Crouse-Hinds; Div. of Cooper Industries, Inc.
 - 2. Hoffman.
 - 3. Hubbell Incorporated; Killark Electric Manufacturing Co. Division.
 - 4. O-Z/Gedney; a unit of General Signal.
 - 5. RACO; a Hubbell Company.
 - 6. Thomas & Betts Corporation.
- C. General Requirements for Boxes, Enclosures, and Cabinets:
 - 1. Comply with TIA-569-D.
 - 2. Boxes, enclosures, and cabinets installed in wet locations shall be listed and labeled as defined in NFPA 70, by an NRTL, and marked for use in wet locations.
 - 3. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
 - 4. Device Box Dimensions: 4 inches square by 2-1/8 inches deep (100 mm square by 60 mm deep).
 - 5. Gangable boxes are prohibited.
- D. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.
- E. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, aluminum, Type FD, with gasketed cover.
- F. Metal Floor Boxes:
 - 1. Material: sheet metal.
 - 2. Type: Fully adjustable.
 - 3. Shape: Rectangular.
 - 4. Metal floor boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- G. Nonmetallic Floor Boxes: Nonadjustable, rectangular.
 - 1. Nonmetallic floor boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- H. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- I. Cast-Metal Access, Pull, and Junction Boxes: Comply with NEMA FB 1 and UL 1773, cast aluminum with gasketed cover.
- J. Nonmetallic Outlet and Device Boxes: Comply with NEMA OS 2 and UL 514C.
- K. Cabinets:
 - 1. NEMA 250, Type 1 galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
 - 2. Hinged door in front cover with flush latch and concealed hinge.
 - 3. Key latch to match panelboards.
 - 4. Metal barriers to separate wiring of different systems and voltage.
 - 5. Accessory feet where required for freestanding equipment.
 - 6. Nonmetallic cabinets shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

PART 3 - EXECUTION

3.1 PATHWAY APPLICATION

- A. Outdoors: Apply pathway products as specified below unless otherwise indicated:
 - 1. Exposed Conduit: GRC.
 - 2. Concealed Conduit, Aboveground: IMC.
 - 3. Underground Conduit: RNC, Type EPC-40-PVC, direct buried.
 - 4. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R.
- B. Indoors: Apply pathway products as specified below unless otherwise indicated:
 - 1. Exposed, Not Subject to Physical Damage: EMT.
 - 2. Exposed, Not Subject to Severe Physical Damage: EMT.
 - 3. Exposed and Subject to Severe Physical Damage: GRC. Pathway locations include the following:
 - a. Loading dock.
 - b. Corridors used for traffic of mechanized carts.
 - c. Mechanical rooms.
 - 4. Concealed in Ceilings and Interior Walls and Partitions: EMT.
 - 5. Damp or Wet Locations: GRC.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

6. Pathways for Optical-Fiber or Communications Cable in Spaces Used for Environmental Air: Plenum-type, communications-cable pathway or EMT.
 7. Pathways for Optical-Fiber or Communications-Cable Risers in Vertical Shafts: EMT.
 8. Pathways for Concealed General-Purpose Distribution of Optical-Fiber or Communications Cable: Plenum-type, communications-cable pathway.
 9. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel units in damp or wet locations.
- C. Minimum Pathway Size: 3/4-inch (21-mm) trade size for copper and aluminum cables, and 1 inch (25 mm) for optical-fiber cables.
- D. Pathway Fittings: Compatible with pathways and suitable for use and location.
1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
 2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
 3. EMT: Use compression, steel fittings. Comply with NEMA FB 2.10.
- E. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.
- F. Install surface pathways only where indicated on Drawings.
- G. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F (49 deg C).

3.2 INSTALLATION

- A. Comply with the following standards for installation requirements except where requirements on Drawings or in this Section are stricter:
1. NECA 1.
 2. NECA/BICSI 568.
 3. TIA-569-D.
 4. NECA 101
 5. NECA 102.
 6. NECA 105.
 7. NECA 111.
- B. Comply with NFPA 70 limitations for types of pathways allowed in specific occupancies and number of floors.
- C. Comply with requirements in Section 270529 "Hangers and Supports for Communications Systems" for hangers and supports.
- D. Comply with requirements in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling" for sleeves and sleeve seals for communications.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- E. Keep pathways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot-water pipes. Install horizontal pathway runs above water and steam piping.
- F. Complete pathway installation before starting conductor installation.
- G. Arrange stub-ups so curved portions of bends are not visible above finished slab.
- H. Install no more than the equivalent of two 90-degree bends in any pathway run. Support within 12 inches (300 mm) of changes in direction. Utilize long radius ells for all optical-fiber cables.
- I. Conceal rigid conduit within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- J. Support conduit within 12 inches (300 mm) of enclosures to which attached.
- K. Pathways Embedded in Slabs:
 - 1. Run conduit larger than 1-inch (27-mm) trade size, parallel or at right angles to main reinforcement. Where at right angles to reinforcement, place conduit close to slab support. Secure pathways to reinforcement at maximum 10-foot (3-m) intervals.
 - 2. Arrange pathways to cross building expansion joints at right angles with expansion fittings. Comply with requirements for expansion joints specified in this article.
 - 3. Arrange pathways to keep a minimum of 2 inches (50 mm) of concrete cover in all directions.
 - 4. Do not embed threadless fittings in concrete unless specifically approved by Architect for each specific location.
 - 5. Change from nonmetallic conduit and fittings to GRC and fittings before rising above floor.
- L. Stub-ups to Above Recessed Ceilings:
 - 1. Use EMT, IMC, or RMC for pathways.
 - 2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.
- M. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of pathway and fittings before making up joints. Follow compound manufacturer's written instructions.
- N. Coat field-cut threads on PVC-coated pathway with a corrosion-preventing conductive compound prior to assembly.
- O. Install pathways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus one additional quarter-turn.
- P. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure, to assure a continuous ground path.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- Q. Cut conduit perpendicular to the length. For conduits of 2-inch (50-mm) trade size and larger, use roll cutter or a guide to ensure cut is straight and perpendicular to the length.
- R. Install pull wires in empty pathways. Use polypropylene or monofilament plastic line with not less than 200-lb (90-kg) tensile strength. Leave at least 12 inches (300 mm) of slack at each end of pull wire. Secure pull wire, so it cannot fall into conduit. Cap pathways designated as spare alongside pathways in use.
- S. Surface Pathways:
1. Install surface pathway for surface telecommunications outlet boxes only where indicated on Drawings.
 2. Install surface pathway with a minimum 2-inch (50-mm) radius control at bend points.
 3. Secure surface pathway with screws or other anchor-type devices at intervals not exceeding 48 inches (1200 mm) and with no less than two supports per straight pathway section. Support surface pathway according to manufacturer's written instructions. Tape and glue are not acceptable support methods.
- T. Pathways for Optical-Fiber and Communications Cable: Install pathways, metal and nonmetallic, rigid and flexible, as follows:
1. 3/4-Inch (21-mm) Trade Size and Smaller: Install pathways in maximum lengths of 50 feet (15 m).
 2. 1-Inch (25-mm) Trade Size and Larger: Install pathways in maximum lengths of 75 feet (23 m).
 3. Install with a maximum of two 90-degree bends or equivalent for each length of pathway unless Drawings show stricter requirements. Separate lengths with pull or junction boxes or terminations at distribution frames or cabinets where necessary to comply with these requirements.
- U. Install pathway-sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed pathways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install pathway-sealing fittings according to NFPA 70.
- V. Install devices to seal pathway interiors at accessible locations. Locate seals, so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all pathways at the following points:
1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
 2. Where an underground service pathway enters a building or structure.
 3. Where otherwise required by NFPA 70.
- W. Comply with manufacturer's written instructions for solvent welding PVC conduit and fittings.
- X. Expansion-Joint Fittings:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Install in each run of aboveground RNC that is located where environmental temperature change may exceed 30 deg F (17 deg C), and that has straight-run length that exceeds 25 feet (7.6 m). Install in each run of aboveground RMC and EMT that is located where environmental temperature change may exceed 100 deg F (55 deg C), and that has straight-run length that exceeds 100 feet (30 m).
 2. Install type and quantity of fittings that accommodate temperature change listed for each of the following locations:
 - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F (70 deg C) temperature change.
 - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F (86 deg C) temperature change.
 - c. Indoor Spaces Connected with Outdoors without Physical Separation: 125 deg F (70 deg C) temperature change.
 - d. Attics: 135 deg F (75 deg C) temperature change.
 3. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F (0.06 mm per meter of length of straight run per deg C) of temperature change for PVC conduits. Install fitting(s) that provide expansion and contraction for at least 0.000078 inch per foot of length of straight run per deg F (0.0115 mm per meter of length of straight run per deg C) of temperature change for metal conduits.
 4. Install expansion fittings at all locations where conduits cross building or structure expansion joints.
 5. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at time of installation. Install conduit supports to allow for expansion movement.
- Y. Hooks:
1. Size to allow a minimum of 25 percent future capacity without exceeding design capacity limits.
 2. Shall be supported by dedicated support wires. Do not use ceiling grid support wire or support rods.
 3. Hook spacing shall allow no more than 6 inches (150 mm) of slack. The lowest point of the cables shall be no less than 6 inches (150 mm) adjacent to ceilings, mechanical ductwork and fittings, luminaires, power conduits, power and telecommunications outlets, and other electrical and communications equipment.
 4. Space hooks no more than 5 feet (1.5 m) o.c.
 5. Provide a hook at each change in direction.
- Z. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to center of box unless otherwise indicated.
- AA. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surface to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- BB. Horizontally separate boxes mounted on opposite sides of walls, so they are not in the same vertical channel.
- CC. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.
- DD. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.
- EE. Set metal floor boxes level and flush with finished floor surface.
- FF. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR COMMUNICATIONS PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling."

3.4 FIRESTOPPING

- A. Install firestopping at penetrations of fire-rated floor and wall assemblies.

3.5 PROTECTION

- A. Protect coatings, finishes, and cabinets from damage or deterioration.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 270528

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270529 - HANGERS AND SUPPORTS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Steel slotted support systems for communication raceways.
 - 2. Aluminum slotted support systems for communication raceways.
 - 3. Conduit and cable support devices.
 - 4. Support for conductors in vertical conduit.
 - 5. Structural steel for fabricated supports and restraints.
 - 6. Mounting, anchoring, and attachment components, including mechanical expansion anchors, concrete inserts, clamps, through bolts, toggle bolts, and hanger rods.
 - 7. Fabricated metal equipment support assemblies.

- B. Related Requirements:

- 1. Section 270548 "Seismic Controls for Communications Systems" for products and installation requirements necessary for compliance with seismic criteria.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for the following:
 - a. Slotted support systems, hardware, and accessories.
 - b. Clamps.
 - c. Hangers.
 - d. Sockets.
 - e. Eye nuts.
 - f. Fasteners.
 - g. Anchors.
 - h. Saddles.
 - i. Brackets.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Include rated capacities and furnished specialties and accessories.
- B. Shop Drawings: For fabrication and installation details for communications hangers and support systems.
1. Trapeze hangers. Include product data for components.
 2. Steel slotted-channel systems.
 3. Aluminum slotted-channel systems.
 4. Equipment supports.
 5. Vibration Isolation Base Details: Detail fabrication, including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.
- C. Delegated-Design Submittal: For hangers and supports for communications systems.
1. Include design calculations and details of trapeze hangers.
 2. Include design calculations for seismic restraints.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plan(s) and other details, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
1. Suspended ceiling components.
 2. Ductwork, piping, fittings, and supports.
 3. Structural members to which hangers and supports will be attached.
 4. Size and location of initial access modules for acoustical tile.
 5. Items penetrating finished ceiling, including the following:
 - a. Luminaires.
 - b. Air outlets and inlets.
 - c. Speakers.
 - d. Sprinklers.
 - e. Access panels.
- B. Seismic Qualification Data: Certificates, for hangers and supports for communications equipment and systems, accessories, and components, from manufacturer.
1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- C. Welding certificates.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.5 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer to design hanger and support system.
- B. Seismic Performance: Hangers and supports shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. The term "withstand" means "the supported equipment and systems will remain in place without separation of any parts when subjected to the seismic forces specified."
 - 2. Component Importance Factor: 1.0.
- C. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame Rating: Class 1.
 - 2. Self-extinguishing according to ASTM D635.

2.2 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Preformed steel channels and angles with minimum 13/32-inch- (10-mm-) diameter holes at a maximum of 8 inches (200 mm) o.c. in at least one surface.
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allied Tube & Conduit.
 - b. Cooper B-Line, Inc.; a division of Cooper Industries.
 - c. ERICO International Corporation.
 - d. GS Metals Corp.
 - e. Thomas & Betts Corporation.
 - f. Unistrut; Tyco International, Ltd.
 - g. Wesanco, Inc.
 - 2. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
 - 3. Material for Channel, Fittings, and Accessories: Galvanized steel.
 - 4. Channel Width: Selected for applicable load criteria.
 - 5. Channel Dimensions: Selected for applicable load criteria.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Aluminum Slotted Support Systems: Extruded aluminum channels and angles with minimum 13/32-inch- (10-mm-) diameter holes at a maximum of 8 inches (200 mm) o.c. in at least one surface.
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cooper B-Line, Inc.; a division of Cooper Industries.
 - b. Flex-Strut Inc.
 - c. Thomas & Betts Corporation.
 - d. Unistrut; Tyco International, Ltd.
 - 2. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
 - 3. Channel Material: 6063-T6 aluminum alloy.
 - 4. Fittings and Accessories Material: 5052-H32 aluminum alloy.
 - 5. Channel Width: Selected for applicable load criteria.
 - 6. Channel Dimensions: Selected for applicable load criteria.
- C. Conduit and Cable Support Devices: Steel and malleable-iron clamps, hangers, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for nonarmored communications conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be made of malleable iron.
- E. Structural Steel for Fabricated Supports and Restraints: ASTM A36/A36M steel plates, shapes, and bars; black and galvanized.
- F. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
 - 1. Mechanical-Expansion Anchors: Insert-wedge-type zinc-coated steel for use in hardened portland cement concrete, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
 - a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Hilti Inc.
 - 2) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
 - 3) MKT Fastening, LLC.
 - 4) Simpson Strong-Tie Co., Inc.; Masterset Fastening Systems Unit.
 - 2. Concrete Inserts: Steel or malleable-iron, slotted support system units are similar to MSS Type 18 units and comply with MFMA-4 or MSS SP-58.
 - 3. Clamps for Attachment to Steel Structural Elements: MSS SP-58 units are suitable for attached structural element.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM F3125/F3125M, Grade A325 (Grade A325M).
5. Toggle Bolts: All-steel springhead type.
6. Hanger Rods: Threaded steel.

2.3 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

- A. Description: Welded or bolted structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

PART 3 - EXECUTION APPLICATION

- A. Comply with the following standards for application and installation requirements of hangers and supports, except where requirements on Drawings or in this Section are stricter:
 1. NECA 1.
 2. NECA/BICSI 568.
 3. TIA-569-D.
 4. NECA 101.
 5. NECA 102.
 6. NECA 105.
 7. NECA 111.
- B. Comply with requirements for pathways specified in Section 270528 "Pathways for Communications Systems."
- C. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMTs, IMCs, and RMCs as scheduled in NECA 1, where its Table 1 lists maximum spacings that are less than those stated in NFPA 70. Minimum rod size shall be 1/4 inch (6 mm) in diameter.
- D. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 1. Secure raceways and cables to these supports with two-bolt conduit clamps.
- E. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch (38-mm) and smaller raceways serving branch circuits and communication systems above suspended ceilings and for fastening raceways to trapeze supports.

3.2 SUPPORT INSTALLATION

- A. Raceway Support Methods: In addition to methods described in NECA 1, EMT may be supported by openings through structure members, according to NFPA 70.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- B. Strength of Support Assemblies: Where not indicated, select sizes of components, so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb (90 kg).
- C. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten communications items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Wood: Fasten with lag screws or through bolts.
 - 2. To New Concrete: Bolt to concrete inserts.
 - 3. To Masonry: Use approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - 4. To Existing Concrete: Use expansion anchor fasteners.
 - 5. To Steel: Beam clamps (MSS SP-58, Type 19, 21, 23, 25, or 27), complying with MSS SP-69.
 - 6. To Light Steel: Sheet metal screws.
 - 7. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate.
- D. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

- A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor communications materials and equipment.
- B. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 PAINTING

- A. Touchup: Comply with requirements in Section 099123 "Interior Painting" for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas, and apply galvanizing-repair paint to comply with ASTM A780.

END OF SECTION 270529

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270536 - CABLE TRAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Ladder cable tray.
- 2. Wire-mesh cable tray.
- 3. Cable tray accessories.
- 4. Warning signs.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of cable tray.

- 1. Include data indicating dimensions and finishes for each type of cable tray indicated.

- B. Shop Drawings: For each type of cable tray.

- 1. Show fabrication and installation details of cable trays, including plans, elevations, and sections of components and attachments to other construction elements. Designate components and accessories, including clamps, brackets, hanger rods, splice-plate connectors, expansion-joint assemblies, straight lengths, and fittings.
- 2. Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
 - a. Vertical and horizontal offsets and transitions.
 - b. Clearances for access above and to sides of cable trays.
 - c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
 - d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Floor plans and sections, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Scaled cable tray layout and relationships between components and adjacent structural, electrical, and mechanical elements.
 2. Vertical and horizontal offsets and transitions.
 3. Clearances for access above and to side of cable trays.
 4. Vertical elevation of cable trays above the floor or below bottom of ceiling structure.
- B. Seismic Qualification Data: Certificates, for cable trays, accessories, and components, from manufacturer.
1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- C. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Cable trays and supports shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
1. The term "withstand" means "the cable trays will remain in place without separation of any parts when subjected to the seismic forces specified."
 2. Component Importance Factor: 1.0.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes in cable tray installed outdoors.
1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.2 GENERAL REQUIREMENTS FOR CABLE TRAYS

- A. Cable Trays and Accessories: Identified as defined in NFPA 70 and marked for intended location, application, and grounding.
1. Source Limitations: Obtain cable trays and components from single manufacturer.
- B. Sizes and Configurations: See the Cable Tray Schedule on Drawings for specific requirements for types, materials, sizes, and configurations.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Structural Performance: See articles for individual cable tray types for specific values for the following parameters:
1. Uniform Load Distribution: Capable of supporting a uniformly distributed load on the indicated support span when supported as a simple span and tested according to NEMA VE 1.
 2. Concentrated Load: A load applied at midpoint of span and centerline of tray.
 3. Load and Safety Factors: Applicable to both side rails and rung capacities.

2.3 LADDER CABLE TRAY

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. B-line, an Eaton Business.
 2. Chatsworth Products, Inc.
 3. Cablofil, Legrand.
 4. Thomas & Betts Corporation.
- B. Description:
1. Configuration: Two longitudinal side rails with transverse rungs swaged or welded to side rails, complying with NEMA VE 1.
 2. Width: 12 inches (300 mm) unless otherwise indicated on Drawings.
 3. Minimum Usable Load Depth: 4 inches (100 mm).
 4. Straight Section Lengths: 10 feet (3.0 m), except where shorter lengths are required to facilitate tray assembly.
 5. Rung Spacing: 9 inches (225 mm) o.c.
 6. Radius-Fitting Rung Spacing: 9 inches (225 mm) at center of tray's width.
 7. Minimum Cable-Bearing Surface for Rungs: 7/8-inch (22-mm) width with radius edges.
 8. No portion of the rungs shall protrude below the bottom plane of side rails.
 9. Structural Performance of Each Rung: Capable of supporting a maximum cable load, with a safety factor of 1.5, plus a 200-lb (90-kg) concentrated load, when tested according to NEMA VE 1.
 10. Fitting Minimum Radius: 12 inches (300 mm).
 11. Splicing Assemblies: Bolted type using serrated flange locknuts.
 12. Splice-Plate Capacity: Splices located within support span shall not diminish rated loading capacity of cable tray.
- C. Materials and Finishes:
1. Steel:
 - a. Straight Section and Fitting Side Rails and Rungs: Steel complies with the minimum mechanical properties of ASTM A1011/A1011M, SS, Grade 33.
 - b. Steel Tray Splice Plates: ASTM A1011/A1011M, HSLAS, Grade 50, Class 1.
 - c. Fasteners: Steel complies with the minimum mechanical properties of ASTM A510/A510M, Grade 1008.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

d. Finish: Powder-coat enamel paint.

- 1) Powder-Coat Enamel: Cable tray manufacturer's recommended primer and corrosion-inhibiting treatment, with factory-applied powder-coat paint.

2. Aluminum:

- a. Materials: Alloy 6063-T6 according to ANSI H35.1/H 35.1M for extruded components, and Alloy 6061-T6 according to ANSI H35.1/H 35.1M for fabricated parts.
- b. Hardware: Chromium-zinc-plated steel, ASTM F1136.
- c. Hardware for Aluminum Cable Tray Used Outdoors: Stainless steel, Type 316, ASTM F593 and ASTM F594.

2.4 WIRE-MESH CABLE TRAY

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. B-line, an Eaton Business.
2. Chatsworth Products, Inc.
3. Cablofil, Legrand.
4. Thomas & Betts Corporation.

B. Description:

1. Configuration: Galvanized- steel wire mesh, complying with NEMA VE 1.
2. Width: 12 inches (300 mm) unless otherwise indicated on Drawings.
3. Minimum Usable Load Depth: 4 inches (100 mm).
4. Straight Section Lengths: 10 feet (3.0 m), except where shorter lengths are required to facilitate tray assembly.
5. Structural Performance: Capable of supporting a maximum cable load, with a safety factor of 1.5, plus a 200-lb (90-kg) concentrated load, when tested according to NEMA VE 1.
6. Splicing Assemblies: Bolted type using serrated flange locknuts.
7. Splice-Plate Capacity: Splices located within support span shall not diminish rated loading capacity of cable tray.

C. Materials and Finishes:

1. Steel:

- a. Straight Sections and Fittings: Steel complies with the minimum mechanical properties of ASTM A1011/A1011M, SS, Grade 33.
- b. Steel Tray Splice Plates: ASTM A1011/A1011M, HSLAS, Grade 50, Class 1.
- c. Fasteners: Steel complies with the minimum mechanical properties of ASTM A510/A510M, Grade 1008.
- d. Finish: Hot-dip galvanized after fabrication, complying with ASTM A123/A123M, Class B2.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- 1) Hardware: Galvanized, ASTM B633.

2.5 CABLE TRAY ACCESSORIES

- A. Fittings: Tees, crosses, risers, elbows, and other fittings as indicated, of same materials and finishes as cable tray.
- B. Barrier Strips: Same materials and finishes as for cable tray.
- C. Cable tray supports and connectors, including bonding jumpers, as recommended by cable tray manufacturer.

2.6 WARNING SIGNS

- A. Comply with requirements for identification in Section 270553 "Identification for Communications Systems."
- B. Lettering: 1-1/2-inch- (40-mm-) high, black letters on yellow background with legend "Warning! Not To Be Used as Walkway, Ladder, or Support for Ladders or Personnel."

2.7 SOURCE QUALITY CONTROL

- A. Testing: Test and inspect cable trays according to NEMA VE 1.

PART 3 - EXECUTION

3.1 CABLE TRAY INSTALLATION

- A. Install cable trays according to NEMA VE 2.
- B. Install cable trays as a complete system, including fasteners, hold-down clips, support systems, barrier strips, adjustable horizontal and vertical splice plates, elbows, reducers, tees, crosses, cable dropouts, adapters, covers, and bonding.
- C. Install cable trays so that the tray is accessible for cable installation and all splices are accessible for inspection and adjustment.
- D. Remove burrs and sharp edges from cable trays.
- E. Join aluminum cable tray with splice plates; use four square neck-carriage bolts and locknuts.
- F. Fasten cable tray supports to building structure and install seismic restraints.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- G. Design fasteners and supports to carry cable tray, the cables, and a concentrated load of 200 lb (90 kg). Comply with requirements in Section 270529 "Hangers and Supports for Communications Systems." Comply with seismic-restraint details according to Section 270548.16 "Seismic Controls for Communications Systems."
- H. Place supports so that spans do not exceed maximum spans on schedules and provide clearances shown on Drawings. Install intermediate supports when cable weight exceeds the load-carrying capacity of the tray rungs.
- I. Construct supports from channel members, threaded rods, and other appurtenances furnished by cable tray manufacturer. Arrange supports in trapeze or wall-bracket form as required by application.
- J. Support bus assembly to prevent twisting from eccentric loading.
- K. Install center-hung supports for single-rail trays designed for 60 versus 40 percent eccentric loading condition, with a safety factor of 3.
- L. Locate and install supports according to NEMA VE 2. Do not install more than one cable tray splice between supports.
- M. Support wire-basket cable trays with trapeze hangers.
- N. Install expansion connectors where cable trays cross building expansion joints and in cable tray runs that exceed dimensions recommended in NEMA VE 2. Space connectors and set gaps according to applicable standard.
- O. Make changes in direction and elevation using manufacturer's recommended fittings.
- P. Make cable tray connections using manufacturer's recommended fittings.
- Q. Seal penetrations through fire and smoke barriers.
- R. Install capped metal sleeves for future cables through firestop-sealed cable tray penetrations of fire and smoke barriers.
- S. Install cable trays with enough workspace to permit access for installing cables.
- T. Install barriers to separate cables of different systems, such as power, communications, and data processing; or of different insulation levels, such as 600, 5000, and 15 000 V.
- U. Install permanent covers, if used, after installing cable. Install cover clamps according to NEMA VE 2.
- V. Clamp covers on cable trays installed outdoors with heavy-duty clamps.
- W. Install warning signs in visible locations on or near cable trays after cable tray installation.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.2 CABLE TRAY GROUNDING

- A. Ground cable trays according to NFPA 70 unless additional grounding is specified. Comply with requirements in Section 270526 "Grounding and Bonding for Communications Systems."
- B. Cable trays shall be bonded together with splice plates listed for grounding purposes or with listed bonding jumpers.
- C. When using powder-coat painted cable trays as a grounding conductor, completely remove coating at all splice contact points or ground connector attachment. After completing splice-to-grounding bolt attachment, repair the coated surfaces with coating materials recommended by cable tray manufacturer.
- D. Bond cable trays to power source for cables contained within with bonding conductors sized according to NFPA 70, Article 250.122, "Size of Equipment Grounding Conductors."

3.3 CABLE INSTALLATION

- A. Install cables only when each cable tray run has been completed and inspected.
- B. Fasten cables on horizontal runs with cable ties according to NEMA VE 2. Tighten clamps only enough to secure the cable, without indenting the cable jacket. Install cable ties with a tool that includes an automatic pressure-limiting device.
- C. Fasten cables on vertical runs to cable trays every 18 inches (450 mm).
- D. Fasten and support cables that pass from one cable tray to another or drop from cable trays to equipment enclosures. Fasten cables to the cable tray at the point of exit and support cables independent of the enclosure. The cable length between cable trays or between cable tray and enclosure shall be no more than 72 inches (1800 mm).
- E. In existing construction, remove inactive or dead cables from cable trays.

3.4 CONNECTIONS

- A. Remove paint from all connection points before making connections. Repair paint after the connections are completed.
- B. Connect pathways to cable trays according to requirements in NEMA VE 2 and NEMA FG 1.

3.5 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. After installing cable trays and after electrical circuitry has been energized, survey for compliance with requirements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Visually inspect cable insulation for damage. Correct sharp corners, protuberances in cable trays, vibrations, and thermal expansion and contraction conditions, which may cause or have caused damage.
 3. Verify that the number, size, and voltage of cables in cable trays do not exceed that permitted by NFPA 70. Verify that communications or data-processing circuits are separated from power circuits by barriers or are installed in separate cable trays.
 4. Verify that there are no intruding items such as pipes, hangers, or other equipment in the cable tray.
 5. Remove dust deposits, industrial process materials, trash of any description, and any blockage of tray ventilation.
 6. Visually inspect each cable tray joint and each ground connection for mechanical continuity. Check bolted connections between sections for corrosion. Clean and retorque in suspect areas.
 7. Check for improperly sized or installed bonding jumpers.
 8. Check for missing, incorrect, or damaged bolts, bolt heads, or nuts. When found, replace with specified hardware.
 9. Perform visual and mechanical checks for adequacy of cable tray grounding; verify that all takeoff raceways are bonded to cable trays. Test entire cable tray system for continuity. Maximum allowable resistance is 1 ohm.
- B. Prepare test and inspection reports.

3.6 PROTECTION

- A. Protect installed cable trays and cables.
1. Install temporary protection for cables in open trays to safeguard exposed cables against falling objects or debris during construction. Temporary protection for cables and cable tray can be constructed of wood or metal materials and shall remain in place until the risk of damage is over.
 2. Repair damage to galvanized finishes with zinc-rich paint recommended by cable tray manufacturer.
 3. Repair damage to paint finishes with matching touchup coating recommended by cable tray manufacturer.

END OF SECTION 270536

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270544 - SLEEVES AND SLEEVE SEALS FOR COMMUNICATIONS PATHWAYS AND CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Sleeves for pathway and cable penetration of non-fire-rated construction walls and floors.
2. Sleeve-seal systems.
3. Sleeve-seal fittings.
4. Grout.
5. Silicone sealants.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Wall Sleeves:

1. Steel Pipe Sleeves: ASTM A53/A53M, Type E, Grade B, Schedule 40, zinc coated, plain ends.
2. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.

- B. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies: Galvanized-steel sheet; 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint, with tabs for screw-fastening the sleeve to the board.

- C. PVC-Pipe Sleeves: ASTM D1785, Schedule 40.

- D. Sleeves for Rectangular Openings:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Material: Galvanized-steel sheet.
2. Minimum Metal Thickness:
 - a. For sleeve cross-section rectangle perimeter less than 50 inches and with no side larger than 16 inches, thickness shall be 0.052 inch.
 - b. For sleeve cross-section rectangle perimeter 50 inches or more and one or more sides larger than 16 inches, thickness shall be 0.138 inch.

2.2 SLEEVE-SEAL SYSTEMS

- A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and pathway or cable.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Advance Products & Systems, Inc.
 2. CALPICO, Inc.
 3. Metraflex Co.
 4. Pipeline Seal and Insulation.
 5. Proco Products, Inc.
- C. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
- D. Pressure Plates: Carbon steel.
- E. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements.

2.3 SLEEVE-SEAL FITTINGS

- A. Description: Manufactured plastic, sleeve-type, waterstop assembly made for embedding in concrete slab or wall. Unit shall have plastic or rubber waterstop collar with center opening to match piping OD.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Advance Products & Systems, Inc.
 2. CALPICO, Inc.
 3. HOLDRITE
 4. Metraflex Co.
 5. Pipeline Seal and Insulation.
 6. Proco Products, Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 GROUT

- A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
- B. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.5 SILICONE SEALANTS

- A. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants of grade indicated below.
 - 1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.
- B. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

- A. Comply with NECA 1.
- B. Comply with NEMA VE 2 for cable tray and cable penetrations.
- C. Sleeves for Conduits Penetrating Above-Grade Non-Fire-Rated Concrete and Masonry-Unit Floors and Walls:
 - 1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
 - a. Seal annular space between sleeve and pathway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 079200 "Joint Sealants."
 - b. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect material while curing.
 - 2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
 - 3. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and pathway or cable unless sleeve seal is to be installed.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.
5. Install sleeves for floor penetrations. Extend sleeves installed in floors 2 inches above finished floor level. Install sleeves during erection of floors.

D. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies:

1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
2. Seal space outside of sleeves with approved joint compound for gypsum board assemblies.

E. Roof-Penetration Sleeves: Seal penetration of individual pathways and cables with flexible boot-type flashing units applied in coordination with roofing work.

F. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

G. Underground, Exterior-Wall and Floor Penetrations: Install cast-iron pipe sleeves. Size sleeves to allow for 1-inch annular clear space between pathway or cable and sleeve for installing sleeve-seal system.

3.2 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at pathway entries into building.
- B. Install type and number of sealing elements recommended by manufacturer for pathway or cable material and size. Position pathway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pathway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.3 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.
- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

END OF SECTION 270544

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 270553 - IDENTIFICATION FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Color and legend requirements for labels and signs.
2. Labels.
3. Signs.
4. Cable ties.
5. Fasteners for labels and signs.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for communications identification products.

- B. Identification Schedule:

1. Outlets: Scaled drawings indicating location and proposed designation.
2. Backbone Cabling: Riser diagram showing each communications room, backbone cable, and proposed backbone cable designation.
3. Racks: Scaled drawings indicating location and proposed designation.
4. Patch Panels: Enlarged scaled drawings showing rack row, number, and proposed designations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Comply with NFPA 70 and TIA 606-C.
- B. Comply with ANSI Z535.4 for safety signs and labels.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- C. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.
- D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.2 COLOR AND LEGEND REQUIREMENTS

- A. Equipment Identification Labels:
 - 1. Black letters on a white field.

2.3 LABELS

- A. Vinyl Wraparound Labels: Preprinted, flexible labels laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Ideal Industries Inc.
 - c. LEM Products, Inc.
- B. Self-Adhesive Wraparound Labels: Preprinted, 3-mil- (0.08-mm-) thick, vinyl flexible labels with acrylic pressure-sensitive adhesive.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Ideal Industries Inc.
 - c. LEM Products, Inc.
 - 2. Self-Lamination: Clear; UV-, weather- and chemical-resistant; self-laminating protective shields over the legend. Labels sized such that the clear shield overlaps the entire printed legend.
 - 3. Marker for Labels: Machine-printed, permanent, waterproof black ink recommended by printer manufacturer.
- C. Self-Adhesive Labels: Vinyl, thermal, transfer-printed, 3-mil- (0.08-mm-) thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Ideal Industries Inc.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

c. LEM Products, Inc.

2. Minimum Nominal Size:

- a. 1-1/2 by 6 inches (37 by 150 mm) for raceway and conductors.
- b. 3-1/2 by 5 inches (76 by 127 mm) for equipment.
- c. As required by authorities having jurisdiction.

2.4 SIGNS

A. Baked-Enamel Signs:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Carlton Industries.
 - c. Marking Services, Inc.
2. Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application.
3. 1/4-inch (6.4-mm) grommets in corners for mounting.
4. Nominal Size: 7 by 10 inches (180 by 250 mm).

B. Laminated-Acrylic or Melamine-Plastic Signs:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Brady Corporation.
 - b. Carlton Industries.
 - c. Marking Services, Inc.
2. Engraved legend.
3. Thickness:
 - a. For signs up to 20 sq. in. (129 sq. cm), minimum 1/16 inch (1.6 mm) thick.
 - b. For signs larger than 20 sq. in. (129 sq. cm), 1/8 inch (3.2 mm) thick.
 - c. Engraved legend with black letters on white face.
 - d. Self-adhesive.
 - e. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.

2.5 CABLE TIES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Hellermann Tyton

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Ideal Industries Inc.
3. Panduit Corp.

- B. General-Purpose Cable Ties: Fungus inert, self-extinguishing, one piece, self-locking, and Type 6/6 nylon.

1. Minimum Width: 3/16 inch (5 mm).
2. Tensile Strength at 73 deg F (23 deg C) according to ASTM D638: 12,000 psi (82.7 MPa).
3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
4. Color: Black, except where used for color-coding.

2.6 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Retain paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Self-Adhesive Identification Products: Before applying communications identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

3.2 INSTALLATION

- A. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.
- B. Install identifying devices before installing acoustical ceilings and similar concealment.
- C. Verify identity of each item before installing identification products.
- D. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.
- E. Apply identification devices to surfaces that require finish after completing finish work.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Install signs with approved legend to facilitate proper identification, operation, and maintenance of communications systems and connected items.
- G. Elevated Components: Increase sizes of labels, signs, and letters to those appropriate for viewing from the floor.
- H. Vinyl Wraparound Labels:
 - 1. Secure tight to surface of raceway or cable at a location with high visibility and accessibility.
 - 2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to the location and substrate.
 - 3. Provide label 6 inches (150 mm) from cable end.
- I. Self-Adhesive Wraparound Labels:
 - 1. Secure tight to surface at a location with high visibility and accessibility.
 - 2. Provide label 6 inches (150 mm) from cable end.
- J. Self-Adhesive Labels:
 - 1. On each item, install unique designation label that is consistent with wiring diagrams, schedules, and operation and maintenance manual.
 - 2. Unless otherwise indicated, provide a single line of text with 1/2-inch- (13-mm-) high letters on 1-1/2-inch- (38-mm-) high label; where two lines of text are required, use labels 2 inches (50 mm) high.
- K. Snap-Around, Color-Coding Bands: Secure tight to surface at a location with high visibility and accessibility.
- L. Cable Ties: General purpose, except as listed below:
 - 1. Outdoors: UV-stabilized nylon.
 - 2. In Spaces Handling Environmental Air: Plenum rated.

3.3 IDENTIFICATION SCHEDULE

- A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.
- B. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations with high visibility. Identify by system and circuit designation.
- C. Accessible Fittings for Raceways and Cables within Buildings: Identify covers of each junction and pull box with self-adhesive labels containing wiring system legend.
 - 1. System legends shall be as follows:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Telecommunications.
 - b. Security.
 - c. Public Address.
- D. Faceplates: Label individual faceplates with self-adhesive labels. Place label at top of faceplate. Each faceplate shall be labeled with its individual, sequential designation, numbered clockwise when entering room from primary egress, composed of the following, in the order listed:
 1. Wiring closet designation.
 2. Colon.
 3. Faceplate number.
- E. Equipment Room Labeling:
 1. Racks, Frames, and Enclosures: Identify front and rear of each with self-adhesive labels containing equipment designation.
 2. Patch Panels: Label individual rows and outlets, starting at top left and working down, with self-adhesive labels.
 3. Data Outlets: Label each outlet with a self-adhesive label indicating the following, in the order listed:
 - a. Room number being served.
 - b. Colon.
 - c. Faceplate number.
- F. Backbone Cables: Label each cable with a self-adhesive wraparound label indicating the location of the far or other end of the backbone cable. Patch panel or punch down block where cable is terminated should be labeled identically.
- G. Horizontal Cables: Label each cable with a self-adhesive wraparound label indicating the following, in the order listed:
 1. Room number.
 2. Colon.
 3. Faceplate number.
- H. Locations of Underground Lines: Underground-line warning tape for copper, coaxial, hybrid copper/fiber, and optical-fiber cable.
- I. Instructional Signs: Self-adhesive labels.
- J. Warning Labels for Indoor Cabinets, Boxes, and Enclosures: Self-adhesive labels.
 1. Apply to exterior of door, cover, or other access.
- K. Equipment Identification Labels:
 1. Indoor Equipment: Baked-enamel signs.
 2. Outdoor Equipment: Laminated-acrylic or melamine-plastic sign.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Equipment to Be Labeled:
 - a. Communications cabinets.
 - b. Uninterruptible power supplies.
 - c. Computer room air conditioners.
 - d. Fire-alarm and suppression equipment.
 - e. Egress points.
 - f. Power distribution components.

END OF SECTION 270553

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

SECTION 283111 - DIGITAL, ADDRESSABLE FIRE-ALARM SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Existing fire-alarm system to be modified.
 - 2. Manual fire-alarm boxes.
 - 3. System smoke detectors.
 - 4. Heat detectors.
 - 5. Notification appliances.
 - 6. Voice evacuation/messaging system.
 - 7. Remote annunciator.
 - 8. Addressable interface device.
 - 9. Digital alarm communicator transmitter.
 - 10. System printer.

1.3 CODES AND STANDARDS:

- A. North Carolina State Building Code, 2012 Edition
- B. North Carolina Fire Prevention Code, 2012 Edition
- C. North Carolina Mechanical Code, 2012 Edition
- D. North Carolina Electrical Code, 2011 Edition
- E. NFPA 72, National Fire Alarm Code, 2007 Edition
- F. ANSI/ASME AII Safety Code for elevators and escalators.
- G. Factory Mutual (FM), FM AG Approval Guide
- H. NFPA Standards 101, 1221 and 90A, latest adopted edition.
- I. National Electrical Code, latest adopted edition.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- J. Local Building Code.
- K. Requirements of local Fire Departments.
- L. North Carolina Department of Insurance, Office of the State Fire Marshall- Fire Detection and Alarm Systems (FDAS), dated 2008.
 - 1. The contractor shall obtain a copy of the FDAS publication and is hereby notified that these specifications contain all relevant portions of the FDAS and the contractor shall comply with all applicable sections of these specifications and the FDAS. Where conflicts occur between these specifications and the FDAS the FDAS shall have precedence.
- M. UL Publication.

1.4 DEFINITIONS

- A. LED: Light-emitting diode.
- B. NICET: National Institute for Certification in Engineering Technologies.
- C. FAAP: Fire alarm annunciator panel.
- D. FACP: Fire alarm control panel.

1.5 SEQUENCING AND SCHEDULING

- A. Existing Fire-Alarm Equipment: Maintain existing equipment fully operational until new equipment has been tested and accepted. When new equipment is installed, label it "NOT IN SERVICE" until it is accepted. Remove labels from new equipment when put into service, and label existing fire-alarm equipment "NOT IN SERVICE" until removed from building.
- B. Equipment Removal: After acceptance of new fire-alarm system, remove existing disconnected fire-alarm equipment and wiring.

1.6 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Fire-alarm control unit and raceways shall withstand the effects of earthquake motions determined according to SEI/ASCE 7.
 - 1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.7 SUBMITTALS

A. General Submittal Requirements:

1. Submittals shall be approved by authorities having jurisdiction prior to submitting them to Engineer.
2. Shop Drawings shall be prepared by persons with the following qualifications:
 - a. Trained and certified by manufacturer in fire-alarm system design on the specific fire alarm system being installed on this project.
 - 1) The factory training and certification must have occurred within the most recent 24 months.
 - 2) Copies of the certification must be part of the Contractor's submittal to the Engineer prior to installation.
 - 3) The submittal will not be approved without this certification.
 - b. In addition to the requirement for factory certification the person preparing the shop drawings shall be a NICET-certified fire-alarm technician, Level III minimum.

B. Product Data: For each type of product indicated.

C. Shop Drawings: For fire-alarm system. The submittal shall include all required items as indicated below. Partial submittals are not acceptable and will be rejected.

1. Comply with recommendations in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter in NFPA 72.
2. Include voltage drop calculations for notification appliance circuits.
 - a. End Of Line (EOL) voltage drop must not exceed 14% of the expected battery voltage.
 - b. Submit calculations indicating compliance with this criteria.
3. Include battery-size calculations.
 - a. Battery:
 - 1) Sizing calculations showing compliance for:
 - a) Provide 24-hours battery capacity while in the alarm mode for 5-minutes.
 - b) Provide battery capacity for 15-minutes while in the alarm mode for fire alarm systems having a voice alarm/signaling system.
 - 2) Submit battery information indicating the rating of each battery that will be used on this project.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Voice Evacuation/messaging system.
 - a. Submit calculations to support the initial voice evacuation speaker power settings (wattage).
 - b. Submit calculations for each voice evacuation/messaging system power supply panel indicating the initial connected load and 50% spare capacity.
 5. Include performance parameters and installation details for each detector, verifying that each detector is listed for complete range of air velocity, temperature, and humidity possible when air-handling system is operating.
 6. Include plans, sections, and elevations of heating, ventilating, and air-conditioning ducts, drawn to scale and coordinating installation of duct smoke detectors and access to them. Show critical dimensions that relate to placement and support of sampling tubes, detector housing, and remote status and alarm indicators. Locate detectors according to manufacturer's written recommendations.
 7. Include Floor Plans:
 - a. Indicate final outlet locations and routing of cable and conduits..
 - b. Show locations for isolation modules, terminal cabinet boxes, FACP, FAAP, NAP power supplies, and main FACP battery cabinet. Isolation modules shall not be located in the FACP.
 - c. Show address of each addressable device.
 8. Include riser diagram:
 - a. Indicate fire alarm system per the planned installation.
 - b. Indicate wiring circuits, and wire sizes.
 - c. Indicate Terminal cabinet locations.
 9. Include voice/alarm signaling-service equipment rack or console layout, grounding schematic, amplifier power calculation, and single-line connection diagram.
 10. Device Address List:
 - a. Coordinate with final system programming.
 - b. Coordinate with Owner for final naming convention and room names to identify location of devices.
 11. System Operation Description:
 - a. Detailed description for this Project, including method of operation and supervision of each type of circuit and sequence of operations for manually and automatically initiated system inputs and outputs.
 - b. Manufacturer's standard descriptions for generic systems are not acceptable.
- D. Operating Instructions: For mounting at the FACP.
- E. Product Certificates: Signed by manufacturers of system components certifying that products furnished comply with requirements.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- F. Field Test Reports: Indicate and interpret test results for compliance with performance requirements. Comply with NFPA 72.
- G. Maintenance Data: For fire alarm systems to include in maintenance manuals specified in Division 1. Comply with NFPA 72.
- H. Submissions to Authorities Having Jurisdiction: In addition to distribution requirements for Submittals specified in Division 01 Section "Submittal Procedures," make an identical submission to authorities having jurisdiction. Include copies of annotated Contract Drawings as needed to depict component locations to facilitate review. Resubmit if required to make clarifications or revisions to obtain approval. On receipt of comments from authorities having jurisdiction, submit them to Engineer for review.
- I. Certificate of Completion: Comply with NFPA 72.
- J. Seismic Qualification Certificates: For fire-alarm control unit, accessories, and components, from manufacturer.
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- K. Field quality-control reports.
- L. Operation and Maintenance Data: For fire-alarm systems and components to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:
 - 1. Comply with the "Records" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72.
 - 2. Provide "Record of Completion Documents" according to NFPA 72 article "Permanent Records" in the "Records" Section of the "Inspection, Testing and Maintenance" Chapter.
 - 3. Record copy of site-specific software.
 - 4. Provide "Maintenance, Inspection and Testing Records" according to NFPA 72 article of the same name and include the following:
 - a. Frequency of testing of installed components.
 - b. Frequency of inspection of installed components.
 - c. Requirements and recommendations related to results of maintenance.
 - d. Manufacturer's user training manuals.
 - 5. Manufacturer's required maintenance related to system warranty requirements.
 - 6. Abbreviated operating instructions for mounting at fire-alarm control unit.
 - 7. Copy of NFPA 25.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

M. Software and Firmware Operational Documentation:

1. Software operating and upgrade manuals.
2. Program Software Backup: On magnetic media or compact disk, complete with data files.
3. Device address list.
4. Printout of software application and graphic screens.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: All persons terminating wiring, installing fire alarm system devices and /or programming the fire alarm systems shall meet the following minimum requirements:

1. Trained and certified by manufacturer in fire-alarm system design on the specific fire alarm system being installed on this project.
 - a. The factory training and certification must have occurred within the most recent 24 months. The manufacturer must sign the certification certifying the installer's compliance with their requirements.
 - b. Copies of the certification must be part of the Contractor's submittal to the Engineer prior to installation.

B. Source Limitations for Fire-Alarm System and Components: Obtain fire-alarm system from single source from single manufacturer.

C. For any fire alarm component that will be connected to an existing fire alarm system the components shall be compatible with, and operate as, an extension of existing system.

D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

E. NFPA Certification: Obtain certification according to NFPA 72 by compliance with the Engineer's witness test. Refer to Part 3 – Execution.

1.9 PROJECT CONDITIONS

A. Interruption of Existing Fire-Alarm Service: Do not interrupt fire-alarm service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary guard service according to requirements indicated:

1. Notify Owner no fewer than five days in advance of proposed interruption of fire-alarm service.
2. Do not proceed with interruption of fire-alarm service without Owner's written permission.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1.10 SEQUENCING AND SCHEDULING

- A. Existing Fire-Alarm Equipment: Maintain existing equipment fully operational until new equipment has been tested and accepted. As new equipment is installed, label it "NOT IN SERVICE" until it is accepted. Remove labels from new equipment when put into service and label existing fire-alarm equipment "NOT IN SERVICE" until removed from the building.
- B. Equipment Removal: After acceptance of new fire-alarm system, remove existing disconnected fire-alarm equipment and wiring.

1.11 SOFTWARE SERVICE AGREEMENT

- A. Comply with UL 864.
- B. Technical Support: Beginning with Substantial Completion, provide software support for one year.
- C. Upgrade Service: Update software to latest version at Project completion. Install and program software upgrades that become available within one year from date of Substantial Completion. Upgrading software shall include operating system. Upgrade shall include new or revised licenses for use of software.
 - 1. Provide 30 days' notice to Owner to allow scheduling and access to system and to allow Owner to upgrade computer equipment if necessary.

1.12 EXTRA MATERIALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Lamps for Remote Indicating Lamp Units: Quantity equal to 5 percent of amount installed, but no fewer than 1 unit.
 - 2. Lamps for Strobe Units: Quantity equal to 5 percent of amount installed, but no fewer than 1 unit.
 - 3. Smoke Detectors, Heat Detectors: Quantity equal to 6 percent of amount of each type installed, but no fewer than 1 unit of each type.
 - 4. Detector Bases: Quantity equal to 6 percent of amount of each type installed, but no fewer than 1 unit of each type.
 - 5. Keys and Tools: One extra set for access to locked and tamper proofed components.
 - 6. Fuses: Two of each type installed in the system.
 - 7. Manual Stations:
 - a. Quantity equal to 2 percent of amount installed.
 - 8. Indoor Notification Appliance:

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- a. Quantity equal to 4 percent of amount installed.

PART 2 - PRODUCTS

2.1 EXISTING FIRE-ALARM SYSTEM TO BE MODIFIED

- A. Basis for Pricing: Simplex 4100ES.
- B. Description: Existing fire alarm system is a complete, non-coded, UL certified addressable, microprocessor-based fire alarm system with addressable initiating devices, non-addressable emergency voice alarm notification appliances, and monitoring and control devices as indicated on the drawings and as specified herein
- C. Source Limitations for Fire-Alarm System and Components: Components must be compatible with, and operate as extension of, existing system. Provide system manufacturer's certification that components provided have been tested as, and will operate as, a system.

2.2 SYSTEMS OPERATIONAL DESCRIPTION

- A. Fire-alarm signal initiation shall be by one or more of the following devices and/or systems:
 1. Manual stations.
 2. Heat detectors.
 3. Smoke detectors.
 4. Duct smoke detectors.
 5. Automatic sprinkler system water flow.
 6. Heat detectors in elevator shaft, machine room and pit.
 7. Fire-extinguishing system operation.
 8. Fire standpipe system.
- B. Fire-alarm signal shall initiate the following actions:
 1. Continuously operate alarm notification appliances.
 2. Identify alarm at fire-alarm control unit and remote annunciators.
 3. Transmit an alarm signal to the remote alarm receiving station.
 4. Unlock electric door locks in designated egress paths. Refer to plans for egress paths.
 5. Release of drop/shutter rolling steel type fire doors.
 6. Activate voice/alarm communication system.
 7. Switch heating, ventilating, and air-conditioning equipment controls to fire-alarm mode.
 - a. Unless otherwise noted on the fire alarm matrix on the drawings the default condition shall be 'OFF' during a general fire alarm condition with a manual override switch/control for activation by the fire department.
 8. Recall elevators to primary or alternate recall floors.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

9. Record events in the system memory.
 10. Record events by the system printer.
 11. Shunt trip elevator power where sprinkler heads are installed in elevator shafts, machine rooms or pits.
- C. Supervisory signal initiation shall be by one or more of the following devices and actions:
1. Valve supervisory switch.
 2. Low-air-pressure switch of a dry-pipe sprinkler system.
 3. Elevator shunt-trip supervision.
- D. System trouble signal initiation shall be by one or more of the following devices and actions:
1. Open circuits, shorts, and grounds in designated circuits.
 2. Opening, tampering with, or removing alarm-initiating and supervisory signal-initiating devices.
 3. Loss of primary power at fire-alarm control unit.
 - a. When 8-hours have elapsed after the power outage.
 4. Ground or a single break in fire-alarm control unit internal circuits.
 5. Abnormal ac voltage at fire-alarm control unit.
 6. Break in standby battery circuitry.
 7. Failure of battery charging.
 8. Abnormal position of any switch at fire-alarm control unit or annunciator.
 9. Low-air-pressure switch operation on a dry-pipe or preaction sprinkler system.
- E. System Trouble and Supervisory Signal Actions: Initiate notification appliance and annunciate at fire-alarm control unit and remote annunciators. Record the event on system printer.

2.3 MANUAL FIRE-ALARM BOXES

- A. General Requirements for Manual Fire-Alarm Boxes: Comply with UL 38. Boxes shall be finished in red with molded, raised-letter operating instructions in contrasting color; shall show visible indication of operation; and shall be mounted on recessed outlet box. If indicated as surface mounted, provide manufacturer's surface back box.
1. Double-action mechanism requiring two actions to initiate an alarm, pull-lever type; with integral addressable module arranged to communicate manual-station status (normal, alarm, or trouble) to fire-alarm control unit.
 2. Station Reset: Key- or wrench-operated switch.
 3. Weatherproof Protective Shield (as shown on floor plans): Factory-fabricated clear plastic enclosure hinged at the top to permit lifting for access to initiate an alarm.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.4 SYSTEM SMOKE DETECTORS

A. General Requirements for System Smoke Detectors:

1. Comply with UL 268; operating at 24-V dc, nominal.
2. Detectors shall be four-wire type.
3. Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to fire-alarm control unit.
4. Base Mounting: Detector and associated electronic components shall be mounted in a twist-lock module that connects to a fixed base. Provide terminals in the fixed base for connection to building wiring.
5. Self-Restoring: Detectors do not require resetting or readjustment after actuation to restore them to normal operation.
6. Integral Visual-Indicating Light: LED type indicating detector has operated and power-on status.
7. Remote Control: Unless otherwise indicated, detectors shall be analog-addressable type, individually monitored at fire-alarm control unit for calibration, sensitivity, and alarm condition and individually adjustable for sensitivity by fire-alarm control unit.
 - a. Provide multiple levels of detection sensitivity for each sensor.

B. Photoelectric Smoke Detectors:

1. Detector address shall be accessible from fire-alarm control unit and shall be able to identify the detector's location within the system and its sensitivity setting.
2. An operator at fire-alarm control unit, having the designated access level, shall be able to manually access the following for each detector:
 - a. Primary status.
 - b. Device type.
 - c. Present average value.
 - d. Present sensitivity selected.
 - e. Sensor range (normal, dirty, etc.).

C. Ionization Smoke Detector:

1. Detector address shall be accessible from fire-alarm control unit and shall be able to identify the detector's location within the system and its sensitivity setting.
2. An operator at fire-alarm control unit, having the designated access level, shall be able to manually access the following for each detector:
 - a. Primary status.
 - b. Device type.
 - c. Present average value.
 - d. Present sensitivity selected.
 - e. Sensor range (normal, dirty, etc.).

D. Duct Smoke Detectors: Photoelectric type complying with UL 268A.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

1. Detector address shall be accessible from fire-alarm control unit and shall be able to identify the detector's location within the system and its sensitivity setting.
 2. An operator at fire-alarm control unit, having the designated access level, shall be able to manually access the following for each detector:
 - a. Primary status.
 - b. Device type.
 - c. Present average value.
 - d. Present sensitivity selected.
 - e. Sensor range (normal, dirty, etc.).
 3. Weatherproof Duct Housing Enclosure: NEMA 250, Type 4X; NRTL listed for use with the supplied detector.
 4. Each sensor shall have multiple levels of detection sensitivity.
 5. Sampling Tubes: Design and dimensions as recommended by manufacturer for specific duct size, air velocity, and installation conditions where applied.
 6. Relay Fan Shutdown: Rated to interrupt fan motor-control circuit.
- E. Remote Test Switch and Indicating Lights: All duct detectors shall have a remote test switch and indicating light installed in the nearest corridor or public area and identified by an engraved label affixed to the wall or ceiling.

2.5 HEAT DETECTORS

- A. General Requirements for Heat Detectors: Comply with UL 521.
- B. Heat Detector, Combination Type: Actuated by either a fixed temperature of 135 deg F or a rate of rise that exceeds 15 deg F per minute unless otherwise indicated.
1. Mounting: Twist-lock base interchangeable with smoke-detector bases.
 2. Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to fire-alarm control unit.
- C. Heat Detector, Fixed-Temperature Type: Actuated by temperature that exceeds a fixed temperature of 190 deg F.
1. Mounting: Twist-lock base interchangeable with smoke-detector bases.
 2. Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to fire-alarm control unit.
- D. Spacing: Drawings reflect spacing based on a prescriptive design of 30 ft per NFPA 72. If heat detector supplied cannot meet this spacing requirement, contractor is responsible for providing additional heat detectors to cover area as indicated on the drawings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.6 NOTIFICATION APPLIANCES

- A. General Requirements for Notification Appliances: Connected to notification appliance signal circuits, zoned as indicated, equipped for mounting as indicated and with screw terminals for system connections.
 - 1. Combination Devices: Factory-integrated audible and visible devices in a single-mounting assembly, equipped for mounting as indicated and with screw terminals for system connections.
- B. Visible Notification Appliances: Xenon strobe lights comply with UL 1971, with clear or nominal white polycarbonate lens mounted on an aluminum faceplate. The word "FIRE" is engraved in minimum 1-inch- high letters on the lens.
 - 1. Rated Light Output:
 - a. 15/30/75/110 cd, selectable in the field.
 - 2. Mounting: Wall mounted unless otherwise indicated.
 - 3. For units with guards to prevent physical damage, light output ratings shall be determined with guards in place.
 - 4. Flashing shall be in a temporal pattern, synchronized with other units.
 - 5. Strobe Leads: Factory connected to screw terminals.
 - 6. Mounting Faceplate: Factory finished, red.
- C. Voice/Tone Notification Appliances:
 - 1. Appliances shall comply with UL 1480 and shall be listed and labeled by an NRTL.
 - 2. High-Range Units: Rated 2 to 15 W field selectable.
 - 3. Low-Range Units: Rated 1 to 2 W field selectable.
 - 4. Mounting: Flush.
 - 5. Matching Transformers: Tap range matched to acoustical environment of speaker location.

2.7 ADDRESSABLE INTERFACE DEVICE

- A. Description: Microelectronic monitor module, NRTL listed for use in providing a system address for alarm-initiating devices for wired applications with normally open contacts.
- B. Multi-gang Indicating Addressable devices are not permitted. All devices shall be installed in individual boxes
- C. Integral Relay: Capable of providing a direct signal to AHU starter, smoke damper operation, elevator controller to initiate elevator recall or to circuit-breaker shunt trip for power shutdown.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.8 DIGITAL ALARM COMMUNICATOR TRANSMITTER

- A. Digital alarm communicator transmitter shall be acceptable to the remote central station and shall comply with UL 632 and be listed and labeled by an NRTL.
- B. Functional Performance: Unit shall receive an alarm, supervisory, or trouble signal from fire-alarm control unit and automatically capture two telephone lines and dial a preset number for a remote central station. When contact is made with central station(s), signals shall be transmitted. Whenever service on either line is interrupted for longer than **45** seconds, transmitter shall initiate a local trouble signal and transmit the signal indicating loss of telephone line to the remote alarm receiving station over the remaining line. Transmitter shall automatically report telephone service restoration to the central station. If service is lost on both telephone lines, transmitter shall initiate the local trouble signal.
- C. Local functions and display at the digital alarm communicator transmitter shall include the following:
 - 1. Verification that both telephone lines are available.
 - 2. Programming device.
 - 3. LED display.
 - 4. Manual test report function and manual transmission clear indication.
 - 5. Communications failure with the central station or fire-alarm control unit.
- D. The following signals shall be reported as applicable:
 - 1. Fire Alarm
 - 2. Sprinkler Water flow Alarm
 - 3. Fire Pump Running Alarm (if pump provided)
 - 4. Fire pump Abnormal Status
 - 5. Sprinkler Valve Tamper (Closed) Supervisory Signal
 - 6. Sprinkler Low Temperature/Air Pressure Supervisory Signal
 - 7. Burglary/Intrusion/Duress/Other Security or Emergency Alarms
 - 8. Fire Alarm System AC Power Trouble after 8-hours.
 - 9. Low Battery
- E. Secondary Power: Integral rechargeable battery and automatic charger.
- F. Self-Test: Conducted automatically every 24 hours with report transmitted to central station.
- G. Precedence of Signals:
 - 1. Fire Alarm.
 - 2. Supervisory signal.
 - 3. Trouble Signal.
 - 4. Security Alarm.
- H. Contractor: Contractor must program the PROM, connect each DACT to the telephone lines provided and verify proper signal receipt by the supervising station.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- I. The installation of this device shall include the required telecommunications cabling as specified for data outlets in these specifications.

2.9 SYSTEM PRINTER

- A. Printer shall be listed and labeled by an NRTL as an integral part of fire-alarm system. Printer shall be 120 volt ac and use ordinary (non-thermal) paper. Install as shown on drawings or as selected by Owner. For high rise buildings, the printer must be monitored by the Central FACP and be powered from an emergency circuit.
 1. Provide wall shelf for mounting.
 2. Provide dedicated 120-volt receptacle from same power source as the FACP.

2.10 DEVICE GUARDS

- A. Description: Welded wire mesh of size and shape for the manual station, smoke detector, gong, or other device requiring protection.
 1. Factory fabricated and furnished by manufacturer of device.
 2. Finish: Paint of color to match the protected device.

2.11 WIRING

- A. Non-Power-Limited Circuits: Copper conductors with 600-V rated, 75 deg C, color-coded THHN/THWN insulation.
 1. Low-Voltage Circuits: Stranded No. 12 AWG, minimum.
 2. Line-Voltage Circuits: Solid No. 12 AWG, minimum.
- B. Power-Limited Circuits: NFPA 70, Types FPL, FPLR, or FPLP, as recommended by manufacturer.
- C. Wiring shall be color coded as follows:
 1. Addressable loop (signaling line) circuits shall be wired with type FPL/FPLR/FPLP fire alarm cable, low capacitance (30-pF Max.), 18 AWG minimum, twisted shielded copper pair. Cable shield drain wires are to be connected at each device on the loop to maintain continuity, taped to insulate from ground, and terminated at the FACP. Acceptable manufacturers include Atlas, Belden, West Penn or equal wire having capacitance of 30 pf/ft. maximum between conductors. The cable jacket color shall be red, with Red (+) and Black (-) conductor insulation.
 2. Unshielded Cable, otherwise equal to the above, is permitted where the manufacturer's installation instructions unequivocally require, or state a preference for, the use of unshielded cable for all systems.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3. Alarm notification appliance circuits (horns and strobes) shall be wired with type THHN/THWN, stranded copper, AWG 12 minimum, color coded Blue (+), Black (-) conductor insulation.
4. One way voice/Alarm digital audio circuits shall be wired with low capacitance (30-pF Max.), AWG 12 minimum, twisted shielded copper pair. Cable shield drain wires are to be connected continuous from the amplifier to the end of the line. Acceptable manufacturers include Atlas, Belden, West Penn or equal wire having capacitance of 30 pf/ft. maximum between conductors. The cable jacket shall be Gray outer jacket, Red (+), Black (-) conductor insulation.
 - a. Note: Where required to meet NFPA fire rating requirements MI cable shall be utilized.
5. System equipment with 24VDC operating power shall be wired with type THHN/THWN, stranded copper, AWG 12 minimum, color coded Yellow (+), Brown (-) conductor insulation.
6. Door control circuits for maglocks if supplied from fire alarm system shall be wired with type THHN/THWN, stranded copper, AWG 12 minimum, color coded Orange conductor insulation.
7. Circuits from Zone Addressable Monitored Devices shall be wired with type THHN/THWN, stranded copper, AWG 12 minimum, color coded Violet (+), Gray (-) conductor insulation.
8. For underground circuits installed in conduit, use Type TC or PLTC cable (PE insulated) to avoid problems for moisture. Color coding for specific application, as described herein, shall be followed.

2.12 POWER SUPPLIES

- A. Notification Appliance circuit booster (“ADA”) power supplies and Voice Messaging power supplies must be individually monitored for integrity and are not permitted to be located above a ceiling, or in non-conditioned space. Any 24vdc power circuits serving addressable control relays must also be monitored for integrity. Provide a smoke detector within 15 feet of the power supply.
 1. Each Power Booster shall be addressable to and supervised, per NFPA requirements, by the FACP.
 2. The FACP shall be able to distinguish each individual Power Booster and issue a digital readout for each individual Power Booster that reports a trouble signal.
 3. Provide dedicated 120-volt receptacle from the same source as the FACP.
 4. Notification Appliance circuit booster total capacity shall not be less than the total load connected to the circuit booster, as calculated from the devices Cd as shown on the drawings, plus 30% spare capacity for additional devices or a change to Cd settings.
 5. Voice messaging power supplies for the speaker system shall have a total capacity not less than the total load connected to the power supply, as calculated from the quantity and device initial settings, plus 50% spare capacity for additional devices or a change to the speaker wattage settings.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2.13 ISOLATION MODULES

- A. To minimize the impact of a wiring fault (short), isolation modules or (if the ceiling height is <10 feet) isolator base type initiating devices shall be provided as follows:
1. After each 20 devices and control points on any addressable circuit.
 2. For each addressable circuit that extends outside the building walls.
 3. Immediately adjacent to the FACP, at each end of the addressable loop. These two isolators must be in the same room as the FACP and within 15 feet. Isolation modules shall not be located in the FACP.
 4. For loops covering more than one floor, install isolator at terminal cabinet on each floor (with additional isolator(s) on any floor with over 20 addresses).
 5. Coordinate with the Owner and the Engineer for the approved method of installation for accessibility and maintenance.

2.14 TVSS

- A. The following protection against voltage transients and surges must be provided by the fire alarm equipment supplier, and installed by the electrical contractor for all fire alarm system panels:
1. On AC Input:
 - a. A feed through (not a shunt-type) branch circuit transient arrestor such as the EFI HWM-120, Leviton OEM-120EFI, Northern Technologies TCS-HW, Transtector ACP100BWN3, or any equivalent UL Listed device submitted to and approved by the Engineer.
 - b. Install suppressor on the outside of the electrical panelboard, and trim excess lead lengths.
 - c. Wind small coil in the branch circuit conductor just downstream of the suppressor connection. Coil to be wound using 5 to 10 turns, ¾”-1” diameter. The coil shall be securely tie-wrapped at two points to maintain the coil diameter and winding integrity.
 - 1) This series impedance will improve the effectiveness of the arrestor in suppressing voltage transients.
 2. On DC Circuits Extending Outside Building:
 - a. Acceptable models: Simples 2081-9027 and 2081-9028, Transtector TSP8601, the Ditek DTKxLVL series, Citel American BF280-24V, Northern Technologies DLP-42. Equal products may be submitted to the Engineer for approval.
 - b. Adjacent to the FACP, and also near point of entry to outlying building, provide “pi” type filter on each leg, consisting of a primary arrestor, a series impedance, and a fast acting secondary arrestor which clamps at 30v to 40v.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION

- A. Comply with NFPA 72 for installation of fire-alarm equipment.
- B. Equipment Mounting: Install fire-alarm control unit on wall as indicated on the drawings.
 - 1. Install seismic bracing. Comply with requirements in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."
- C. Connecting to Existing Equipment: Verify that existing fire-alarm system is operational before making changes or connections.
 - 1. Connect new equipment to existing control panel in existing part of the building.
 - 2. Connect new equipment to existing monitoring equipment at the supervising station.
 - 3. Expand, modify, and supplement existing **[control]** **[monitoring]** equipment as necessary to extend existing **[control]** **[monitoring]** functions to the new points. New components shall be capable of merging with existing configuration without degrading the performance of either system.
- D. Control Relays
 - 1. Control relays shall be installed to meet NFPA requirements. This shall include but not limited to control relays that actuate smoke and/or fire dampers and motors associated with smoke exhaust/removal systems.
 - a. The maximum distance from the fire alarm control relay to the motor controller shall be 3-ft.
- E. Smoke- or Heat-Detector Spacing:
 - 1. The fire alarm devices shown on the plans and details are diagrammatic in nature and are to establish the basis for bidding. The certified contractor shall install all devices in compliance with NFPA, National, Local codes as applicable to this project.
 - 2. During installation the certified contractor shall review the design layout and adjust the fire alarm system using, but not limited to, the following guidelines:
 - a. Comply with NFPA 72, "Smoke-Sensing Fire Detectors" Section in the "Initiating Devices" Chapter, for smoke-detector spacing.
 - b. Comply with NFPA 72, "Heat-Sensing Fire Detectors" Section in the "Initiating Devices" Chapter, for heat-detector spacing.
 - c. Not less than 4 inches (100 mm) from a side wall to the near edge.
 - d. For exposed solid-joist construction, mount detectors on the bottom of joists unless the depth of the beams create a pocket as defined by NFPA.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- e. Refer to the latest edition of the NFPA for mounting of detectors where there is no gypsum board or acoustical tile (drop) ceilings to mount detectors on. Follow NFPA requirements for mounting height.
 - f. Review all structural beam depths, spacing and structural ceilings prior to installing conduits and detectors.
 - g. On smooth ceiling, install not more than 30 feet (9 m) apart in any direction.
 - h. Wall-Mounted Smoke Detectors: Not less than 4 inches (100 mm), but not more than 12 inches (300 mm), below the ceiling.
 - i. Spacing of detectors for irregular areas, for irregular ceiling construction, and for high ceiling areas shall be determined according to the appropriate Appendix in NFPA 72.
 - j. HVAC: Locate detectors not closer than 3 feet from air-supply diffuser or return-air opening.
 - k. Lighting Fixtures: Locate detectors not closer than 12 inches from any part of a lighting fixture.
- F. Smoke detector: Mount photoelectric smoke detector within 15' of the central FACP, any FAAPs and each external power supply.
- G. Duct Smoke Detectors: Comply with NFPA 72 and NFPA 90A. Install sampling tubes so they extend the full width of duct. Each duct detector installation shall have a hinged or latched duct access panel, 12x12 inches minimum, for sampling tube inspection and cleaning. Indicate airflow direction on the duct, adjacent to the detector.
 - 1. Verify that each unit is listed for the complete range of air velocity, temperature, and humidity possible when air-handling system is operating.
 - 2. Install sampling tubes so they extend the full width of the duct.
- H. Manual Pull Stations: Mount semi-flush in recessed back boxes. Mount 48" AFF to top of device.
 - 1. Coordinate with the general contractor for installation of devices required by code to be within 5-ft of exit doors.
 - a. Method of installing fire alarm cables through mullions of curtain wall systems.
 - 1) Submit to the Engineer and Engineer for approval installation drawings showing methods to be used for routing of cables and device mounting.
- I. Water-Flow Detectors and Valve Supervisory Switches: Connect for each sprinkler valve station required to be supervised.
- J. Heat Detectors in Elevator Shafts, Machine Rooms or Pits:
 - 1. Coordinate temperature rating and location with sprinkler rating and location.
 - 2. Heat detectors shall be installed within 2-ft. of each sprinkler head location.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- K. Remote Status and Alarm Indicators: Install near each smoke detector and each sprinkler water-flow switch and valve-tamper switch that is not readily visible from normal viewing position. Indicators shall be installed in individual boxes and not be installed in multi-gang boxes.
- L. Audible Alarm-Indicating Devices: Install 80" AFF to device bottom unless noted otherwise on the drawings..
- M. Visible Alarm-Indicating Devices: Install 80" AFF to device bottom unless noted otherwise on the drawings.
- N. Device Location-Indicating Lights: Locate in public space near the device they monitor.
- O. Fire-Alarm Control Unit: Surface mounted, with tops of cabinets not more than 72 inches above the finished floor.
- P. Annunciator: Install with top of panel not more than 72 inches above the finished floor.
- Q. Digital dialer: Provide two (2) data outlet jacks compatible with the digital dialer, including data cabling as specified in these specifications (Category 5e minimum rating). Connect to the local floor telecommunications equipment as specified in these specifications. Install in ½" conduit minimum from outlet jacks to telecommunications equipment.
- R. Smoke Detector Protection: Unless suitable protected against dust, paint, etc., spot type smoke detectors shall not be installed until the final construction clean-up has been completed. In the event of contamination during construction, the detectors must be replaced.
- S. Detector Identification: Identification of individual detectors is required. Assign each a unique number as follows, in sequence starting at the FACP: (Addressable Loop#-- Device#) Put on the as-built plans, and also permanently mount on each detector's base so that it's readable standing on the floor below without having to remove the smoke detector. Exception: for detectors with housings (i.e., air duct, projected beam, air sampling, flame), apply the identification to a suitable location on exterior of their housing.
- T. Fire Alarm System notification circuits, an end-of-line (EOL) resistor should be located as follows:
 - 1. In a location that is accessible to fire alarm maintenance personnel.
 - 2. In an area where maintenance or testing at the EOL resistor location will not be disruptive to the normal use of the facility.
 - 3. In an area that is not easily accessible to the normal building occupants (objective is to avoid accidental or malicious damage by building occupants).
 - 4. In an area that is no higher than 9 ft or lower than 7 ft from the floor level.
 - 5. Not located in a stairway or bathroom location.
- U. The branch circuit breaker(s) supplying any circuit for Fire Alarm system equipment must be physically protected by panelboard lock or handle lock and must be identified with a 1/4" permanent red dot applied to handle or exposed body area.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- V. A floor plan diagram with device identifiers shall be framed under glass and mounted near the main Fire Alarm Control Panel.

3.2 CONNECTIONS

- A. For fire-protection systems related to doors in fire-rated walls and partitions and to doors in smoke partitions, comply with requirements in Division 08 Section "Door Hardware." Connect hardware and devices to fire-alarm system.
 - 1. Verify that hardware and devices are NRTL listed for use with fire-alarm system in this Section before making connections.
- B. Make addressable connections with a supervised interface device to the following devices and systems. Install the interface device less than 3 feet from the device controlled. Make an addressable confirmation connection when such feedback is available at the device or system being controlled.
 - 1. Alarm-initiating connection to smoke-control system (smoke management) at firefighter smoke-control system panel.
 - 2. Smoke dampers in air ducts of designated air-conditioning duct systems.
 - 3. Alarm-initiating connection to elevator recall system and components.
 - 4. Alarm-initiating connection to activate emergency lighting control.
 - 5. Alarm-initiating connection to activate emergency shutoffs for gas and fuel supplies.
 - 6. Supervisory connections at valve supervisory switches.
 - 7. Supervisory connections at low-air-pressure switch of each dry-pipe sprinkler system.
 - 8. Supervisory connections at elevator shunt trip breaker.
 - 9. Supervisory connections at fire-pump power failure including a dead-phase or phase-reversal condition.
 - 10. Supervisory connections at fire-pump engine control panel.

3.3 WIRING INSTALLATION

- A. Installer Qualifications: All persons terminating wiring, installing fire alarm system devices and /or programming the fire alarm systems shall meet the following minimum requirements:
 - 1. Trained and certified by manufacturer in fire-alarm system design on the specific fire alarm system being installed on this project.
 - a. The factory training and certification must have occurred within the most recent 24 months. The manufacturer must sign the certification certifying the installer's compliance with their requirements.
 - b. Copies of the certification must be part of the Contractor's submittal to the Engineer prior to installation.
 - c. The submittal will not be approved without this certification.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. In addition to the requirement for factory certification the person preparing the shop drawings shall be a NICET-certified fire-alarm technician, Level III minimum.
- B. Wiring Method: Install wiring in metal raceway according to Division 26 Section “Raceways and Boxes for Electrical Systems.” Conceal raceway except in unfinished spaces and as indicated.
1. Coordinate with the general contractor for installation of devices required by code to be within 5-ft of exit doors.
 - a. Method of installing fire alarm cables through mullions of curtain wall systems.
 - 1) Submit to the Engineer for approval installation drawings showing methods to be used for routing of cables and device mounting.
 2. All Class A SLC loop circuits, as required herein, shall have the supply and return ‘loop’ cables installed in separate raceways to insure survivability except as noted herein.
 - a. On multi-story buildings each floor shall have a dedicated Class A SLC loop.
 - b. Minimum separation distance between the Class A SLC supply and return raceways/cables shall be the corridor width, less 1-ft., for the floor being served by the Class A SLC loop.
 - 1) Exception: The supply and return Class A loop cables may occupy the same raceway from the junction box where the SLC initiating device is mounted for a maximum distance of 6-ft. where they shall enter into a common junction box where they shall be installed in separate raceways to the next device on the loop, fire alarm terminal cabinet or fire alarm control panel.
 - c. As an option on multi-story buildings, the Class A SLC supply and return raceways may be installed so that the Class A SLC loop cables terminate in fire alarm terminal cabinets located at opposite ends of the floor being served by a Class A SLC loop. From the terminal cabinets on each floor the supply and return loop cables shall be installed in raceways containing only SLC cables and shall be routed to the next fire alarm terminal cabinet on a lower floor or directly back to the fire alarm control panel.
 - d. The supply and return Class A SLC loop cables/raceways shall be kept separated back to within 10-ft. from where they enter the fire alarm control panel.
- C. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by the manufacturer.
1. All wiring and splices shall be made using terminal blocks. Crimp type connectors or ‘wire nuts’ connectors are prohibited.
 2. All terminal block screws shall have pressure wire connectors of the self-lifting or box lug type.
 3. All terminal blocks shall be securely fastened in place using screws. Adhesive tape or glue will not be acceptable.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

4. Run fire alarm system wiring in dedicated raceway system containing only fire alarm system wiring.
5. Install conductors parallel with or at right angles to sides and back of the enclosure.
6. Bundle, lace, and train conductors to terminal points with no excess.
7. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks.
8. All doors of all enclosures shall contain a green insulated #12 copper conductor bonding the enclosure to the door. This shall not impede opening of the door to 180 degrees.
9. Mark each terminal according to the system's wiring diagrams.
10. Make all connections with approved crimp-on terminal spade lugs, screw terminal blocks, or plug connectors.
11. Label all wires at all termination points.
12. Label inside of enclosure with 120 VAC source panel board and circuit number.

3.4 IDENTIFICATION

- A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."
 1. All system wiring shall be labeled at each termination point or splice.
- B. Identify each enclosure with an engraved, red, laminated, phenolic-resin nameplate with lettering not less than 1 inch (25 mm) high. Identify individual components and modules within cabinets with permanent labels.
- C. Install Instructions frame in a location visible from the FACP.
- D. Label Central FACP with engraved label indicating panel location, panel name, and circuit number of power source to FACP.
- E. It is understood that the room names and numbers shown on the contract document may change prior to the final acceptance of the building by the Owner.
 1. The installing contractor shall coordinate with the Owner and/or the General Contractor the final room names and numbers for the entire building. This shall occur prior to the final Engineer's acceptance testing.
 2. The FACP programming and subsequent display readouts shall indicate these room names, numbers and identical device addresses in order as follows:
 - a. Device type.
 - b. Equipment or unit number associated with the device whenever applicable.
 - c. Location by room number.
 - d. Device address number.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

3.5 GROUNDING

- A. Ground fire-alarm control unit and associated circuits; comply with IEEE 1100. Install a ground wire from main service ground to fire-alarm control unit.
- B. Ground the enclosure doors using a green insulated #12 grounding conductor attached to the enclosure housing and the door. Install so that the door is free to swing open 180- degrees.
- C. The Fire Alarm Control Panel shall be grounded to the AC supply source with an insulated equipment grounding conductor installed and routed in the same raceway with the AC branch circuit conductors feeding the Fire Alarm Control Panel.

3.6 FIELD QUALITY CONTROL

- A. Field tests shall be witnessed by the Owner Representative and/or the Engineer of Record.
- B. Tests and inspections.
 - 1. Manufacturer's Field Service: The trained and certified person who terminates and programs the system shall be required to perform all field testing as described within these specifications.
- C. Contractor/Manufacturer Representative Tests and Inspections:
 - 1. Visual Inspection: Conduct visual inspection prior to testing.
 - a. Inspection shall be based on completed Record Drawings and system documentation that is required by NFPA 72 in its "Completion Documents, Preparation" Table in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter.
 - b. Comply with "Visual Inspection Frequencies" Table in the "Inspection" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72; retain the "Initial/Reacceptance" column and list only the installed components.
 - 2. System Testing: Comply with "Test Methods" Table in the "Testing" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72.
 - 3. Test audible appliances for the public operating mode according to manufacturer's written instructions. Perform the test using a portable sound-level meter complying with Type 2 requirements in ANSI S1.4.
 - 4. Test audible appliances for the private operating mode according to manufacturer's written instructions.
 - 5. Test visible appliances for the public operating mode according to manufacturer's written instructions.
 - 6. Factory-authorized service representative shall prepare the "Fire Alarm System Record of Completion" in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter in NFPA 72.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

- D. Reacceptance Testing: Perform reacceptance testing to verify the proper operation of added or replaced devices and appliances.
- E. The engineer shall then be informed by written notification that the system is complete per plans and specifications that the 100% system test was completed and is ready for the Engineer's acceptance test.
- F. Fire-alarm system will be considered defective if it does not pass tests and inspections.
- G. The Contractor shall notify the Engineer two (2) weeks in advance to schedule the Engineer's acceptance test of the completed system.
- H. Engineer of Record Test and Inspections:
 - 1. The Engineer, in the presence of the contractor and an authorized factory-trained representative of the manufacturer who terminated and programmed the fire alarm system, shall perform an acceptance test to verify compliance with the plans, specifications and applicable codes.
 - 2. The contractor shall assist the engineer with the test.
 - 3. The test shall be directed and controlled by the Engineer.
 - 4. The contractor shall provide two-way radios, ladders and any other materials needed to test the system (smoke candles, approved test smoke, etc.).
- I. After the Engineers acceptance test has been successfully completed and all deficiencies have been corrected, the installing contractor shall provide specific documentation for the fire alarm system. This documentation shall include but is not limited to the following:
 - 1. System Status and Program Printout.
 - 2. System Operation Matrix.
 - 3. As-Built Drawings.
 - 4. Two Bound Copies of General System Information for the Owner.
 - 5. For buildings with a smoke control or smoke purge system, an HVAC balance report in the smoke control/purge mode.
- J. After testing and correction of deficiencies have been completed the contractor shall provide site specified FACP programming on a diskette or CD as appropriate for review. This process shall be repeated until there are no further errors or corrections to the database.

3.7 FINAL DOCUMENTATION

- A. After all system corrections have been made provide to the engineer the following documentation.
 - 1. Riser diagram(s) showing all fire alarm panels, power booster panels, fire alarm devices and terminal boxes. The diagram shall represent how the devices are connected to the fire alarm system and shall be suitable for trouble shooting the fire alarm system connections.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

2. Documentation shall be provided in CAD file format compatible with the engineer's CAD files for the project.
3. The contractor shall make all corrections to the file(s) as directed by the engineer.

3.8 GUARANTEE:

- A. All wiring, etc., shall be in strict accordance with the local Electrical Code requirements and shall have the written approval of all public authorities having jurisdiction. The Contractor shall guarantee all equipment and wiring free from inherent mechanical and electrical defects for a period of one (1) year from date of installation. The final connection between the equipment and wiring system and all programming shall be made under the direct supervision of a qualified technical representative of the manufacturer. All products of combustion detectors shall have sensitivities set by Factory Trained Technician, and results submitted to the Engineer.

3.9 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain fire-alarm system.

3.10 TRAINING:

- A. Training shall cover the following topics at a minimum:
 1. Preventative maintenance service techniques and schedules, including historical data trending of alarm and trouble records.
 2. Overall system concepts, capabilities, and functions. Training shall be in-depth, so that the owner shall be able to add or delete devices to the system and to take any device out of service and return any device to service without need for Manufacturer's approval.
 3. Explanation of all control functions, including training to program and operate the system software.
 4. Methods and means of troubleshooting and replacement of all field wiring and devices.
 5. Methods and procedures for troubleshooting the main fire alarm control panel, including field peripheral devices as to programming, bussing systems, internal panel and unit wiring, circuitry and interconnections.
 6. Manuals, drawings, and technical documentation. Actual system software used for training shall be provided on 3 ½ inch floppy disk or CD and shall be left with the Owner at the completion of training for the Owner's use in the future.

Fayetteville Regional Airport – Airline Terminal Improvements – Part 3

Owner: City of Fayetteville
Fayetteville, North Carolina
Gordon Johnson Architecture

RMF#: 02230515.A0

July 31, 2023

PART 4 - NFPA FORMS

4.1 FIRE ALARM SYSTEM CERTIFICATION OF COMPLETION.

- A. Complete the latest revised NFPA 72-2016, Figure 4.5.2.1, “Record of Completion” Form.
 - 1. On the form, place the installers name and NICET number or factory authorized certification number of installing technician who is responsible for certifying the installation of the fire alarm system.
- B. Submit to Engineer for review prior to Engineer’s scheduled acceptance testing.

END OF SECTION 283111