






















































ELECTRICAL DIAGRAMS

SYMBOL	DESCRIPTIONS	
	AUTOMATIC TRANSFER DEVICE	
	GROUND CONNECTION	
	TRANSFORMER (DELTA – RESISTANCE GROUNDED WYE SHOWN)	


LIGHTING SYMBOLS

SYMBOL	DESCRIPTIONS	MH (UON)
	SINGLE POLE TOGGLE SWITCH	48" TOD
	SWITCH – SUBLETTER INDICATES FIXTURES CONTROLLED	48" TOD
	THREE-WAY TOGGLE SWITCH (SPDT)	48" TOD
	FOUR-WAY TOGGLE SWITCH (DPDT)	48" TOD
	THREE WAY DIMMER SWITCH CONTROLLING FIXTURES INDICATED WITH LOWERCASE o.	48" TOD
	MANUAL STARTER WITH OVERLOADS	48" TOD
	DIMMER SWITCH	48" TOD
	WALL MOUNTED OCCUPANCY SENSOR	48" TOD
	DUAL TECHNOLOGY OCCUPANCY SENSOR--"U" INDICATES ULTRASONIC TECHNOLOGY	
	DUAL TECHNOLOGY OCCUPANCY SENSOR--"U" INDICATES ULTRASONIC TECHNOLOGY	
	PHOTOCELL OR PUSHPLATE SWITCH	
	EMERGENCY TRANSFER RELAY CONTROL DEVICE	
	FLUORESCENT LIGHTING FIXTURE – RECESSED, SURFACE, OR PENDANT MOUNTED, TYPE AS SPECIFIED	
	FLUORESCENT INDUSTRIAL LIGHTING FIXTURE	
	FLUORESCENT LIGHTING FIXTURE – WALL MOUNTED, TYPE AS SPECIFIED	
	LIGHTING FIXTURE – RECESSED, SURFACE, OR PENDANT MOUNTED	
	LIGHTING FIXTURE – WALL MOUNTED TYPE AS SPECIFIED	
	WALL WASHER	
	ADJUSTABLE WALL WASHER	
	LIGHTING FIXTURE ON EMERGENCY CIRCUIT	
	NIGHT LIGHT-- LIGHTING FIXTURE WIRED TO SOURCE AHEAD OF ANY SWITCHING	
	EMERGENCY BATTERY PACK WITH NUMBER OF HEADS INDICATED	
	EXIT SIGN – CEILING OR PENDANT MOUNTED (SHADED PORTION INDICATES FACE)	
	EXIT SIGN – WALL MOUNTED – END, BACK	
	EXIT SIGN WITH DIRECTIONAL ARROWS	










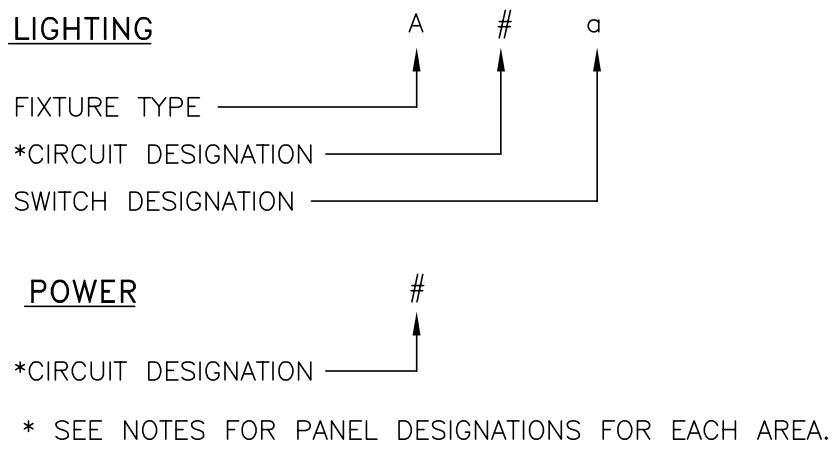





















POWER SYMBOLS

SYMBOL	DESCRIPTIONS	MH (UON)
	CHARGING STATION	TOD 48" AFF
	COMBINATION SWITCH AND DUPLEX RECEPTACLE	TOD 48" AFF
	SIMPLEX RECEPTACLE	CTR 18" AFF
	DUPLEX RECEPTACLE. 'E' (IF SHOWN) INDICATES CONNECTED TO EMERGENCY CIRCUIT.	CTR 18" AFF
	DUPLEX RECEPTACLE, FLOOR MOUNTED	
	DOUBLE DUPLEX RECEPTACLE, FLOOR MOUNTED 'D' (IF SHOWN) INDICATES POWER AND DATA IN BOX.	
	DUPLEX RECEPTACLE, SPLIT WIRED – TOP HALF SWITCHED	CTR 18" AFF
	DUPLEX RECEPTACLE, CEILING MOUNTED	
	PEDESTAL TYPE DUPLEX RECEPTACLE	
	SPECIAL RECEPTACLE: 30A, 1P, 3W, 125V, NEMA L5-30R	CTR 18" AFF
	SPECIAL RECEPTACLE: 50A, 2P, 3W, 250V, NEMA L6-50R	CTR 18" AFF
	SPECIAL RECEPTACLE: 20A, 3P, 4W, 208/120V NEMA 14-20	CTR 18" AFF
	SPECIAL RECEPTACLE: 30A, 3P, 4W, 208V NEMA 15-30	CTR 18" AFF
	SPECIAL RECEPTACLE: FLOOR-BOX MOUNTED, 30A, 1P, 3W, 125V, NEMA L5-30R	
	SPECIAL RECEPTACLE: FLOOR-BOX MOUNTED, 50A, 2P, 3W, 250V, NEMA L6-50R	
	PEDESTAL TYPE SPECIAL RECEPTACLE, NEMA 6-20R	
	DOUBLE DUPLEX RECEPTACLE	CTR 18" AFF
	RECEPTACLE MOUNTED 6" ABOVE BACK SPLASH OR COUNTER	
	GROUND FAULT INTERRUPTER TYPE RECEPTACLE	
	RECEPTACLE OUTLET MOUNTED HIGH	CTR 84" AFF
	ISOLATED GROUND RECEPTACLE	BOD 18" AFF
	DUPLEX RECEPTACLE AT 54" AFF	CTR 54" AFF
	DUPLEX RECEPTACLE FOR PAY PHONE	CTR 54" AFF
	DUPLEX RECEPTACLE FOR CART RECHARGE	CTR 36" AFF
	SIMPLEX RECEPTACLE FOR CART RECHARGE	CTR 36" AFF
	TELEVISION RECEPTACLE	CTR 72" AFF
	TELEVISION RECEPTACLE	CTR 18" BFC
	CLOCK HANGER OUTLET	CTR 84" AFF
	PROGRAM CLOCK OUTLET – SINGLE FACE, DOUBLE FACE	CTR 84" AFF
	EMERGENCY POWER OFF SWITCH	TOD 48" AFF
	JUNCTION BOX	
	EQUIPMENT CONNECTION – SEE EQUIPMENT SCHED. ON SHEET E7.01	
	HEATER CONNECTION – NUMBER INDICATES KILOWATTS (3KW)	
	HEATER FAN – CEILING MOUNTED	
	ENCLOSED CIRCUIT BREAKER	
	NON-FUSED DISCONNECT SWITCH, 30A, 3P (UNLESS OTHERWISE NOTED)	
	FUSED DISCONNECT SWITCH – FUSE SIZE AS INDICATED (40A)	
	PANELBOARD	
	DISTRIBUTION PANELBOARD	
	TRANSFORMER	

CIRCUIT DESIGNATIONS













SPECIAL SYSTEMS SYMBOLS

SYMBOL	DESCRIPTIONS	MH (UON)
	FIRE ALARM FLASHING STROBE LIGHT – WALL MOUNTED NUMBER INDICATES CANDELA RATING. IF NO NUMBER IS SHOWN RATING SHALL BE 15cd	GENERAL NOTE 5
	WALL MOUNTED COMBINATION FIRE ALARM SPEAKER AND FLASHING STROBE. IF NO NUMBER IS SHOWN RATING SHALL BE 15cd	GENERAL NOTE 5
	CEILING MOUNTED COMBINATION SPEAKER AND FLASHING STROBE. NUMBER INDICATES CANDELA RATING. IF NO NUMBER IS SHOWN RATING SHALL BE 15cd	
	CEILING MOUNTED FIRE ALARM SPEAKER	
	MAGNETIC DOOR HOLDER	
	REMOTE FIRE ALARM ANNUNCIATOR PANEL	
	FIRE ALARM PANEL	
	RESCUE ASSISTANCE MASTER CONTROL PANEL	TOD 48" AFF
	FIRE ALARM TRANSPONDER	
	RESCUE ASSISTANCE REMOTE STATION	TOD 48" AFF
	DIGITAL ALARM COMMUNICATOR TRANSMITTER	
	DOOR SOLENOID, ELECTRIC STRIKE – LOCKING DEVICE CONNECTION POINT	
	FIRE ALARM PULL STATION	TOD 48" AFF
	HEAT DETECTOR	
	SMOKE DETECTOR (PHOTOELECTRIC), AB INDICATES AUDIBLE BASE, E INDICATES ELEVATOR CONTROLS	
	SMOKE DETECTOR (IONIZATION)	
	DUCT SMOKE DETECTOR	
	FIRE ALARM SYSTEM ADDRESSABLE RELAY – CONTROL	
	FIRE ALARM SYSTEM ADDRESSABLE RELAY – MONITOR	
	FIRE ALARM SYSTEM DUCT SMOKE DETECTOR REMOTE ALARM/STATUS INDICATOR LIGHTS	
	FLOW SWITCH CONNECTION	
	PRESSURE SWITCH CONNECTION	
	TAMPER SWITCH CONNECTION	
	CARD READER	TOD 48" AFF
	TELEPHONE OUTLET	CTR 18" AFF
	TELEPHONE OUTLET, WALL MOUNTED	CTR 54" AFF
	DATA/TELEPHONE OUTLET, UNSHADED AREA = DATA, SHADED AREA = VOICE, NUMERALS INDICATE QUANTITY OF WIRED JACKS	CTR 18" AFF
	TELEPHONE OUTLET – EMERGENCY	TOD 54" AFF
	DATA OUTLET – PROVIDE BACKBOX WITH 2 DATA DROPS IN 1" CONDUIT UP TO ACCESSIBLE CEILING.	
	TELEVISION ANTENNA OUTLET	CTR 72" AFF
	ROUGH IN JUNCTION BOX FOR CCTV CAMERA	

ELECTRICAL DRAWING

PRESENTATION

SYMBOL	DESCRIPTIONS
	REVISION NUMBER 2
	DRAWING NOTE NUMBER 2
	EQUIPMENT TAG NUMBER – REFER TO EQUIPMENT SCHEDULE
	SECTION/ELEVATION IDENTIFICATION
	PART PLAN AND DETAIL IDENTIFICATION
	EXISTING LINE TYPE
	NEW ELECTRICAL WORK LINE TYPE
	FUTURE ELECTRICAL WORK LINE TYPE
	DEMOLITION LINE TYPE ON DEMOLITION DRAWINGS
	EQUIPMENT LOCATED OUTSIDE OF DRAWING AREA IN GENERAL DIRECTION OF ARROW HEAD

EQUIPMENT DESIGNATIONS


DESIGNATION	DESCRIPTIONS
SWGR	SWITCHGEAR
SWBD	SWITCHBOARD
PNL	PANELBOARD
MCC	MOTOR CONTROL CENTER
XFMR	TRANSFORMER

ELECTRICAL ABBREVIATIONS

A, AMP	– AMPERE	KVAR	– KILOVOLT AMPERES REACTIVE
AC	– ALTERNATING CURRENT	KW	– KILOWATTS
A/C	– AIR CONDITIONING	KWH	– KILOWATT HOUR
AFF	– ABOVE FINISHED FLOOR	LA	– LIGHTNING ARRESTOR
AHJ	– AUTHORITY HAVING JURISDICTION	LC	– LIGHTING CONTACTOR
AFG	– ABOVE FINAL GRADE	LTG	– LIGHTING
AHU	– AIR HANDLING UNIT	LTNG	– LIGHTNING
AIG	– AMPS INTERRUPTING CAPACITY	LP	– LIGHTING PANEL
ALT	– ALTERNATE	LRA	– LOCKED ROTOR AMPERES
ANN	– ANNUNCIATOR	MATV	– MASTER ANTENNA TELEVISION
APPROX	– APPROXIMATELY	MCB	– MAIN CIRCUIT BREAKER
ARCH	– ARCHITECT	MCC	– MOTOR CONTROL CENTER
ATC	– AUTOMATIC TEMPERATURE CONTROL	MEH	– METAL HALIDE
ATS	– AUTOMATIC TRANSFER SWITCH	MH	– MANHOLE, MOUNTING HEIGHT
AWG	– AMERICAN WIRE GAUGE	MLO	– MAIN LUGS ONLY
BAS	– BUILDING AUTOMATION SYSTEM	MSP	– MOTOR STARTER PANEL
BFC	– BELOW FINISHED CEILING	MTD	– MOUNTED
BFG	– BELOW FINISHED GRADE	MV	– MERCURY VAPOR
BLDG	– BUILDING	NC	– NORMALLY CLOSED
BOD	– BOTTOM OF DEVICE	NEC	– NATIONAL ELECTRICAL CODE
C, CND	– CONDUIT	NFSS	– NON-FUSED SAFETY SWITCH
CATV	– CABLE TELEVISION	NO	– NUMBER, NORMALLY OPEN
CB	– CIRCUIT BREAKER	OC	– ON CENTER
CCTV	– CLOSED CIRCUIT TELEVISION	OFCI	– OWNER FURNISHED, CONTRACTOR INSTALLED
CKT	– CIRCUIT	OFOI	– OWNER FURNISHED, OWNER INSTALLED
CL	– CURRENT LIMITING	OH	– OVERHEAD
CLG	– CEILING	Ø, PH	– PHASE
CONN	– CONNECT	P	– POLE
CPT	– CONTROL POWER TRANSFORMER	PB	– PUSHBUTTON
CT	– CURRENT TRANSFORMER	PF	– POWER FACTOR
CTR	– CENTER	PFFC	– POWER FACTOR CORRECTION CAPACITOR
CU,CO	– COPPER	PL	– PILOT LIGHT
CX	– CONNECT TO EXISTING	PLC	– PROGRAMMABLE LIGHTING CONTROL
DC	– DIRECT CURRENT	PNL	– PANEL
DISC	– DISCONNECT	PP	– POWER PANEL
DN	– DOWN	PR	– PAIR
DP	– DISTRIBUTION PANEL	PT	– POTENTIAL TRANSFORMER
DPST	– DOUBLE POLE SINGLE THROW	PVC	– POLYVINYL CHLORIDE
DPDT	– DOUBLE POLE DOUBLE THROW	Pp	– PUMP
DT	– DOUBLE THROW	QTY	– QUANTITY
DWG	– DRAWING	RCS	– REMOTE CONTROL SWITCH
E, EMERG	– EMERGENCY	REC, RECP	– RECEPTACLE
EA	– EACH	REQ'D	– REQUIRED
EC	– ELECTRICAL CONTRACTOR	RFI	– RADIO FREQUENCY INTERFERENCE
EF	– EXHAUST FAN	RGS	– RIGID GALVANIZED STEEL
EH	– ELECTRIC HEATER	RLA	– RUNNING LOAD AMPERES
ELEC	– ELECTRIC	RM	– ROOM
ELEV	– ELEVATION	RVAT	– REDUCED VOLTAGE AUTO TRANSFORMER
ETR	– EXISTING TO REMAIN	RX	– REMOVE EXISTING
EX	– EXISTING	SC	– SURGE CAPACITOR
EXP	– EXPOSED	SEC	– SECONDARY
EWC	– ELECTRIC WATER COOLER	SN, S/N	– SOLID NEUTRAL
FR	– FRAME	SP	– SURGE PROTECTION
FA	– FIRE ALARM	SPDT	– SINGLE POLE DOUBLE THROW
FABP	– FIRE ALARM BOOSTER PANEL	SS	– SAFETY SWITCH
FAAP	– FIRE ALARM ANNUNCIATOR PANEL	SST	– SOLID STATE
FACP	– FIRE ALARM CONTROL PANEL	ST	– SINGLE THROW
FBO	– FURNISHED BY OTHERS	SW	– SWITCH
FC	– FAN COIL	SWBD	– SWITCHBOARD
FDR	– FEEDER	T	– TAMPER RESISTANT
FLA	– FULL LOAD AMPERES	TBR	– TO BE REMOVED
FLR	– FLOOR	TC	– TIME CLOCK
FU	– FUSED AND FUSIBLE	TEL, TELE	– TELEPHONE
FUSS	– FUSED SAFETY SWITCH	TOD	– TOP OF DEVICE
FVR	– FULL VOLTAGE REVERSING	TRANS/XFMR	– TRANSFORMER
FVNR	– FULL VOLTAGE NON-REVERSING	TH	– TUNGSTEN HALOGEN
GEN	– GENERATOR, GENERAL	TTB	– TELEPHONE TERMINAL BOARD
GFI	– GROUND FAULT INTERRUPTER	TW	– TWISTED
GFR	– GROUND FAULT RELAY	TYP	– TYPICAL
GRD	– GROUND	UG	– UNDERGROUND
GRS	– GALVANIZED RIGID STEEL	UH	– UNIT HEATER
HID	– HIGH INTENSITY DISCHARGE	UON	– UNLESS OTHERWISE NOTED
HOA	– HAND-OFF-AUTOMATIC	V	– VOLTS
HP	– HORSEPOWER	VFC	– VARIABLE FREQUENCY CONTROLLER
HPS	– HIGH PRESSURE SODIUM	W	– WATTS, WIRE
HTR	– HEATER	W/	– WITH
HV	– HIGH VOLTAGE	WP	– WEATHER-PROOF
HZ	– HERTZ	XP	– EXPLOSION PROOF
IG	– ISOLATED GROUND	2S1W	– 2 SPEED SINGLE WINDING
JB	– JUNCTION BOX	2S2W	– 2 SPEED DOUBLE WINDING
KCMIL	– THOUSAND CIRCULAR MILS		
KV	– KILOVOLTS		
KVA	– KILOVOLT AMPERES		

GENERAL NOTES:

1. THIS IS A STANDARD SYMBOL LIST, SOME SYMBOLS MAY NOT APPEAR ON THE ACCOMPANYING DRAWINGS.
2. REFER TO SPECIFICATIONS FOR DETAILED REQUIREMENTS.
3. PLAN & SECTION SYMBOLS MAY ALSO BE USED ON RISER DIAGRAMS.
4. ON SINGLE LINE DIAGRAMS FOR 3 PHASE SYSTEMS, DEVICE QUANTITY = 3 UNLESS OTHERWISE NOTED.
5. DEVICE SHALL BE MOUNTED A MINIMUM OF 80" AFF TO BOTTOM OF DEVICE LENS AND BELOW THE FINISHED CEILING OF NOT LESS THAN 6".
6. UNLESS OTHERWISE NOTED ALL INTERIOR CONDUITS AND BOXES SHALL BE CONCEALED.

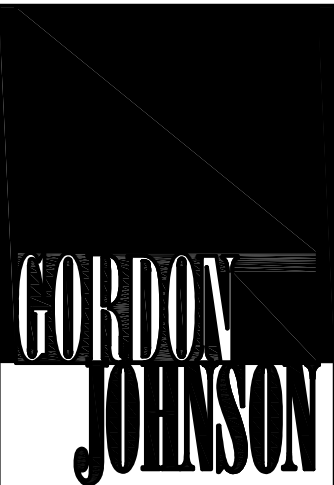

**GORDON
JOHNSON**
Architecture

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 225-2188
F M O I
gordon@gordonjohnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA

Reproduction or publication of this document is not permitted without the expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the requirements of the American with Disabilities Act (ADA). However, Architects and Engineers are not licensed to prepare laws or give advice concerning laws. The client should have this document reviewed by his attorney to determine if it complies with ADA and other applicable laws.

SEAL

040724

07/31/2023

CHRISTINA D. CALDWELL

PROFESSIONAL

ENGINEER

STATE OF NORTH CAROLINA

REGISTERED

Fayetteville Regional Airport Airline Terminal Improvements – Part 3

400 Airport Road
Fayetteville, North Carolina 28306

DRAWN BY: **JMM**







REVIEWED BY: **CDC**

DATE: **7/31/2023**

PROJECT NO.: **02230515.A0**


NOTES: _____

REVISIONS

SHEET NUMBER

E0.01

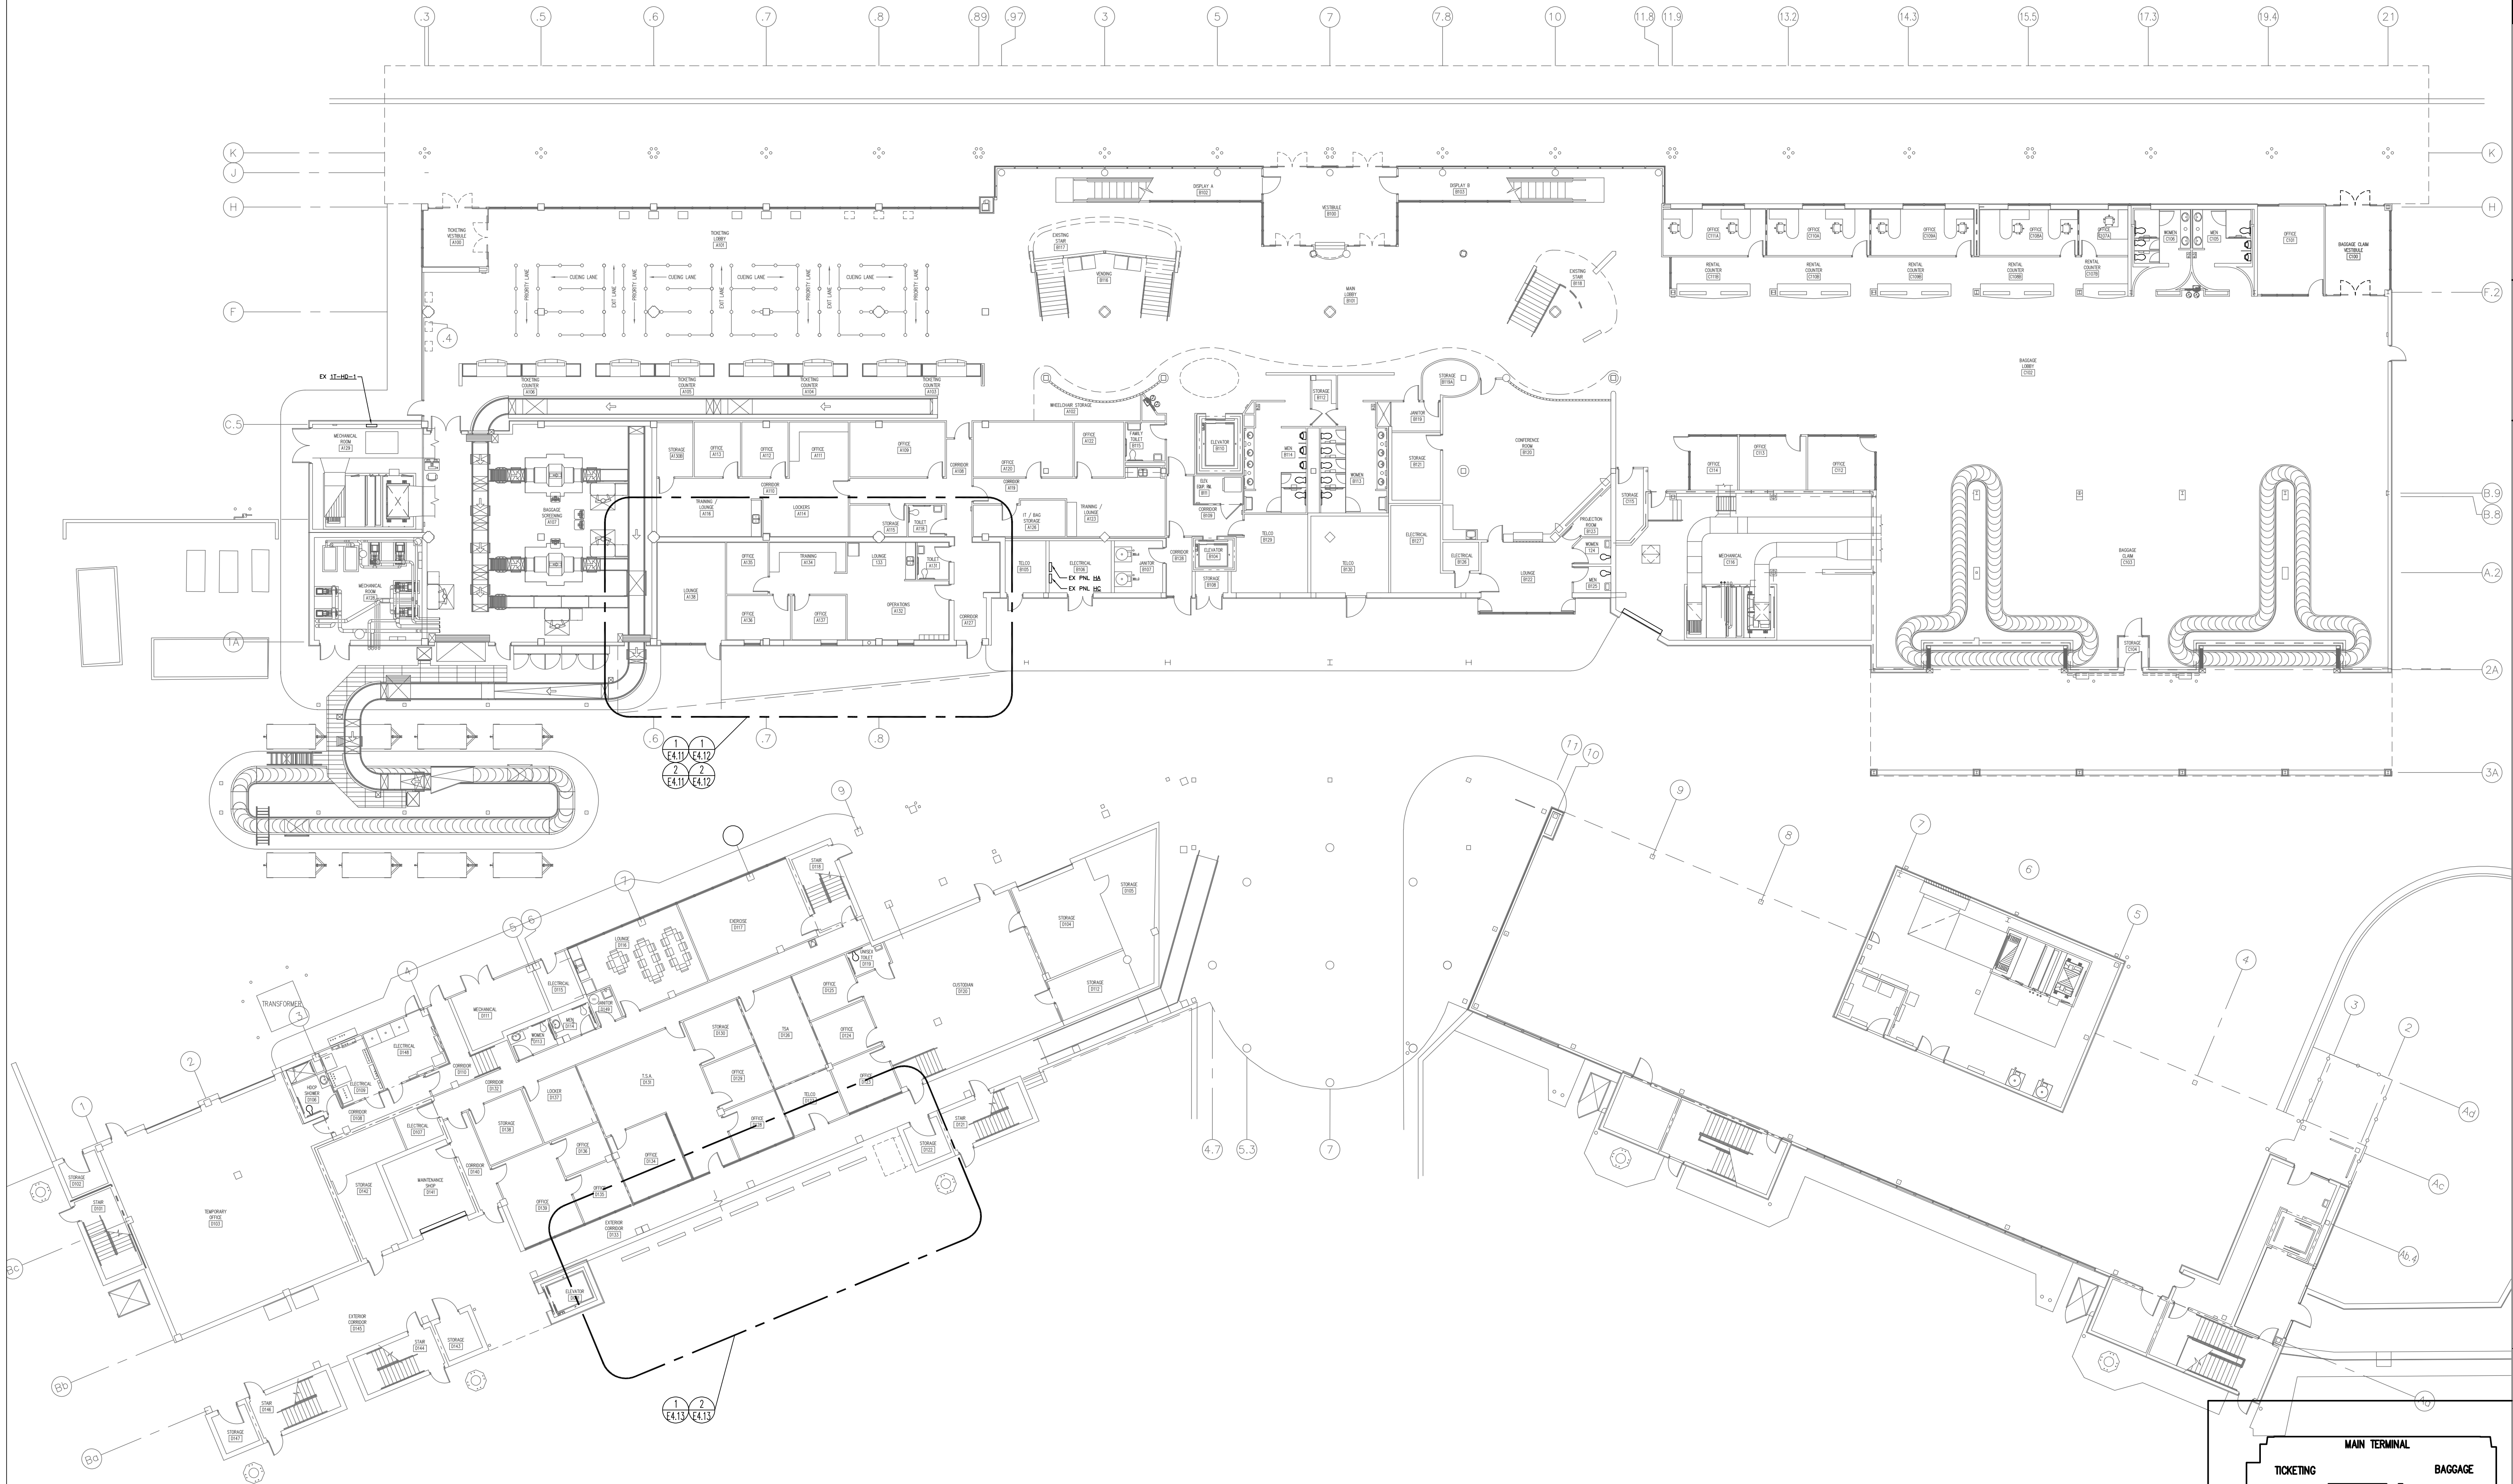

**GORDON
JOHNSON**
Architecture

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 225-2188
E-mail: gordon@johnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA
Reproduction or publication of this
document is not permitted without the
expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the
requirements of the American with Disabilities Act
(ADA). However, Architects and Engineers are not
licensed to interpret laws or give advice concerning
laws. The Owner should have this document
reviewed by its attorney to determine if it complies
with the ADA, and if not, to make any necessary
changes.




Fayetteville Regional Airport Airline Terminal Improvements - Part 3
FIRST FLOOR OVERALL PLAN
400 Airport Road
Fayetteville, North Carolina 28306

DRAWN BY: JMW
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES:



REVISIONS	

SHEET NUMBER

E1.10

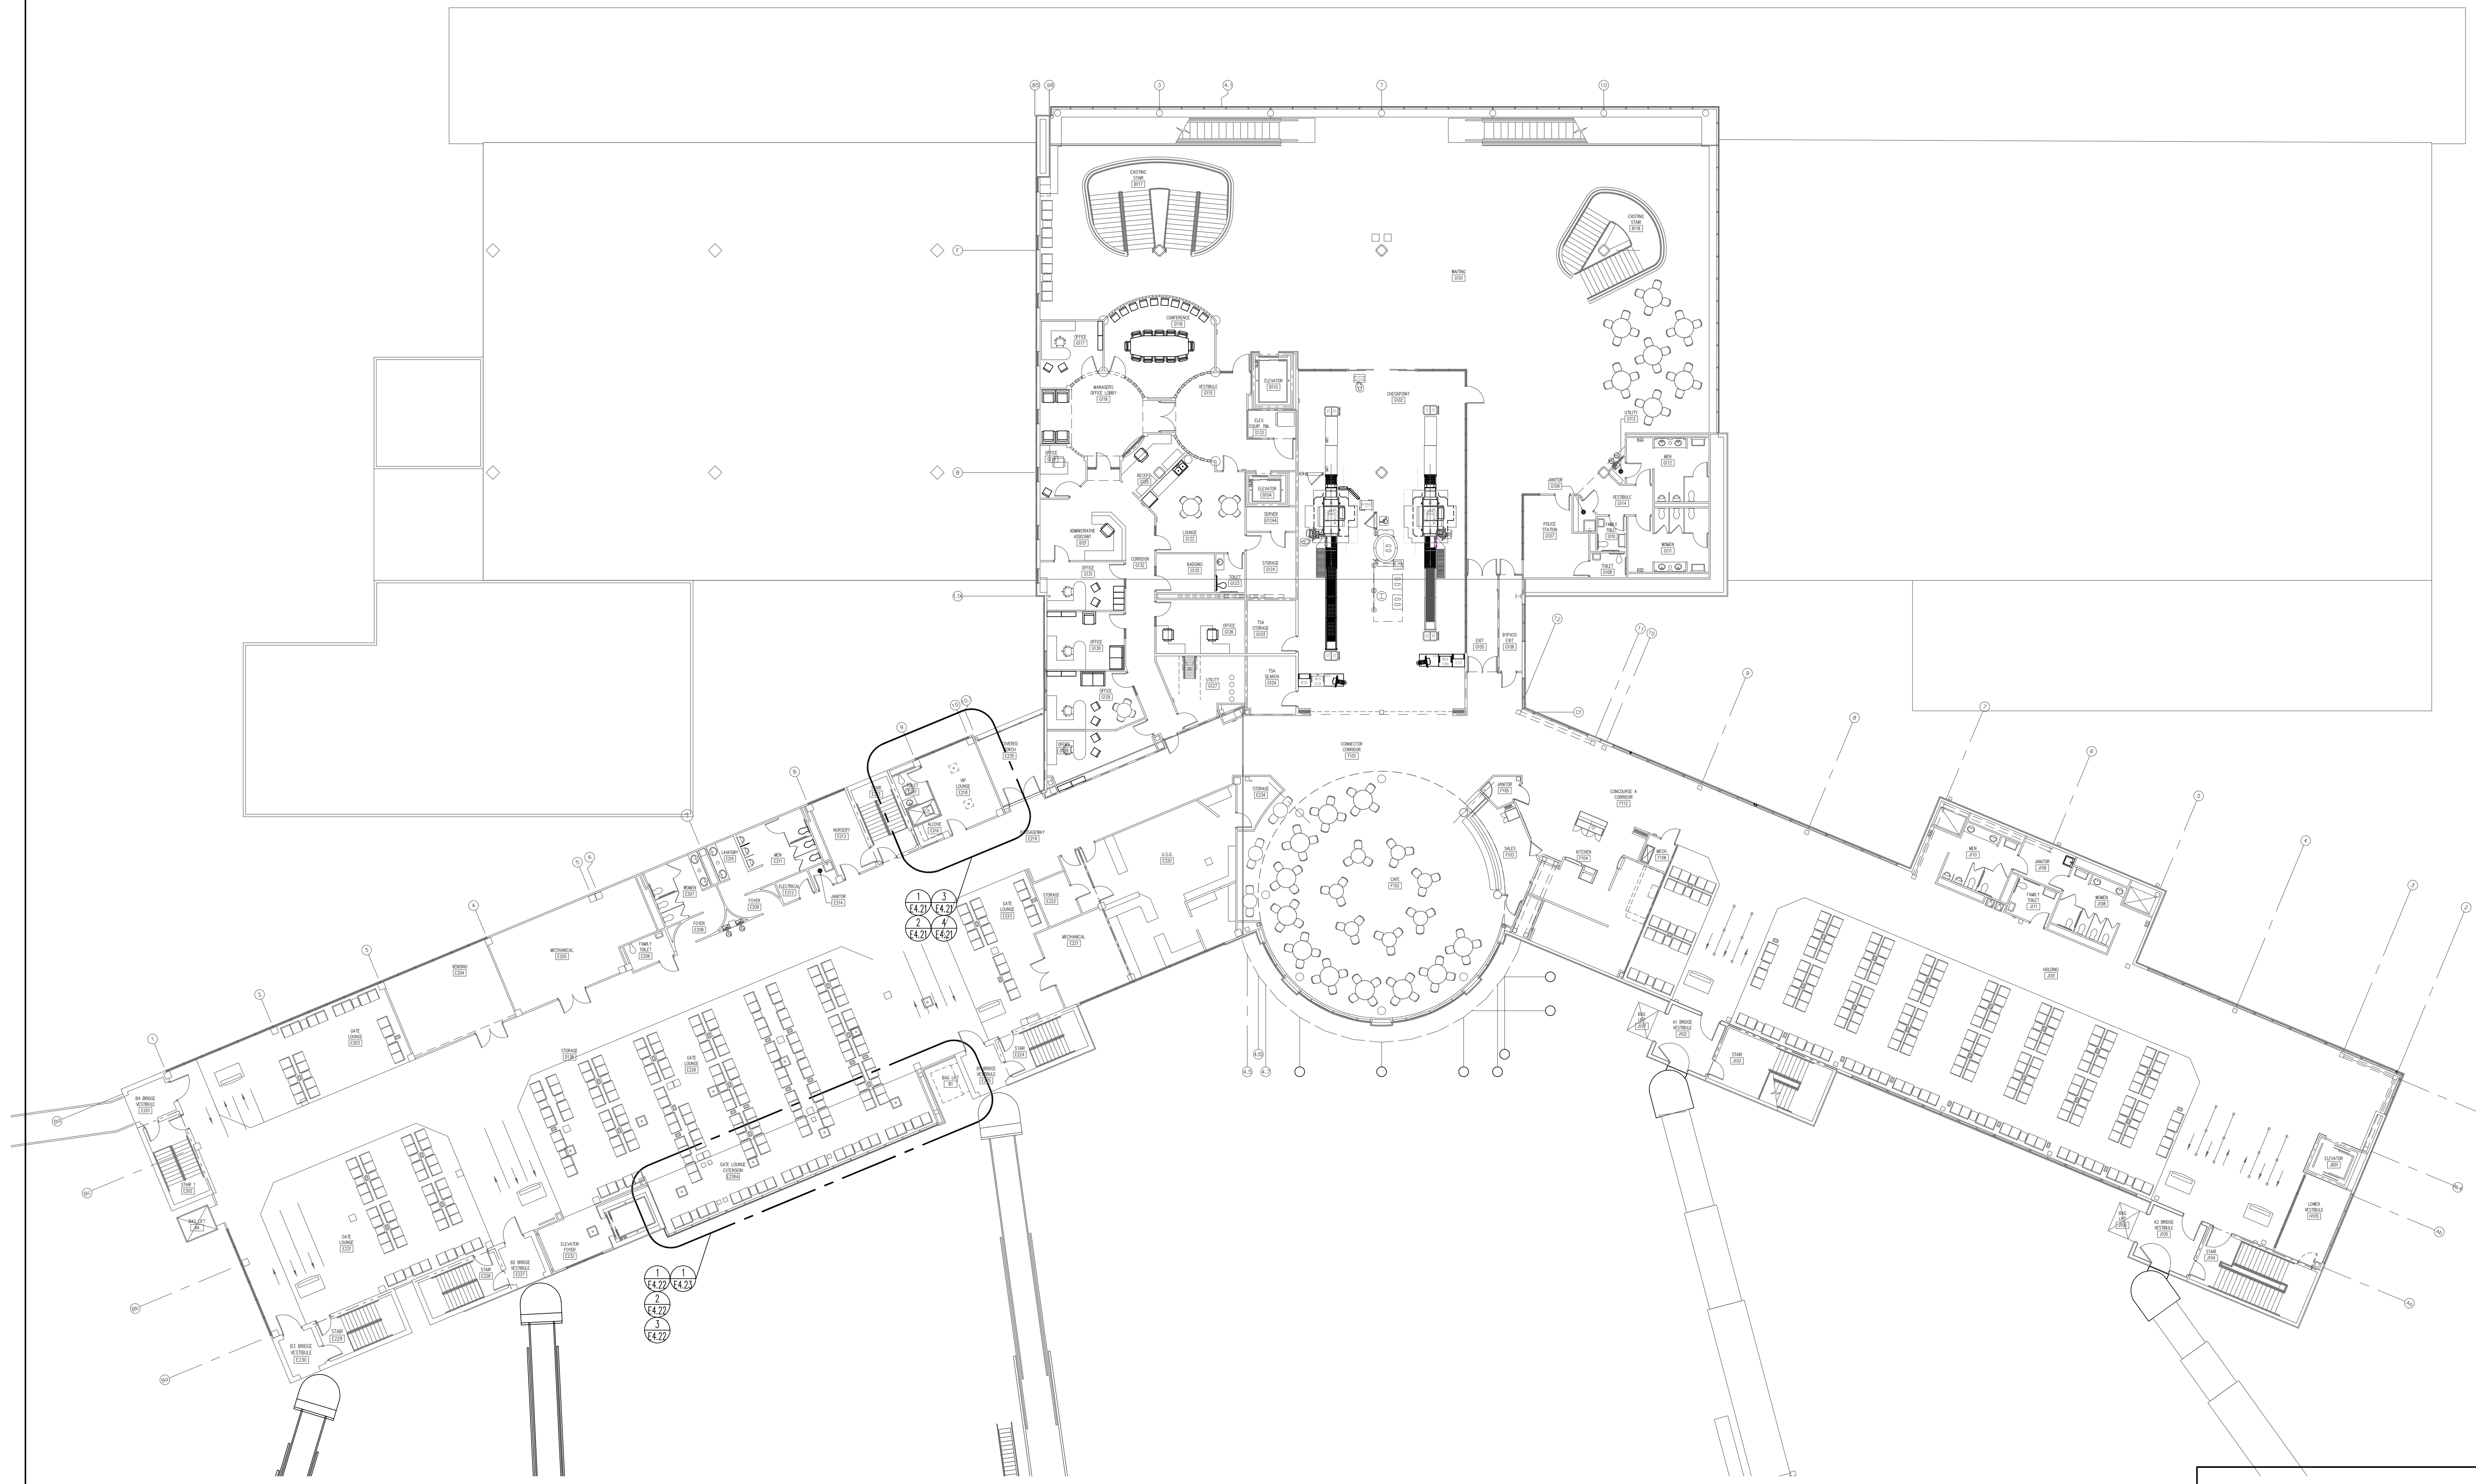

FIRE RATED WALL LEGEND
- - - - - 1 HOUR FIRE PARTITION
- - - - - 1 HOUR FIRE BARRIER

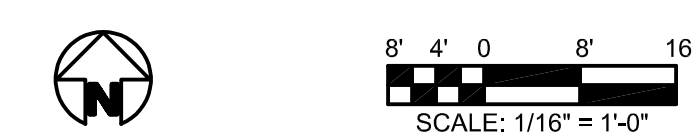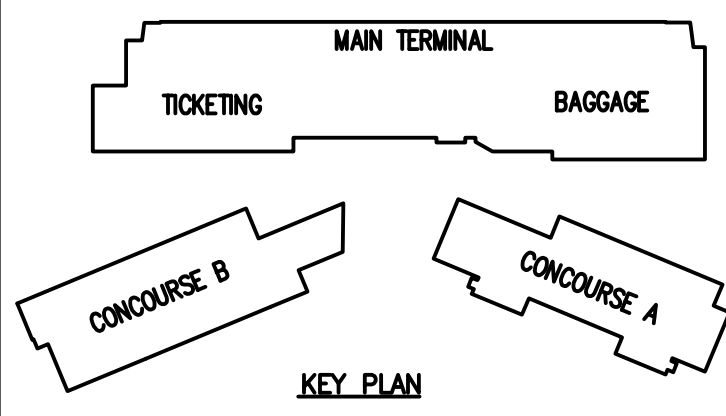

DRAWN BY: JMM
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES:

REVISIONS	
1	
2	
3	


SHEET NUMBER
E1.20

GORDON JOHNSON
Architecture
654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 225-2188
E - M O
gordon@gordonjohnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA
Reproduction or publication of this document is not permitted without the expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the requirements of the American with Disabilities Act (ADA). However, Architects and Engineers are not licensed to interpret laws or give advice concerning laws. The Owner should have this document reviewed by its attorney to determine if it complies with ADA and other laws.

Professional Engineer Seal
NORTH CAROLINA
PROFESSIONAL ENGINEER
SEAL
040724
07/31/2023
CHRISTINA D. CALDWELL

Fayetteville Regional Airport Airline Terminal Improvements – Part 3
SECOND FLOOR OVERALL PLAN
400 Airport Road
Fayetteville, North Carolina 28306

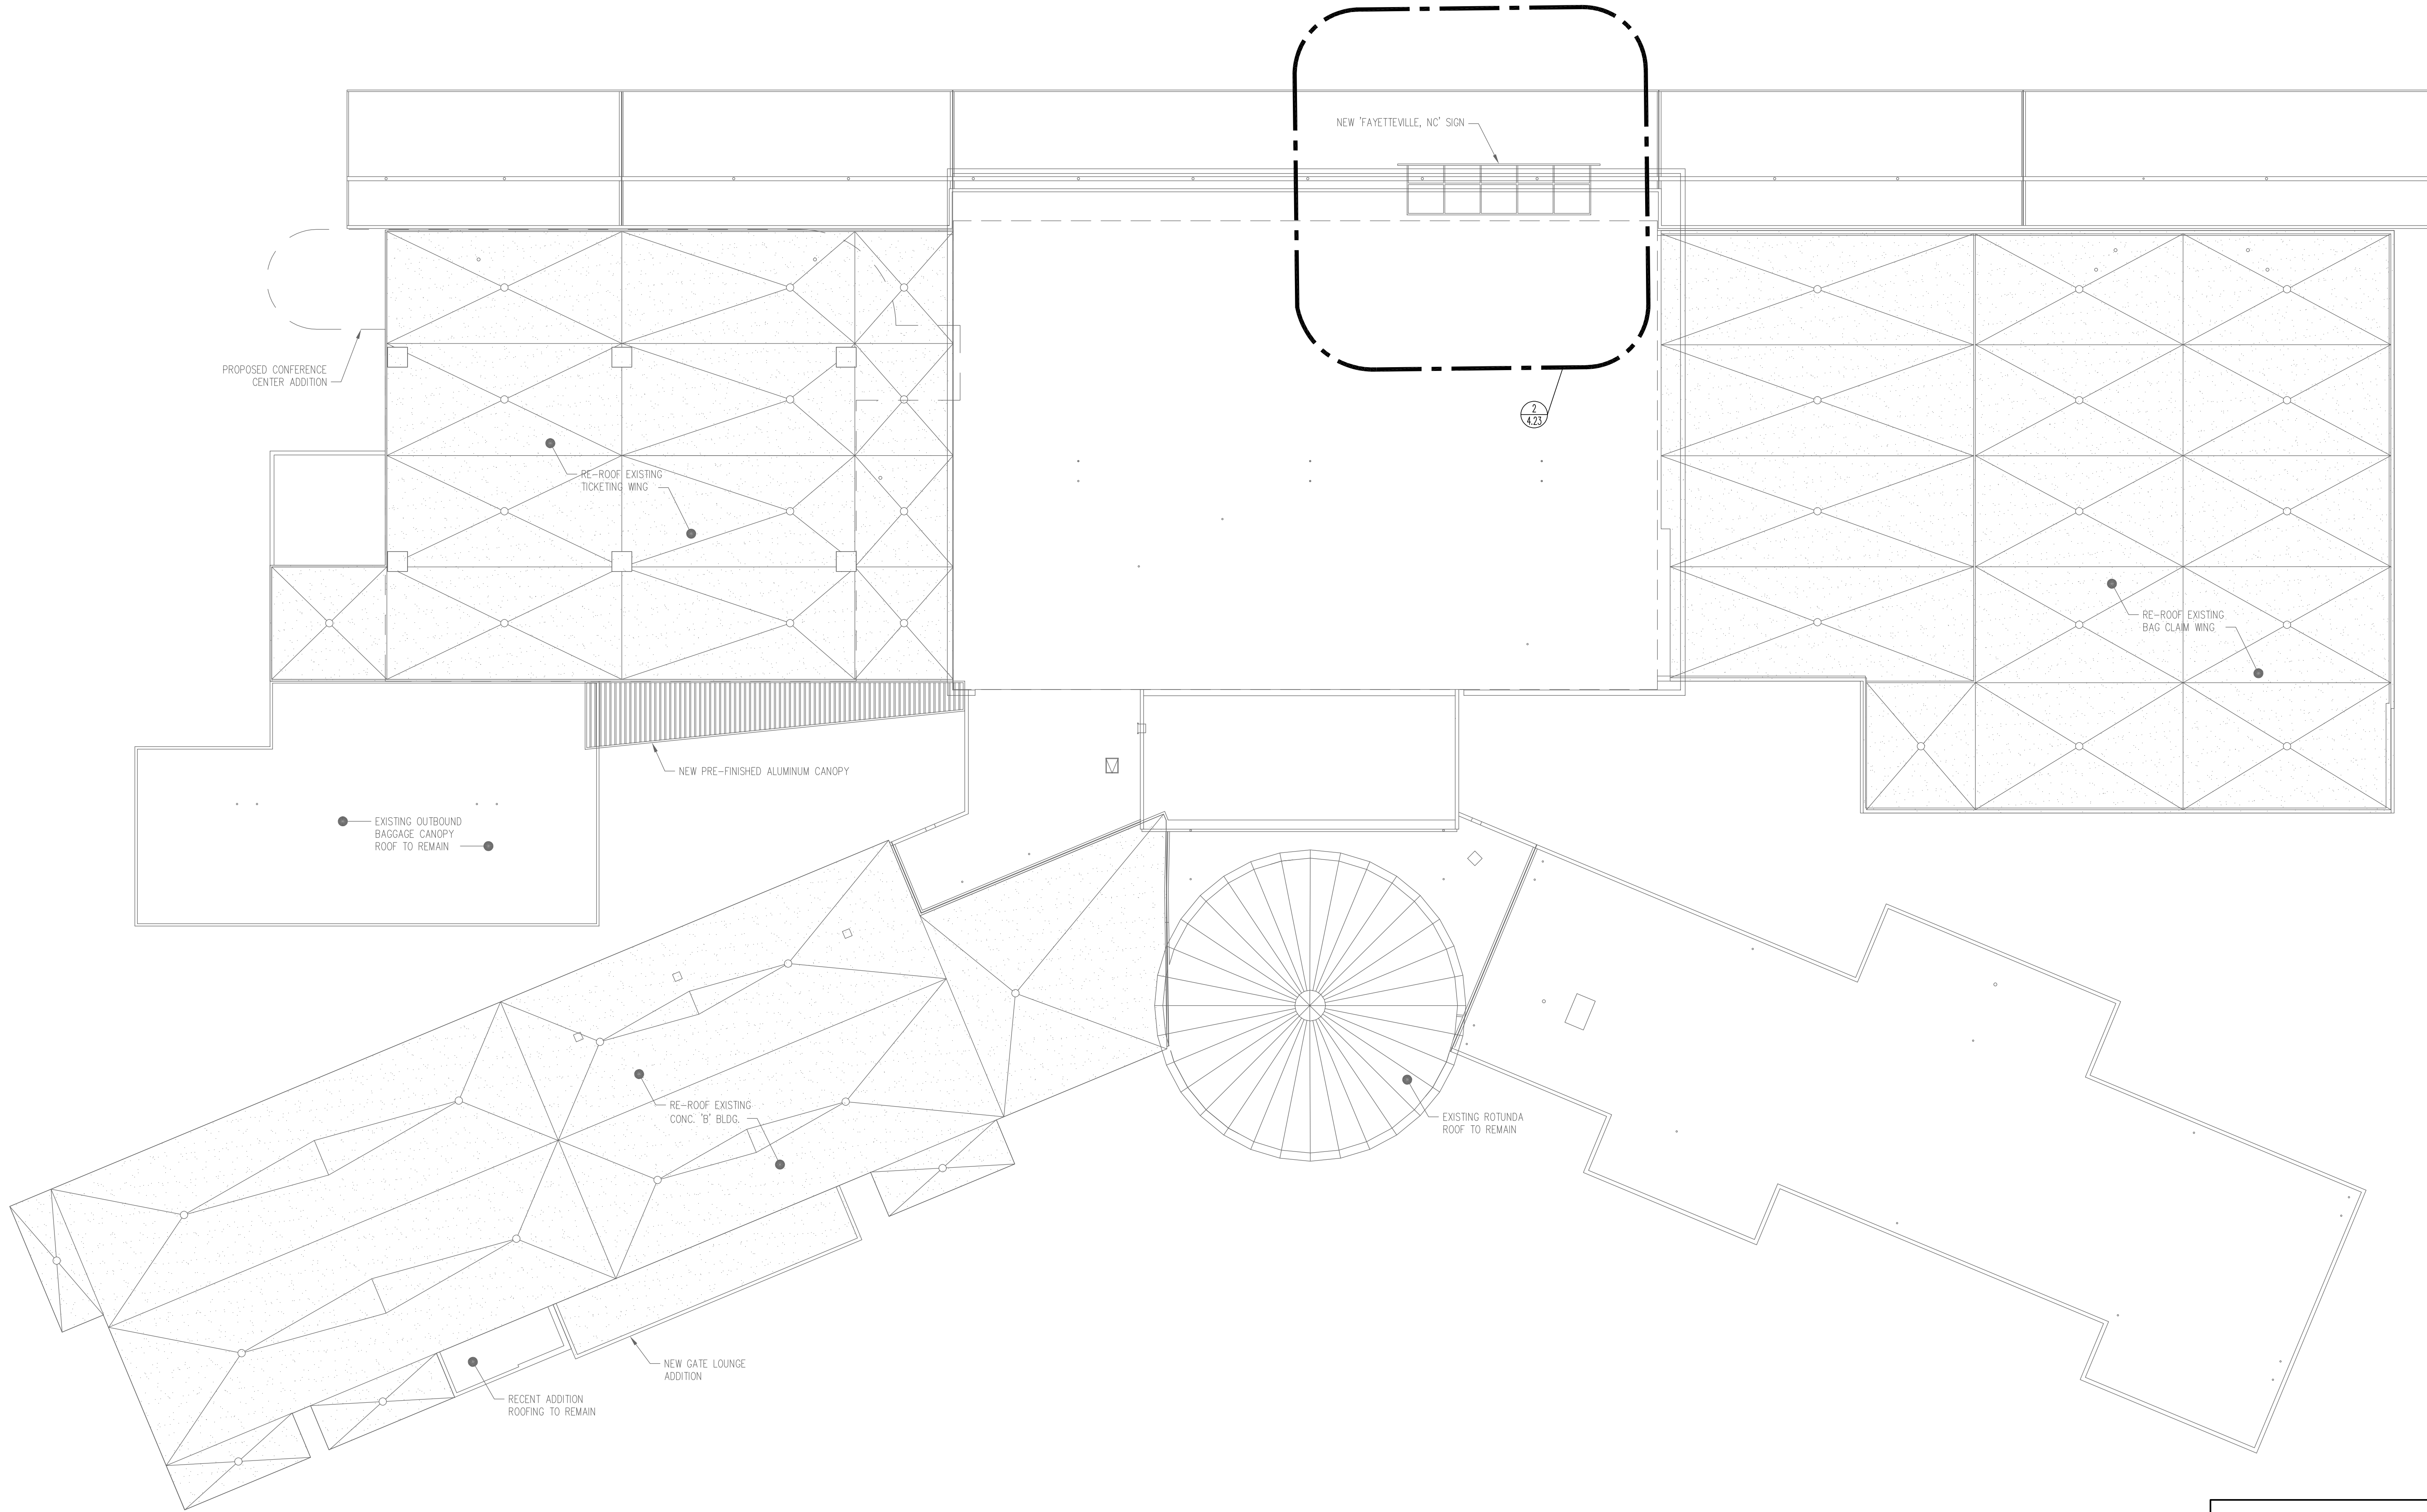

**GORDON
JOHNSON**

Architecture

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 225-2188
E-Mail: gordon@gordonjohnsonarchitecture.com

© Copyright 2023

Gordon E. Johnson, AIA

Reproduction or publication of this document is not permitted without the expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the requirements of the American with Disabilities Act (ADA). However, Architects and Engineers are not licensed to interpret laws or give advice concerning laws. The Owner should have this document reviewed by its attorney to determine if it complies with the ADA and other applicable laws.



Fayetteville Regional Airport Airline Terminal Improvements – Part 3

OVERALL ROOF PLAN

400 Airport Road
Fayetteville, North Carolina 28306


DRAWN BY: JMM
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES:

REVISIONS	
1	
2	
3	


SHEET NUMBER

E1.30


FIRE RATED WALL LEGEND
- - - - - 1 HOUR FIRE PARTITION
- - - - - 1 HOUR FIRE BARRIER

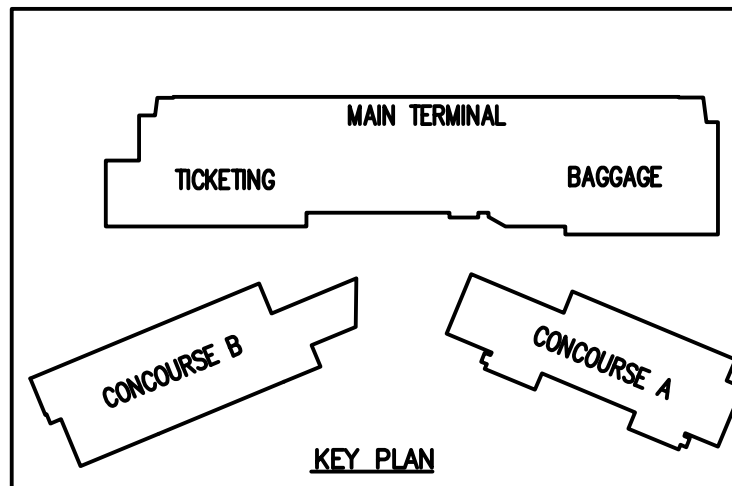

8' 4' 0' 8' 16'
SCALE: 1/16" = 1'-0"

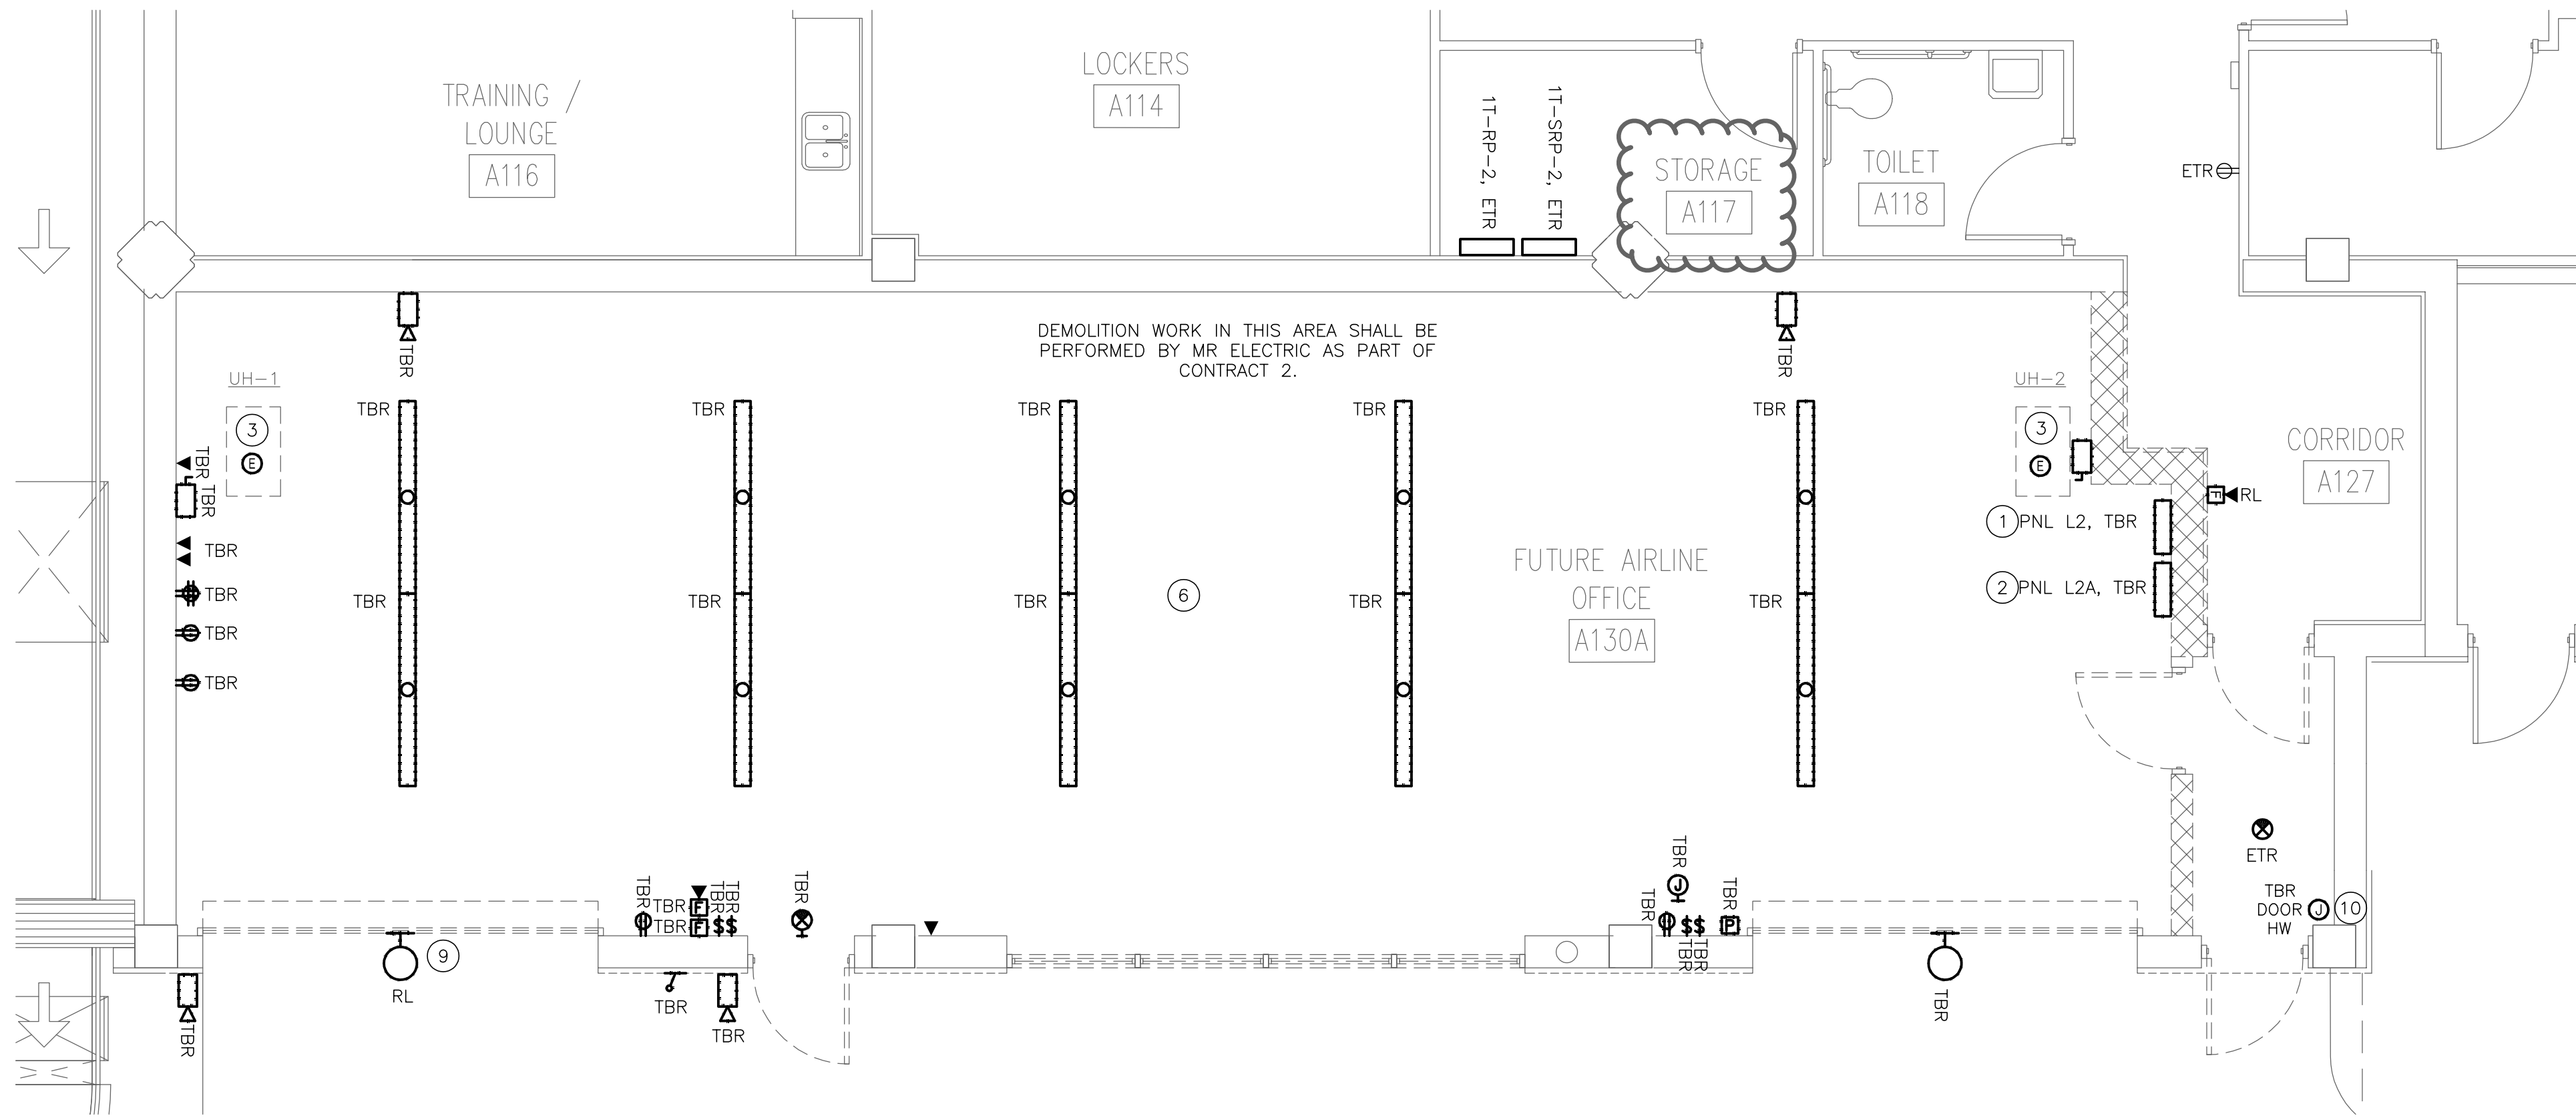

AIRLINE OFFICE DEMOLITION PLAN - ELECTRICAL
SCALE: 1/4" = 1'-0"

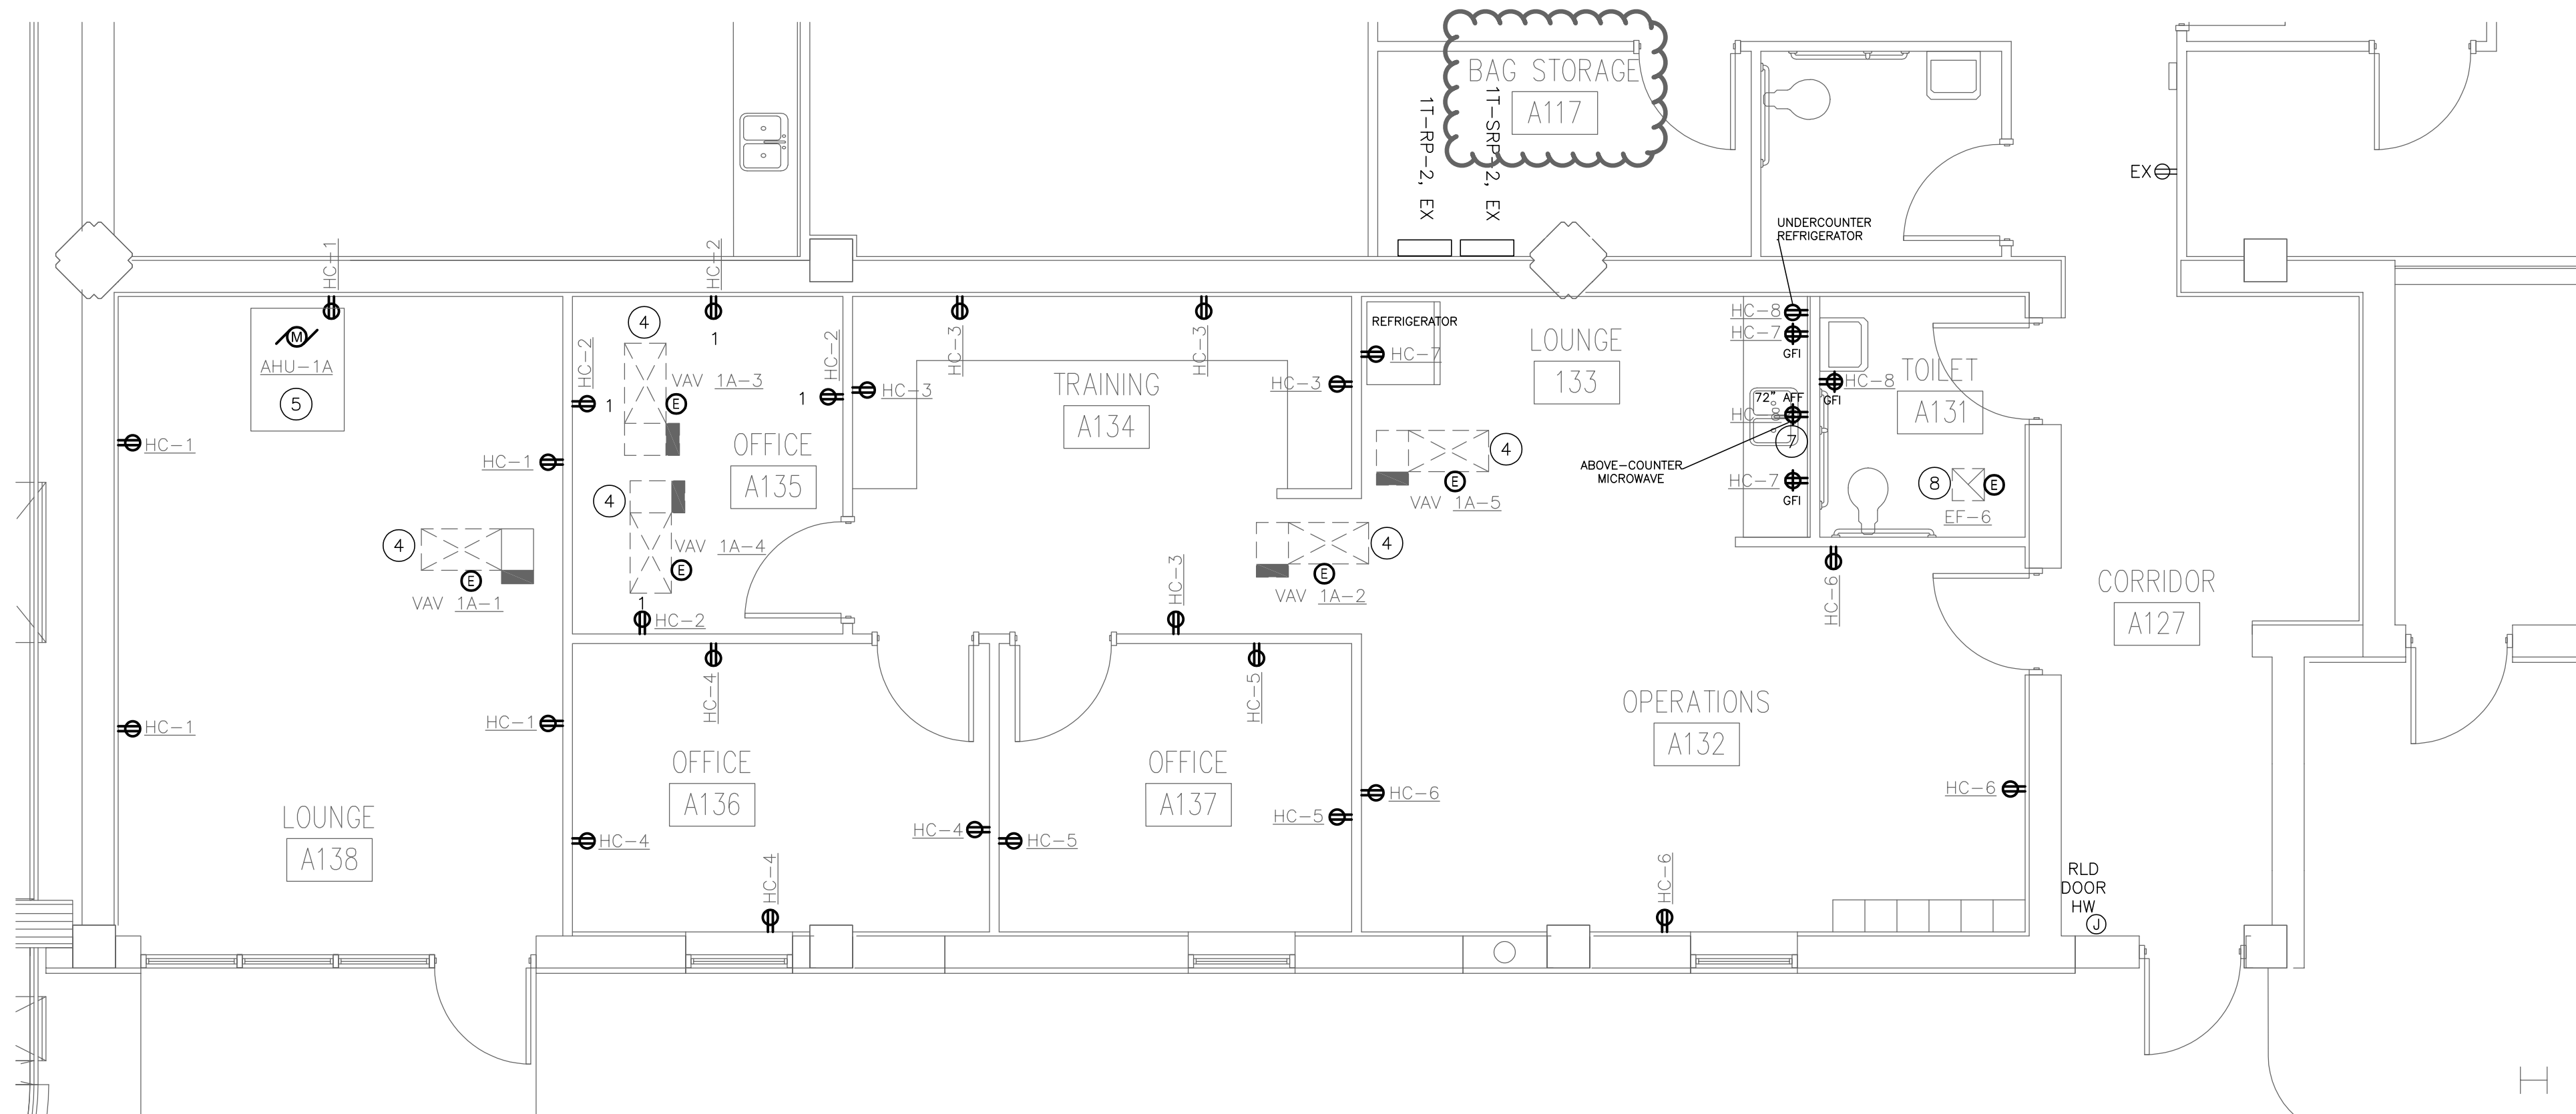

AIRLINE OFFICE NEW WORK PLAN - POWER
SCALE: 1/4" = 1'-0"

GENERAL NOTES:

- WIRE RECEPTACLES TO PANEL IT-RP-1 WITH 2#12 AND #12 GROUND IN 3/4" CONDUIT.
- RECONNECT LIGHTING IN THIS AREA TO EXISTING CIRCUIT SERVING THIS AREA.

DRAWING NOTES:

- ACTIVE CIRCUITS SHALL BE RELOCATED TO PANEL IT-SRP-2. SET JUNCTION BOX IN CEILING ABOVE PANEL RUN WIRE FROM NEW PANEL TO JUNCTION BOX ONE AT A TIME.
- ACTIVE CIRCUITS SHALL BE RELOCATED TO PANEL IT-RP-2. SET JUNCTION BOX IN CEILING ABOVE PANEL RUN WIRE FROM NEW PANEL TO JUNCTION BOX ONE AT A TIME.
- DISCONNECT POWER TO UNIT HEATER AND REMOVE. REMOVE BRANCH CIRCUIT BACK TO SOURCE.
- PROVIDE 120V CONNECTION TO VAV BOXES. COORDINATE INSTALLATION WITH MECHANICAL CONTRACTOR. INSTALL PER MANUFACTURER'S RECOMMENDATION.
- PROVIDE 480V/3-PHASE CONNECTION TO NEW AIR HANDLING UNIT. COORDINATE INSTALLATION WITH MECHANICAL CONTRACTOR. INSTALL PER MANUFACTURER'S RECOMMENDATION.
- POWER SHALL BE DISCONNECTED. EXISTING LIGHTING FIXTURES TO BE REMOVED BY DEMOLITION CONTRACTOR (MR ELECTRIC). EXISTING BRANCH CIRCUIT SHALL BE MAINTAINED FOR RE-USE UNDER NEW WORK.
- PROVIDE RECEPTACLE FOR ABOVE-COUNTER MICROWAVE WITH CASEWORK PRIOR TO INSTALLATION.
- PROVIDE 120V CONNECTION FOR EXHAUST FAN. COORDINATE INSTALLATION WITH MECHANICAL CONTRACTOR. INSTALL PER MANUFACTURER'S RECOMMENDATION.
- DISCONNECT POWER TO EXISTING LIGHTING FIXTURE. MAINTAIN LIGHTING FIXTURE AND BRANCH CIRCUIT FOR RE-USE UNDER NEW WORK. EXTEND BRANCH CIRCUIT TO NEW LOCATION.
- CONNECTION FOR DOOR HARDWARE SHALL BE RELOCATED WITH DOOR SWING. SEE NEW PLAN BELOW FOR ADDITIONAL INFORMATION.

**GORDON
JOHNSON**
Architecture

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 223-2186
E - M O
gordon@gordonjohnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA
Reproduction or publication of this
document is not permitted without the
expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the
requirements of the American with Disabilities Act
(ADA). However, Accessibility and Compliance are not
limited to physical space or any other accessible
area. The Owner should have this document
reviewed by the attorney to determine if it complies
with ADA and other laws.



Fayetteville Regional Airport Airline Terminal Improvements - Part 3

MAIN TERMINAL FIRST FLOOR ELECTRICAL ENLARGED PLANS

400 Airport Road
Fayetteville, North Carolina 28306

DRAWN BY: JMW
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES:


REVISIONS

8/28/23 ADDENDUM #2

SHEET NUMBER

E4.11

FIRE RATED WALL LEGEND
- - - 1 HOUR FIRE PARTITION
- - - 1 HOUR FIRE BARRIER

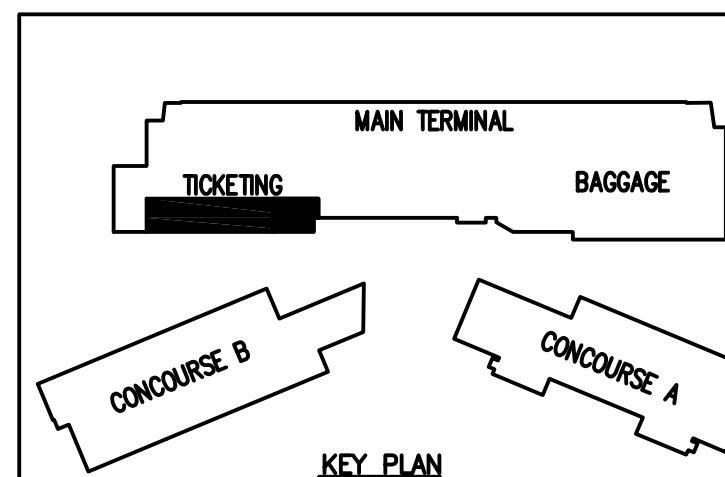


SCALE: 1/4" = 1'-0"

GENERAL NOTES:


- A. NOTIFY THE OWNER, IN WRITING, AT LEAST SEVEN (7) DAYS IN ADVANCE OF ALL REQUIRED SHUTDOWNS OF ELECTRICAL SERVICE, OR OTHER UTILITIES. UPON WRITTEN RECEIPT OF APPROVAL FROM OWNER, SHUTDOWNS SHALL BE PERFORMED DURING HOURS AS DIRECTED BY THE OWNER AND SHALL BE ACCOMPLISHED AT NO ADDITIONAL CONTRACT COST. AT THE END OF EACH SHUT DOWN ALL SERVICES SHALL BE RESTORED.
- B. WHEN WORKING IN AND AROUND THE EXISTING BUILDING, EXTREME CARE SHALL BE EXERCISED WITH REGARD TO PROTECTION OF THE EXISTING STRUCTURE AND PLUMBING, MECHANICAL AND ELECTRICAL SERVICES WHICH WILL REMAIN. REPAIR, REPLACE, OR RESTORE TO THE SATISFACTION OF THE OWNER ALL EXISTING WORK DAMAGED IN THE PERFORMANCE OF DEMOLITION AND/OR NEW WORK.
- C. EXISTING EQUIPMENT SIZES NOTED ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY AND ARE NOT WARRANTED TO BE CORRECT. CONTRACTOR SHALL VERIFY ALL SIZES IN THE FIELD IF THEY EFFECT HIS WORK.
- D. PATCH TO MATCH EXISTING ALL NEW AND EXISTING OPENINGS AND WALLS, CEILINGS, ROOF, AND FLOOR SURFACES DAMAGED OR CREATED BY DEMOLITION WORK. PATCHING WHERE POSSIBLE SHALL MATCH EXISTING ADJACENT SURFACES AS TO THICKNESS, TEXTURES MATERIALS, AND COLOR. ALL PATCHING SHALL BE PERFORMED TO THE SATISFACTION OF THE ARCHITECT AND AT NO ADDITIONAL CONTRACT COST.
- E. EXISTING ARCHITECTURAL DRAWINGS AND MEP DRAWINGS DO NOT INDICATE RATED WALLS IN THE SCOPES OF WORK. THE EXTERIOR WALLS ARE BLOCK TYPE, BUT THE WALLS BETWEEN THE CORRIDOR AND CLASSROOMS ARE NOT RATED.
- F. EC SHALL CONFIRM EXISTING CONDITIONS AND LOAD PRIOR TO PERFORMING WORK. REPORT ANY DISCREPANCIES BACK TO ENGINEER.
- G. ELECTRICAL DEVICES AND SYMBOLOLOGY DENOTED 'EX' ARE EXISTING POWERING DEVICES.
- H. EC SHALL PROVIDE TYPEWRITTEN, UPDATED PANEL DIRECTORY FOR ALL AFFECTED PANELS WITHIN THE SCOPE OF THIS PROJECT IN ACCORDANCE TO NEC 408.4.A.

DRAWING NOTES:

- ① LIGHTING FIXTURES IN THIS ROOM SHALL BE CONNECTED TO EXISTING NORMAL POWER BRANCH CIRCUIT PREVIOUSLY SERVING THIS AREA. UNLESS OTHERWISE NOTED ON PLAN.
- ② RECONNECT TO EXISTING BRANCH CIRCUIT SERVING EXTERIOR LIGHTING FIXTURES. MAKE ALL FINAL CONNECTIONS TO MATCH EXISTING.
- ③ FOR ALL DATA OUTLETS IN THIS SUITE RUN DATA CABLES BACK TO ROOM B129. DO NOT TERMINATE CABLES. MATCH EXISTING CABLE TYPE. PROVIDE 20' EXTRA CABLE, COIL UP AT CEILING FOR FUTURE TERMINATION.


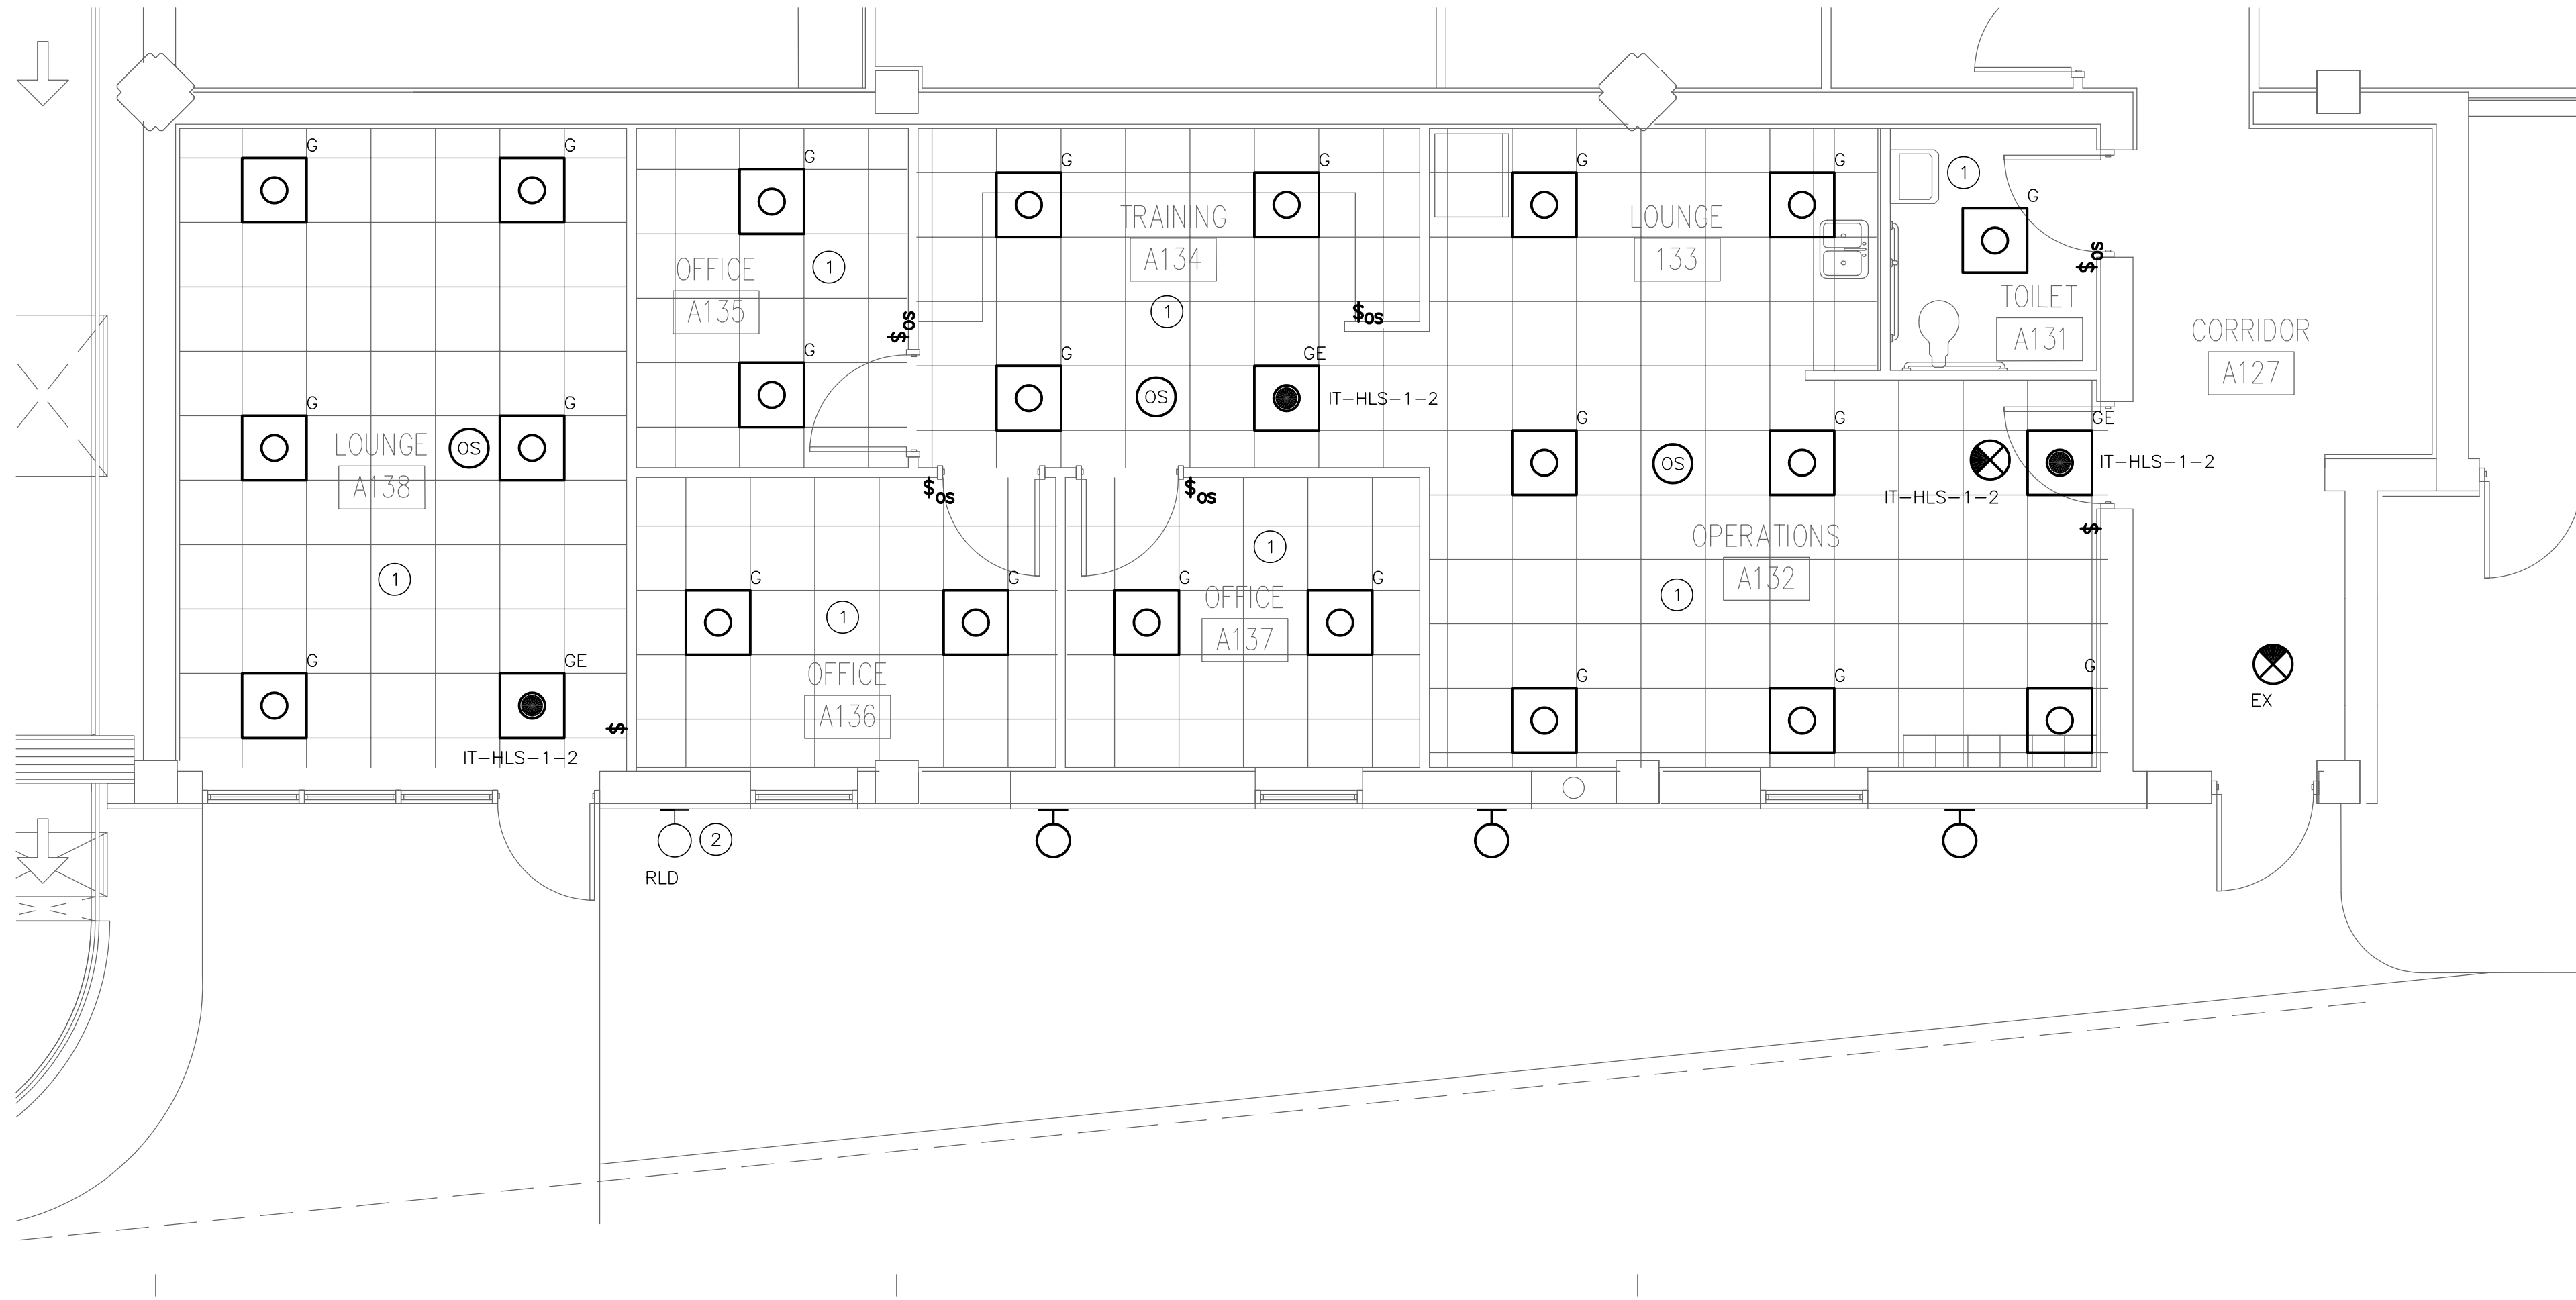




AIRLINE OFFICE NEW WORK PLAN - LIGHTING
SCALE: 1/4" = 1'-0"

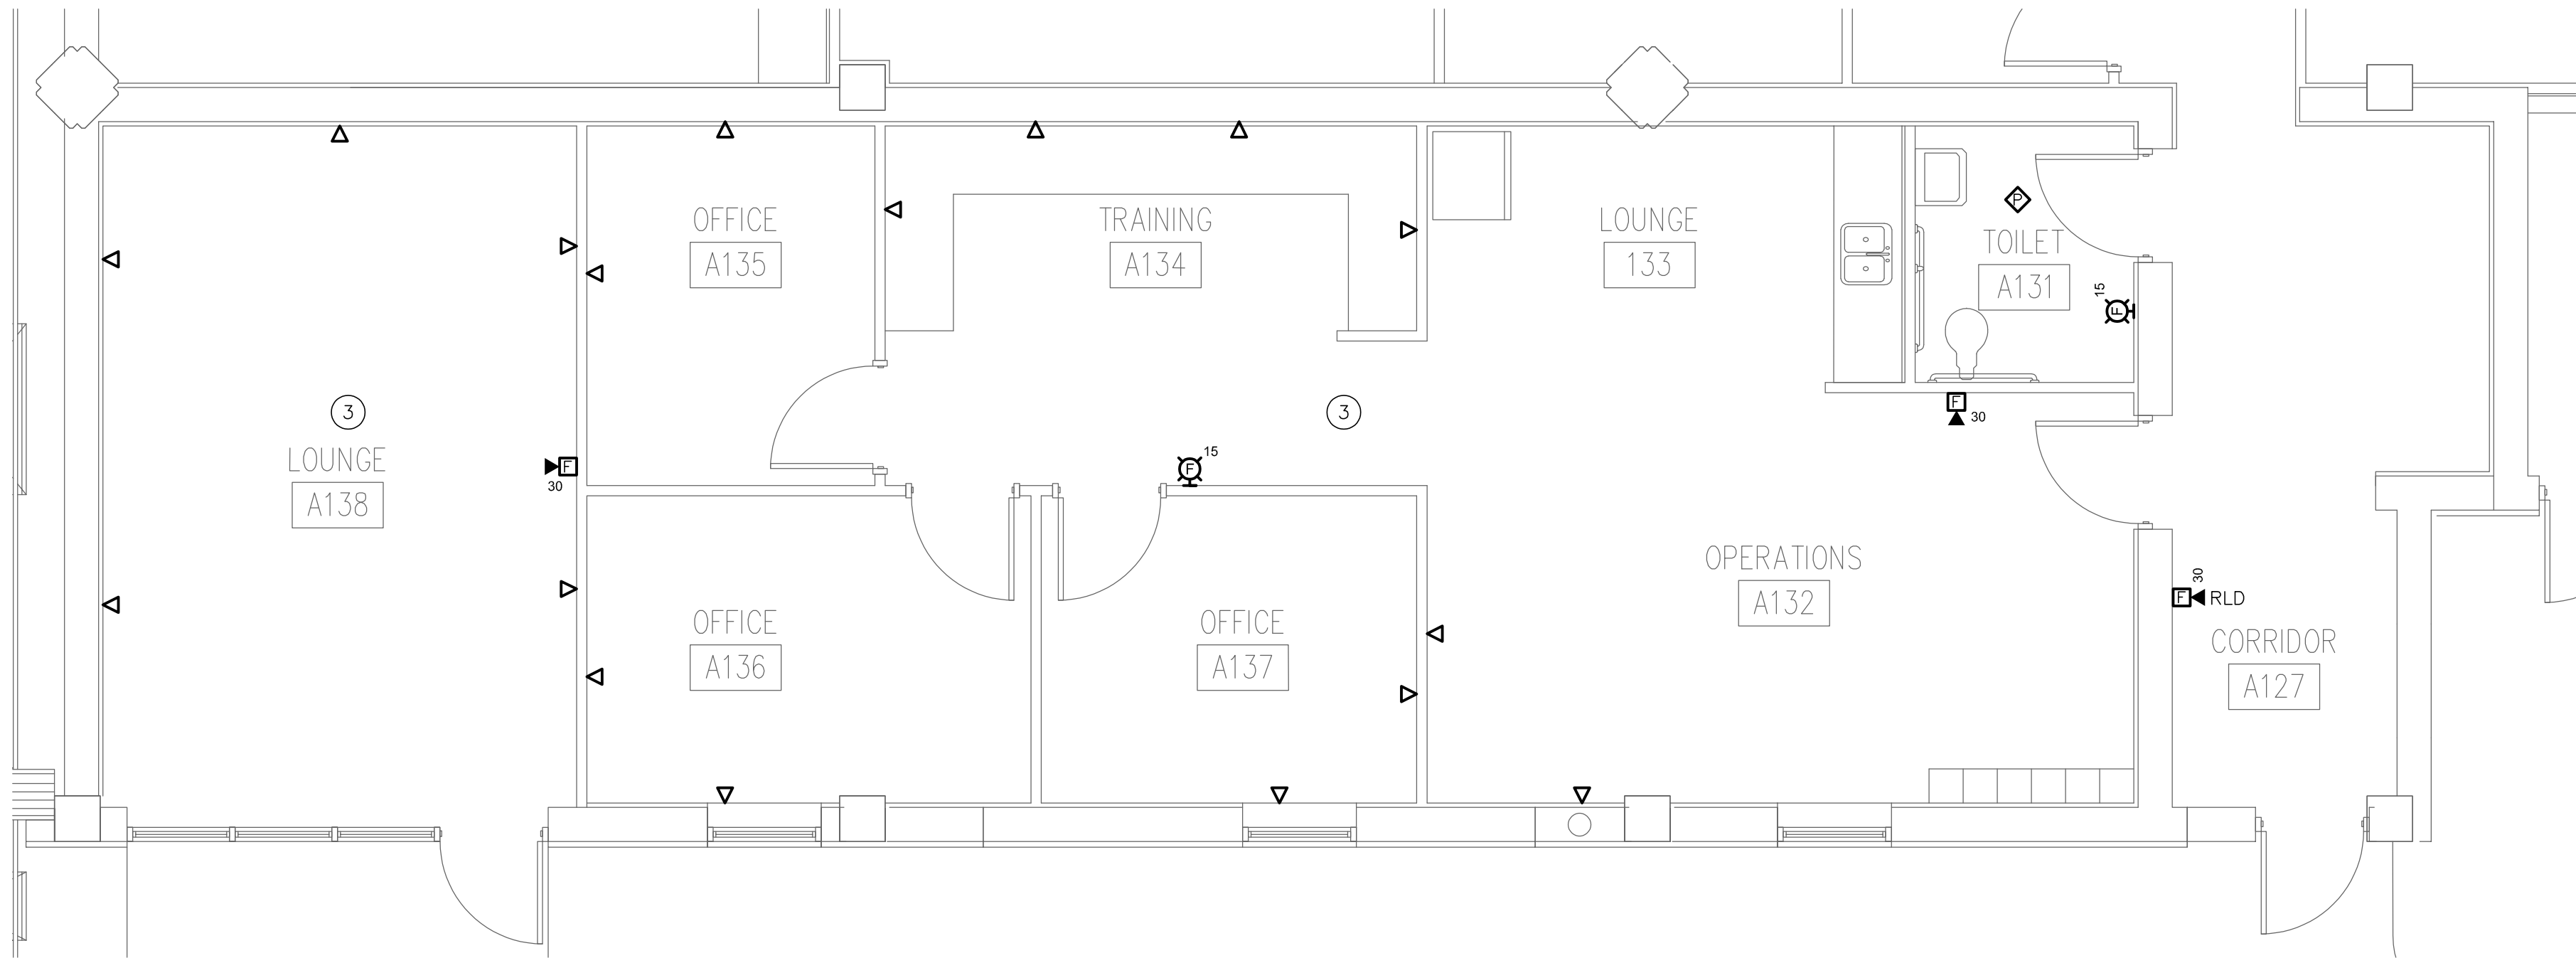

AIRLINE OFFICE NEW WORK PLAN - SPECIAL SYSTEMS
SCALE: 1/4" = 1'-0"



FIRE RATED WALL LEGEND
- - - 1 HOUR FIRE PARTITION
- - - 1 HOUR FIRE BARRIER

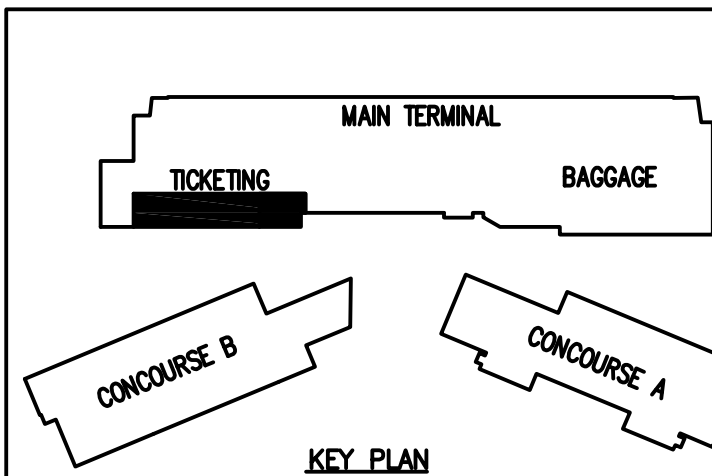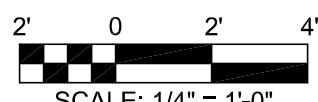

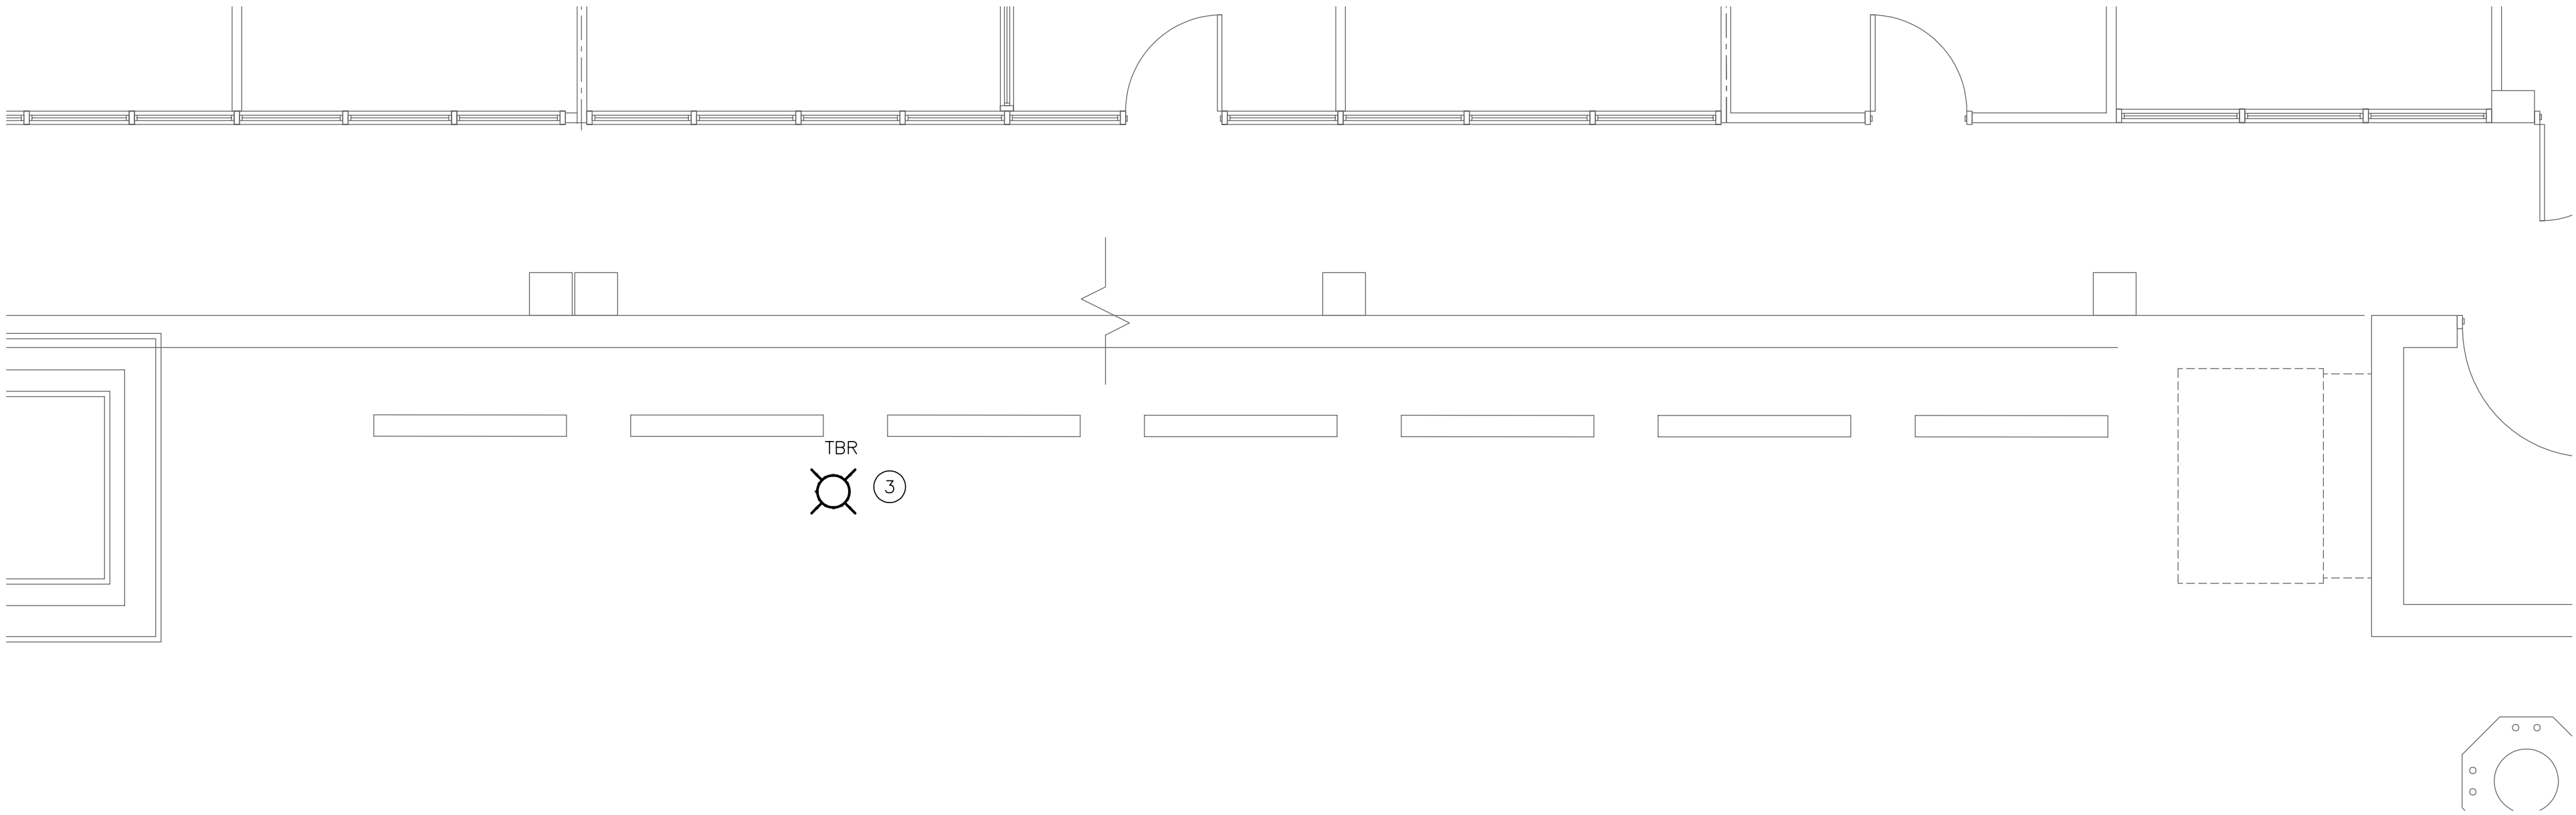

CONCOURSE B FIRST FLOOR PLAN - DEMOLITION

SCALE: 1/4" = 1'-0"

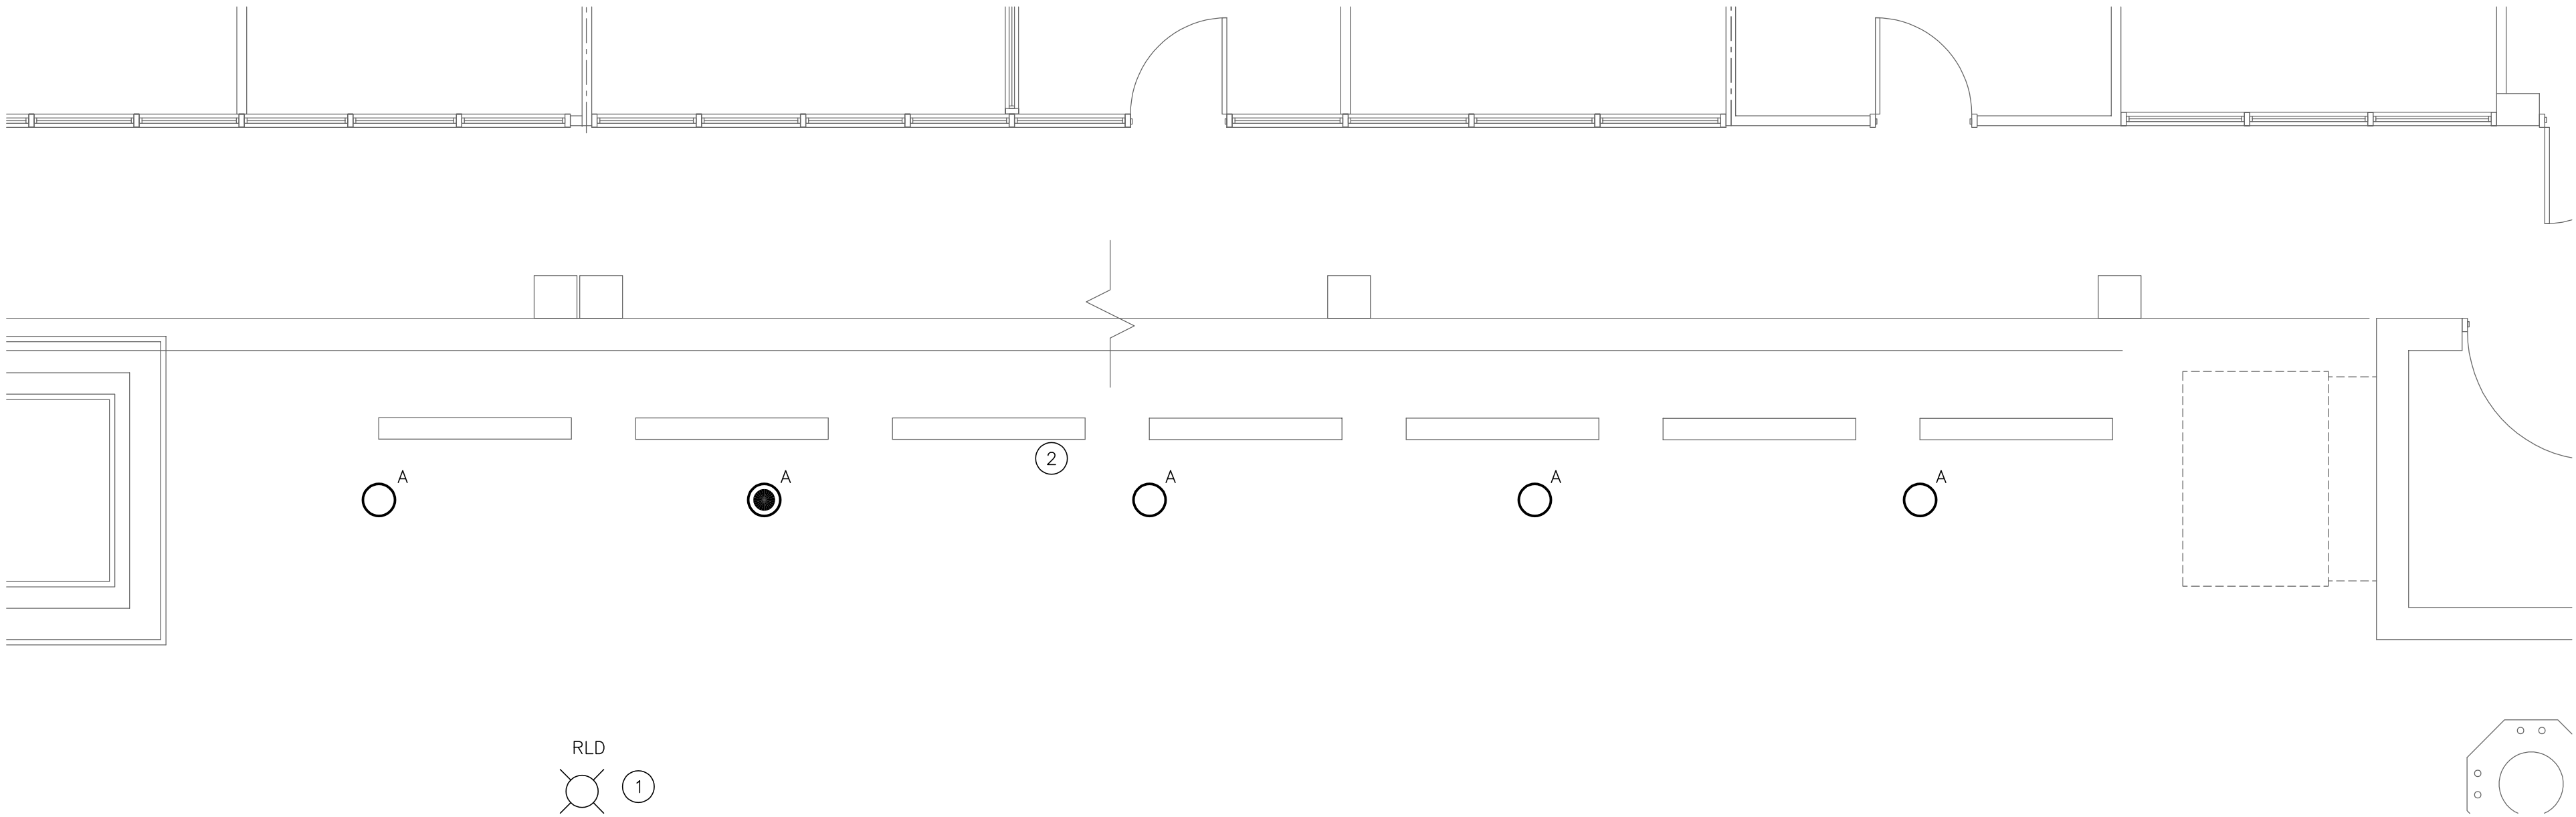

CONCOURSE B FIRST FLOOR NEW WORK PLAN - LIGHTING

SCALE: 1/4" = 1'-0"

GENERAL NOTES:

A. CONNECT LIGHTING IN THIS AREA TO EXISTING CIRCUIT SERVING THIS AREA.

DRAWING NOTES:

- 1 RELOCATED LIGHT POLE. SEE POLE BASE DETAIL ON SHEET E501. SEE ARCHITECTURAL PLAN FOR EXACT LOCATION. MAKE ALL FINAL CONNECTIONS TO MATCH EXISTING POWER AND CONTROLS.
- 2 CONNECT LIGHTING IN THIS AREA TO EXISTING NORMAL OR EMERGENCY CIRCUIT AND CONTROLS SERVING THIS AREA.
- 3 LIGHT POLE SHALL BE RELOCATED AND RECONNECTED TO SAME CIRCUIT AND CONTROLS. SEE ARCHITECTURAL PLANS FOR ADDITIONAL DIRECTION.

**GORDON
JOHNSON**
Architecture

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 223-2186
E: gordon@johnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA
Reproduction or publication of this
document is not permitted without the
expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the
requirements of the American with Disabilities Act
(ADA). However, Accessibility and Compliance are not
limited to interpret laws or any other relevant
laws. The Client should have this document
reviewed by its attorney to determine if it complies
with ADA and other laws.



Fayetteville Regional Airport Airline Terminal Improvements – Part 3
CONCOURSE B FIRST FLOOR ELECTRICAL ENLARGED PLANS
400 Airport Road
Fayetteville, North Carolina 28306



DRAWN BY: **TW**
REVIEWED BY: **OC**
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES:


REVISIONS	
1	
2	
3	

SHEET NUMBER

E4.13

FIRE RATED WALL LEGEND	
---	1 HOUR FIRE PARTITION
---	1 HOUR FIRE BARRIER

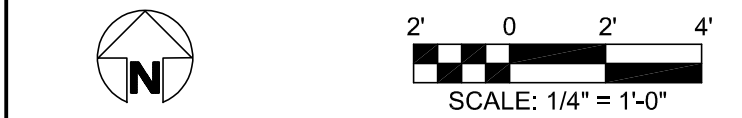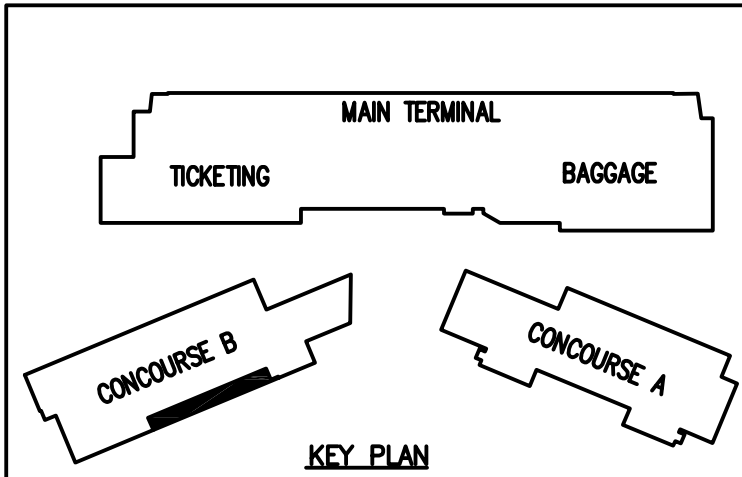

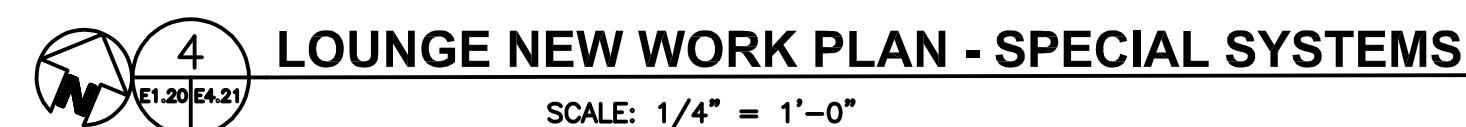


A key plan of the airport terminal. The Main Terminal is at the top, containing Ticketing and Baggage areas. Below it are Concourse A and Concourse B, connected by a central corridor. Concourse B has a small black rectangular area highlighted on its outer edge.

DRAWN BY: TMW
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES: _____

REVISIONS		
△		
△		
△		
SHEET NUMBER		

E4.21

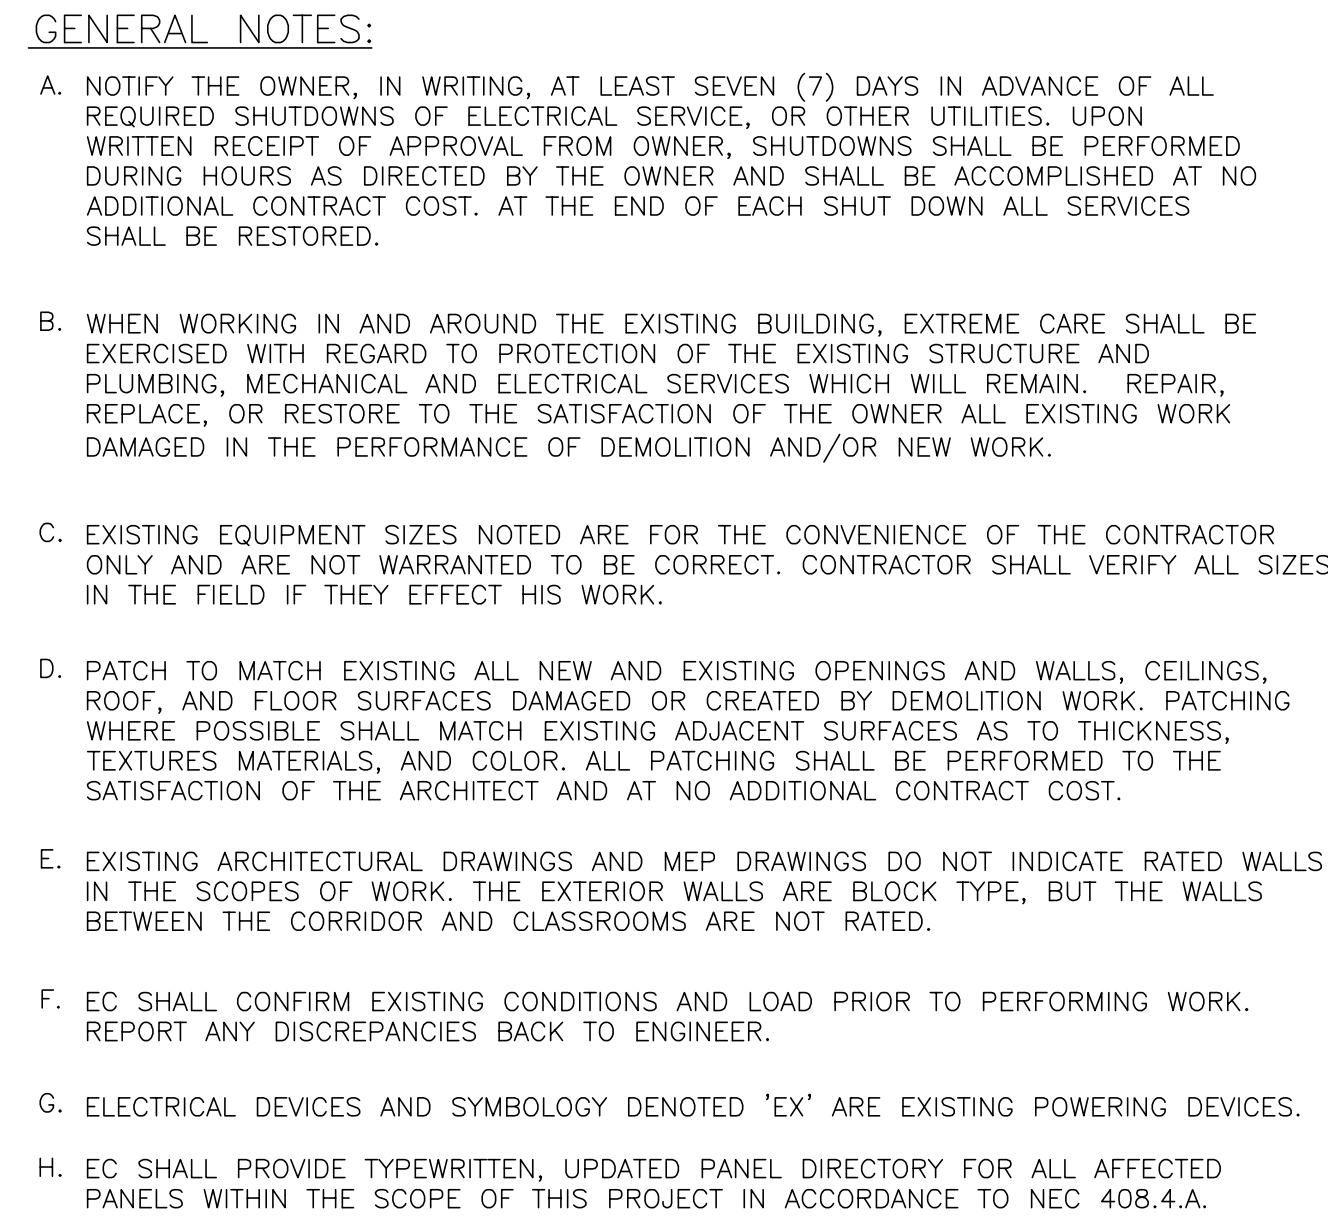

GATE LOUNGE
EXTENSION
E226A

CHG 1T-RP-1-14

CHG 1T-RP-1-16


CHG 1T-RP-1-18

CHG 1T-RP-1-20


Architectural floor plan of the Gate Lounge Extension E226A. The plan shows a long, narrow rectangular space with a grid of seats. There are several exits labeled 'EX' and 'G'. A central area is labeled 'GATE LOUNGE EXTENSION E226A'. There are also labels for '4 TYPICAL' and 'OS'. The plan includes a north arrow and a scale bar.


DRAWING NOTES:

- 1 DISCONNECT, PRESERVE CIRCUIT, AND EXTEND TO NEW LOCATION FOR REUSE UNDER NEW WORK.
- 2 RECONNECT TO ORIGINAL CIRCUIT. CONNECT NEW LIGHTING FIXTURE TO EXISTING CONTROLS.
- 3 PROVIDE CONNECTION FOR OWNER PROVIDED CHARGING STATIONS. ALL FINAL CONNECTIONS PER MANUFACTURER'S RECOMMENDATION.
- 4 CONNECT NEW LIGHTING FIXTURES TO EXISTING NORMAL POWER BRANCH CIRCUIT AND CONTROLS SERVING THIS AREA.

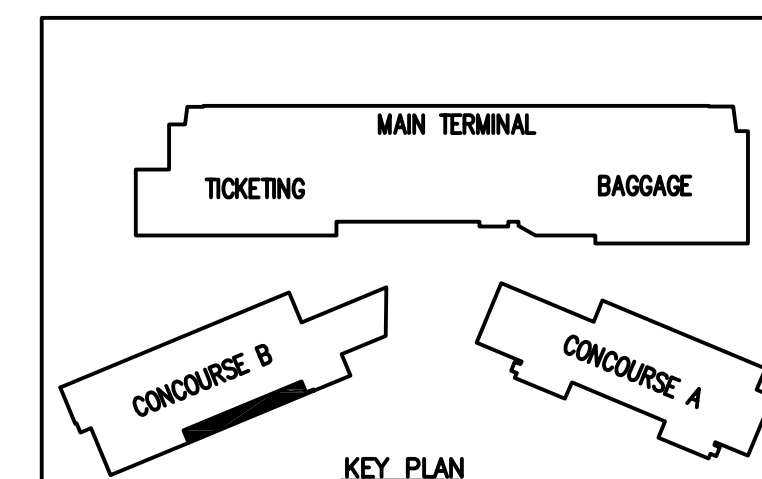

FIRE RATED WALL LEGEND	
	1 HOUR FIRE PARTITION
	1 HOUR FIRE BARRIER







SCALE: 1/4" = 1'-0"

- A. NOTIFY THE OWNER, IN WRITING, AT LEAST SEVEN (7) DAYS IN ADVANCE OF ALL REQUIRED SHUTDOWNS OF ELECTRICAL SERVICE, OR OTHER UTILITIES. UPON WRITTEN RECEIPT OF APPROVAL FROM OWNER, SHUTDOWNS SHALL BE PERFORMED DURING HOURS AS DIRECTED BY THE OWNER AND SHALL BE ACCOMPLISHED AT NO ADDITIONAL CONTRACT COST. AT THE END OF EACH SHUT DOWN ALL SERVICES SHALL BE RESTORED.
- B. WHEN WORKING IN AND AROUND THE EXISTING BUILDING, EXTREME CARE SHALL BE EXERCISED WITH REGARD TO PROTECTION OF THE EXISTING STRUCTURE AND PLUMBING, MECHANICAL AND ELECTRICAL SERVICES WHICH WILL REMAIN. REPAIR, REPLACE, OR RESTORE TO THE SATISFACTION OF THE OWNER ALL EXISTING WORK DAMAGED IN THE PERFORMANCE OF DEMOLITION AND/OR NEW WORK.
- C. EXISTING EQUIPMENT SIZES NOTED ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY AND ARE NOT WARRANTED TO BE CORRECT. CONTRACTOR SHALL VERIFY ALL SIZES IN THE FIELD IF THEY EFFECT HIS WORK.
- D. PATCH TO MATCH EXISTING ALL NEW AND EXISTING OPENINGS AND WALLS, CEILINGS, ROOF, AND FLOOR SURFACES DAMAGED OR CREATED BY DEMOLITION WORK. PATCHING WHERE POSSIBLE SHALL MATCH EXISTING ADJACENT SURFACES AS TO THICKNESS, TEXTURES MATERIALS, AND COLOR. ALL PATCHING SHALL BE PERFORMED TO THE SATISFACTION OF THE ARCHITECT AND AT NO ADDITIONAL CONTRACT COST.
- E. EXISTING ARCHITECTURAL DRAWINGS AND MEP DRAWINGS DO NOT INDICATE RATED WALLS IN THE SCOPES OF WORK. THE EXTERIOR WALLS ARE BLOCK TYPE, BUT THE WALLS BETWEEN THE CORRIDOR AND CLASSROOMS ARE NOT RATED.
- F. EC SHALL CONFIRM EXISTING CONDITIONS AND LOAD PRIOR TO PERFORMING WORK. REPORT ANY DISCREPANCIES BACK TO ENGINEER.
- G. ELECTRICAL DEVICES AND SYMBOLOLOGY DENOTED 'EX' ARE EXISTING POWERING DEVICES.
- H. EC SHALL PROVIDE TYPEWRITTEN, UPDATED PANEL DIRECTORY FOR ALL AFFECTED PANELS WITHIN THE SCOPE OF THIS PROJECT IN ACCORDANCE TO NEC 408.4.A.

① PROVIDE 120V CONNECTION WITH 2#12, 1#12G, IN 3/4" CONDUIT TO 1P-20A CIRCUIT FOR POWERED SIGN. INSTALL PER MANUFACTURER'S RECOMMENDATION. COORDINATE EXACT CONNECT AND LOCATION IN THE FIELD PRIOR TO PERFORMING WORK. PER ARCHITECT CONDUIT SHALL NOT BE EXPOSED IF POSSIBLE. SUBMIT CONDUIT ROUTING TO DESIGN TEAM FOR REVIEW PRIOR TO INSTALLATION.

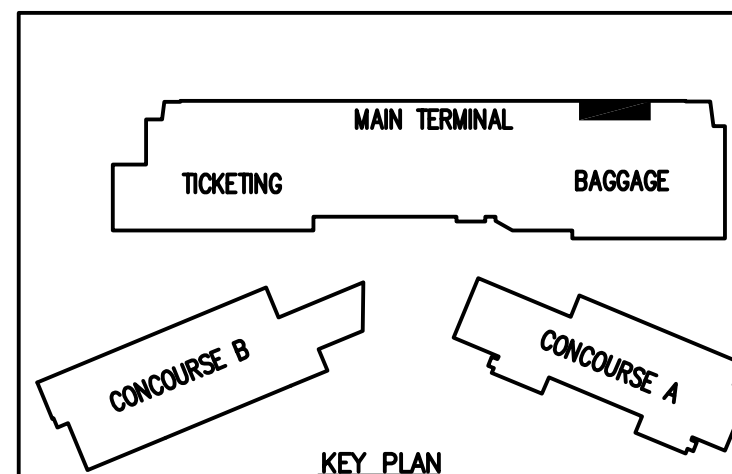

<p style="text-align: center;"><u>FIRE RATED WALL LEGEND</u></p> <p>————— 1 HOUR FIRE PARTITION</p> <p>..... 1 HOUR FIRE BARRIER</p>	 <p>SCALE: 1/4" = 1'-0"</p>
---	--

Fayetteville Regional Airport Terminal Improvements – Part 3

400 Airport Road
Fayetteville, North Carolina 28306


MAIN TERMINAL PARTIAL ROOF ELECTRICAL PLAN

DRAWN BY: TMW
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.AG
NOTES: _____

REVISIONS		
2	8/28/23	ADDENDUM #2

SHEET NUMBER

E4.23

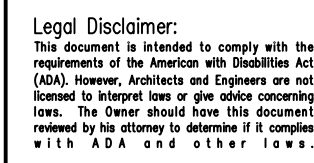




RECEPTACLE GROUNDING DETAIL



ISOLATED GROUND RECEPTACLE GROUNDING DETAIL

LIGHTING POLE FOUNDATION DETAIL



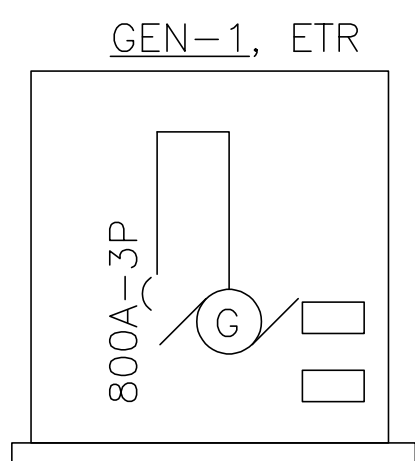

INCOMING
PWC PRIMARY

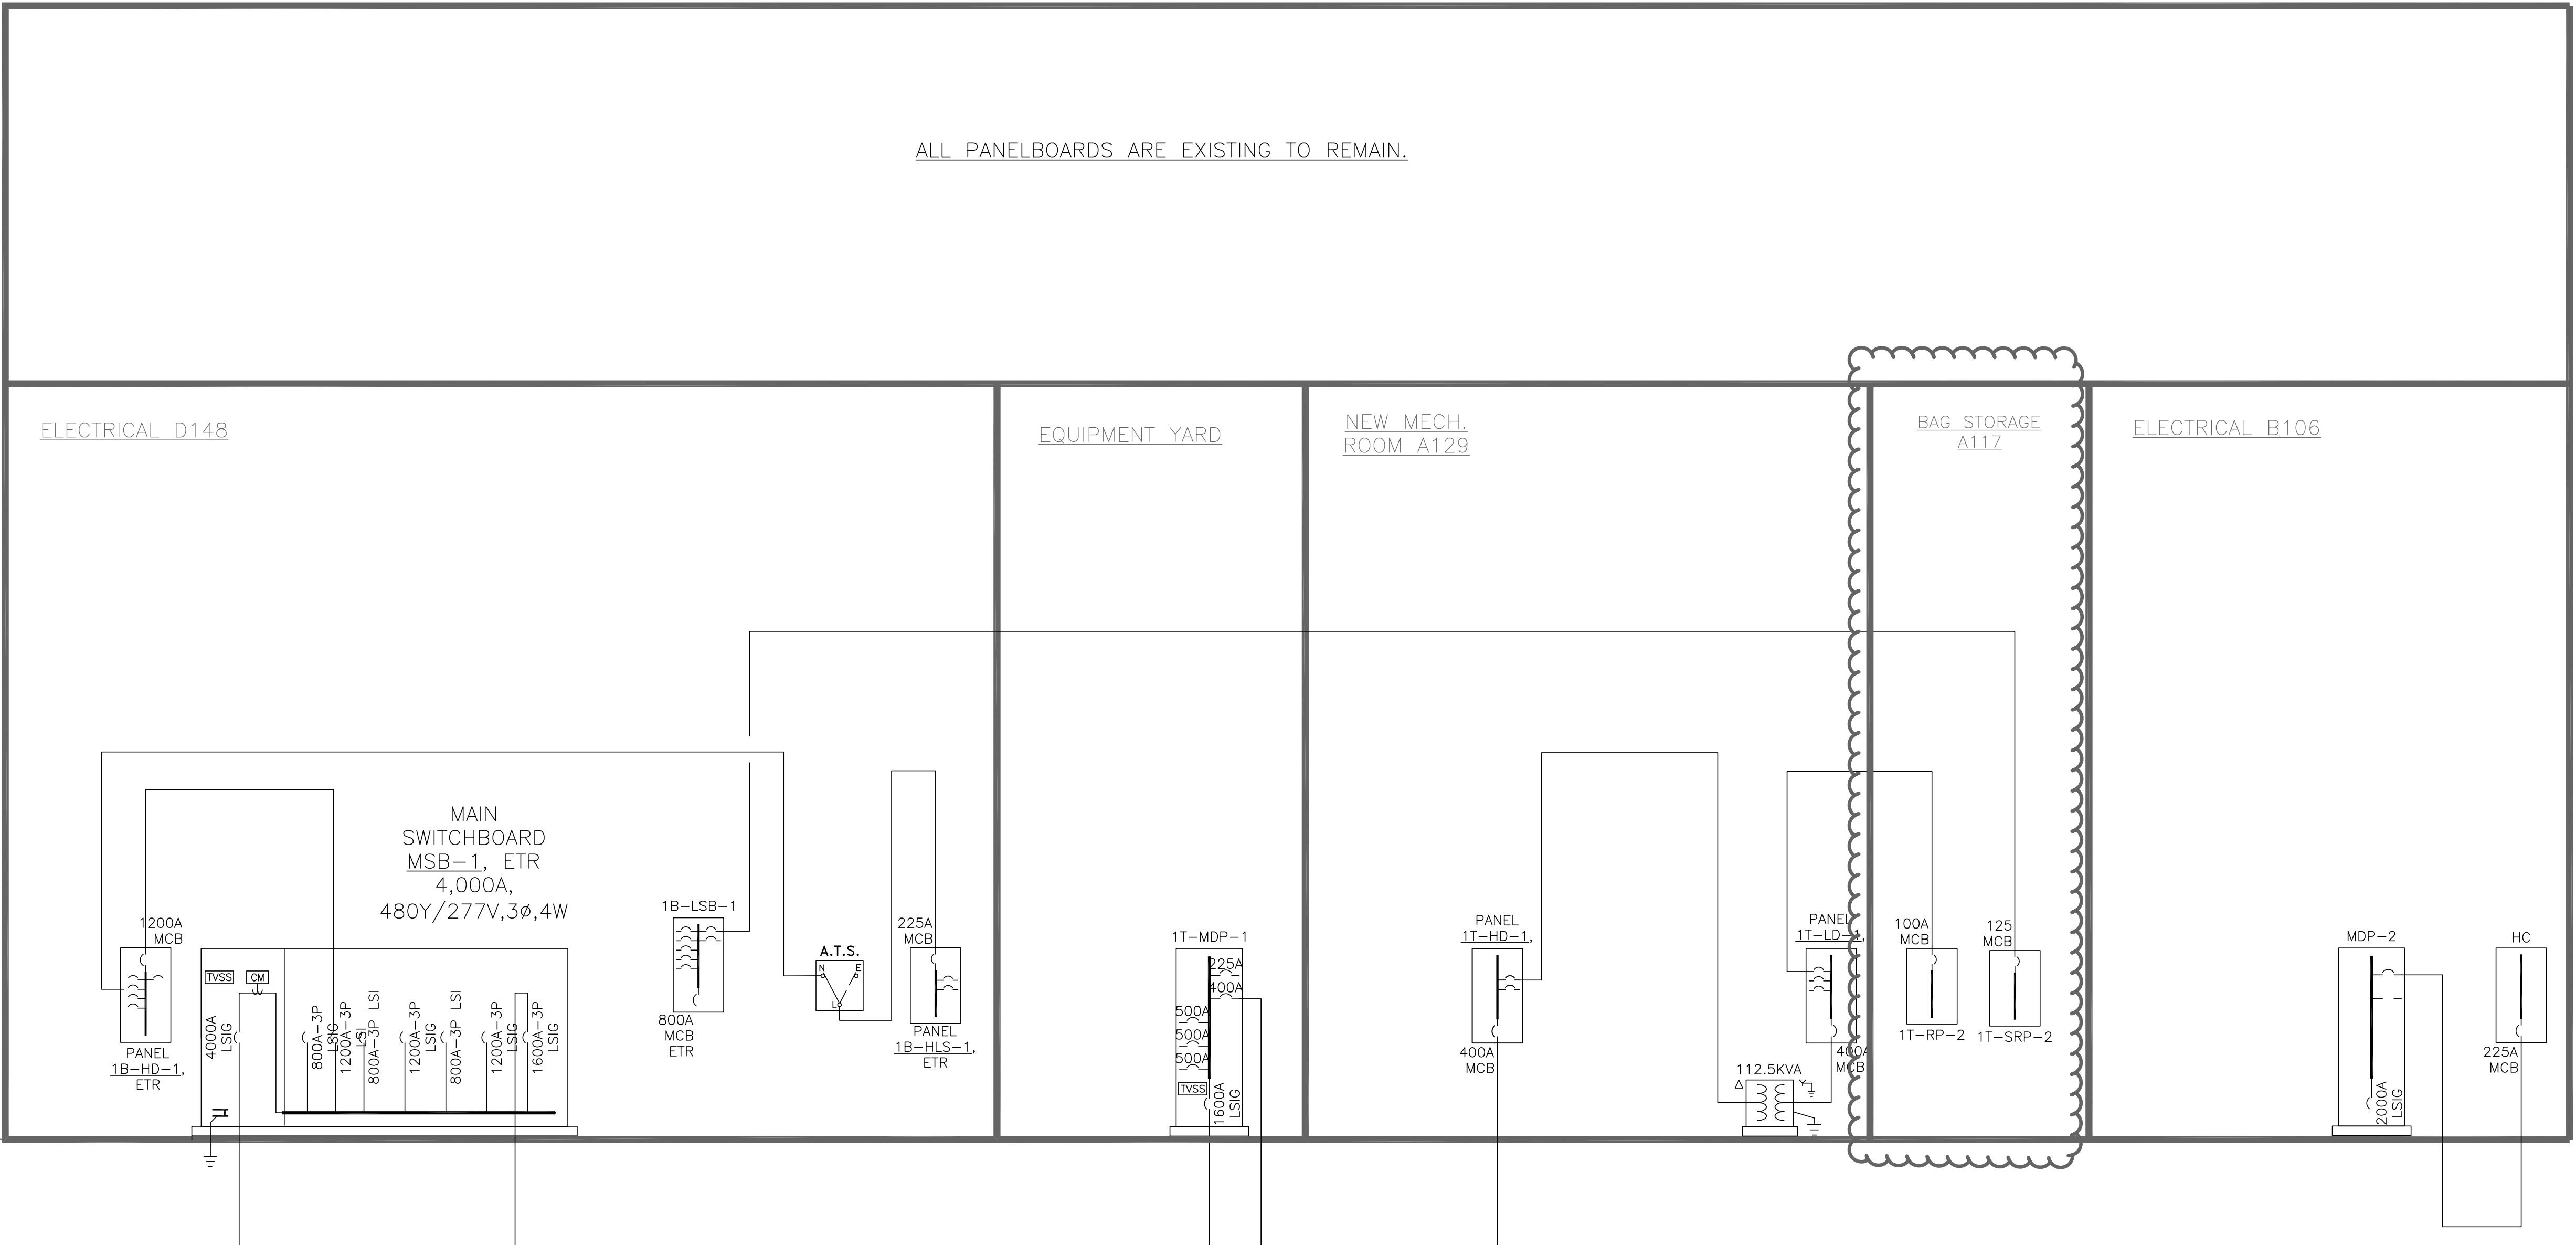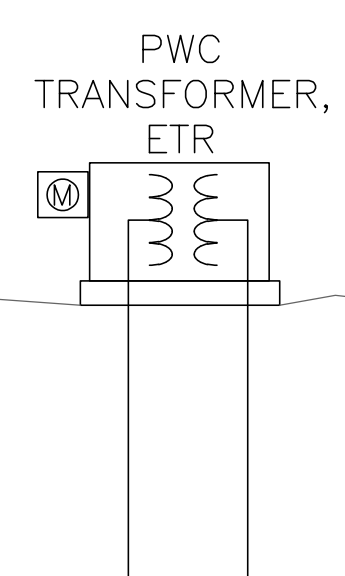

ALL PANELBOARDS ARE EXISTING TO REMAIN.

PARTIAL RISER DIAGRAM

654 Hay Street, Suite 4
Fayetteville, NC 28301
Phone: (910) 225-2188
E-mail: gordon@gordonjohnsonarchitecture.com
© Copyright 2023
Gordon E. Johnson, AIA
Reproduction or publication of this document is not permitted without the expressed consent of the above.

Legal Disclaimer:
This document is intended to comply with the requirements of the American with Disabilities Act (ADA). However, Architects and Engineers are not licensed to interpret laws or give advice concerning laws. The Client should hire this document reviewed by its attorney to determine if it complies with ADA and other laws.

Fayetteville Regional Airport Airline Terminal Improvements – Part 3

400 Airport Road
Fayetteville, North Carolina 28306


PARTIAL RISER DIAGRAM

DRAWN BY: JMW
REVIEWED BY: CDC
DATE: 7/31/2023
PROJECT NO.: 02230515.A0
NOTES: _____

REVISIONS	
1	8/28/23 ADDENDUM #2
2	
3	

SHEET NUMBER

E6.01

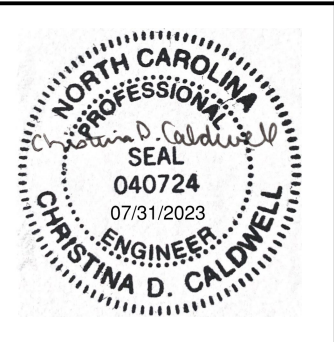

REVISIONS		
Δ		
Δ		
Δ		

LIGHTING FIXTURE SCHEDULE											
TYPE	DESCRIPTION	LAMPS - SYLVANIA					MOUNTING	REMARKS	MANUFACTURER		TYPE
		TYPE	WATTAGE	QTY.	COLOR TEMP.	VOLTAGE					
A	12" SQUARE CAST--ALUMINUM SURFACE MOUNTED LED CANOPY FIXTURE	LED	41	1	50K	MVOLT	SURFACE	—	LITHONIA VRC LED 1 50K MVOLT		A
D	6" SHOWER LED DOWNLIGHT NON IC	LED	18	1	35K	MVOLT	RECESSED	CONFIRM VOLTAGE AND MOUNTING. PROVIDE ALL COMPONENTS NECESSARY TO COMPRISE A COMPLETE WORKING SYSTEM.	LITHONIA LIGHTING: LDN6 35/15 LW6AR LSS MVOLT GZ10		D
G	4" 2X2 RECESSED LED	LED	36.9	1	35K	—	RECESSED	CONFIRM VOLTAGE AND MOUNTING. PROVIDE ALL COMPONENTS NECESSARY TO COMPRISE A COMPLETE WORKING SYSTEM.	FINELITE HPR LED F 2X2 DCO SO 3500K SC		G

MOTOR EQUIPMENT AND CONTROL SCHEDULE																			
EQUIPMENT						SUPPLY					CONTROL DEVICES AS SHOWN ON PLANS BY ITEM NUMBER					KEYED MOTOR STARTER NOTES:			
PLAN SYMBOL	NAME	LOCATION	HP/A/KV	PHASE	VOLT	PANEL	CIRCUIT BREAKER	POWER WIRING FROM PANEL TO CONTROL UNIT	POWER REQUIREMENT FROM CONTROL UNIT TO EQUIPMENT BY DIV. FURNISHING THE EQUIPMENT	REF. NOTES	DISCONNECT SWITCH			MOTOR STARTER AND ACCESSORIES	CONTROL DEVICE LOCATION	ITEM NUM.	K6. COMBINATION REDUCED VOLTAGE MAGNETIC STARTER K7. PACKAGED CONTROL UNIT K14. MANUAL MOTOR STARTER WITH RELAY (RELAY TO ACCOMMODATE DDC CONTROL.) K15. VARIABLE FREQUENCY DRIVE K16. DUPLEX CONTROLLER WITH ALTERNATION CIRCUIT K17. FIRE ALARM FAN SHUTDOWN K18. PROVIDE DUPLEX RECEPTACLE FOR EQUIPMENT CONNECTION K19. FURNISHED WITH EQUIPMENT		
ITEM NUM.											SWITCH AMPS	FUSE SIZE	LOC.					NEMA SIZE	
	AHU-1A	NEW AIR HANDLING UNIT	NEW LOUNGE A138	1/2.50/.810	3	480	1T-HD-1/13,15,17	15A-3P	3#12, #12G, 3/4"C	3#12, #12G, 3/4"C	R1	15	15	NR	1	K15,K17,K19		-	AHU-1A
	EF-B5	NEW EXHAUST FAN - CSP-A200	TOILET E217	--	1	115	HC	15A-1P	2#12, 3/4"C	2#12, 3/4"C									
	EF-6	NEW EXHAUST FAN - SP-LP0511-1	TOILET A131	--	1	115	HC	15A-1P	2#12, 3/4"C	2#12, 3/4"C									
GENERAL NOTES: A. REFER TO EQUIPMENT CONNECTION RESPONSIBILITIES DETAIL AND PROVIDE ALL DEVICES, EQUIPMENT AND WIRING REQUIRED UNDER AREA OF RESPONSIBILITY. B. ITEM NUMBER INDICATES EQUIPMENT NUMBER C. ALL CONTROL DEVICES ARE TO BE SURFACE MOUNTED UNLESS OTHERWISE NOTED D. PROVIDE OVERLOADS, SIZE AS REQUIRED BY DIVISION SUPPLYING THE EQUIPMENT E. "AU" INDICATES CONTROL DEVICE LOCATED AT UNIT												REFERENCE NOTES: R1. PROVIDE HACR TYPE BREAKER. R2. PROVIDE SHUNT TRIP BREAKER. R3. VERIFY EXACT REQUIREMENTS WITH EQUIPMENT MANUFACTURER PRIOR TO ROUGH-IN. R4. COORDINATE SUMP PUMP CONTROL PANEL LOCATION WITH INSTALLER PRIOR TO ROUGH-IN. R5. PROVIDE (GFEP) GROUND FAULT EQUIPMENT PROTECTION TYPE BREAKER.							
F. "NR" INDICATES NEAR UNIT G. "NF" INDICATES NOT--FUSED H. PROVIDE LAMACOD LABEL WITH EQUIPMENT DESIGNATION AND POWER SOURCE AT EACH DICONNECT SWITCH AND STARTER																			

PANELBOARD: 1B-HLS-1 MAINS: 150A MCB AMPS: 225A MIN AIC: 45000											
EMERGENCY ELEC.											
LOCATION: D109 VOLTS: 480/277 VAC PHASE: 3 WIRES: 4											
MOUNTING: SURFACE ENCL NEMA: 1 NOTES: EXISTING, LIFE SAFETY											
SERVES	CB	TA	SP	BUS	CB	SERVES					
EMER LGHTG D106,D109,D148,D108,D127	1	20	1	A	2		CB	TA	P		
EMER LGHTG MAIN TERMINAL ENTRANCE	1	20	3	B	4		60	3		PANEL 2B-HLS-1	
EMER LGHTG MAIN TERMINAL ENT / TELCO B13109	1	20	5	C	6						
EMER LGHTG TSA TEMP CHECKPOINT G124	1	20	7		8						
EMER LGHTG TSA TEMP CHECKPOINT G124	1	20	9		10		60	3		PANEL IT-HLS-1	
SPARE	1	20	11		12						
SPARE	1	20	13		14		1			SPACE	
SPARE	1	15			16		1			SPACE	
SPARE	1	17			18		1			SPACE	
SPARE	1	19			20		1			SPACE	
SPARE	1	21			22		1			SPACE	
SPARE	1	23			24		1			SPACE	
SPARE	1	25			26		1			SPACE	
SPARE	1	27			28		1			SPACE	
SPARE	1	29			30		1			SPACE	
SPARE	1	31			32		1			SPACE	
SPARE	1	33			34		1			SPACE	
SPARE	1	35			36		1			SPACE	
SPARE	1	37			38		1			SPACE	
SPARE	1	39			40		1			SPACE	
SPARE	1	41			42		1			SPACE	
0.41 0.44 0.17											

GENERAL NOTES:

- A. ELECTRICAL CONTRACTOR SHALL CONDUCT 30 DAY METER READINGS FOR ALL AFFECTED PANELBOARDS TO CONFIRM AVAILABLE CAPACITY DOES NOT EXCEED 80% OF PANEL RATING. IF ANY PANELS EXCEED 80% OF THE RATING CONTRACTOR SHALL NOTIFY ENGINEER OF RECORD.

DRAWING NOTES:

- ① CIRCUITS RELOCATED FROM PANEL L2A. UTILIZE EXISTING 1P, 20A CIRCUIT BREAKER.
- ② CIRCUITS RELOCATED FROM PANEL L2. UTILIZE EXISTING 1P, 20A CIRCUIT BREAKER.
- ③ PROVIDE 1P, 20A CIRCUIT BREAKER TO MATCH EXISTING GE TYPE NLAB PANEL MAKE AND CHARACTERISTICS.

PANELBOARD: 1T-HD-1 MAINS: 600A MCB AMPS: 600A MIN AIC: 65,000											
NEW MECH.											
LOCATION: RM A129 VOLTS: 480Y/277 VAC PHASE: 3 WIRES: 4											
MOUNTING: SURFACE ENCL NEMA: 1 NOTES: EXISTING											
SERVES	CB	TA	SP	BUS	CB	SERVES					
SPARE	3	100	1	A	2		225	3		EX XFMR TO PANELBOARD	
			3	B	4					1T-LD-1	
			5	C	6						
SPARE	3	90	7		8						
			9		10		100	3		PANEL IT-HP-1	
			11		12						
AHU	3	15	13		14						
			15	B	16		3			SPACE	
			17	C	18						
			19		20						
SPACE	3		21		22		3			SPACE	
			23		24						
SPACE	3		25		26						
			27		28		3			SPACE	
			29		30						
SPACE	3		31		32		3			SPACE	
			33		34						
			35		36						
SPACE	3		37		38		3			SPACE	
			39		40						
			41		42						
SPACE	3		43		44		3			SPACE	
			45		46						
			47		48						
SPACE	3		49		50		3			SPACE	
			51		52						
			53		54						
SPACE	3		55		56		3			SPACE	
			57		58						
			59		60						
82.26 78.9 82.12											

PANELBOARD: 1T-RP-2 MAINS: 100A MCB AMPS: XXX MIN AIC: 65,000											
BAG STORAGE											
LOCATION: A117 VOLTS: 208Y/120 VAC PHASE: 3 WIRES: 4											
MOUNTING: SURFACE ENCL NEMA: 1 NOTES: DESIGNATION 2											
SERVES	CB	TA	SP	BUS	CB	SERVES					
RECPT - TICKET CTR A105	1	20	1	A	2		20	1		RECPT - A117, A118, A108	
RECPT - TICKET CTR A105	1	20	3	B	4		20	1		RECPT - TV A114	
RECPT - TICKET CTR A105	1	20	5	C	6		20	1		RECPT - TV A101	
RECPT - TICKET CTR A105	1	20	7		8		20	1		RECPT - DOOR HW A101,6	
RECPT - TICKET CTR A105	1	20	9		10		20	1		RECPT - OFFICE A109	
RECPT - TICKET CTR A104	1	20	11		12		20	1		DOOR HW A108	
RECPT - TICKET CTR A104	1	20	13		14		20	1		RECPT - A113	
RECPT - OFFICE A112	1	20	15		16		20	1		RECPT - LOUNGE A114	
RECPT - OFFICE A111	1	20	17		18		20	1		RECPT - TICK CTR A104	
RECPT - OFFICE A116	1	20	19		20		20	1		EF-5	
RECPT - OFFICE A116	1	20	21		22		20	1		EF-B4 & B5	
RECPT - A116	1	20	23		24		20	1		RECPT - VENDING	
EF-B3	1	20	25		26		20	1		RECPT - VENDING	
BAG ROOM WORKSTATION	1	20	27		28		20	1		RECPT - VENDING	
BAG ROOM SCANNER	1	20	29		30		20	1		RECPT - OFFICE A111	
SPARE	1	20	31		32		20	1		SPARE	
SPARE	1	20	33		34		20	1		SPARE	
SPARE	1	20	35		36		20	1		SPARE	
SPARE	1	20	37		38		20	1		SPARE	
SPARE	1	20	39		40		20	1		SPARE	
			41		42						
5.36 4.86 4.18											

PANELBOARD: 1T-HC MAINS: MLO AMPS: 225A MIN AIC: 65,000											
ELECTRICAL											
LOCATION: B106 VOLTS: 208Y/120 VAC PHASE: 3 WIRES: 4											
MOUNTING: SURFACE ENCL NEMA: 1 NOTES: EXISTING											
SERVES	CB	TA	SP	BUS	CB	SERVES					
RECPTS - LOUNGE A138	1	20	1	A	2		20	1		RECPTS - OFFICE A135	
RECPTS - TRAINING A134	1	20	3	B	4		20	1		RECPTS - OFFICE A136	
RECPTS - OFFICE A137	1	20	5	C	6		20	1		RECPTS - OPERATIONS A132	
RECPTS - LOUNGE 133	1	20	7		8		20	1		RECPTS - TOILET A131 & LOUNGE 133	
RECPT - TOILET E217	1	20	9		10		20	1		RECPT - ALCOVE E216	
POWERED SIGN	1	20	11		12		20	1		NEW EXHAUST FAN - EF-B5	
NEW EXHAUST FAN - EF-6	1	20	13		14		20	1		RECPT -	
RECPT -	1	20	15		16		20	1		RECPT -	
SPARE	1	20	17		18		20	1		SPARE	
SPARE	1	20	19		20		20	1		SPARE	
SPACE	1	--	21		22	--	1			SPACE	
SPACE	1	--	23		24	--	1			SPACE	
SPACE	1	--	25		26	--	1			SPACE	
SPACE	1	--	27		28	--	1			SPACE	
SPACE	1	--	29		30	--	1			SPACE	
SPACE	1	--	31		32	--	1			SPACE	
SPACE	1	--	33		34	--	1			SPACE	
SPACE	1	--	35		36	--	1			SPACE	
SPACE	1	--	37		38	--	1			SPACE	
SPACE	1	--	39		40	--	1			SPACE	
SPACE	1	--	41		42	--	1			SPACE	
X X X											

PANELBOARD: 1T-SRP-2		MAINS: 125 A MCB		AMPS: 225A		MIN AIC: 65,000		
BAG STORAGE								
LOCATION: A117		VOLTS: 208Y/120 VAC		PHASE: 3		WIRES: 4		
MOUNTING: SURFACE		ENCL NEMA: 1		NOTES: EXISTING (DESIGNATION S2)				
SERVES		CB	TA	SP	BUS	CB	P	SERVES
TICKETING CTR A105 RECEPTACLES	1	20	1	A	2	20	1	EX TICKETING LOBBY A101 COL F7 KIOSK RECEPTACLES
TICKETING CTR A105 RECEPTACLES	1	20	3	B	4	20	1	EX TICKETING LOBBY A101 COL F7 KIOSK RECEPTACLES
TICKETING CTR A105 RECEPTACLES	1	20	5	C	6	20	1	EX TICKETING LOBBY A101 COL F7 KIOSK RECEPTACLES
TICKETING CTR A105 RECEPTACLES	1	20	7		8	20	1	EX TICKETING LOBBY A101 COL F8 KIOSK RECEPTACLES
TICKETING CTR A105 RECEPTACLES	1	20	9		10	20	1	EX TICKETING LOBBY A101 COL F8 KIOSK RECEPTACLES
TICKETING CTR A104 RECEPTACLES	1	20	11		12	20	1	EX TICKETING LOBBY A101 COL F8 KIOSK RECEPTACLES
TICKETING CTR A104 RECEPTACLES	1	20	13		14	30	2	EX BAG SCREENING (A107)
TICKETING CTR A104 RECEPTACLES	1	20	15		16			CT-80DR (WEST UNIT)
TICKETING CTR A103 RECEPTACLES	1	20	17		18	30	2	EX BAG SCREENING (A107)
TICKETING CTR A103 RECEPTACLES	1	20	19		20			CT-80DR (EAST UNIT)
EX DOOR HW-A107 (NORTH)	1	20	21		22	40	2	EX BAG SCREENING (A107)
EX BAG SCREENING (A107) VIEWING STATION REC. (WEST)	1	20	23		24			SCANNER UPS (WEST UNIT)
EX BAG SCREENING (A107) VIEWING STATION REC. (EAST)	1	20	25		26	40	2	EX BAG SCREENING (A107)
EX OVERSIZE SCREEN(A106) LUGGAGE WAITING	1	20	27		28			SCANNER UPS (EAST UNIT)
EX DOOR HW-A107 (SOUTH)	1	20	29		30	40	2	SPARE
EX TICKETING COUNTER A103 RECEPTACLES	1	20	31		32			
EX TICKETING COUNTER A103 RECEPTACLES	1	20	33		34	30	2	SPARE
SPACE	1	30	35		36			
DATA RACK - OFFICE A111	1	15	37	2,80	38	1		SPACE
SPACE	1	39			40	1		SPACE
SPACE	—	41			42	1		SPACE
				8.92	10.4	7.92		